


**NEW!**

## Standard Duty Detent Pins

Ideal for basic holding and removal applications that don't require a positive locking ball feature.

- ✓ Body (Shank) is CRES 303 Stainless with CRES 316 stainless spring & ball
- ✓ Pins are activated by push or pull motion
- ✓ Includes split ring for attachment of optional general purpose lanyard
- ✓ Optional materials, sizes, and styles available

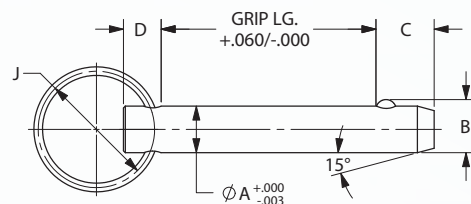

See lanyard diagrams & information on reverse side.

### STANDARD DUTY DETENT SPECIFICATIONS - INCH

Nom. Pin Dia.	Dia. +0.000/-0.003					Double Shear Strength (lbs)	Pull Out Force (lbs)	Recommended Hole Diameter	
	A	B	C	D	J			Max.	Min.
3/16	.1875	.204	.200	.187	1.00	2,530	4 - 6	.1930	.1890
1/4	.2500	.286	.312	.220	1.00	4,500	5 - 7	.2555	.2515
5/16	.3125	.358	.375	.250	1.00	7,100	5 - 7	.3180	.3140
3/8	.3750	.426	.500	.250	1.00	10,300	7 - 10	.3805	.3765
1/2	.5000	.486	.625	.250	1.25	18,400	10 - 14	.5065	.5015
5/8	.6250	.710	.750	.375	1.25	28,900	23 - 26	.6315	.6265
3/4	.7500	.856	.937	.375	1.50	41,800	24 - 27	.7585	.7515
1	1.000	1.140	1.250	.500	1.50	74,600	30 - 33	1.0115	1.0015


### STANDARD DUTY DETENT PINS - INCH

Pin Dia.	Grip length (inches)										
	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	6
3/16	804000	804001	804002	804003	804004	804005					
1/4	804011	804012	804013	804014	804015	804016					
5/16	804022	804023	804024	804025	804026	804027	804028	804029	804030		
3/8		804034	804035	804036	804037	804038	804039	804040	804041	804042	
1/2		804045	804046	804047	804048	804049	804050	804051	804052	804053	
5/8		804056	804057	804058	804059	804060	804061	804062	804063	804064	
3/4		804067	804068	804069	804070	804071	804072	804073	804074	804075	804076
1				804080	804081	804082	804083	804084	804085	804086	804087

Continued other side ►

## General Purpose Lanyard Specifications & Styles

(Available on Standard Duty Detent Pins only)

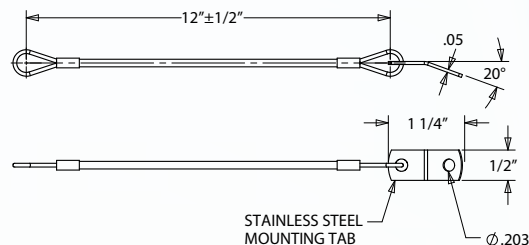

- 300 Series Stainless Steel cable, 1/16" (1.59 mm), with clear nylon jacket, 1/8" (3.18 mm)
- 1/16", 7 x 7 construction, clear nylon jacket, 1/8" light duty
- Other cable diameters, other jacket colors (blue, black, clear) and special configuration styles by special order.

### Ordering Lanyards Attached to Pins (Attached to Split Ring)

Standard cone loop with rectangular tab

**Part Numbering:** Specify the six digit standard detent pin number followed by the 3 digit suffix (i.e. 804014L12 - 1/4" x 2" pin with 12" lanyard attached to ring).

#### Ordering Lanyards Attached (Specify)

Length	Rect Stainless Steel
6"	XXXXXX - L06
12"	XXXXXX - L12

Note: .203" mounting hole

### Ordering Lanyards When Supplied Separately Without Pins

**Part Numbering:** Specify the six digit number below for the 6" or 12" lanyard.

#### Ordering Lanyards Separately

Length	Rect Stainless Steel
6"	890340
12"	890341

Note: .203" mounting hole

#### WORLD HEADQUARTERS

15700 S. Waterloo Road. Cleveland, OH 44110-3898

☎ 800.537.4367 📠 216.481.6193

✉ info@jergensinc.com

🌐 www.jergensinc.com

AD0313

© Copyright Jergens, Inc. 2013