

2.8W filter-free mono class D audio power amplifier


Features

- Operating from $V_{CC}=2.4V$ to $5.5V$
- Standby mode active low
- Output power: 2.8W into 4Ω and 1.7W into 8Ω with 10% THD+N max and 5V power supply
- Output power: 2.2W @5V or 0.7W @ 3.0V into 4Ω with 1% THD+N max.
- Output power: 1.4W @5V or 0.5W @ 3.0V into 8Ω with 1% THD+N max.
- Adjustable gain via external resistors
- Low current consumption 2mA @ 3V
- Efficiency: 88% typ.
- Signal to noise ratio: 85dB typ.
- PSRR: 63dB typ. @217Hz with 6dB gain
- PWM base frequency: 280kHz
- Low pop & click noise
- Thermal shutdown protection
- Available in DFN8 3X3 mm package

Description

The TS4962 is a differential class-D BTL power amplifier. It is able to drive up to 2.2W into a 4Ω load and 1.4W into a 8Ω load at 5V. It achieves outstanding efficiency (88% typ.) compared to standard AB-class audio amps.

The gain of the device can be controlled via two external gain-setting resistors. Pop & click reduction circuitry provides low on/off switch noise while allowing the device to start within 5ms. A standby function (active low) allows the reduction of current consumption to 10nA typ.

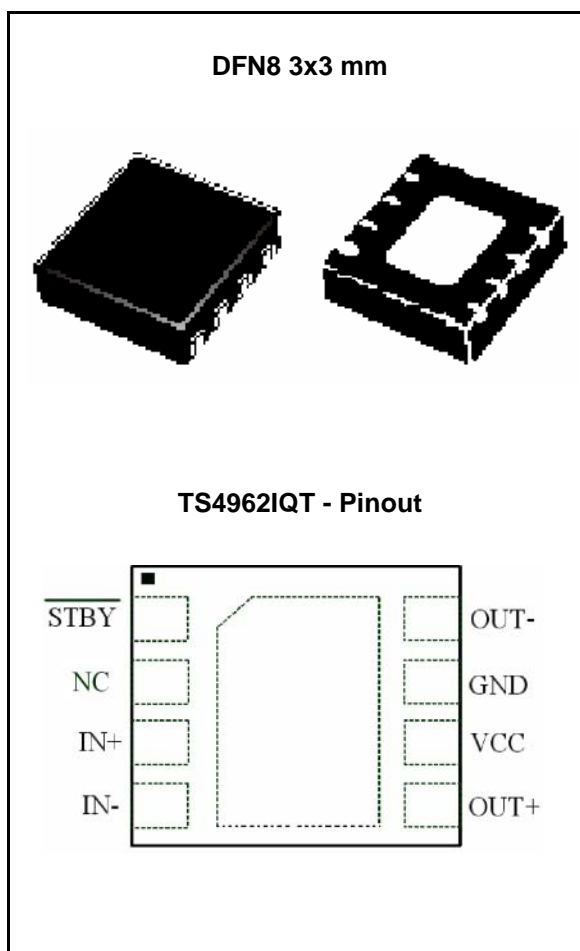

Applications

- Cellular phone
- PDA
- Notebook PC

Contents

1	Absolute maximum ratings and operating conditions	6
2	Application component information	8
3	Electrical characteristics	9
3.1	Electrical characteristics tables	9
3.2	Electrical characteristics curves	21
4	Application information	32
4.1	Differential configuration principle	32
4.2	Gain in typical application schematic	32
4.3	Common mode feedback loop limitations	33
4.4	Low frequency response	33
4.5	Decoupling of the circuit	34
4.6	Wake-up time (t_{WU})	34
4.7	Shutdown time (t_{STBY})	34
4.8	Consumption in standby mode	34
4.9	Single-ended input configuration	35
4.10	Output filter considerations	36
4.11	Several examples with summed inputs	37
	Example 1: Dual differential inputs.	37
	Example 2: One differential input plus one single ended input	38
5	Demo board	39
6	Recommended footprint	41
7	DFN8 package information	42
8	Ordering information	44
9	Revision history	45

List of tables

Table 1.	Absolute maximum ratings	6
Table 2.	Dissipation ratings	6
Table 3.	Operating conditions	7
Table 4.	Component information	8
Table 5.	Electrical characteristics at $V_{CC} = +5V$, with $GND = 0V$, $V_{icm} = 2.5V$, and $T_{amb} = 25^{\circ}C$ (unless otherwise specified)	9
Table 6.	Electrical characteristics at $V_{CC} = +4.2V$ with $GND = 0V$, $V_{icm} = 2.1V$, and $T_{amb} = 25^{\circ}C$ (unless otherwise specified)	11
Table 7.	Electrical characteristics at $V_{CC} = +3.6V$ with $GND = 0V$, $V_{icm} = 1.8V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)	13
Table 8.	Electrical characteristics at $V_{CC} = +3.0V$ with $GND = 0V$, $V_{icm} = 1.5V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)	15
Table 9.	Electrical characteristics at $V_{CC} = +2.5V$ with $GND = 0V$, $V_{icm} = 1.25V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)	17
Table 10.	Electrical characteristics at $V_{CC} = +2.4V$ with $GND = 0V$, $V_{icm} = 1.2V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)	19
Table 11.	Order codes	44
Table 12.	Document revision history	45

List of figures

Figure 1.	Typical application schematics	8
Figure 2.	Schematic used for test measurements	21
Figure 3.	Schematic used for PSSR measurements	21
Figure 4.	Current consumption vs. power supply voltage	22
Figure 6.	Current consumption vs. standby voltage	22
Figure 7.	Output offset voltage vs. common mode input voltage	22
Figure 8.	Efficiency vs. output power	22
Figure 9.	Efficiency vs. output power	22
Figure 10.	Efficiency vs. output power	23
Figure 11.	Efficiency vs. output power	23
Figure 12.	Output power vs. power supply voltage	23
Figure 13.	Output power vs. power supply voltage	23
Figure 14.	PSRR vs. frequency	23
Figure 15.	PSRR vs. frequency	23
Figure 16.	PSRR vs. frequency	24
Figure 17.	PSRR vs. frequency	24
Figure 18.	PSRR vs. frequency	24
Figure 19.	PSRR vs. frequency	24
Figure 20.	PSRR vs. common mode input voltage	24
Figure 21.	CMRR vs. frequency	24
Figure 22.	CMRR vs. frequency	25
Figure 23.	CMRR vs. frequency	25
Figure 24.	CMRR vs. frequency	25
Figure 25.	CMRR vs. frequency	25
Figure 26.	CMRR vs. frequency	25
Figure 27.	CMRR vs. common mode input voltage	25
Figure 28.	THD+N vs. output power	26
Figure 29.	THD+N vs. output power	26
Figure 30.	THD+N vs. output power	26
Figure 31.	THD+N vs. output power	26
Figure 32.	THD+N vs. output power	26
Figure 33.	THD+N vs. output power	26
Figure 34.	THD+N vs. output power	27
Figure 35.	THD+N vs. output power	27
Figure 36.	THD+N vs. frequency	27
Figure 37.	THD+N vs. frequency	27
Figure 38.	THD+N vs. frequency	27
Figure 39.	THD+N vs. frequency	27
Figure 40.	THD+N vs. frequency	28
Figure 41.	THD+N vs. frequency	28
Figure 42.	THD+N vs. frequency	28
Figure 43.	THD+N vs. frequency	28
Figure 44.	THD+N vs. frequency	28
Figure 45.	THD+N vs. frequency	28
Figure 46.	THD+N vs. frequency	29
Figure 47.	THD+N vs. frequency	29
Figure 48.	Gain vs. frequency	29
Figure 49.	Gain vs. frequency	29

Figure 50.	Gain vs. frequency	29
Figure 51.	Gain vs. frequency	29
Figure 52.	Gain vs. frequency	30
Figure 53.	Gain vs. frequency	30
Figure 54.	Gain vs. frequency	30
Figure 55.	Startup & shutdown time $V_{CC} = 5V$, $G = 6dB$, $C_{in} = 1\mu F$ (5ms/div)	30
Figure 56.	Startup & shutdown time $V_{CC} = 3V$, $G = 6dB$, $C_{in} = 1\mu F$ (5ms/div)	30
Figure 57.	Startup & shutdown time $V_{CC} = 5V$, $G = 6dB$, $C_{in} = 100nF$ (5ms/div)	30
Figure 58.	Startup & shutdown time $V_{CC} = 3V$, $G = 6dB$, $C_{in} = 100nF$ (5ms/div)	31
Figure 59.	Startup & shutdown time $V_{CC} = 5V$, $G = 6dB$, No C_{in} (5ms/div)	31
Figure 60.	Startup & shutdown time $V_{CC} = 3V$, $G = 6dB$, No C_{in} (5ms/div)	31
Figure 61.	Single-ended input typical application	35
Figure 62.	Typical application schematic with multiple single-ended inputs	35
Figure 63.	Method for shorting perturbations to ground	37
Figure 64.	Typical application schematic with dual differential inputs	37
Figure 65.	Typical application schematic with one differential input plus one single-ended input . . .	38
Figure 66.	Schematic diagram of mono class D demoboard for the TS4962 DFN package	39
Figure 67.	Top view	39
Figure 68.	Bottom layer	40
Figure 69.	Top layer	40
Figure 70.	Recommended footprint for TS4962 DFN package	41
Figure 71.	DFN8 3x3 exposed pad package	43

1 Absolute maximum ratings and operating conditions

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CC}	Supply voltage ^{(1), (2)}	6	V
V_i	Input voltage ⁽³⁾	GND to V_{CC}	V
T_{oper}	Operating free air temperature range	-40 to + 85	°C
T_{stg}	Storage temperature	-65 to +150	°C
T_j	Maximum junction temperature	150	°C
R_{thja}	Thermal resistance junction to ambient DFN8 package	120	°C/W
P_d	Power dissipation	Internally limited ⁽⁴⁾	
ESD	Human body model	2	kV
ESD	Machine model	200	V
Latch-up	Latch-up immunity	200	mA
V_{STBY}	Standby pin voltage maximum voltage ⁽⁵⁾	GND to V_{CC}	V
	Lead temperature (soldering, 10sec)	260	°C

1. Caution: This device is not protected in the event of abnormal operating conditions such as, for example, short-circuiting between any one output pin and ground, between any one output pin and V_{CC} , and between individual output pins.
2. All voltage values are measured with respect to the ground pin.
3. The magnitude of the input signal must never exceed $V_{CC} + 0.3V$ / GND - 0.3V.
4. Exceeding the power derating curves during a long period will provoke abnormal operation.
5. The magnitude of the standby signal must never exceed $V_{CC} + 0.3V$ / GND - 0.3V.

Table 2. Dissipation ratings

Package	Derating factor	Power rating @25°C	Power rating @ 85°C
DFN8	20 mW / °C	2.5 W	1.3 W

Table 3. Operating conditions

Symbol	Parameter	Value	Unit
V_{CC}	Supply voltage ⁽¹⁾	2.4 to 5.5	V
V_{IC}	Common mode input voltage range ⁽²⁾	0.5 to $V_{CC}-0.8$	V
V_{STBY}	Standby voltage input: ⁽³⁾ Device ON Device OFF	$1.4 \leq V_{STBY} \leq V_{CC}$ $GND \leq V_{STBY} \leq 0.4$ ⁽⁴⁾	V
R_L	Load resistor	≥ 4	Ω
R_{thja}	Thermal resistance junction to ambient DFN8 package ⁽⁵⁾	50	$^{\circ}\text{C}/\text{W}$


1. For V_{CC} between 2.4V and 2.5V, the operating temperature range is reduced to $0^{\circ}\text{C} \leq T_{amb} \leq 70^{\circ}\text{C}$.
2. For V_{CC} between 2.4V and 2.5V, the common mode input range must be set at $V_{CC}/2$.
3. Without any signal on V_{STBY} , the device will be in standby.
4. Minimum current consumption is obtained when $V_{STBY} = GND$.
5. When mounted on a 4-layer PCB.

2 Application component information

Table 4. Component information

Component	Functional description
C_S	Bypass supply capacitor. Install as close as possible to the TS4962 to minimize high-frequency ripple. A 100nF ceramic capacitor should be added to enhance the power supply filtering at high frequency.
R_{in}	Input resistor used to program the TS4962 differential gain ($\text{Gain} = 300\text{k}\Omega/R_{in}$ with R_{in} in $\text{k}\Omega$).
Input capacitor	Because of common mode feedback these input capacitors are optional. However, they can be added to form with R_{in} a 1st order high pass filter with -3dB cut-off frequency $= 1/(2*\pi*R_{in}*C_{in})$.

Figure 1. Typical application schematics

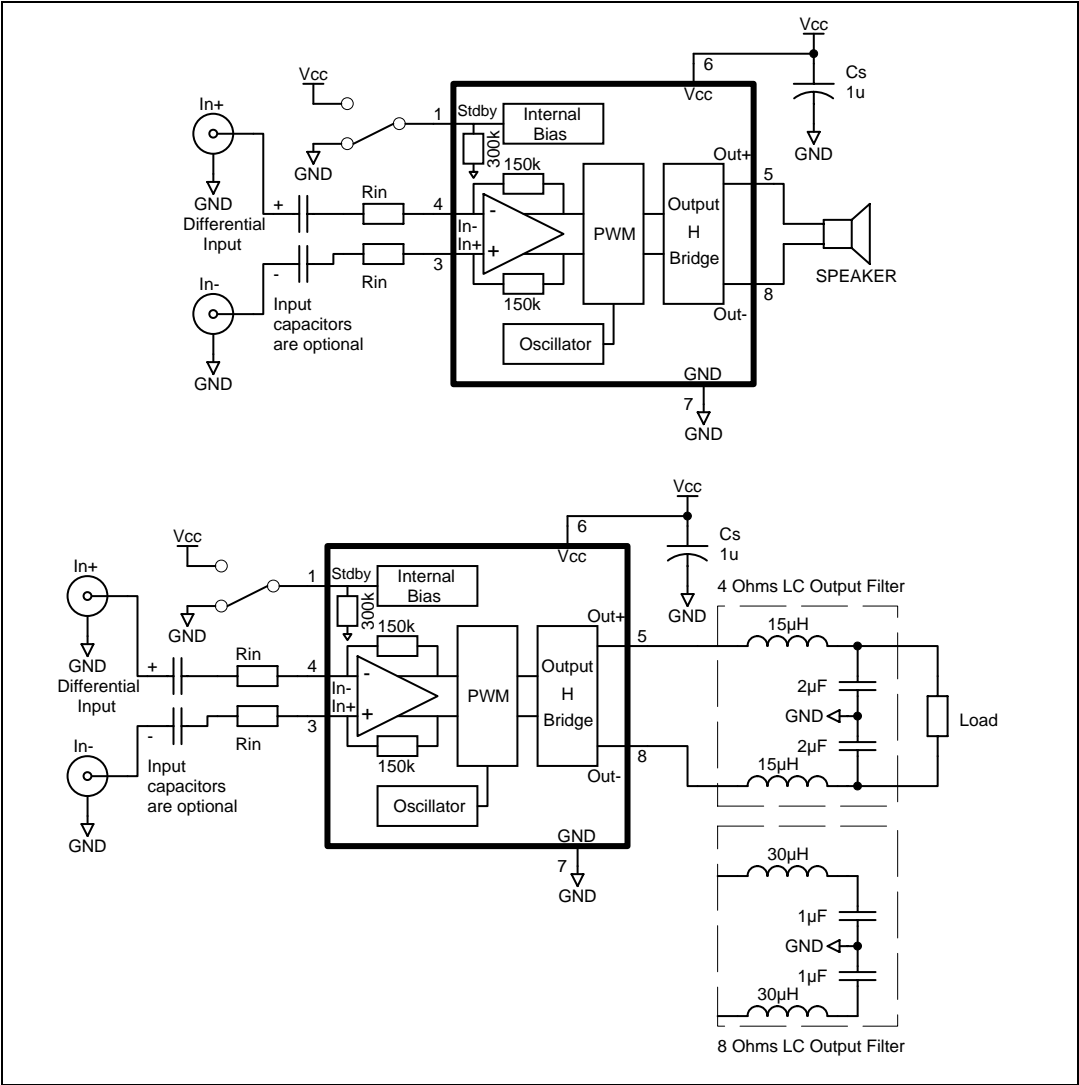

3 Electrical characteristics

3.1 Electrical characteristics tables

**Table 5. Electrical characteristics at $V_{CC} = +5V$,
with $GND = 0V$, $V_{icm} = 2.5V$, and $T_{amb} = 25^{\circ}C$ (unless otherwise specified)**

Symbol	Parameter	Min.	Typ.	Max.	Unit
I_{CC}	Supply current No input signal, no load		2.3	3.3	mA
I_{STBY}	Standby current ⁽¹⁾ No input signal, $V_{STBY} = GND$		10	1000	nA
V_{oo}	Output offset voltage No input signal, $R_L = 8\Omega$		3	25	mV
P_{out}	Output power, $G=6dB$ THD = 1% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$, $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 8\Omega$		2.2 2.8 1.4 1.7		W
THD + N	Total harmonic distortion + noise $P_{out} = 850 mW_{RMS}$, $G = 6dB$, $20Hz < f < 20kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$ $P_{out} = 1W_{RMS}$, $G = 6dB$, $f = 1kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$		2 0.4		%
Efficiency	Efficiency $P_{out} = 2 W_{RMS}$, $R_L = 4\Omega + \geq 15\mu H$ $P_{out} = 1.2 W_{RMS}$, $R_L = 8\Omega + \geq 15\mu H$		78 88		%
PSRR	Power supply rejection ratio with inputs grounded ⁽²⁾ $f = 217Hz$, $R_L = 8\Omega$, $G=6dB$, $V_{ripple} = 200mV_{pp}$		63		dB
CMRR	Common mode rejection ratio $f = 217Hz$, $R_L = 8\Omega$, $G = 6dB$, $\Delta V_{ic} = 200mV_{pp}$		57		dB
Gain	Gain value (R_{in} in $k\Omega$)	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
R_{STBY}	Internal resistance from standby to GND	273	300	327	$k\Omega$
F_{PWM}	Pulse width modulator base frequency	200	280	360	kHz
SNR	Signal to noise ratio (A weighting), $P_{out} = 1.2W$, $R_L = 8\Omega$		85		dB
t_{WU}	Wake-up time		5	10	ms
t_{STBY}	Standby time		5	10	ms

Table 5. Electrical characteristics at $V_{CC} = +5V$, with $GND = 0V$, $V_{icm} = 2.5V$, and $T_{amb} = 25^{\circ}C$ (unless otherwise specified) (continued)

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_N	Output voltage noise $f = 20Hz$ to $20kHz$, $G = 6dB$				
	Unweighted $R_L = 4\Omega$		85		
	A-weighted $R_L = 4\Omega$		60		
	Unweighted $R_L = 8\Omega$		86		
	A-weighted $R_L = 8\Omega$		62		
	Unweighted $R_L = 4\Omega + 15\mu H$		83		
	A-weighted $R_L = 4\Omega + 15\mu H$		60		
	Unweighted $R_L = 4\Omega + 30\mu H$		88		
	A-weighted $R_L = 4\Omega + 30\mu H$		64		
	Unweighted $R_L = 8\Omega + 30\mu H$		78		
	A-weighted $R_L = 8\Omega + 30\mu H$		57		
	Unweighted $R_L = 4\Omega + \text{Filter}$		87		
	A-weighted $R_L = 4\Omega + \text{Filter}$		65		
	Unweighted $R_L = 4\Omega + \text{Filter}$		82		
	A-weighted $R_L = 4\Omega + \text{Filter}$		59		

 μV_{RMS}

1. Standby mode is active when V_{STBY} is tied to GND.
2. Dynamic measurements - $20 \cdot \log(rms(V_{out})/rms(V_{ripple}))$. V_{ripple} is the superimposed sinusoidal signal to V_{CC} @ $f = 217Hz$.

Table 6. Electrical characteristics at $V_{CC} = +4.2V$ with $GND = 0V$, $V_{icm} = 2.1V$, and $T_{amb} = 25^{\circ}C$ (unless otherwise specified)⁽¹⁾

Symbol	Parameter	Min.	Typ.	Max.	Unit
I_{CC}	Supply current No input signal, no load		2.1	3	mA
I_{STBY}	Standby current ⁽²⁾ No input signal, $V_{STBY} = GND$		10	1000	nA
V_{oo}	Output offset voltage No input signal, $R_L = 8\Omega$		3	25	mV
P_{out}	Output power, $G=6dB$ THD = 1% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$, $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 8\Omega$		1.5 1.95 0.9 1.1		W
THD + N	Total harmonic distortion + noise $P_{out} = 600 mW_{RMS}$, $G = 6dB$, $20Hz < f < 20kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$ $P_{out} = 700mW_{RMS}$, $G = 6dB$, $f = 1kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$		2 0.35		%
Efficiency	Efficiency $P_{out} = 1.45 W_{RMS}$, $R_L = 4\Omega + \geq 15\mu H$ $P_{out} = 0.9 W_{RMS}$, $R_L = 8\Omega + \geq 15\mu H$		78 88		%
PSRR	Power supply rejection ratio with inputs grounded ⁽³⁾ $f = 217Hz$, $R_L = 8\Omega$, $G=6dB$, $V_{ripple} = 200mV_{pp}$		63		dB
CMRR	Common mode rejection ratio $f = 217Hz$, $R_L = 8\Omega$, $G = 6dB$, $\Delta V_{ic} = 200mV_{pp}$		57		dB
Gain	Gain value (R_{in} in $k\Omega$)	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
R_{STBY}	Internal resistance from standby to GND	273	300	327	$k\Omega$
F_{PWM}	Pulse width modulator base frequency	200	280	360	kHz
SNR	Signal to noise ratio (A-weighting) $P_{out} = 0.8W$, $R_L = 8\Omega$		85		dB
t_{WU}	Wake-up time		5	10	ms
t_{STBY}	Standby time		5	10	ms

Table 6. Electrical characteristics at $V_{CC} = +4.2V$ with $GND = 0V$, $V_{icm} = 2.1V$, and $T_{amb} = 25^{\circ}C$ (unless otherwise specified)⁽¹⁾ (continued)

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_N	Output voltage noise $f = 20Hz$ to $20kHz$, $G = 6dB$				
	Unweighted $R_L = 4\Omega$		85		
	A-weighted $R_L = 4\Omega$		60		
	Unweighted $R_L = 8\Omega$		86		
	A-weighted $R_L = 8\Omega$		62		
	Unweighted $R_L = 4\Omega + 15\mu H$		83		
	A-weighted $R_L = 4\Omega + 15\mu H$		60		
	Unweighted $R_L = 4\Omega + 30\mu H$		88		
	A-weighted $R_L = 4\Omega + 30\mu H$		64		
	Unweighted $R_L = 8\Omega + 30\mu H$		78		
	A-weighted $R_L = 8\Omega + 30\mu H$		57		
	Unweighted $R_L = 4\Omega + \text{Filter}$		87		
	A-weighted $R_L = 4\Omega + \text{Filter}$		65		
	Unweighted $R_L = 4\Omega + \text{Filter}$		82		
	A-weighted $R_L = 4\Omega + \text{Filter}$		59		

μV_{RMS}

1. All electrical values are guaranteed with correlation measurements at 2.5V and 5V.
2. Standby mode is active when V_{STBY} is tied to GND.
3. Dynamic measurements - $20 \cdot \log(rms(V_{out})/rms(V_{ripple}))$. V_{ripple} is the superimposed sinusoidal signal to V_{CC} @ $f = 217Hz$.

**Table 7. Electrical characteristics at $V_{CC} = +3.6V$
with $GND = 0V$, $V_{icm} = 1.8V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)⁽¹⁾**

Symbol	Parameter	Min.	Typ.	Max.	Unit
I_{CC}	Supply current No input signal, no load		2	2.8	mA
I_{STBY}	Standby current ⁽²⁾ No input signal, $V_{STBY} = GND$		10	1000	nA
V_{oo}	Output offset voltage No input signal, $R_L = 8\Omega$		3	25	mV
P_{out}	Output power, $G=6dB$ THD = 1% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$, $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 8\Omega$		1.1 1.4 0.7 0.85		W
THD + N	Total harmonic distortion + noise $P_{out} = 450 mW_{RMS}$, $G = 6dB$, $20Hz < f < 20kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$ $P_{out} = 500mW_{RMS}$, $G = 6dB$, $f = 1kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$		2 0.1		%
Efficiency	Efficiency $P_{out} = 1 W_{RMS}$, $R_L = 4\Omega + \geq 15\mu H$ $P_{out} = 0.65 W_{RMS}$, $R_L = 8\Omega + \geq 15\mu H$		78 88		%
PSRR	Power supply rejection ratio with inputs grounded ⁽³⁾ $f = 217Hz$, $R_L = 8\Omega$, $G=6dB$, $V_{ripple} = 200mV_{pp}$		62		dB
CMRR	Common mode rejection ratio $f = 217Hz$, $R_L = 8\Omega$, $G = 6dB$, $\Delta V_{ic} = 200mV_{pp}$		56		dB
Gain	Gain value (R_{in} in $k\Omega$)	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
R_{STBY}	Internal resistance from standby to GND	273	300	327	$k\Omega$
F_{PWM}	Pulse width modulator base frequency	200	280	360	kHz
SNR	Signal to noise ratio (A-weighting) $P_{out} = 0.6W$, $R_L = 8\Omega$		83		dB
t_{WU}	Wake-up time		5	10	ms
t_{STBY}	Standby time		5	10	ms

**Table 7. Electrical characteristics at $V_{CC} = +3.6V$
with $GND = 0V$, $V_{icm} = 1.8V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)⁽¹⁾
(continued)**

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_N	Output voltage noise $f = 20Hz$ to $20kHz$, $G = 6dB$				
	Unweighted $R_L = 4\Omega$		83		
	A-weighted $R_L = 4\Omega$		57		
	Unweighted $R_L = 8\Omega$		83		
	A-weighted $R_L = 8\Omega$		61		
	Unweighted $R_L = 4\Omega + 15\mu H$		81		
	A-weighted $R_L = 4\Omega + 15\mu H$		58		
	Unweighted $R_L = 4\Omega + 30\mu H$		87		
	A-weighted $R_L = 4\Omega + 30\mu H$		62		
	Unweighted $R_L = 8\Omega + 30\mu H$		77		
	A-weighted $R_L = 8\Omega + 30\mu H$		56		
	Unweighted $R_L = 4\Omega + \text{Filter}$		85		
	A-weighted $R_L = 4\Omega + \text{Filter}$		63		
	Unweighted $R_L = 4\Omega + \text{Filter}$		80		
	A-weighted $R_L = 4\Omega + \text{Filter}$		57		

 μV_{RMS}

1. All electrical values are guaranteed with correlation measurements at 2.5V and 5V.
2. Standby mode is activated when V_{STBY} is tied to GND.
3. Dynamic measurements - $20 \cdot \log(\text{rms}(V_{out})/\text{rms}(V_{ripple}))$. V_{ripple} is the superimposed sinusoidal signal to V_{CC} @ $f = 217Hz$.

**Table 8. Electrical characteristics at $V_{CC} = +3.0V$
with $GND = 0V$, $V_{icm} = 1.5V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)⁽¹⁾**

Symbol	Parameter	Min.	Typ.	Max.	Unit
I_{CC}	Supply current No input signal, no load		1.9	2.7	mA
I_{STBY}	Standby current ⁽²⁾ No input signal, $V_{STBY} = GND$		10	1000	nA
V_{oo}	Output offset voltage No input signal, $R_L = 8\Omega$		3	25	mV
P_{out}	Output power, $G=6dB$ THD = 1% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$, $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 8\Omega$		0.7 1 0.5 0.6		W
THD + N	Total harmonic distortion + noise $P_{out} = 300 mW_{RMS}$, $G = 6dB$, $20Hz < f < 20kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$ $P_{out} = 350mW_{RMS}$, $G = 6dB$, $f = 1kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$		2 0.1		%
Efficiency	Efficiency $P_{out} = 0.7 W_{RMS}$, $R_L = 4\Omega + \geq 15\mu H$ $P_{out} = 0.45 W_{RMS}$, $R_L = 8\Omega + \geq 15\mu H$		78 88		%
PSRR	Power supply rejection ratio with inputs grounded ⁽³⁾ $f = 217Hz$, $R_L = 8\Omega$, $G=6dB$, $V_{ripple} = 200mV_{pp}$		60		dB
CMRR	Common mode rejection ratio $f = 217Hz$, $R_L = 8\Omega$, $G = 6dB$, $\Delta V_{ic} = 200mV_{pp}$		54		dB
Gain	Gain value (R_{in} in $k\Omega$)	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
R_{STBY}	Internal resistance from standby to GND	273	300	327	$k\Omega$
F_{PWM}	Pulse width modulator base frequency	200	280	360	kHz
SNR	Signal to noise ratio (A-weighting) $P_{out} = 0.4W$, $R_L = 8\Omega$		82		dB
t_{WU}	Wake-up time		5	10	ms
t_{STBY}	Standby time		5	10	ms

**Table 8. Electrical characteristics at $V_{CC} = +3.0V$
with $GND = 0V$, $V_{icm} = 1.5V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)⁽¹⁾
(continued)**

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_N	Output voltage noise $f = 20Hz$ to $20kHz$, $G = 6dB$				
	Unweighted $R_L = 4\Omega$		83		
	A-weighted $R_L = 4\Omega$		57		
	Unweighted $R_L = 8\Omega$		83		
	A-weighted $R_L = 8\Omega$		61		
	Unweighted $R_L = 4\Omega + 15\mu H$		81		
	A-weighted $R_L = 4\Omega + 15\mu H$		58		
	Unweighted $R_L = 4\Omega + 30\mu H$		87		
	A-weighted $R_L = 4\Omega + 30\mu H$		62		
	Unweighted $R_L = 8\Omega + 30\mu H$		77		
	A-weighted $R_L = 8\Omega + 30\mu H$		56		
	Unweighted $R_L = 4\Omega + \text{Filter}$		85		
	A-weighted $R_L = 4\Omega + \text{Filter}$		63		
	Unweighted $R_L = 4\Omega + \text{Filter}$		80		
	A-weighted $R_L = 4\Omega + \text{Filter}$		57		

 μV_{RMS}

1. All electrical values are guaranteed with correlation measurements at 2.5V and 5V.
2. Standby mode is active when V_{STBY} is tied to GND.
3. Dynamic measurements - $20 \cdot \log(\text{rms}(V_{out})/\text{rms}(V_{ripple}))$. V_{ripple} is the superimposed sinusoidal signal to V_{CC} @ $f = 217Hz$.

**Table 9. Electrical characteristics at $V_{CC} = +2.5V$
with $GND = 0V$, $V_{icm} = 1.25V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)**

Symbol	Parameter	Min.	Typ.	Max.	Unit
I_{CC}	Supply current No input signal, no load		1.7	2.4	mA
I_{STBY}	Standby current ⁽¹⁾ No input signal, $V_{STBY} = GND$		10	1000	nA
V_{oo}	Output offset voltage No input signal, $R_L = 8\Omega$		3	25	mV
P_{out}	Output power, $G=6dB$ THD = 1% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$, $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 8\Omega$		0.5 0.65 0.33 0.41		W
THD + N	Total harmonic distortion + noise $P_{out} = 180 mW_{RMS}$, $G = 6dB$, $20Hz < f < 20kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$ $P_{out} = 200mW_{RMS}$, $G = 6dB$, $f = 1kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$		1 0.05		%
Efficiency	Efficiency $P_{out} = 0.47 W_{RMS}$, $R_L = 4\Omega + \geq 15\mu H$ $P_{out} = 0.3 W_{RMS}$, $R_L = 8\Omega + \geq 15\mu H$		78 88		%
PSRR	Power supply rejection ratio with inputs grounded ⁽²⁾ $f = 217Hz$, $R_L = 8\Omega$, $G=6dB$, $V_{ripple} = 200mV_{pp}$		60		dB
CMRR	Common mode rejection ratio $f = 217Hz$, $R_L = 8\Omega$, $G = 6dB$, $\Delta V_{ic} = 200mV_{pp}$		54		dB
Gain	Gain value (R_{in} in $k\Omega$)	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
R_{STBY}	Internal resistance from standby to GND	273	300	327	$k\Omega$
F_{PWM}	Pulse width modulator base frequency	200	280	360	kHz
SNR	Signal to noise ratio (A-weighting) $P_{out} = 0.3W$, $R_L = 8\Omega$		80		dB
t_{WU}	Wake-up time		5	10	ms
t_{STBY}	Standby time		5	10	ms

**Table 9. Electrical characteristics at $V_{CC} = +2.5V$
with $GND = 0V$, $V_{icm} = 1.25V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)
(continued)**

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_N	Output voltage noise $f = 20Hz$ to $20kHz$, $G = 6dB$				
	Unweighted $R_L = 4\Omega$		85		μV_{RMS}
	A-weighted $R_L = 4\Omega$		60		
	Unweighted $R_L = 8\Omega$		86		
	A-weighted $R_L = 8\Omega$		62		
	Unweighted $R_L = 4\Omega + 15\mu H$		76		
	A-weighted $R_L = 4\Omega + 15\mu H$		56		
	Unweighted $R_L = 4\Omega + 30\mu H$		82		
	A-weighted $R_L = 4\Omega + 30\mu H$		60		
	Unweighted $R_L = 8\Omega + 30\mu H$		67		
	A-weighted $R_L = 8\Omega + 30\mu H$		53		
	Unweighted $R_L = 4\Omega + \text{Filter}$		78		
	A-weighted $R_L = 4\Omega + \text{Filter}$		57		
	Unweighted $R_L = 4\Omega + \text{Filter}$		74		
	A-weighted $R_L = 4\Omega + \text{Filter}$		54		

1. Standby mode is active when V_{STBY} is tied to GND.
2. Dynamic measurements - $20 \cdot \log(\text{rms}(V_{out})/\text{rms}(V_{ripple}))$. V_{ripple} is the superimposed sinusoidal signal to V_{CC} @ $f = 217Hz$.

**Table 10. Electrical characteristics at $V_{CC} + 2.4V$
with $GND = 0V$, $V_{icm} = 1.2V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)**

Symbol	Parameter	Min.	Typ.	Max.	Unit
I_{CC}	Supply current No input signal, no load		1.7		mA
I_{STBY}	Standby current ⁽¹⁾ No input signal, $V_{STBY} = GND$		10		nA
V_{oo}	Output offset voltage No input signal, $R_L = 8\Omega$		3		mV
P_{out}	Output power, $G=6dB$ THD = 1% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 4\Omega$ THD = 1% Max, $f = 1kHz$, $R_L = 8\Omega$ THD = 10% Max, $f = 1kHz$, $R_L = 8\Omega$		0.42 0.61 0.3 0.38		W
THD + N	Total harmonic distortion + noise $P_{out} = 150 mW_{RMS}$, $G = 6dB$, $20Hz < f < 20kHz$ $R_L = 8\Omega + 15\mu H$, $BW < 30kHz$		1		%
Efficiency	Efficiency $P_{out} = 0.38 W_{RMS}$, $R_L = 4\Omega + \geq 15\mu H$ $P_{out} = 0.25 W_{RMS}$, $R_L = 8\Omega + \geq 15\mu H$		77 86		%
CMRR	Common mode rejection ratio $f = 217Hz$, $R_L = 8\Omega$, $G = 6dB$, $\Delta V_{ic} = 200mV_{pp}$		54		dB
Gain	Gain value (R_{in} in $k\Omega$)	$\frac{273k\Omega}{R_{in}}$	$\frac{300k\Omega}{R_{in}}$	$\frac{327k\Omega}{R_{in}}$	V/V
R_{STBY}	Internal resistance from standby to GND	273	300	327	$k\Omega$
F_{PWM}	Pulse width modulator base frequency		280		kHz
SNR	Signal to noise ratio (A-weighting) $P_{out} = 0.25W$, $R_L = 8\Omega$		80		dB
t_{WU}	Wake-up time		5		ms
t_{STBY}	Standby time		5		ms

**Table 10. Electrical characteristics at $V_{CC} + 2.4V$
with $GND = 0V$, $V_{icm} = 1.2V$, $T_{amb} = 25^{\circ}C$ (unless otherwise specified)**

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_N	Output voltage noise $f = 20Hz$ to $20kHz$, $G = 6dB$				
	Unweighted $R_L = 4\Omega$		85		
	A-weighted $R_L = 4\Omega$		60		
	Unweighted $R_L = 8\Omega$		86		
	A-weighted $R_L = 8\Omega$		62		
	Unweighted $R_L = 4\Omega + 15\mu H$		76		
	A-weighted $R_L = 4\Omega + 15\mu H$		56		
	Unweighted $R_L = 4\Omega + 30\mu H$		82		
	A-weighted $R_L = 4\Omega + 30\mu H$		60		
	Unweighted $R_L = 8\Omega + 30\mu H$		67		
	A-weighted $R_L = 8\Omega + 30\mu H$		53		
	Unweighted $R_L = 4\Omega + \text{Filter}$		78		
	A-weighted $R_L = 4\Omega + \text{Filter}$		57		
	Unweighted $R_L = 4\Omega + \text{Filter}$		74		
	A-weighted $R_L = 4\Omega + \text{Filter}$		54		

1. Standby mode is active when V_{STBY} is tied to GND.

3.2 Electrical characteristics curves

The graphs shown in this section use the following abbreviations:

- $R_L + 15\mu\text{H}$ or $30\mu\text{H}$ = pure resistor+ very low series resistance inductor
- Filter = LC output filter ($1\mu\text{F}+30\mu\text{H}$ for 4Ω and $0.5\mu\text{F}+60\mu\text{H}$ for 8Ω)

All measurements are done with $C_{S1}=1\mu\text{F}$ and $C_{S2}=100\text{nF}$ (see [Figure 2](#)), except for the PSRR where C_{S1} is removed (see [Figure 3](#)).

Figure 2. Schematic used for test measurements

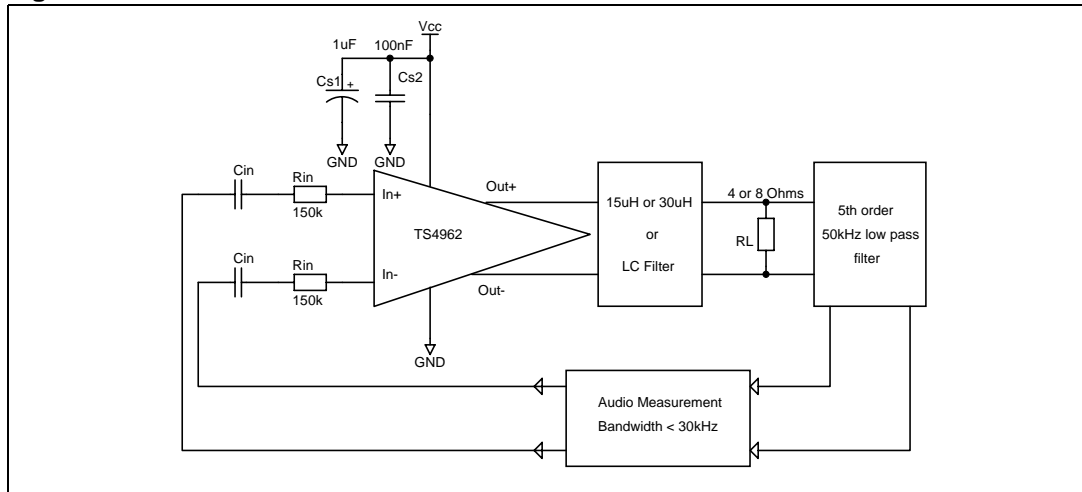


Figure 3. Schematic used for PSSR measurements

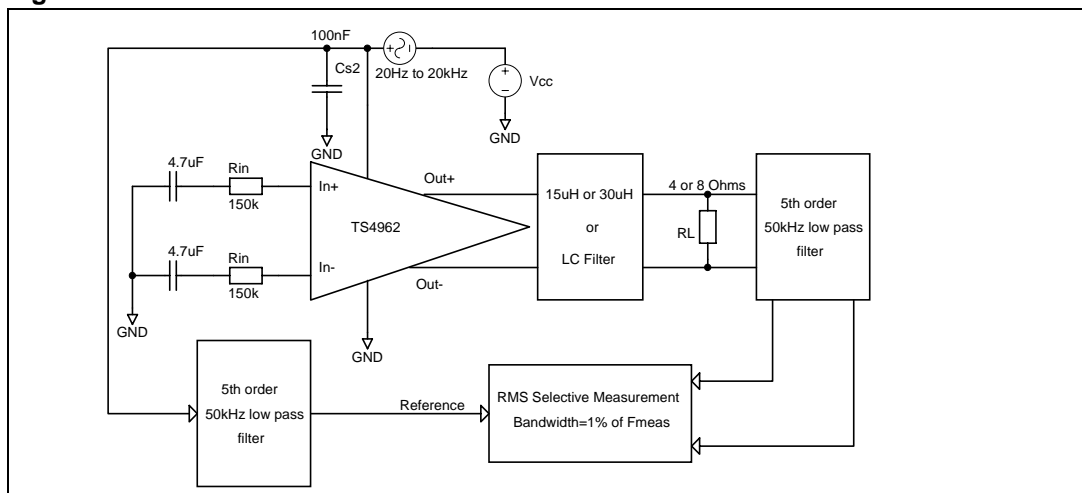


Figure 4. Current consumption vs. power supply voltage

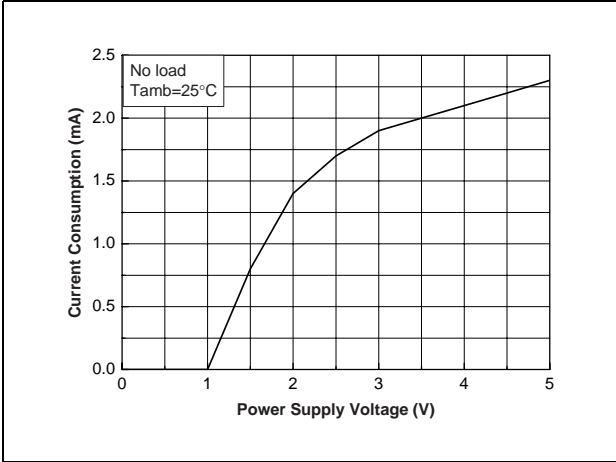


Figure 5. Current consumption vs. standby voltage

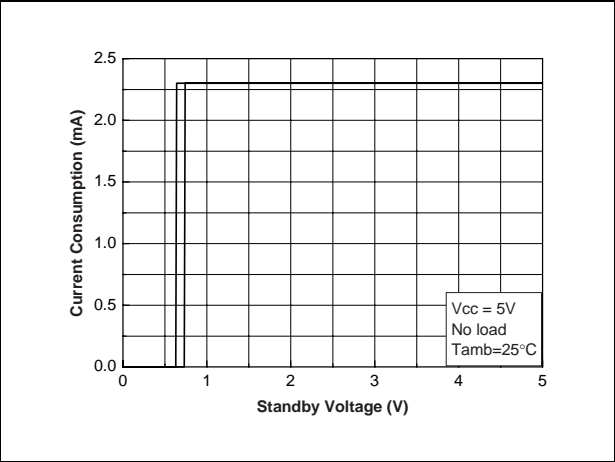


Figure 6. Current consumption vs. standby voltage

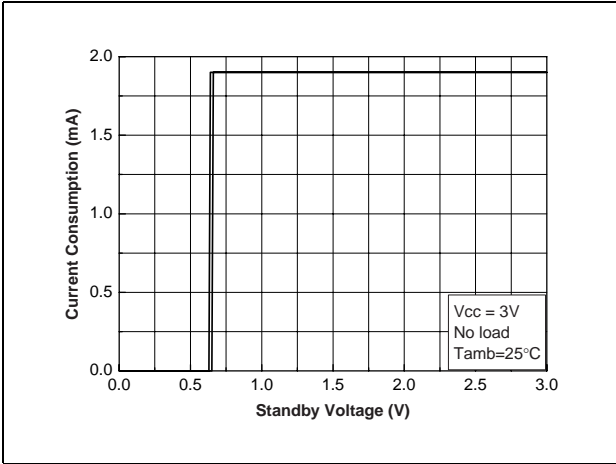


Figure 7. Output offset voltage vs. common mode input voltage

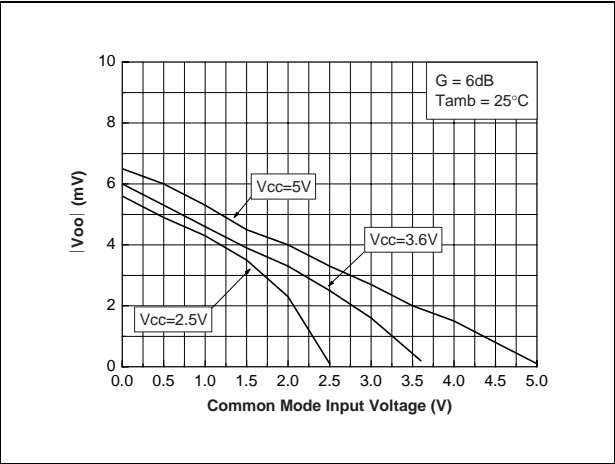


Figure 8. Efficiency vs. output power

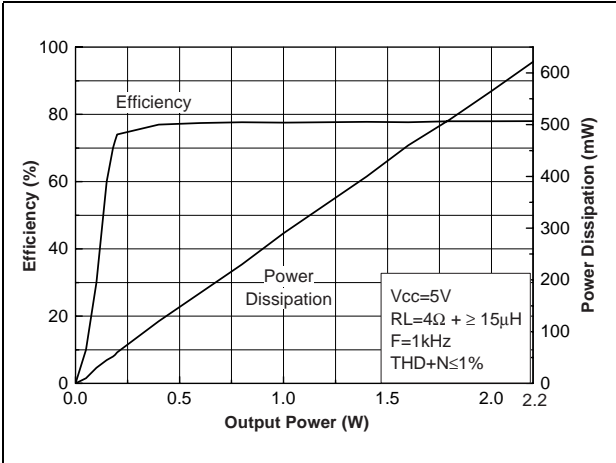


Figure 9. Efficiency vs. output power

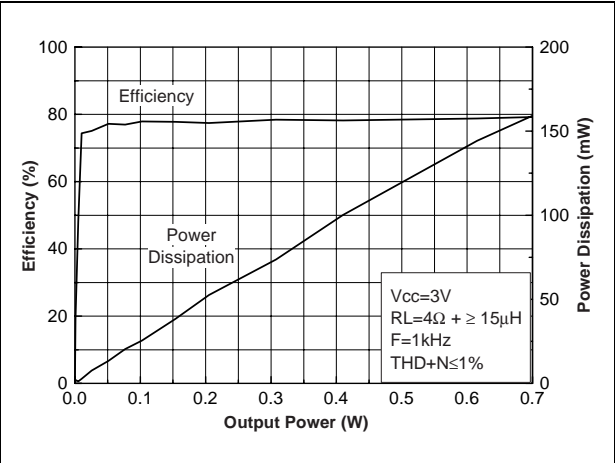


Figure 10. Efficiency vs. output power

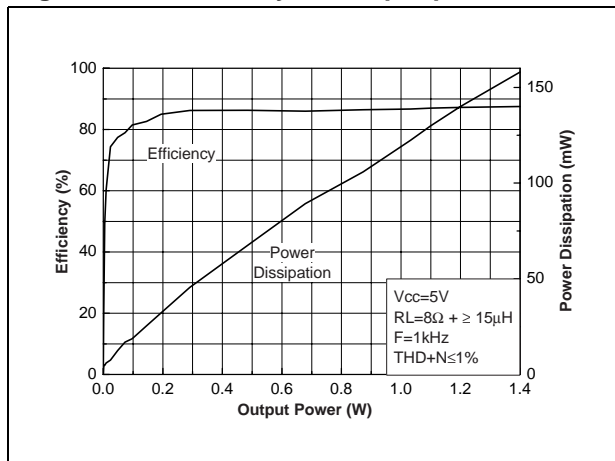


Figure 11. Efficiency vs. output power

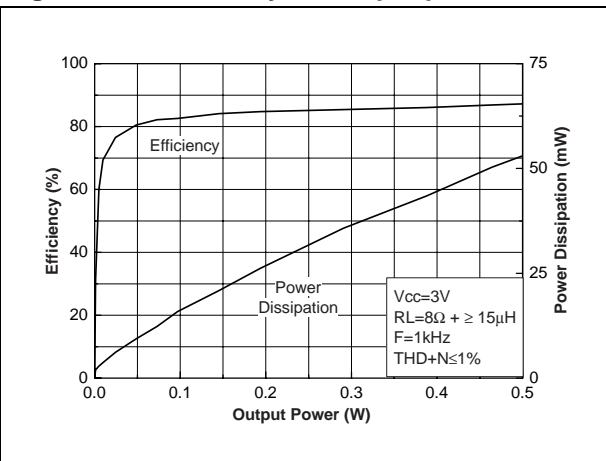


Figure 12. Output power vs. power supply voltage

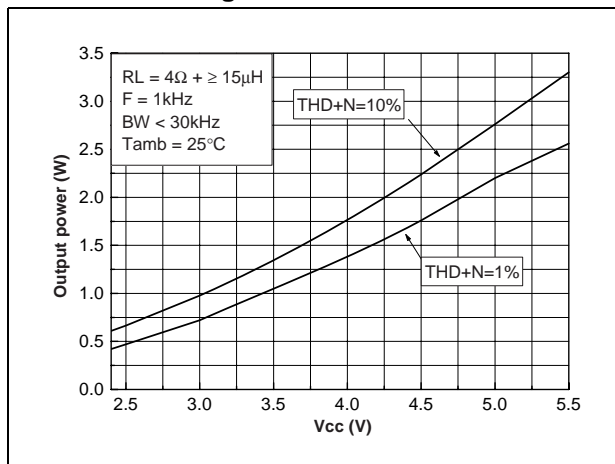


Figure 13. Output power vs. power supply voltage

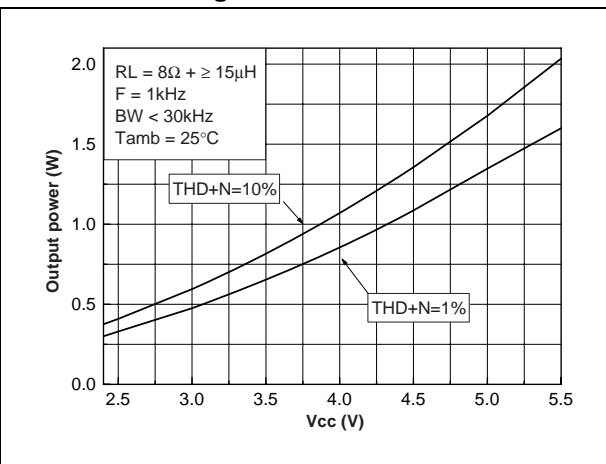


Figure 14. PSRR vs. frequency

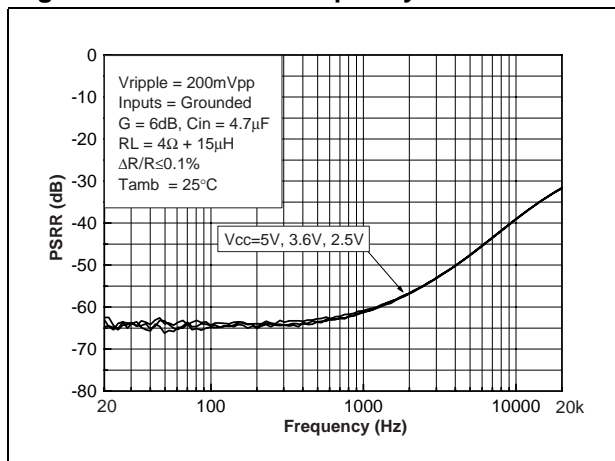


Figure 15. PSRR vs. frequency

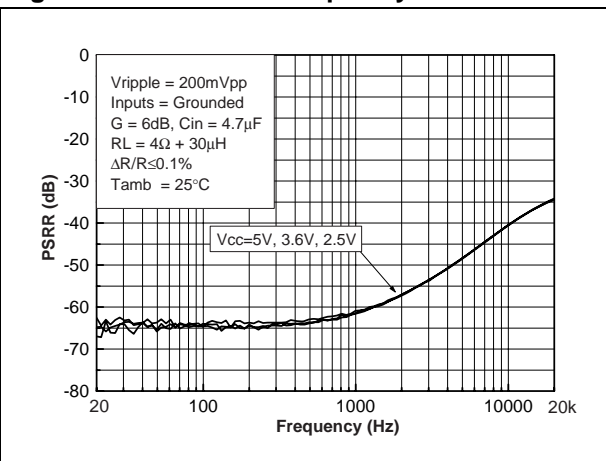


Figure 16. PSRR vs. frequency

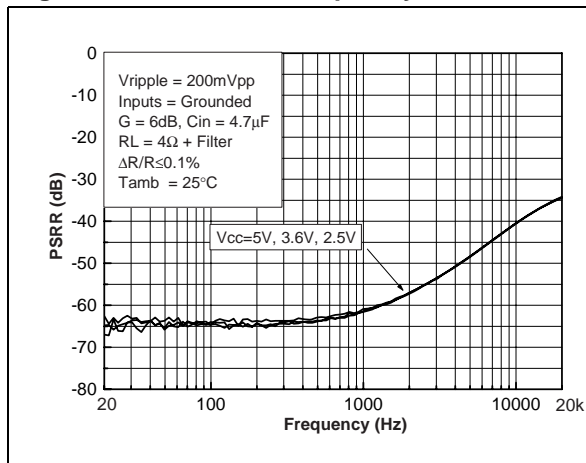


Figure 17. PSRR vs. frequency

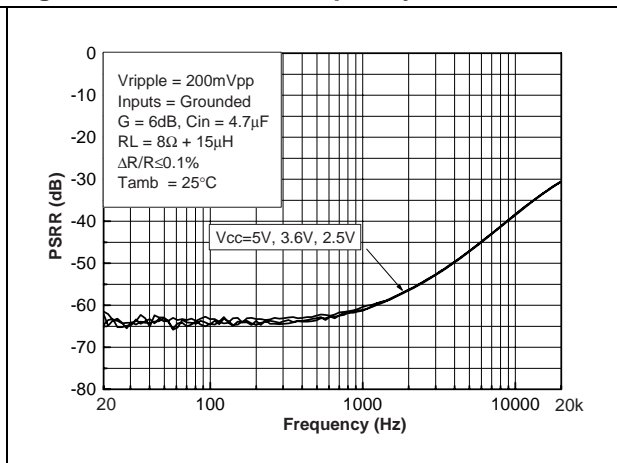


Figure 18. PSRR vs. frequency

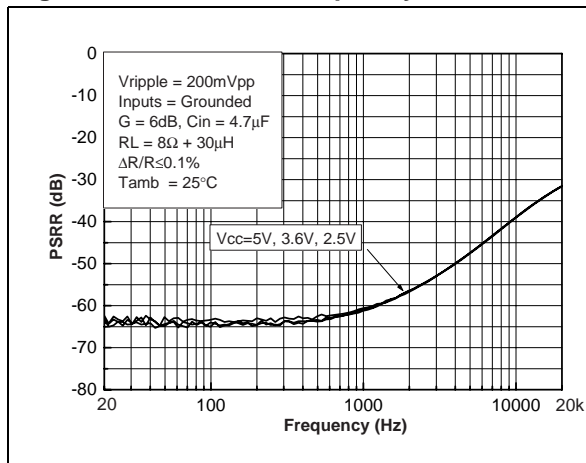


Figure 19. PSRR vs. frequency

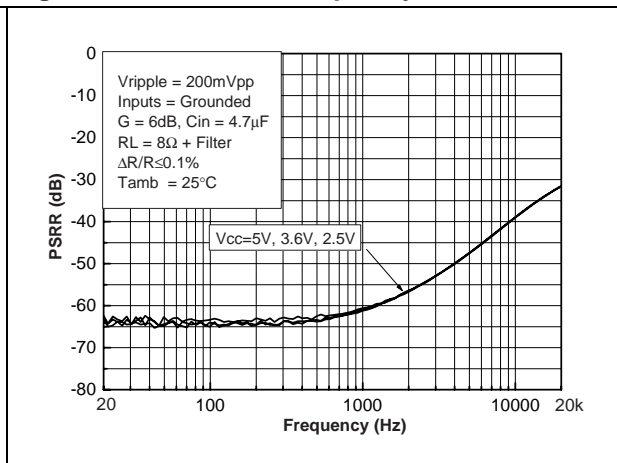


Figure 20. PSRR vs. common mode input voltage

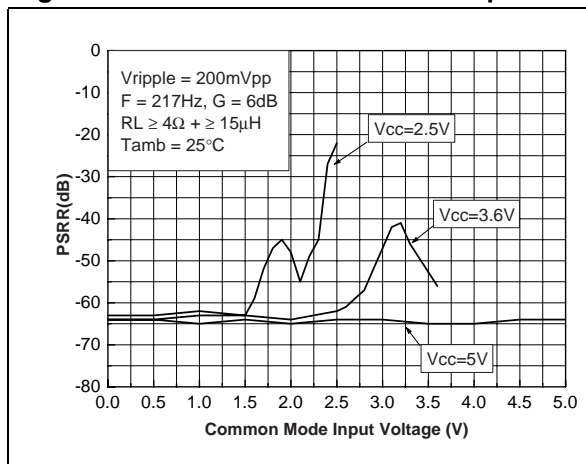


Figure 21. CMRR vs. frequency

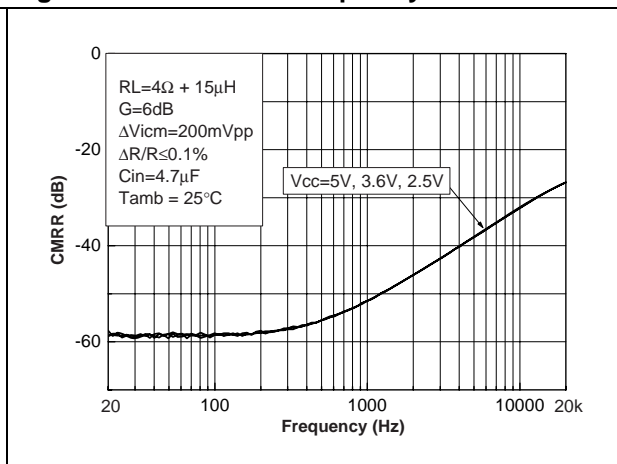


Figure 22. CMRR vs. frequency

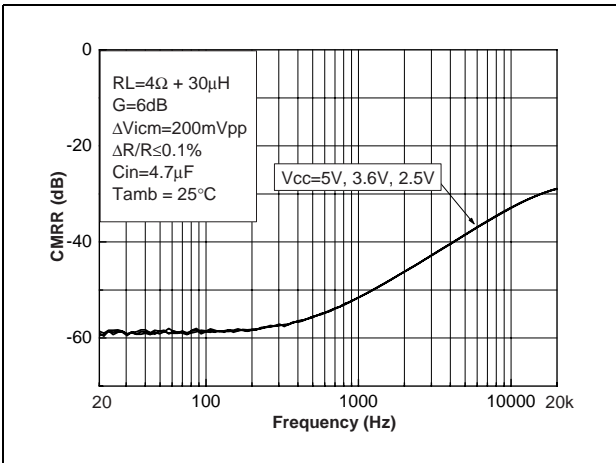


Figure 23. CMRR vs. frequency

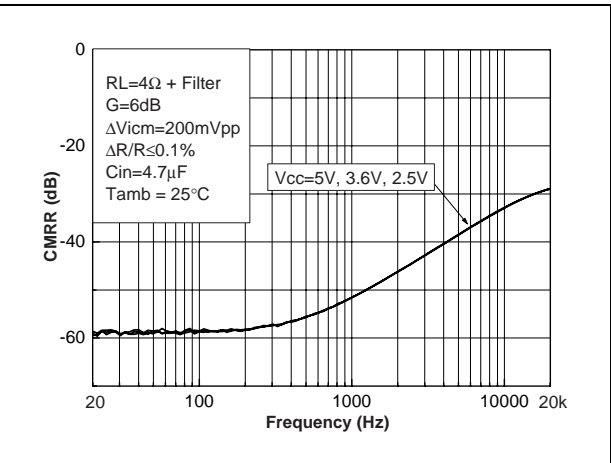


Figure 24. CMRR vs. frequency

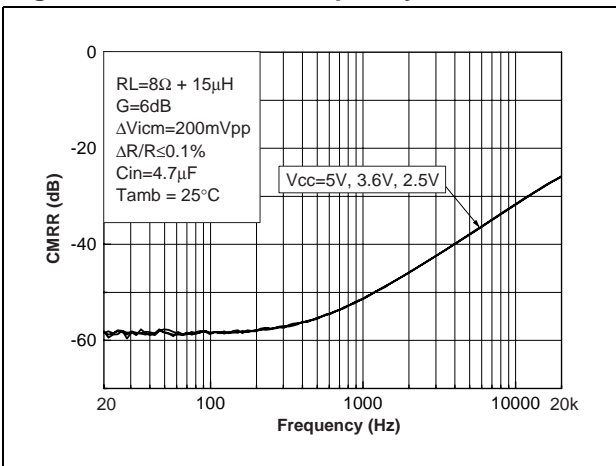


Figure 25. CMRR vs. frequency

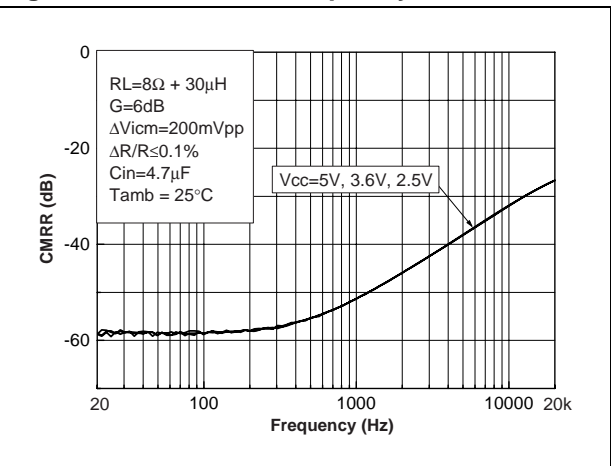


Figure 26. CMRR vs. frequency

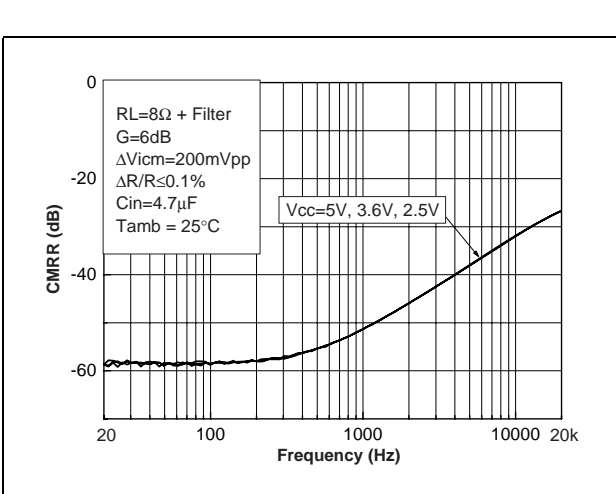


Figure 27. CMRR vs. common mode input voltage

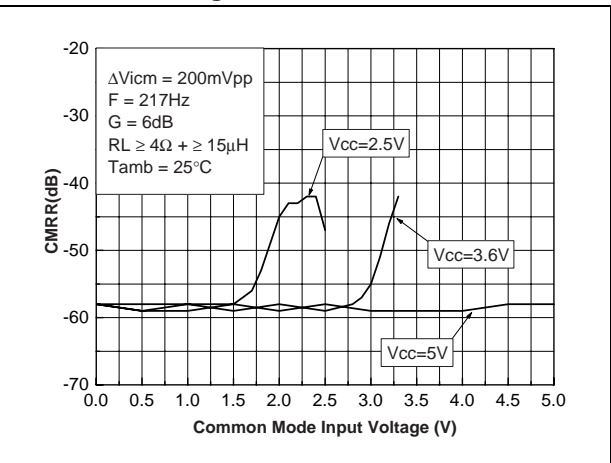


Figure 28. THD+N vs. output power

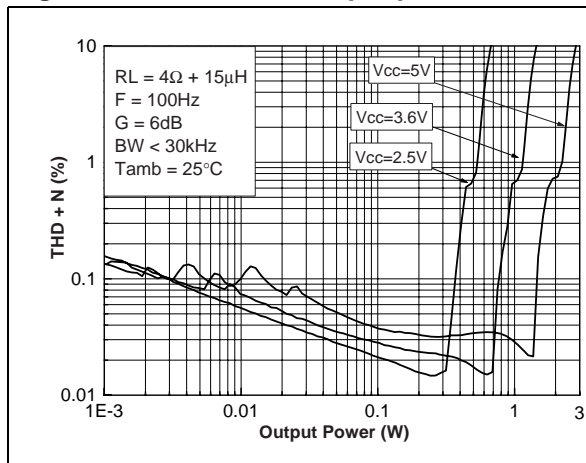


Figure 29. THD+N vs. output power

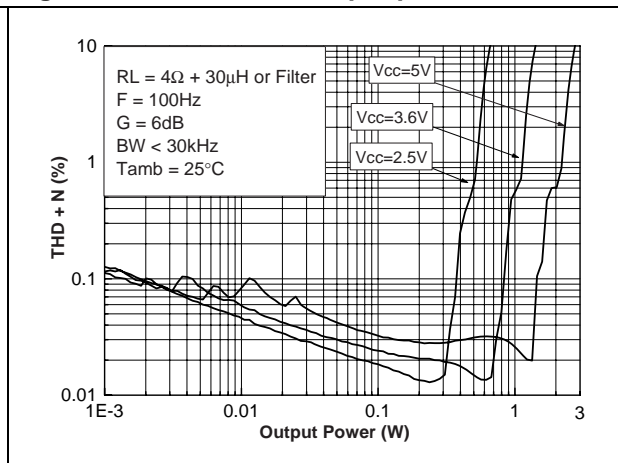


Figure 30. THD+N vs. output power

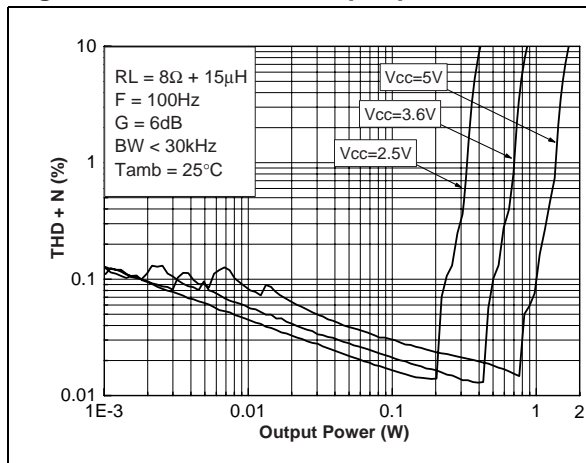


Figure 31. THD+N vs. output power

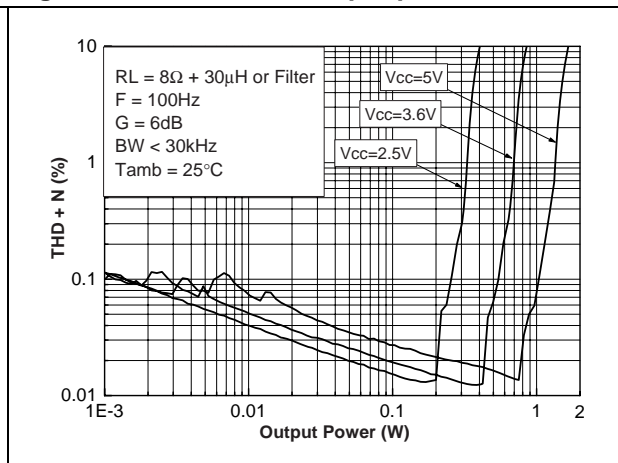


Figure 32. THD+N vs. output power

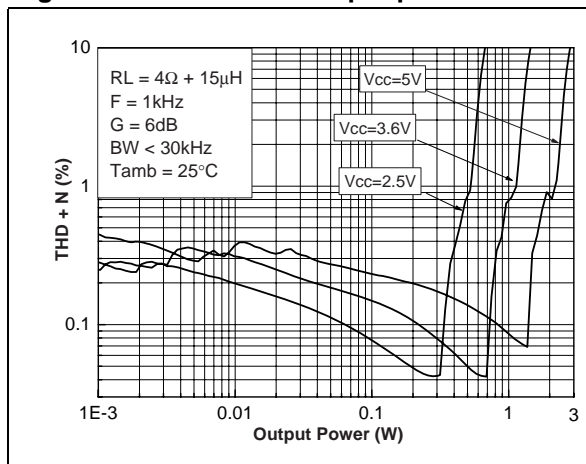


Figure 33. THD+N vs. output power

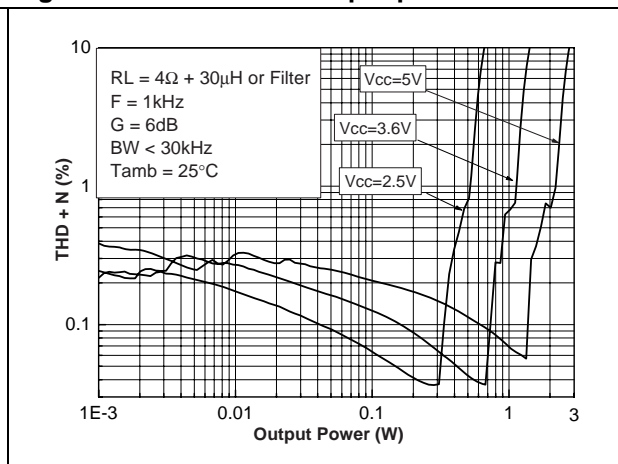


Figure 34. THD+N vs. output power

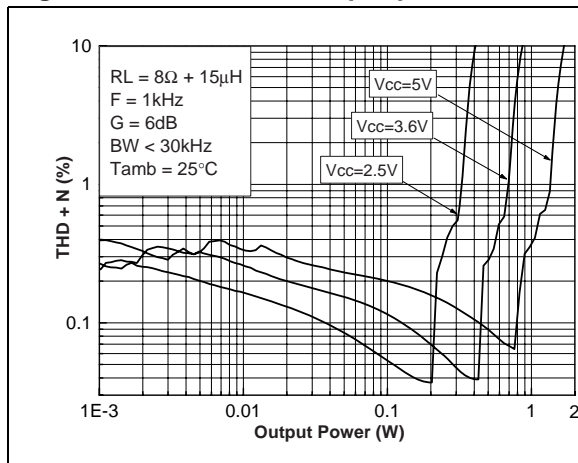


Figure 35. THD+N vs. output power

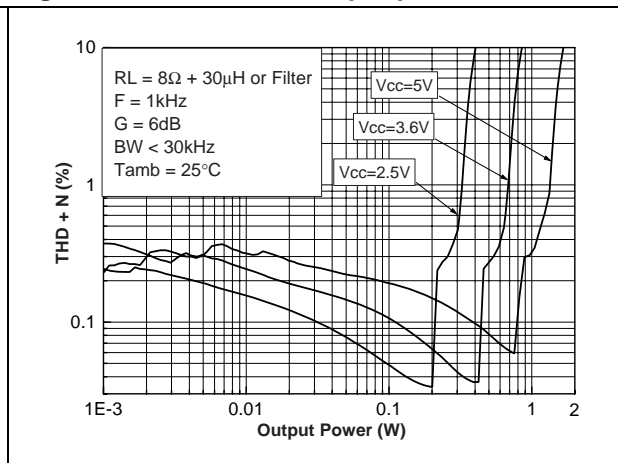


Figure 36. THD+N vs. frequency

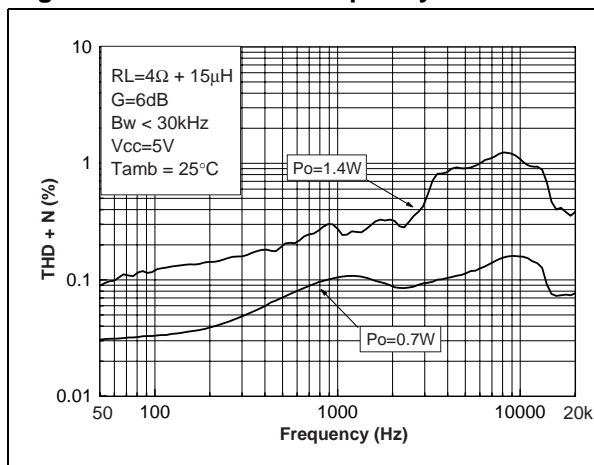


Figure 37. THD+N vs. frequency

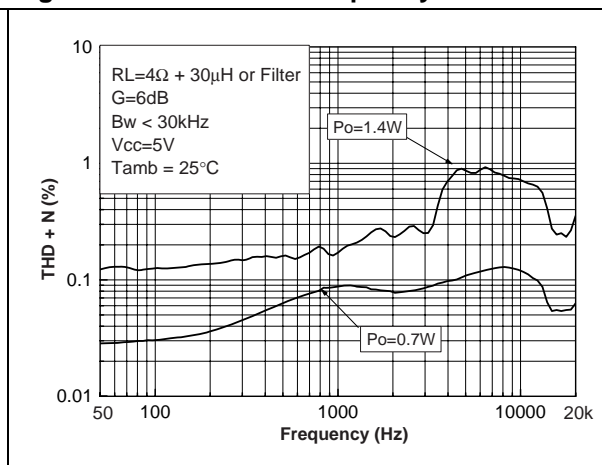


Figure 38. THD+N vs. frequency

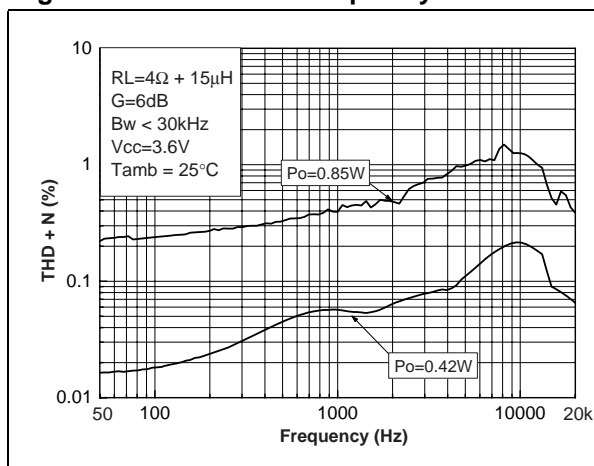


Figure 39. THD+N vs. frequency

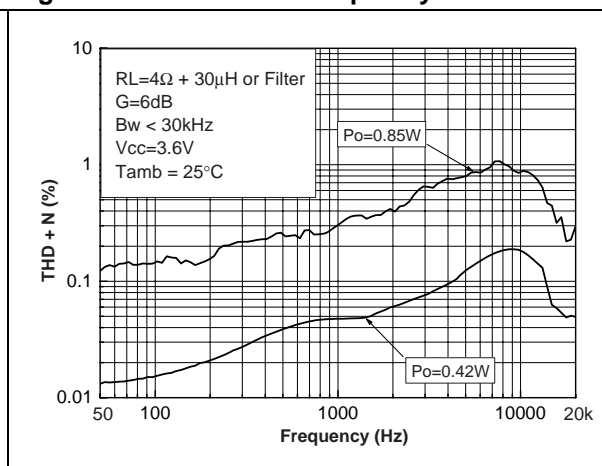


Figure 40. THD+N vs. frequency

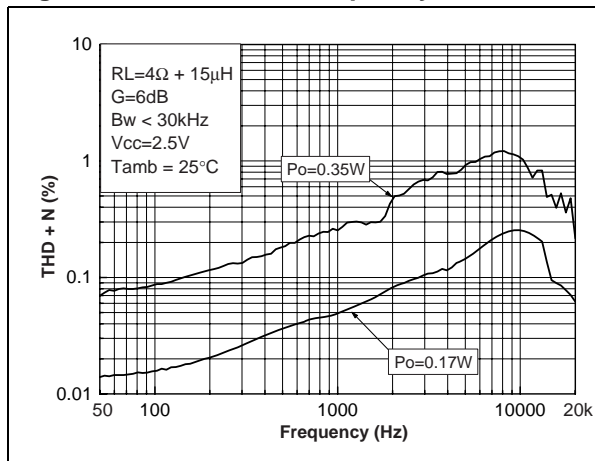


Figure 41. THD+N vs. frequency

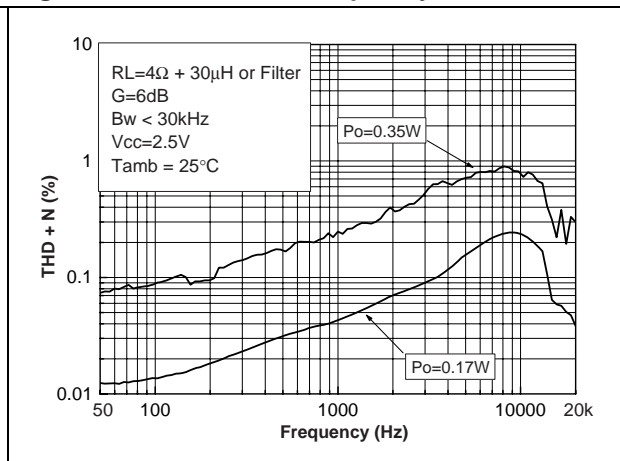


Figure 42. THD+N vs. frequency

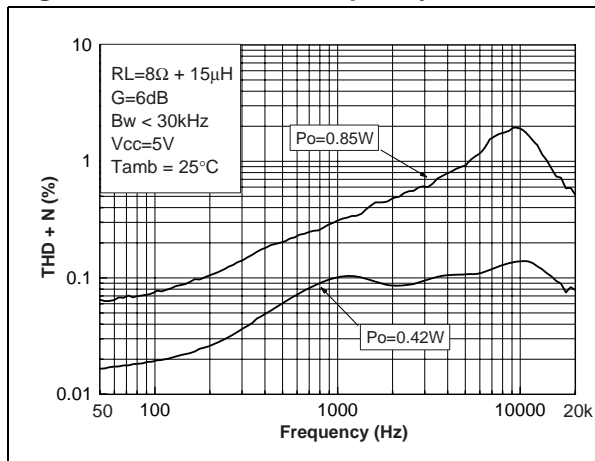


Figure 43. THD+N vs. frequency

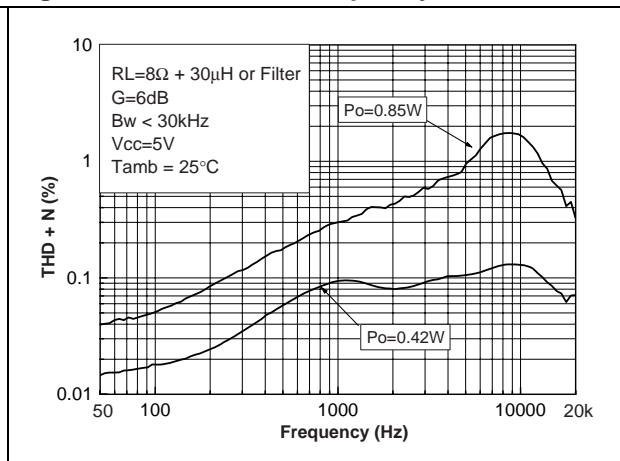


Figure 44. THD+N vs. frequency

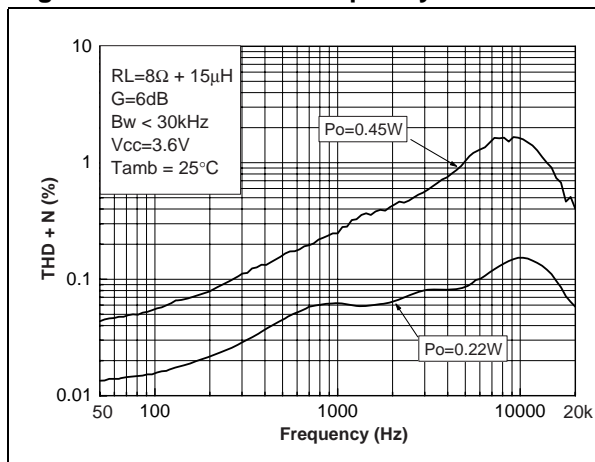


Figure 45. THD+N vs. frequency

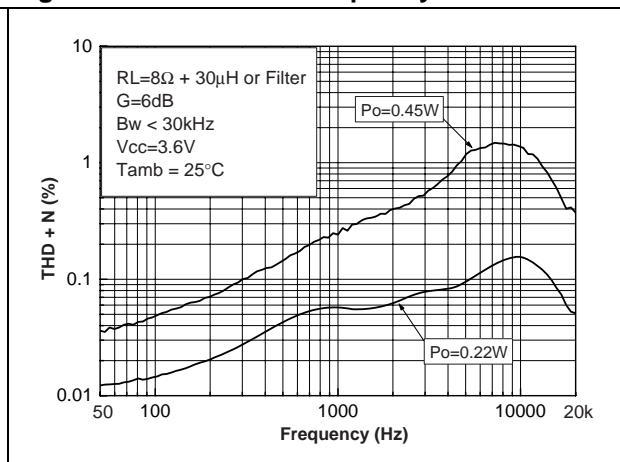


Figure 46. THD+N vs. frequency

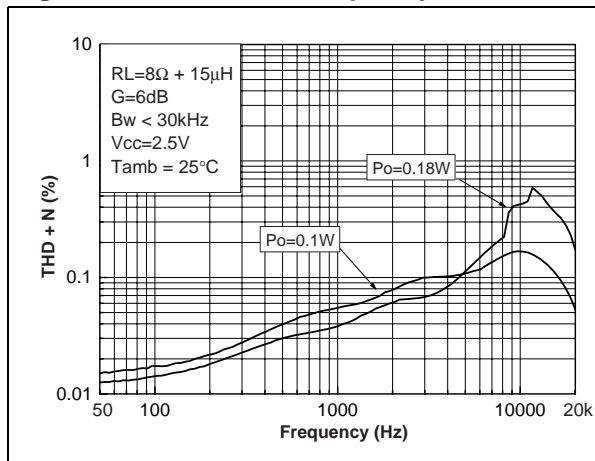


Figure 47. THD+N vs. frequency

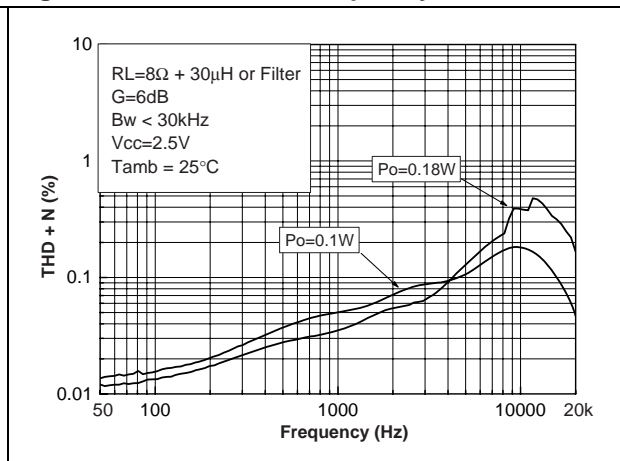


Figure 48. Gain vs. frequency

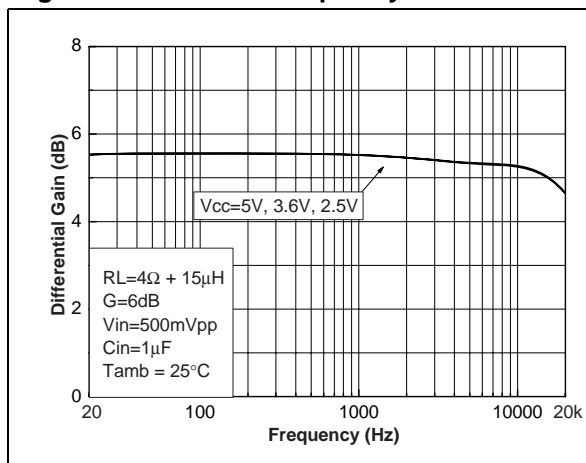


Figure 49. Gain vs. frequency

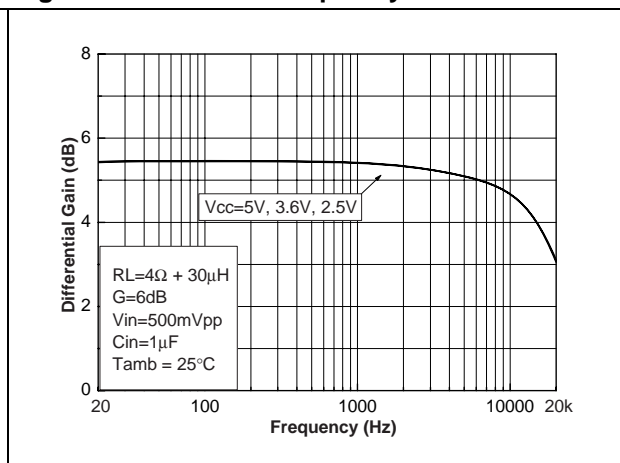


Figure 50. Gain vs. frequency

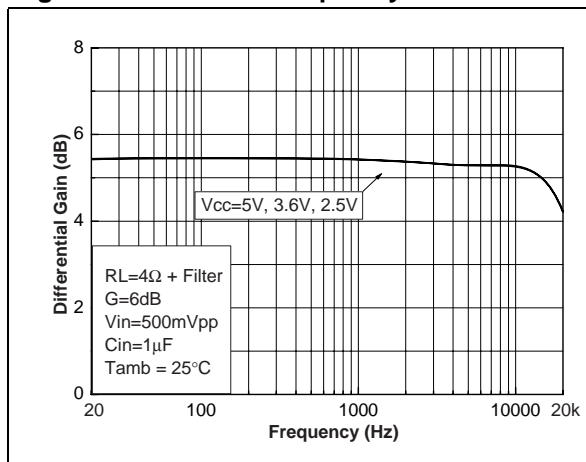


Figure 51. Gain vs. frequency

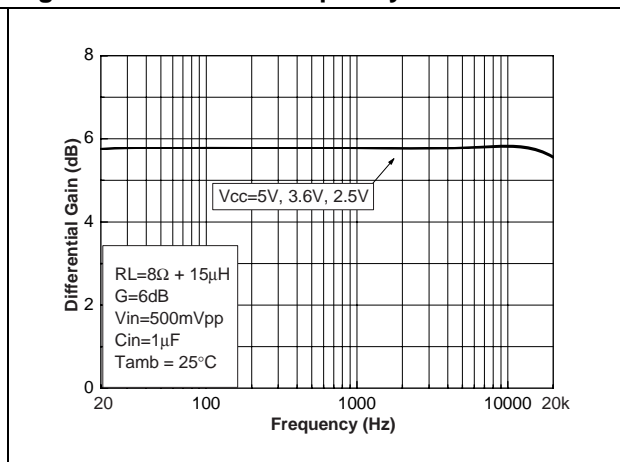


Figure 52. Gain vs. frequency

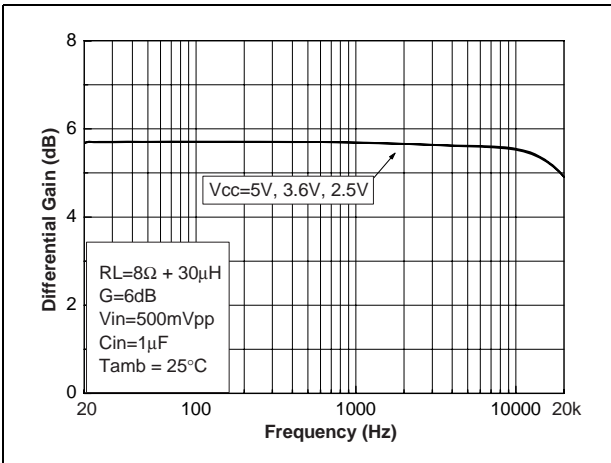


Figure 53. Gain vs. frequency

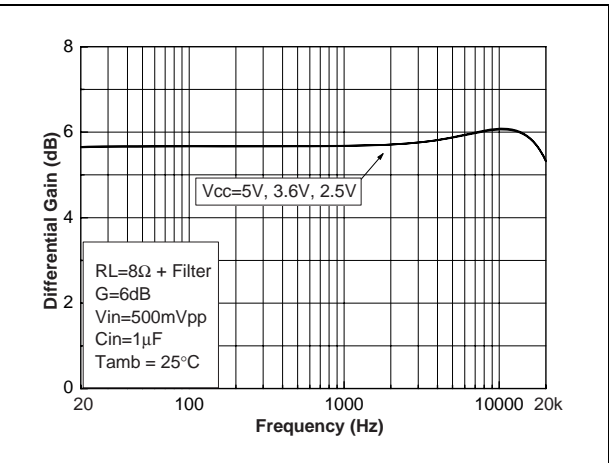


Figure 54. Gain vs. frequency

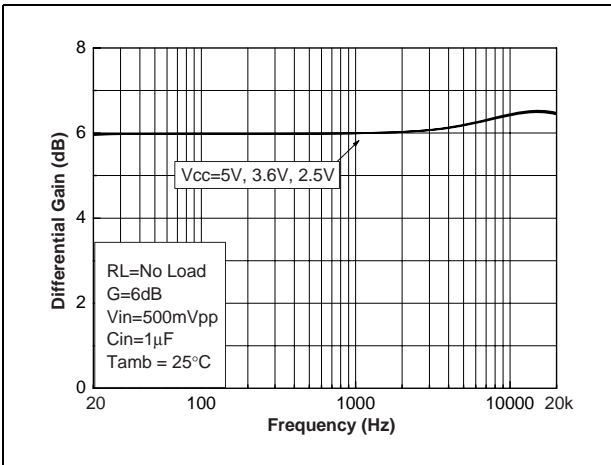


Figure 55. Startup & shutdown time
 $V_{CC} = 5V$, $G = 6dB$, $C_{in} = 1\mu F$ (5ms/div)

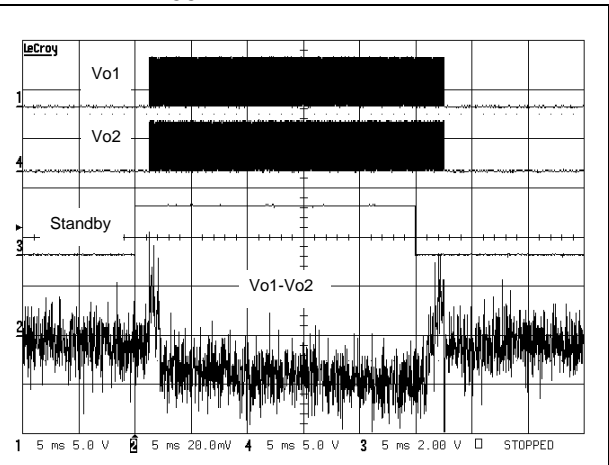


Figure 56. Startup & shutdown time
 $V_{CC} = 3V$, $G = 6dB$, $C_{in} = 1\mu F$ (5ms/div)

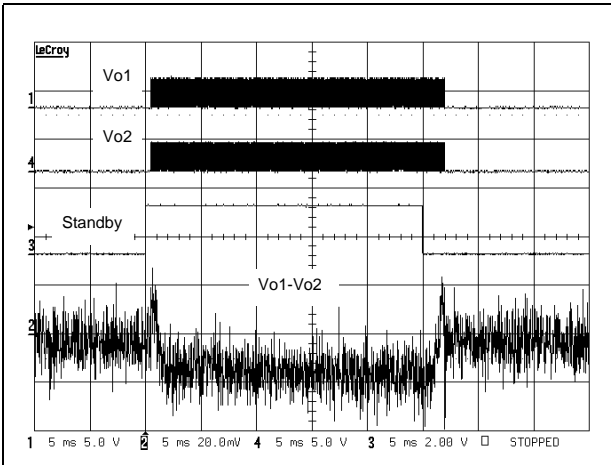


Figure 57. Startup & shutdown time
 $V_{CC} = 5V$, $G = 6dB$, $C_{in} = 100nF$ (5ms/div)

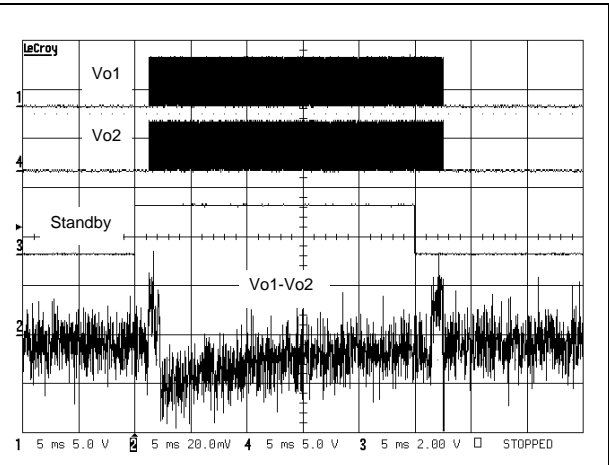


Figure 58. Startup & shutdown time
 $V_{CC} = 3V$, $G = 6dB$, $C_{in} = 100nF$ (5ms/div)

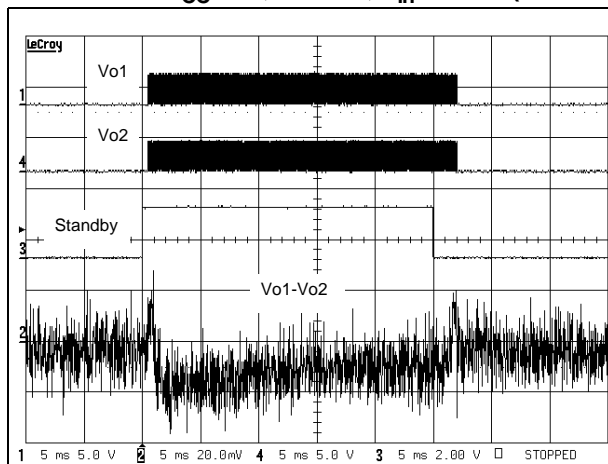


Figure 59. Startup & shutdown time
 $V_{CC} = 5V$, $G = 6dB$, No C_{in} (5ms/div)


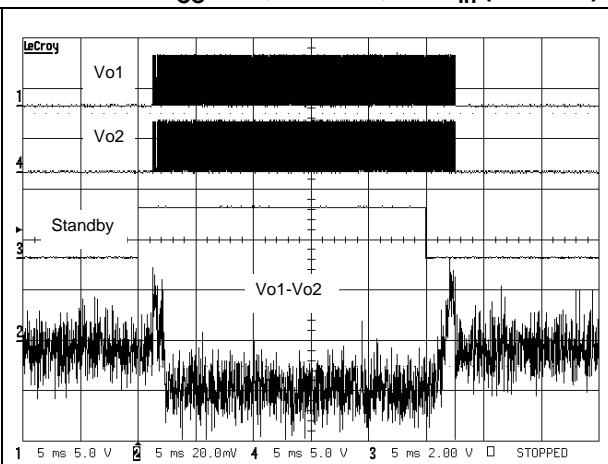


Figure 60. Startup & shutdown time
 $V_{CC} = 3V$, $G = 6dB$, No C_{in} (5ms/div)

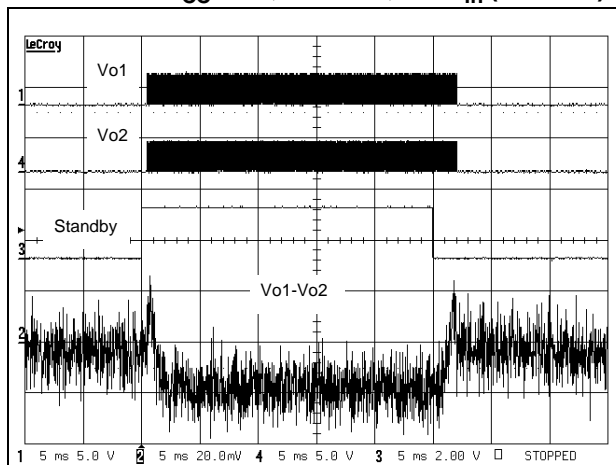

4 Application information

4.1 Differential configuration principle

The TS4962 is a monolithic fully-differential input/output class D power amplifier. The TS4962 also includes a common-mode feedback loop that controls the output bias value to average it at $V_{CC}/2$ for any DC common mode input voltage. This allows the device to always have a maximum output voltage swing, and by consequence, maximize the output power. Moreover, as the load is connected differentially compared to a single-ended topology, the output is four times higher for the same power supply voltage.

The advantages of a full-differential amplifier are:

- High PSRR (power supply rejection ratio).
- High common mode noise rejection.
- Virtually zero pop without additional circuitry, giving a faster start-up time compared to conventional single-ended input amplifiers.
- Easier interfacing with differential output audio DAC.
- No input coupling capacitors required because of common mode feedback loop.

The main disadvantage is:

- As the differential function is directly linked to external resistor mismatching, paying particular attention to this mismatching is mandatory in order to obtain the best performance from the amplifier.

4.2 Gain in typical application schematic

Typical differential applications are shown in [Figure 1 on page 8](#).

In the flat region of the frequency-response curve (no input coupling capacitor effect), the differential gain is expressed by the relation:

$$A_{V_{diff}} = \frac{Out^+ - Out^-}{In^+ - In^-} = \frac{300}{R_{in}}$$

with R_{in} expressed in $k\Omega$

Due to the tolerance of the internal $150k\Omega$ feedback resistor, the differential gain is in the range (no tolerance on R_{in}):

$$\frac{273}{R_{in}} \leq A_{V_{diff}} \leq \frac{327}{R_{in}}$$

4.3 Common mode feedback loop limitations

As explained previously, the common mode feedback loop allows the output DC bias voltage to be averaged at $V_{CC}/2$ for any DC common mode bias input voltage.

However, due to V_{icm} limitation in the input stage (see [Table 3: Operating conditions on page 7](#)), the common mode feedback loop can play its role only within a defined range. This range depends upon the values of V_{CC} and R_{in} (A_{Vdiff}). To have a good estimation of the V_{icm} value, we can apply this formula (no tolerance on R_{in}):

$$V_{icm} = \frac{V_{CC} \times R_{in} + 2 \times V_{IC} \times 150k\Omega}{2 \times (R_{in} + 150k\Omega)} \quad (V)$$

with

$$V_{IC} = \frac{In^+ + In^-}{2} \quad (V)$$

and the result of the calculation must be in the range:

$$0.5V \leq V_{icm} \leq V_{CC} - 0.8V$$

Due to the +/-9% tolerance on the 150kΩ resistor, it's also important to check V_{icm} in these conditions:

$$\frac{V_{CC} \times R_{in} + 2 \times V_{IC} \times 136.5k\Omega}{2 \times (R_{in} + 136.5k\Omega)} \leq V_{icm} \leq \frac{V_{CC} \times R_{in} + 2 \times V_{IC} \times 163.5k\Omega}{2 \times (R_{in} + 163.5k\Omega)}$$

If the result of V_{icm} calculation is not in the previous range, input coupling capacitors must be used (with V_{CC} between 2.4V and 2.5V, input coupling capacitors are mandatory).

For example:

With $V_{CC}=3V$, $R_{in}=150k$ and $V_{IC}=2.5V$, we typically find $V_{icm}=2V$, which is lower than $3V-0.8V=2.2V$. With 136.5kΩ we find 1.97V and with 163.5kΩ we have 2.02V. So, no input coupling capacitors are required.

4.4 Low frequency response

If a low frequency bandwidth limitation is requested, it is possible to use input coupling capacitors.

In the low frequency region, C_{in} (input coupling capacitor) starts to have an effect. C_{in} forms, with R_{in} , a first order high-pass filter with a -3dB cut-off frequency:

$$F_{CL} = \frac{1}{2\pi \times R_{in} \times C_{in}} \quad (Hz)$$

So, for a desired cut-off frequency we can calculate C_{in} ,

$$C_{in} = \frac{1}{2\pi \times R_{in} \times F_{CL}} \quad (F)$$

with R_{in} in Ω and F_{CL} in Hz.

4.5 Decoupling of the circuit

A power supply capacitor, referred to as C_S , is needed to correctly bypass the TS4962.

The TS4962 has a typical switching frequency at 250kHz and output fall and rise time about 5ns. Due to these very fast transients, careful decoupling is mandatory.

A 1μF ceramic capacitor is enough, but it must be located very close to the TS4962 in order to avoid any extra parasitic inductance being created by an overly long track wire. In relation with dI/dt , this parasitic inductance introduces an overvoltage that decreases the global efficiency and, if it is too high, may cause a breakdown of the device.

In addition, even if a ceramic capacitor has an adequate high frequency ESR value, its current capability is also important. A 0603 size is a good compromise, particularly when a 4Ω load is used.

Another important parameter is the rated voltage of the capacitor. A 1μF/6.3V capacitor used at 5V loses about 50% of its value. In fact, with a 5V power supply voltage, the decoupling value is about 0.5μF instead of 1μF. As C_S has particular influence on the THD+N in the medium-high frequency region, this capacitor variation becomes decisive. In addition, less decoupling means higher overshoots, which can be problematic if they reach the power supply AMR value (6V).

4.6 Wake-up time (t_{WU})

When the standby is released to set the device ON, there is a wait of about 5ms. The TS4962 has an internal digital delay that mutes the outputs and releases them after this time in order to avoid any pop noise.

4.7 Shutdown time (t_{STBY})

When the standby command is set, the time required to put the two output stages into high impedance and to put the internal circuitry in standby mode is about 5ms. This time is used to decrease the gain and avoid any pop noise during the shutdown phase.

4.8 Consumption in standby mode

Between the standby pin and GND there is an internal 300kΩ resistor. This resistor forces the TS4962 to be in standby mode when the standby input pin is left floating.


However, this resistor also introduces additional power consumption if the standby pin voltage is not 0V.

For example, with a 0.4V standby voltage pin, [Table 3: Operating conditions on page 7](#) shows that you must add $0.4V/300k\Omega=1.3\mu A$ in typical ($0.4V/273k\Omega=1.46\mu A$ in maximum) to the standby current specified in [Table 5 on page 9](#).

4.9 Single-ended input configuration

It's possible to use the TS4962 in a single-ended input configuration. However, input coupling capacitors are needed in this configuration. The schematics in [Figure 61](#) show a single-ended input typical application.

Figure 61. Single-ended input typical application

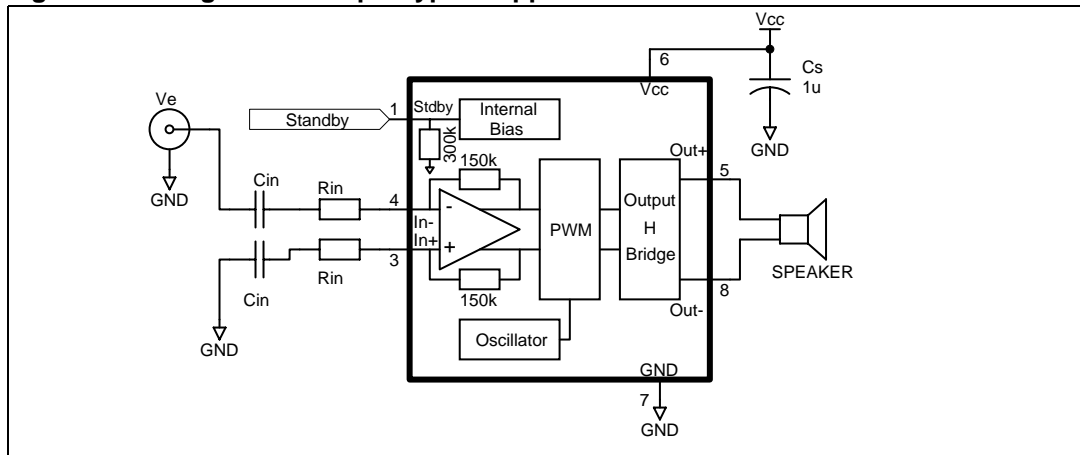

All formulas are identical except for the gain with R_{in} in $k\Omega$


$$A_{V_{single}} = \frac{V_e}{Out^+ - Out^-} = \frac{300}{R_{in}}$$

And, due to the internal resistor tolerance we have:

$$\frac{273}{R_{in}} \leq A_{V_{single}} \leq \frac{327}{R_{in}}$$

In the event that multiple single-ended inputs are summed, it is important that the impedance on both TS4962 inputs (In^- and In^+) are equal.

Figure 62. Typical application schematic with multiple single-ended inputs

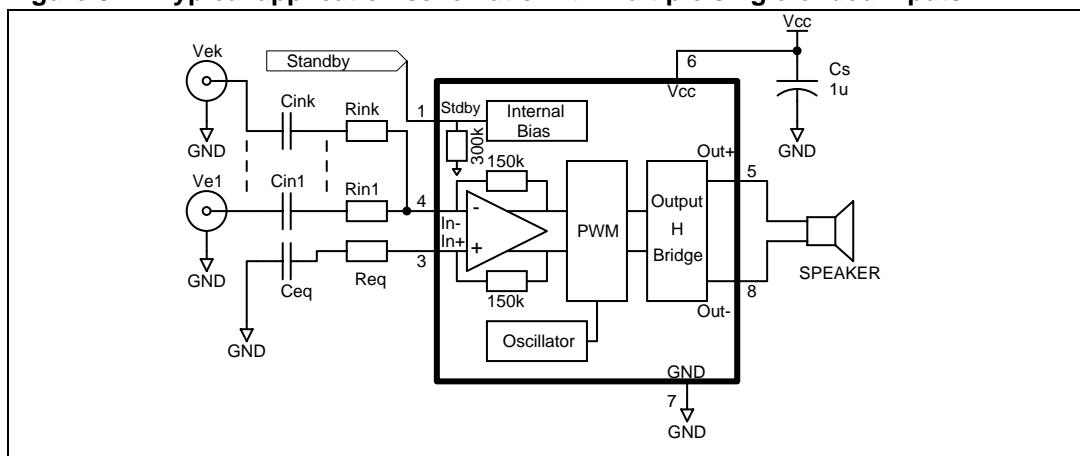

We have the following equations:

$$\text{Out}^+ - \text{Out}^- = V_{e1} \times \frac{300}{R_{in1}} + \dots + V_{ek} \times \frac{300}{R_{ink}} \quad (\text{V})$$

$$C_{eq} = \sum_{j=1}^k C_{ini}$$

$$C_{ini} = \frac{1}{2 \times \pi \times R_{ini} \times F_{CLi}} \quad (\text{F})$$

$$R_{eq} = \frac{1}{\sum_{j=1}^k \frac{1}{R_{ini}}}$$

In general, for mixed situations (single-ended and differential inputs) it is best to use the same rule, that is, to equalize impedance on both TS4962 inputs.


4.10 Output filter considerations

The TS4962 is designed to operate without an output filter. However, due to very sharp transients on the TS4962 output, EMI radiated emissions may cause some standard compliance issues.

These EMI standard compliance issues can appear if the distance between the TS4962 outputs and the loudspeaker terminal is long (typically more than 50mm, or 100mm in both directions, to the speaker terminals). As the PCB layout and internal equipment device are different for each configuration, it is difficult to provide a one-size-fits-all solution.

However, to decrease the probability of EMI issues, there are several simple rules to follow:


- Reduce, as much as possible, the distance between the TS4962 output pins and the speaker terminals.
- Use ground planes for “shielding” sensitive wires.
- Place, as close as possible to the TS4962 and in series with each output, a ferrite bead with a rated current at minimum 2.5A and impedance greater than 50Ω at frequencies above 30MHz. If, after testing, these ferrite beads are not necessary, replace them by a short-circuit.
- Allow enough footprint to place, if necessary, a capacitor to short perturbations to ground (see [Figure 63](#)).

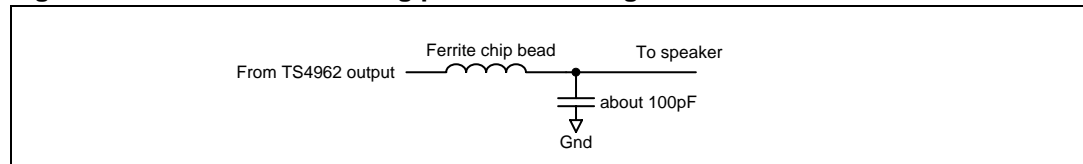Figure 63. Method for shorting perturbations to ground

In the case where the distance between the TS4962 output and the speaker terminals is high, it's possible to have low frequency EMI issues due to the fact that the typical operating frequency is 250kHz. In this configuration, we recommend using an output filter (as represented in [Figure 1: Typical application schematics on page 8](#)). It should be placed as close as possible to the device.

4.11 Several examples with summed inputs

Example 1: Dual differential inputs

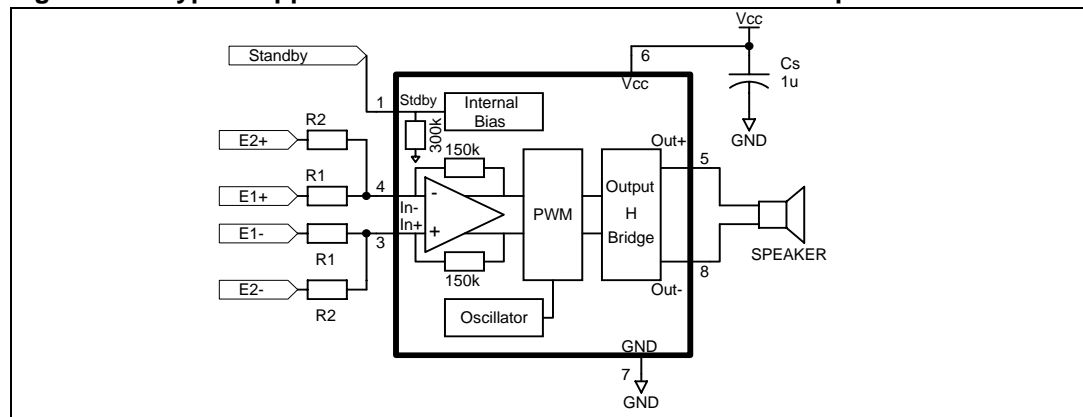Figure 64. Typical application schematic with dual differential inputs

With (R_i in $k\Omega$):

$$A_{V_1} = \frac{Out^+ - Out^-}{E_1^+ - E_1^-} = \frac{300}{R_1}$$


$$A_{V_2} = \frac{Out^+ - Out^-}{E_2^+ - E_2^-} = \frac{300}{R_2}$$

$$0.5V \leq \frac{V_{CC} \times R_1 \times R_2 + 300 \times (V_{IC1} \times R_2 + V_{IC2} \times R_1)}{300 \times (R_1 + R_2) + 2 \times R_1 \times R_2} \leq V_{CC} - 0.8V$$

$$V_{IC1} = \frac{E_1^+ + E_1^-}{2} \quad \text{and} \quad V_{IC2} = \frac{E_2^+ + E_2^-}{2}$$

Example 2: One differential input plus one single ended input

Figure 65. Typical application schematic with one differential input plus one single-ended input

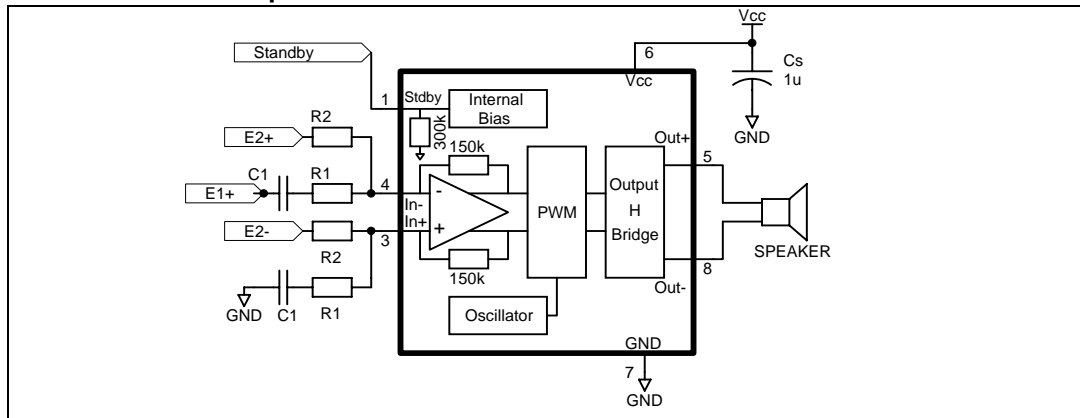

With (R_i in $k\Omega$):

$$A_{V_1} = \frac{Out^+ - Out^-}{E_1^+} = \frac{300}{R_1}$$

$$A_{V_2} = \frac{Out^+ - Out^-}{E_2^+ - E_2^-} = \frac{300}{R_2}$$

$$C_1 = \frac{1}{2\pi \times R_1 \times F_{CL}} \quad (F)$$

5 Demo board

A demo board for the TS4962 is available. For more information about this demo board, refer to the **Application Note AN2406**.

Figure 66. Schematic diagram of mono class D demoboard for the TS4962 DFN package

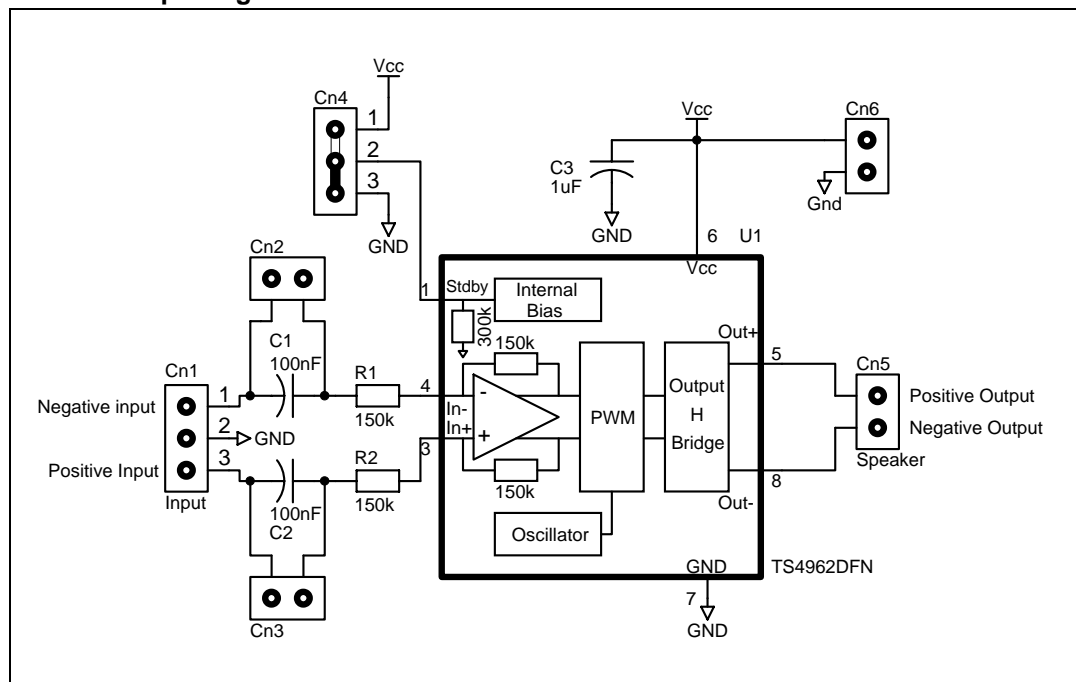


Figure 67. Top view

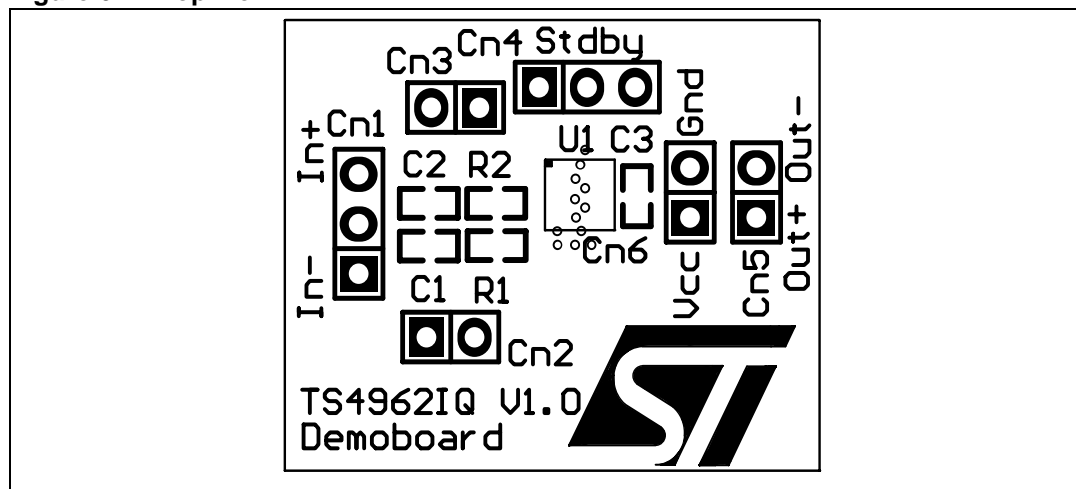


Figure 68. Bottom layer



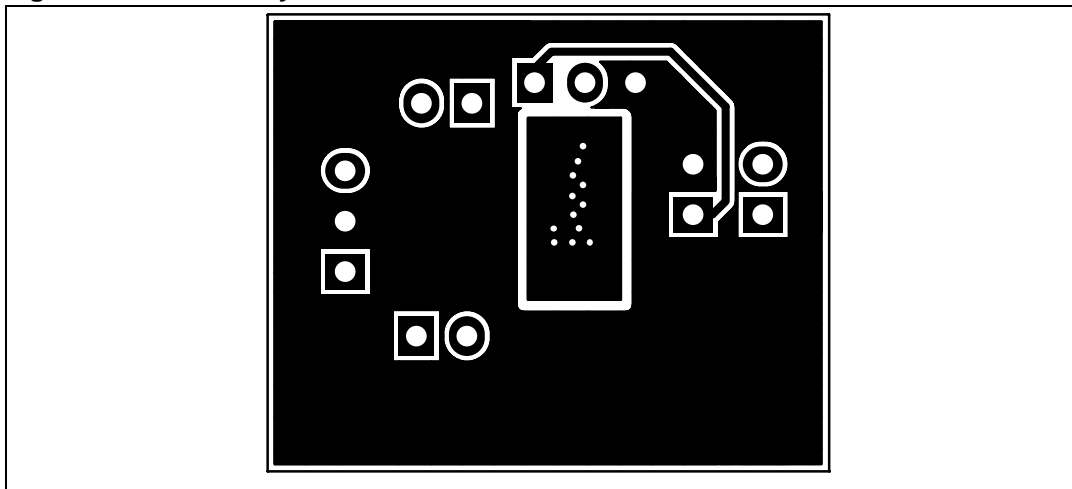


Figure 69. Top layer

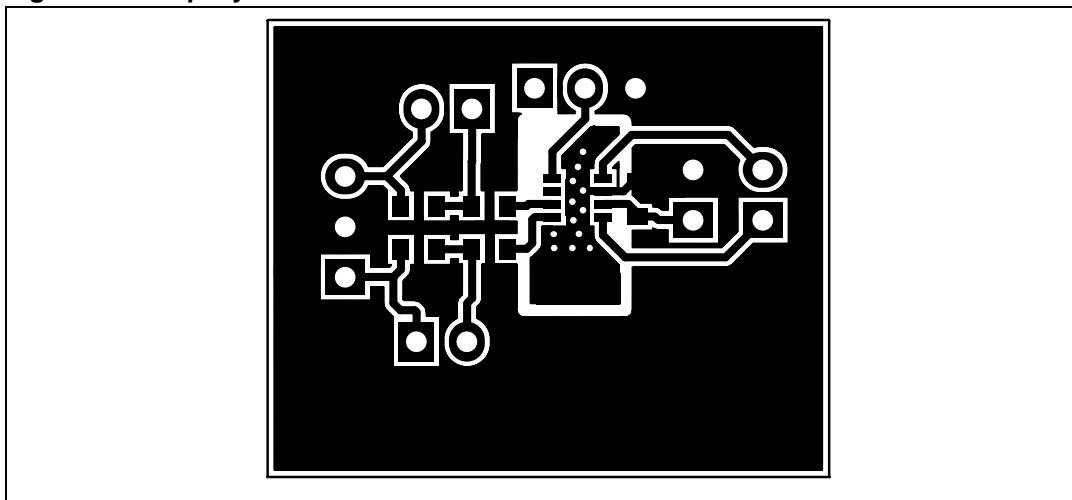

6 Recommended footprint

Figure 70. Recommended footprint for TS4962 DFN package

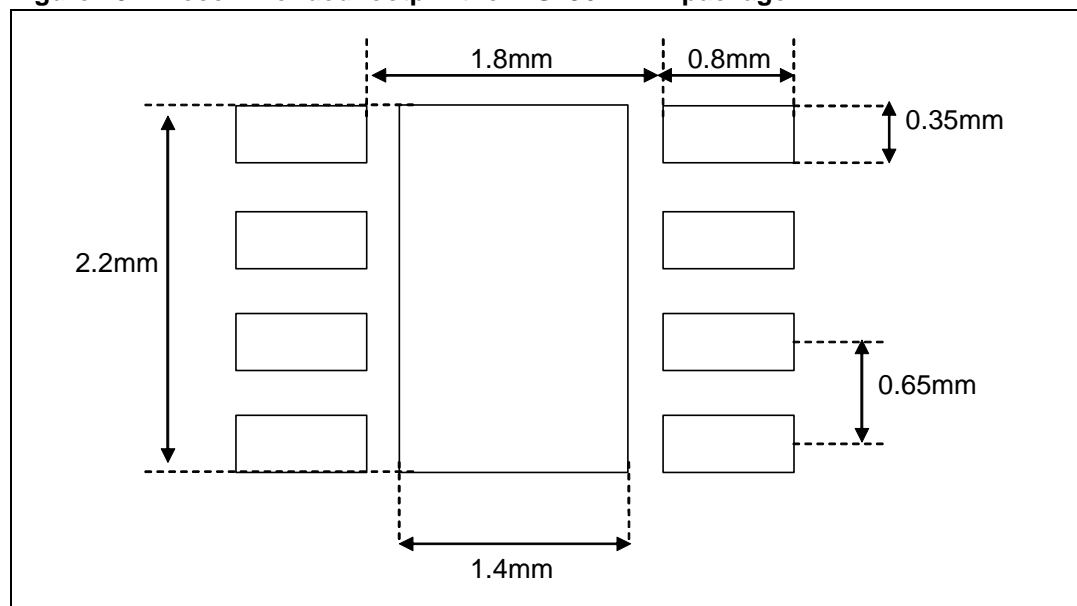

7 DFN8 package information

In order to meet environmental requirements, STMicroelectronics offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an STMicroelectronics trademark. ECOPACK specifications are available at: www.st.com.

Figure 71. DFN8 3x3 exposed pad package

Ref.	Dimensions					
	Millimeters			Mils		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.50	0.60	0.65	19.70	23.62	25.60
A1		0.02	0.05		0.79	1.97
A2		0.40			15.75	
A3		0.15	0.22		5.90	8.67
b	0.25	0.30	0.35	9.85	11.81	13.78
D	2.85	3.00	3.15	112.20	118.10	124.00
D2	1.60	1.70	1.80	63.00	66.93	70.87
E	2.85	3.00	3.15	112.20	118.10	124.00
E2	1.10	1.20	1.30	43.30	47.25	51.18
e		0.65			25.60	
L	0.50	0.55	0.60	19.70	21.65	23.62

Note: DFN8 exposed pad (e2 x d2) is connected to pin number 7.

For enhanced thermal performance, the exposed pad must be soldered to a copper area on the PCB, acting as heatsink. This copper area can be electrically connected to pin7 or left floating.

8 Ordering information

Table 11. Order codes

Part number	Temperature range	Package	Packaging	Marking
TS4962IQT	-40° C, +85°C	DFN8	Tape & reel	K962

9 Revision history

Table 12. Document revision history

Date	Revision	Changes
31-May-2006	5	Modified package information. Now includes only standard DFN8 package.
16-Oct-2006	6	Added curves in Section 3: Electrical characteristics . Added evaluation board information in Section 5: Demo board . Added recommended footprint.
10-Jan-2007	7	Added paragraph about rated voltage of capacitor in Section 4.5: Decoupling of the circuit .

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com