STM32H750VB /H743VI核心板

预留5V输入接口，连接器间距2.54mm

供电稳压供电

BOOT0	BOOT1	启动方式
0		无关	用户闪存
1	0	ISP下载模式
1	1	内部RAM

STM32工作模式已经默认接地：BOOT0通过R7接地

STM32工作模式选择

SWD调试编程接口

TFT液晶屏接口

可以接本店：0.96寸、1.3寸OLED液晶屏 1.3寸、2.0寸TFT 高清液晶屏

1.44寸、1.8寸TFT液晶屏   2.4寸、2.8寸TFT液晶屏

还有其他规格，欢迎到店咨询

SD/TF卡接口(小卡座，自弹)

**供电指示灯**

LED指示灯

按键

大

STM32H750VB /H743VI核心板

内 核 ：Cortex-M7
(H750VB) FLASH：128K
(H743VI) FLASH：2048K (2M)
RAM：1024K

STM32H750VB /H743VI核心板（M版）

STM32H750VB /H743VI
U2
STM32H7xx

可以接本店摄像头模块：

OV2640-200 万像素

OV5640-500 万像素(自动对焦)

此处为FPC插座（翻盖式）
店铺可以选购FPC转接延长线

DCMI接口-摄像头插座

扩展I/O接口

接口支持QSPI接口模式
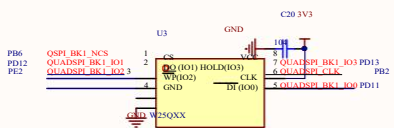
外部存储FLASH

标准MicroUSB接口
即常见安卓手机供电接口

**USB 供电接口
(STM32 USB Slave)**

实时时钟备用电池接口B1（预留）

Title STM32H750VB /H743VI核心板（M版）

Size Number D

直径3mm

SWD

J1

BT0 3V3 GND

J5

LCD / OLED

62.48（mm）

68.59（mm）

U2

SD_Card

F: Mcudev.taobao.com

34.79（mm）

40.89

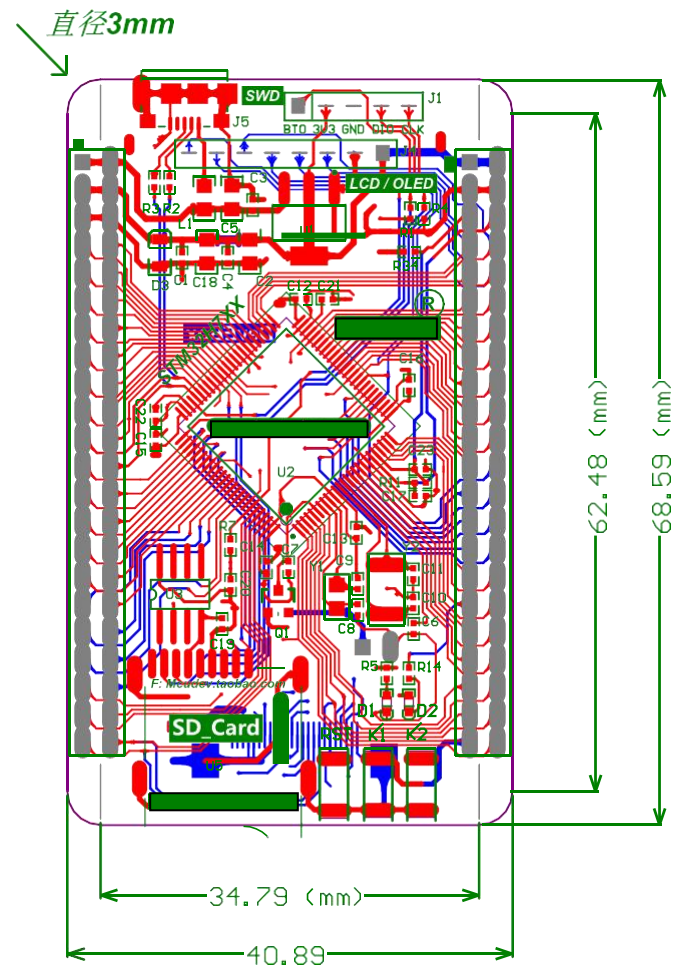# Bill of Materials   <Parameter Title not found>

Source Data From:	**STM32_H7XX_M.PrjPcb**
Project:	**STM32_H7XX_M.PrjPcb**
Variant:	**None**

Creation Date: 2019-11-23   下午 01:44:44
Print Date: 43792   43792.57279

Footprint	Comment	LibRef	Designator	Description	Quantity
SIP2-2.54mm	BAT	BATTERY	B1		1
RC0402	104	Cap, CAP, CAP, CAP, Cap, Cap, Cap, Cap, Cap, Cap, Cap, Cap Semi, CAP, Cap	C1, C3, C4, C6, C7, C12, C13, C14, C15, C16, C17, C19, C20, C23	Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor, Capacitor (Semiconductor SIM Model), [NoValue], Capacitor	14
RC0805	106	ELECTRO2, ELECTRO2, Cap	C2, C5, C18	[NoValue], [NoValue], Capacitor	3
RC0402	10P	CAP	C8, C9		2
RC0402	20P	CAP	C10, C11	Capacitor	2
RC0603	2.2uF	Cap	C21, C22	Capacitor	
LED-0603	LED	LED	D1, D2		2
SOD_323	5V1	Diode	D3	Default Diode	1
SIP5-2.54mm	SPI_1X5	Header 5H	J1	Header, 5-Pin, Right Angle	1
IDE2X22	Header 22X2	Header 22X2	J2, J3	Header, 22-Pin, Dual row	2
HDR1X8	SIP8-2.54mm	Header 8	J4	Header, 8-Pin	1
micro_USB	Micro_USB	MiniUSB	J5		1
FPC24-05MM	FPC-24P	FPC-24P	J6		1
SW-SPST	Key	SW-PB	K1, K2, RST		3
RC0805	500mA	RES	L1		1
SOT-23-BAT54C	BAT54C	BAT54C	Q1		1
RC0402	10K	Res2	R1, R4, R7	Resistor	3
RC0402	0R	Res2	R2, R3, R11, R34	Resistor	4
RC0402	510R	Res2	R5, R14	Resistor	2
SOT-223	AMS1117-3.3V	11	U1		1
	STM32H7xx	STM32H750V	U2		1
SOP8L	W25QXX		U3		1
	MiniSD	MiniSD	U5		1
JZ3215-32K	32.768K	CRYSTAL	Y1	晶振	1
JZ5032-8M	25M	CRYSTAL	Y2	Crystal	1
		W25 0.1u			53

Approved		Notes			