A2 PROSOIL	BOREHOLE NO: BH_BRRL_CTG-06	Longitude: E 91°40'13.39"	Latitude: N 22°36'55.97"
	Name of Project: Engineering Soil mapping of Noakhali & Duptila as per soil classification of Road Master Plan Noakhali, Feni, Bhola, Chittagong, Dohazari & Cox's Bazar		
CLIENT : BRRL.	Type of Drill Rig: Mechanical Rotary	Borehole Depth: 51.0m	RL: 2.18m below From Road Level.
Location: Sitakunda.	Commencement Date: 12-06-2016	Completed Date: 13-06-2016	G. W. T : 3.65m Below from E. G. L.

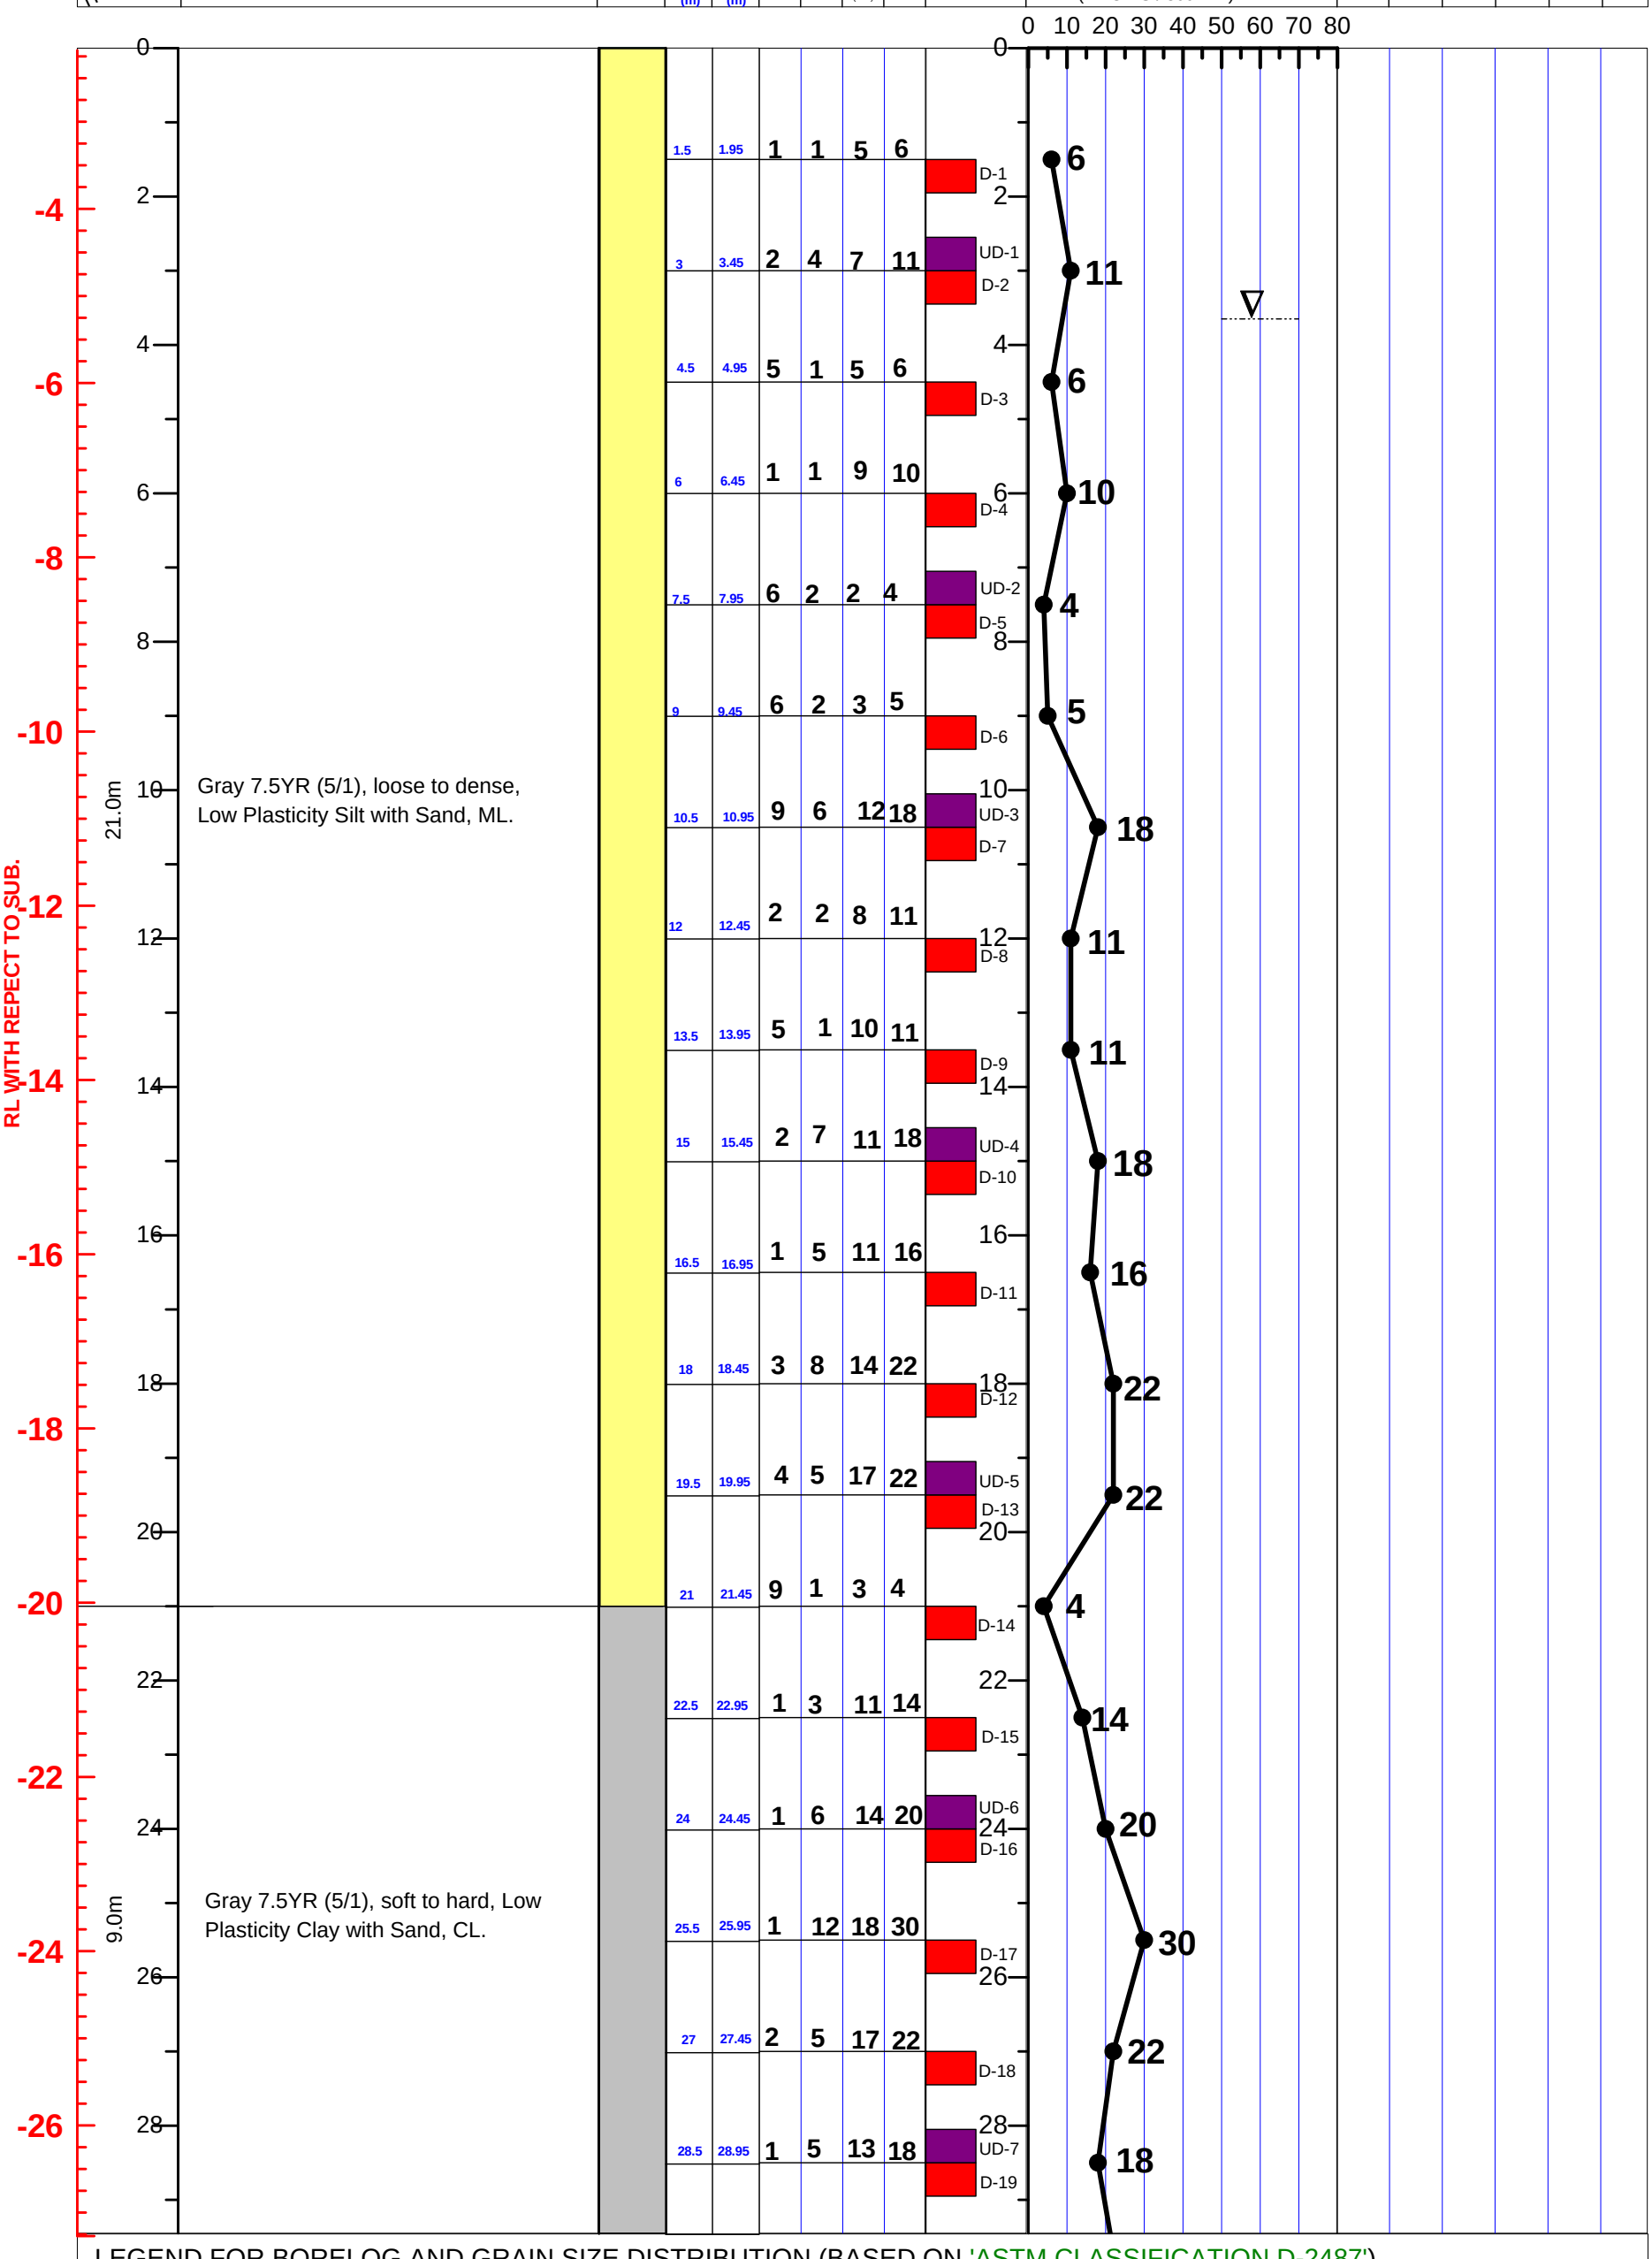

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY	SILT	PEAT/HIGHLY ORGANIC SOIL	UNDISTURBED SAMPLE
MICACEOUS FINE SAND/SILT	SAND	SHALE	DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED 50/X = BLOWS 50, "X" MM PENETRATION left of 300 mm

01	BRRL PROSOIL	BOREHOLE NO: BH_BRRL_CTG-06	Longitude: E 91°40'13.39"	Latitude: N 22°36'55.97"
		Name of Project: Engineering Soil mapping of Noakhali & Duptila as per soil classification of Road Master Plan Noakhali, Feni, Bhola, Chittagong, Dohazari & Cox's Bazar		
CLIENT : BRRL.		Type of Drill Rig: Mechanical Rotary	Borehole Depth: 51.0m	RL: 2.18m below From Road Level.
Location: Sitakunda.		Commencement Date: 12-06-2016	Completed Date: 13-06-2016	G. W. T : 3.65m Below from E. G. L.

THICKNESS	SOIL STRATA	BORE LOG	SAMPLING From (m)	SAMPLING To (m)	SPT-N Value Blow/300mm N1=150 (mm)	N2=300 (mm)	N3=450 (mm)	N=N2+N3	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	% Sand	% Passing 200	% LL	% PI	SP Gravity	% W_n
9.0m	Gray 7.5YR (5/1), soft to hard, Low Plasticity Clay with Sand, CL.		28.5	28.95	1	5	13	18	UD-7	18						
									D-19							
			30	30.45	4	8	15	23	D-20	23						
			31.5	31.95	7	20	30	50	D-21	50						
			33	33.45	1	13	37	50	UD-8							
									D-22	50						
			34.5	34.95	11	20	30	50	D-23							
			36	36.45	4	12	23	35	D-24	35						
			37.5	37.95	9	7	43	50	UD-9							
									D-25	50						
			39	39.45	1	11	23	34	UD-10							
									D-26	34						
21.45m	Gray 7.5YR (5/1), dense to very dense, Low Plasticity Silt with Sand, ML.		40.5	40.95	4	9	27	36	UD-11							
									D-27	36						
			42	42.45	4	8	22	30	D-28	30						
			43.5	43.95	15	7	43	50	D-29	50						
			45	45.45	12	12	23	35	D-30	35						
			46.5	46.95	16	16	22	38	UD-12							
									D-31	38						
			48	48.45	14	14	23	37	D-32	37						
			49.5	49.95	19	19	31	50	D-33	50						
			51	51.45	15	15	35	50	UD-13							
									D-34	50						

RL WITH REPECT TO SUB.

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SILT | PEAT/HIGHLY ORGANIC SOIL | UNDISTURBED SAMPLE

MICACEOUS FINE SAND/SILT | SAND | SHALE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED 50/X = BLOWS 50, "X" MM PENETRATION left of 300 mm