PROSOIL FOUNDATION CONSULTANT

A2.3.1 BOREHOLE LOG

Project: BHOLA-LAKSHMIPUR BRIDGE PRE-FEASIBILITY STUDY

Client: Bangladesh Bridge Authority (BBA)

Location: Char Ramanimohan Lakshmipur Sadar

Drilling Type (Rotary): 100mm Dia

Dia & Depth of Casing: 125mm & 6m


Borehole: LBH-3 E:

Depth: 120.45m N:

Elev: m Start: 15-12-2023

GWT: -4.80m End: 23-12-2023

Depth (m)	Elevation (m)	Sample No.	Sample Rec.(mm)	Particle Size Distribution: Gravel (%)	Sand (%)	Fine (%)	Atterberg Limits: L.L.	P.I.	Moisture Content: W (%)	Unit Weight (kN/m³): Y_t	Y_d	Specific Gravity: G_s	Consolidation: e_0	C_c	C_r	Shear Strength: Type	C/$?_u$ (kPa)	?/%	150mm	300mm	450mm	N-value	Layer Symbol	Description
0	0	B-1																						Grayish Brown, High Plastic Silt, MH.
2	-2	D-1	290	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	2	2	3	5		
4	-4	D-2	240	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	1	1	1	2		Gray, very loose to loose, Sandy Silt, ML. (Trace Mica at 3.0m)
6	-6	D-3	230	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	3	5	8	13		
8	-8	D-4	170	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	2	2	3	5		
10	-10	D-5	120	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	1	1	1	2		
12	-12	D-6	200	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	1	2	2	4		
14	-14	D-7	250	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	4	3	4	7		Gray, very loose to medium dense, Silty Sand, SM. (Trace Mica from 6.0m to 9.0m & 12.0m)
16	-16	D-8	180	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	2	4	6	10		
18	-18	D-9	220	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	6	6	8	14		
20	-20	D-10	220	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	2	2	3	5		Gray, loose, Sandy Silt, ML.
22	-22	D-11	210	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	6	8	15	23		
24	-24	D-12	210	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	12	18	22	40		
26	-26	D-13	190	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	7	17	18	35		
28	-28	D-14	180	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	6	11	14	25		Gray, meduim dense to dense, Silty Sand, SM.
30	-30	D-15	170	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	8	14	13	27		
		D-16	160	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	10	13	19	32		
		D-17	110	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	10	19	24	43		
		D-18	130	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	6	6	6	12		
		D-19	200	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	2	5	8	13		Gray, medium dense, Sandy Silt, ML,

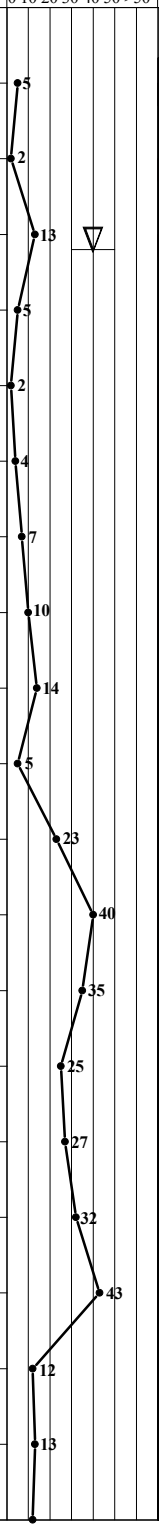

Legend

L.L.= liquid Limit
P.I.= Plasticity Index
W= Moister Content
G_s= Specific Gravity

Y_t= Total Unit Weight
Y_d= Dry Unit Weight
C_c= Compression Index
C_r= Re-compression Index

e_0= Initial Void Ratio
C= Cohesion
$?_u$= Ultimate Axial Stress
?= Friction Angle

%= Strain at Failure
D= Disturbed Sample
UD= Undisturbed Sample
G.W.T.= Ground Water Table

Silty Sand
Sand
Silt
Clay

PROSOIL FOUNDATION CONSULTANT

A2.3.1 BOREHOLE LOG

Project: BHOLA-LAKSHMIPUR BRIDGE PRE-FEASIBILITY STUDY

Client: Bangladesh Bridge Authority (BBA)

Location: Char Ramanimohan Lakshmipur Sadar

Borehole: LBH-3 | E:

Depth: 120.45m | N:


Elev: m | Start: 15-12-2023

GWT: -4.80m | End: 23-12-2023

Drilling Type (Rotary): 100mm Dia

Dia & Depth of Casing: 125mm & 6m

Particle Size Distribution			Atterberg Limits		Moisture Content	Unit Weight (kN/m^3)		Specific Gravity	Consolidation			Shear Strength			Blows/300mm				Sample No.	Sample Rec.(mm)	Depth (m)	Elevation (m)	Layer Symbol	Description
Gravel (%)	Sand (%)	Fine (%)	L.L.	P.I.	W (%)	Y_t	Y_d	G_s	e_0	C_c	C_r	Type	$C/?_u$ (kPa)	?/%	150mm	300mm	450mm	N-value						
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	2	5	8	13	D-19	200	30	-30		Gray, medium dense, Sandy Silt, ML,
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	4	4	8	12	D-20	260				
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	1	1	1	2	D-21	270	32	-32		Gray, loose, High Plastic Silt, MH.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	3	3	4	7	D-22	260				
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	1	3	5	8	D-23	260	34	-34		Gray to Brown, medium stiff to very stiff, Silty Clay, CL-ML.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	2	3	3	6	D-24	250	36	-36		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	1	3	3	6	D-25	240	38	-38		
																			UD-1					
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	3	4	4	8	D-26	210				
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	2	3	4	7	D-27	230	40	-40		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	2	4	5	9	D-28	210	42	-42		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	6	9	13	22	D-29	220				
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	6	8	13	21	D-30	300	44	-44		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	5	9	9	18	D-31	230	46	-46		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	5	8	8	16	D-32	240	48	-48		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	5	10	11	21	D-33	260	50	-50		Brown, medium dense, High Plastic Silt, MH.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	7	17	26	43	D-34	260				Brown, dense, Sandy Silt, ML.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	16	31	19	50	D-35	200	52	-52		Brown, very dense, Silty Sand, SM.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	14	16	14	30	D-36	210	54	-54		Brown, medium dense, Sandy Silt, ML.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	18	26	24	50	D-37	230	56	-56		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	25	23	27	50	D-38	120	58	-58		Brown to Grayish Brown, very dense, Silty Sand, SM. (Trace Mica at 60.0m & 63.0m)
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	18	29	21	50	D-39	220	60	-60		

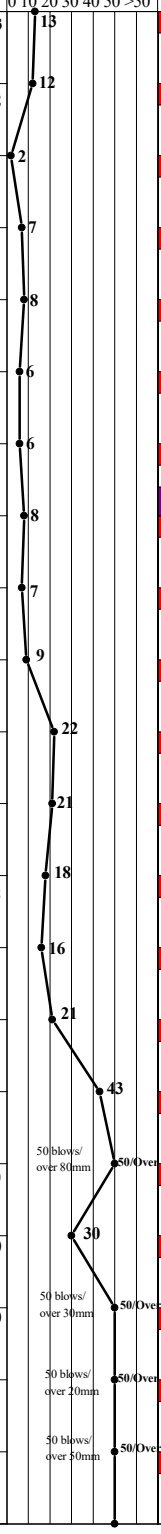

Legend

L.L.= liquid Limit
P.I.= Plasticity Index
W= Moister Content
G_s= Specific Gravity

Y_t= Total Unit Weight
Y_d= Dry Unit Weight
C_c= Compression Index
C_r= Re-compression Index

e_0= Initial Void Ratio
C= Cohesion
$?_u$= Ultimate Axial Stress
?= Friction Angle

%= Strain at Failure
D= Disturbed Sample
UD= Undisturbed Sample
G.W.T.= Ground Water Table

Silty Sand
Sand
Silt
Clay

PROSOIL FOUNDATION CONSULTANT

A2.3.1 BOREHOLE LOG

Project: BHOLA-LAKSHMIPUR BRIDGE PRE-FEASIBILITY STUDY

Client: Bangladesh Bridge Authority (BBA)

Location: Char Ramanimohan Lakshmipur Sadar

Borehole: LBH-3 E:

Depth: 120.45m N:


Elev: m Start: 15-12-2023

GWT: -4.80m End: 23-12-2023

Drilling Type (Rotary): 100mm Dia

Dia & Depth of Casing: 125mm & 6m

Particle Size Distribution			Atterberg Limits		Moisture Content	Unit Weight (kN/m^3)		Specific Gravity	Consolidation			Shear Strength			Standard Penetration Test (SPT)				Sample No.	Sample Rec.(mm)	Depth (m)	Elevation (m)	Layer Symbol	Description
Gravel (%)	Sand (%)	Fine (%)	L.L.	P.I.	W (%)	Y_t	Y_d	G_s	e_0	C_c	C_r	Type	C/$?_u$ (kPa)	?/%	150mm	300mm	450mm	N-value						
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	18	29	21	50	D-39	220				
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	21	32	18	50	D-40	240	60	-60		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	23	24	26	50	D-41	210	62	-62		Brown to Grayish Brown, very dense, Silty Sand, SM. (Trace Mica at 60.0m & 63.0m)
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	22	26	24	50	D-42	220	64	-64		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	11	20	25	45	D-43	190				Grayish Brown, dense, Sandy Silt, ML.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	24	27	23	50	D-44	180	66	-66		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	17	26	24	50	D-45	150	68	-68		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	28	50		50	D-46	150				Grayish Brown to Gray, very dense, Silty Sand, SM. (Trace Mica at 66.0m)
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	34	50		50	D-47	140	70	-70		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	32	50		50	D-48	200	72	-72		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	3	9	14	23	D-49	260				
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	5	12	13	25	D-50	280	74	-74		Gray, medium dense, High Plastic Silt, MH.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	3	6	7	13	D-51	270	76	-76		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	0	3	5	8	D-52	260	78	-78		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	6	10	11	21	D-53	280				Gray, medium stiff to very stiff, Silty Clay, CL-ML.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	10	12	13	25	D-54	180	80	-80		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	5	13	18	31	D-55	280	82	-82		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	13	34	16	50	D-56	220				Gray, dense, Sandy Silt, ML.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	40	50		50	D-57	150	84	-84		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	45	50		50	D-58	190	86	-86		
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	34	50		50	D-59	230	88	-88		Gray, dense to very dense, Silty Sand, SM. (Trace Mica from 106.5m to 108.0m)
																					90	-90		

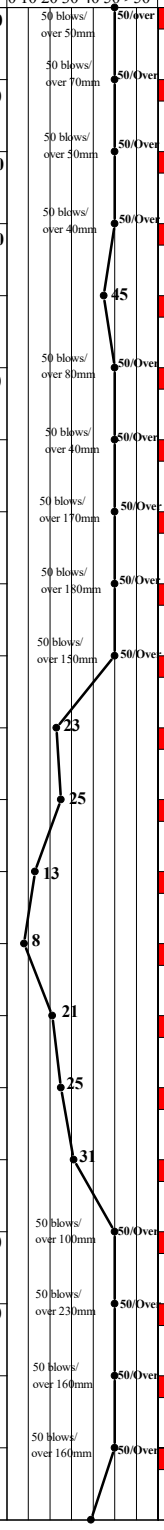

Legend

L.L.= liquid Limit
P.I.= Plasticity Index
W= Moister Content
G_s= Specific Gravity

Y_t= Total Unit Weight
Y_d= Dry Unit Weight
C_c= Compression Index
C_r= Re-compression Index

e_0= Initial Void Ratio
C= Cohesion
$?_u$= Ultimate Axial Stress
?= Friction Angle

%= Strain at Failure
D= Disturbed Sample
UD= Undisturbed Sample
G.W.T.= Ground Water Table

Silty Sand
Sand
Silt
Clay

PROSOIL FOUNDATION CONSULTANT

A2.3.1 BOREHOLE LOG

Project: BHOLA-LAKSHMIPUR BRIDGE PRE-FEASIBILITY STUDY

Client: Bangladesh Bridge Authority (BBA)

Location: Char Ramanimohan Lakshmipur Sadar

Drilling Type (Rotary): 100mm Dia

Dia & Depth of Casing: 125mm & 6m

Borehole: LBH-3 E:

Depth: 120.45m N:

Elev: m Start: 15-12-2023

GWT: -4.80m End: 23-12-2023

Particle Size Distribution			Atterberg Limits		Moisture Content	Unit Weight (kN/m³)		Specific Gravity	Consolidation			Shear Strength			Drilling Type (Rotary): 100mm Dia							
Dia & Depth of Casing: 125mm & 6m																					
Gravel (%)	Sand (%)	Fine (%)	L.L.	P.I.	W (%)	Y_t	Y_d	G_s	e_0	C_c	C_r	Type	$C/?_u$ (kPa)	?/%	150mm	300mm	450mm	N-value	0 10 20 30 40 50 >50	Sample No.	Sample Rec.(mm)	Depth (m)	Elevation (m)	Layer Symbol
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	34	50		50	50 blows/ over 160mm 50/over	D-59	230			
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	11	14	25	39	39	D-60	300	90	-90	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	27	46	4	50	50 blows/ over 140mm 50/Over	D-61	180	92	-92	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	9	35	15	50	50 blows/ over 100mm 50/Over	D-62	160	94	-94	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	34	41	9	50	50 blows/ over 140mm 50/Over	D-63	180			
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	22	35	15	50	50 blows/ over 90mm 50/Over	D-64	230	96	-96	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	33	35	15	50	50 blows/ over 80mm 50/Over	D-65	160	98	-98	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	30	50		50	50 blows/ over 170mm 50/Over	D-66	180			
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	24	27	23	50	50 blows/ over 40mm 50/Over	D-67	220	100	-100	Gray, dense to very dense, Silty Sand, SM. (Trace Mica from 106.5m to 108.0m)
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	28	30	20	50	50 blows/ over 30mm 50/Over	D-68	190	102	-102	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	24	44	6	50	50 blows/ over 140mm 50/Over	D-69	230	104	-104	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	17	31	19	50	50 blows/ over 90mm 50/Over	D-70	210	106	-106	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	19	28	22	50	50 blows/ over 60mm 50/Over	D-71	240			
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	20	32	18	50	50 blows/ over 60mm 50/Over	D-72	230	108	-108	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	24	32	18	50	50 blows/ over 60mm 50/Over	D-73	200	110	-110	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	19	31	19	50	50 blows/ over 100mm 50/Over	D-74	140	112	-112	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	1	1	9	10	10	D-75	300			Gray, loose, Sandy Silt, ML.
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	16	28	22	50	50 blows/ over 50mm 50/Over	D-76	250	114	-114	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	20	26	24	50	50 blows/ over 40mm 50/Over	D-77	230	116	-116	
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	25	36	14	50	50 blows/ over 90mm 50/Over	D-78	210	118	-118	Gray, very dense, Silty Sand, SM. (Trace Mica at 117.0m)
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	39	50		50	50 blows/ over 160mm 50/Over	D-79	200	120	-120	

Legend

L.L.= liquid Limit
P.I.= Plasticity Index
W= Moister Content
G_s= Specific Gravity

Y_t= Total Unit Weight
Y_d= Dry Unit Weight
C_c= Compression Index
C_r= Re-compression Index

e_0= Initial Void Ratio
C= Cohesion
$?_u$= Ultimate Axial Stress
?= Friction Angle

%= Strain at Failure
D= Disturbed Sample
UD= Undisturbed Sample
G.W.T.= Ground Water Table

Silty Sand
Sand
Silt
Clay

PROSOIL FOUNDATION CONSULTANT

A2.3.1
BOREHOLE LOG

Project: BHOLA-LAKSHMIPUR BRIDGE PRE-FEASIBILITY STUDY

Client: Bangladesh Bridge Authority (BBA)

Location: Char Ramanimohan Lakshmipur Sadar

Drilling Type (Rotary): 100mm Dia

Dia & Depth of Casing: 125mm & 6m

Borehole: LBH-3 | E:

Depth: 120.45m | N:

Elev: m | Start: 15-12-2023

GWT: -4.80m | End: 23-12-2023

Particle Size Distribution			Atterberg Limits		Moisture Content	Unit Weight (kN/m^3)		Specific Gravity	Consolidation			Shear Strength			Sample No.	Sample Rec.(mm)	Depth (m)	Elevation (m)	Layer Symbol	150mm	300mm	450mm	N-value	0 10 20 30 40 50 >50
Gravel (%)	Sand (%)	Fine (%)	L.L.	P.I.	W (%)	Y_t	Y_d	G_s	e_0	C_c	C_r	Type	$C/?_u$ (kPa)	?/%										
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	D-79	200	120	-120		39	50		50	50 blows/ over 160mm 50/over
(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	(--)	D-80	220	122	-122		43	45	5	50	50 blows/ over 140mm 50/Over
																	124	-124						
																	126	-126						
																	128	-128						
																	130	-130						
																	132	-132						
																	134	-134						
																	136	-136						
																	138	-138						
																	140	-140						
																	142	-142						
																	144	-144						
																	146	-146						
																	148	-148						
																	150	-150						

Gray, very dense, Silty Sand, SM.
(Trace Mica at 117.0m)

Legend

L.L.= liquid Limit
P.I.= Plasticity Index
W= Moister Content
G_s= Specific Gravity

Y_t= Total Unit Weight
Y_d= Dry Unit Weight
C_c= Compression Index
C_r= Re-compression Index

e_0= Initial Void Ratio
C= Cohesion
$?_u$= Ultimate Axial Stress
?= Friction Angle

%= Strain at Failure
D= Disturbed Sample
UD= Undisturbed Sample
G.W.T.= Ground Water Table

Silty Sand
Sand
Silt
Clay