A2	PROSOIL	BOREHOLE NO: BH_BRRL_COX-10	Longitude: E 91°58'42.17"	Latitude: N 21°25'35.88"
		Name of Project: Engineering Soil mapping of Noakhali & Duptila as per soil classification of Road Master Plan Noakhali, Feni, Bhola, Chittagong, Dohazari & Cox's Bazar.		
CLIENT : BRRL.		Type of Drill Rig: Mechanical Rotary	Borehole Depth: 51.0m	RL: 3.6m Below from Road Level.
Location: Kolatoli Road, Cox's Bazar.		Commencement Date: 31-05-2016	Completed Date: 04-06-2016	G. W. T : 0.74m Below from E. G. L.

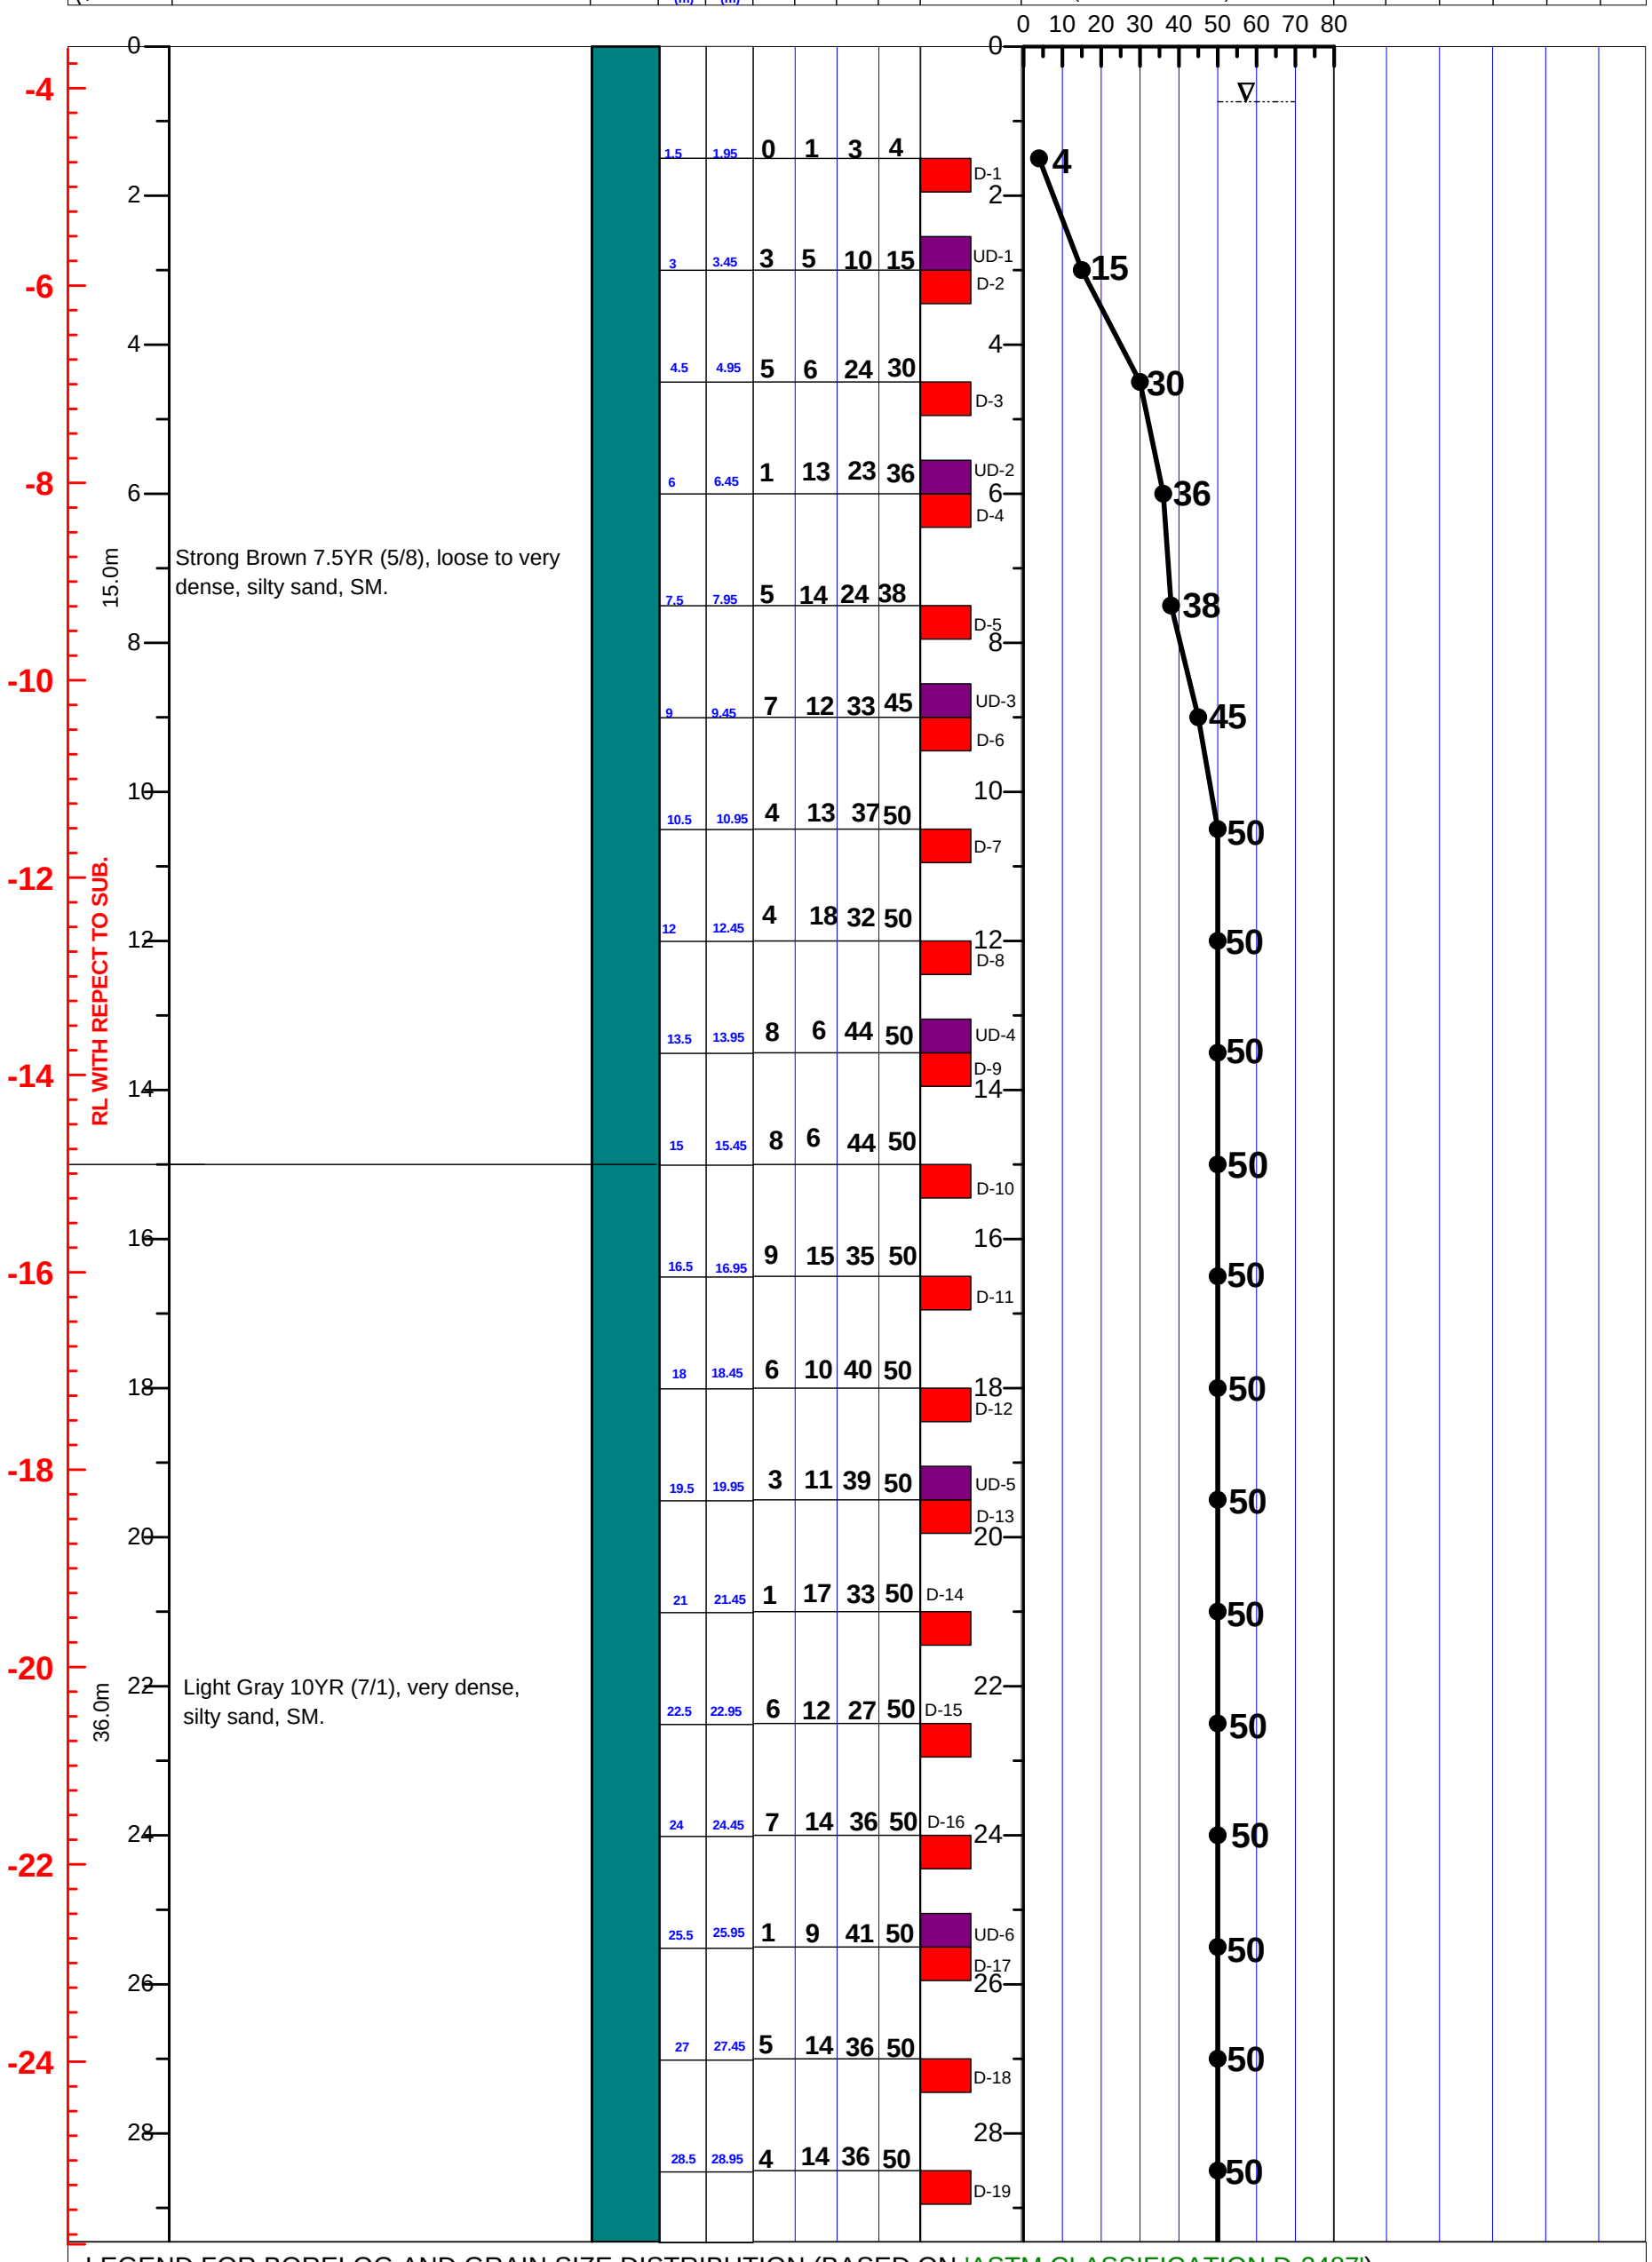
THICKNESS
SOIL STRATA
BORE LOG
SAMPLING
From (m)
To (m)
SPT-N Value Blow/300mm
N1=150 (mm)
N2=300 (mm)
N3=450 (mm)
N=N2+N3
DISTURBED SAMPLE
DEPTH (m) SPT VALUES (BLOWS / 300mm)
0 10 20 30 40 50 60 70 80
% Sand
% Passing 200
% LL
% PI
SP Gravity
% W_n
RL WITH REPECT TO SUB.
15.0m
Strong Brown 7.5YR (5/8), loose to very dense, silty sand, SM.
36.0m
Light Gray 10YR (7/1), very dense, silty sand, SM.
1.5 1.95 0 1 3 4 D-1
3 3.45 3 5 10 15 UD-1 D-2
4.5 4.95 5 6 24 30 D-3
6 6.45 1 13 23 36 UD-2 D-4
7.5 7.95 5 14 24 38 D-5
9 9.45 7 12 33 45 UD-3 D-6
10.5 10.95 4 13 37 50 D-7
12 12.45 4 18 32 50 D-8
13.5 13.95 8 6 44 50 UD-4 D-9
15 15.45 8 6 44 50 D-10
16.5 16.95 9 15 35 50 D-11
18 18.45 6 10 40 50 D-12
19.5 19.95 3 11 39 50 UD-5 D-13
21 21.45 1 17 33 50 D-14
22.5 22.95 6 12 27 50 D-15
24 24.45 7 14 36 50 D-16
25.5 25.95 1 9 41 50 UD-6 D-17
27 27.45 5 14 36 50 D-18
28.5 28.95 4 14 36 50 D-19
4 15 30 36 38 45 50 50 50

01	BRRL PROSOIL	BOREHOLE NO: BH_BRRL_COX-10	Longitude: E 91°58'42.17"	Latitude: N 21°25'35.88"
		Name of Project: Engineering Soil mapping of Noakhali & Duptila as per soil classification of Road Master Plan Noakhali, Feni, Bhola, Chittagong, Dohazari & Cox's Bazar.		
CLIENT : BRRL.		Type of Drill Rig: Mechanical Rotary	Borehole Depth: 51.0m	RL: 3.6m Below from Road Level.
Location: Kolatoli Road, Cox's Bazar.		Commencement Date: 31-05-2016	Completed Date: 04-06-2016	G. W. T : 0.74m Below from E. G. L.

THICKNESS	SOIL STRATA	BORE LOG	SAMPLING From (m)	SAMPLING To (m)	SPT-N Value Blow/300mm N1=150 (mm)	N2=300 (mm)	N3=450 (mm)	N=N2+N3	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	% Sand	% Passing 200	% LL	% PI	SP Gravity	% W_n
36.0m	Light Gray 10YR (7/1), very dense, silty sand, SM.		28.5	28.95	4	14	36	50	D-19	50						
			30	30.45	1	13	37	50	UD-7							
									D-20	50						
			31.5	31.95	7	13	37	50	D-21	50						
			33	33.45	10	12	38	50	UD-8							
									D-22	50						
			34.5	34.95	3	15	35	50	D-23	50						
			36	36.45	6	6	44	50	D-24	50						
			37.5	37.95	4	5	45	50	UD-9							
									D-25	50						
			39	39.45	5	13	37	50	D-26	50						
			40.5	40.95	5	16	34	50	UD-10							
									D-27	50						
			42	42.45	10	14	36	50	D-28	50						
			43.5	43.95	9	15	35	50	D-29	50						
			45	45.45	10	10	40	50	UD-11							
									D-30	50						
			46.5	46.95	12	12	38	50	UD-12							
									D-31	50						
			48	48.45	15	15	35	50	UD-13							
									D-32	50						
			49.5	49.95	16	16	34	50	UD-14							
									D-33	50						
			51	51.45	17	17	33	50	D-34	50						

RL WITH REPECT TO SUB.

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SILT | PEAT/HIGHLY ORGANIC SOIL | UNDISTURBED SAMPLE

MICACEOUS FINE SAND/SILT | SAND | SHALE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED 50/X = BLOWS 50, "X" MM PENETRATION left of 300 mm