	BOREHOLE NO: BH-1
	LOCATION: Vill: Sankarpasha, Po: Talma, Ps: Nagarkanda, Dist: Faridpur.
	DEPTH OF BORING: 21.0m — R. L.: 0.91m below from Road Level.
	DATE OF BORING: 10-01-2015. — B. W. T : 2.13m below from E. G. L.

THICKNESS	SOIL STRATA	BORELOG	UNDISTURBED SAMPLE	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	Grain Size Distribution, % Clay %, Silt %, Sand %	Max^{m} Penetration
4.0m	Brown 7.5YR (5/1), medium plasticity, soft to medium stiff, silty Clay, CL.		UD-1, UD-2, UD-3	D-1, D-2, D-3, D-4	3, 3, 4, 8		
12.5m	Gray 7.5YR (5/1), medium dense to dense, silty Sand, SM.			D-5, D-6, D-7, D-8, D-9, D-10, D-11, D-12, D-13	9, 11, 10, 11, 12, 14, 15, 16, 18		
4.95m	Gray 7.5YR (5/1), dense to very dense, fine Sand, SM.			D-14, D-15, D-16, D-17	21, 23, 27, 31		

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

- PLASTIC CLAY
- SAND
- SILT
- SHALE
- PEAT/HIGHLY ORGANIC SOIL
- MICACEOUS FINE SAND/SILT
- UNDISTURBED SAMPLE
- DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS


AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED

PROSOIL FOUNDATION CONSULTANT DHAKA-1205 69/B, INDIRA ROAD

Md. Shamsul Islam

(Engr. Md. Shamsul Islam)
B. Sc. Engg. (Civil, BUET),
M. Engg. (Geotech), MCSD, FIEB, CCPE
Chief Executive
Prosoil Foundation Consultant

A2	PROSOIL	BOREHOLE NO: BH-2	
		LOCATION: Vill: Sankarpasha, Po: Talma, Ps: Nagarkanda, Dist: Faridpur.	
PROJECT : Telecommunication Tower.		DEPTH OF BORING: 21.0m	R. L.: 0.91m below from Road Level.
CLIENT : AXIATA (Bangladesh) Ltd.		DATE OF BORING: 11-01-2015.	B. W. T : 2.13m below from E. G. L.

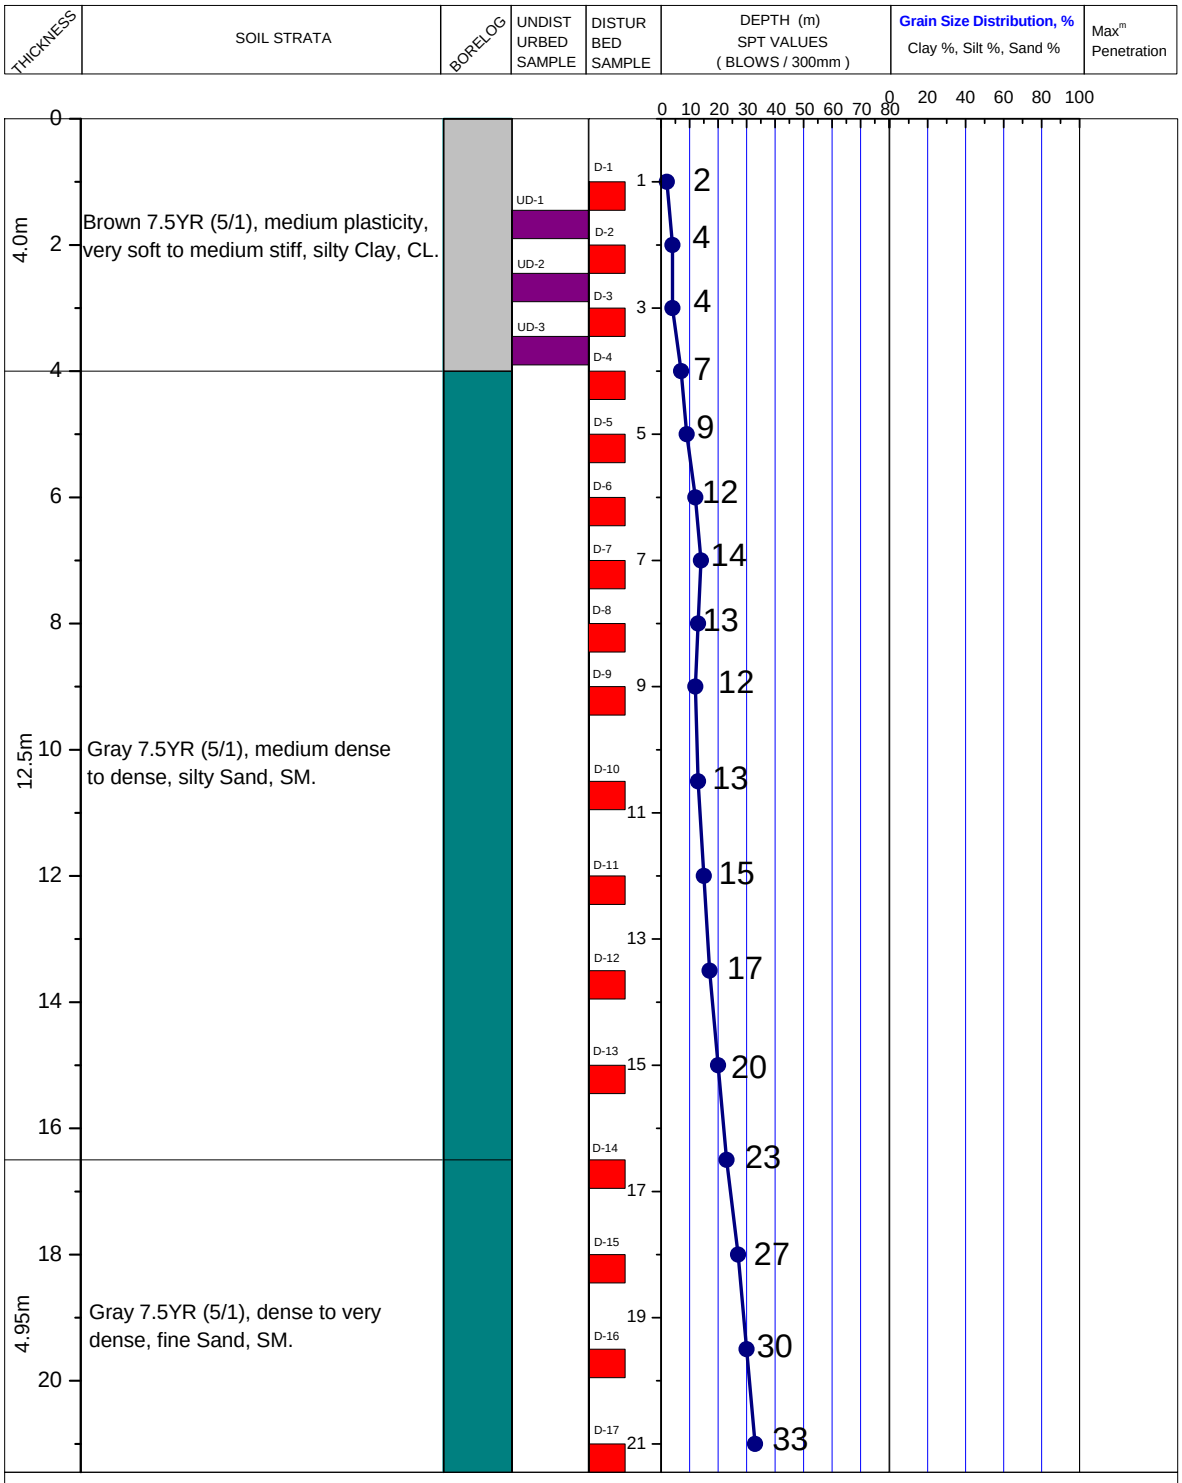

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SAND | SILT | SHALE

PEAT/HIGHLY ORGANIC SOIL | MICACEOUS FINE SAND/SILT | UNDISTURBED SAMPLE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^m PENETRATION= 50 BLOWS


AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED

PROSOIL FOUNDATION CONSULTANT DHAKA-1205 68/B, INDIRA ROAD

Md. Shamsul Islam

(Engr. Md. Shamsul Islam)
B. Sc. Engg. (Civil, BUET),
M. Engg. (Geotech), MCSD, FIEB, CCPE
Chief Executive
Prosoil Foundation Consultant

A2	PROSOIL	BOREHOLE NO: BH-3	
		LOCATION: Vill: Sankarpasha, Po: Talma, Ps: Nagarkanda, Dist: Faridpur.	
PROJECT : Telecommunication Tower.		DEPTH OF BORING: 21.0m	R. L.: 0.91m below from Road Level.
CLIENT : AXIATA (Bangladesh) Ltd.		DATE OF BORING: 11-01-2015.	B. W. T : 2.13m below from E. G. L.

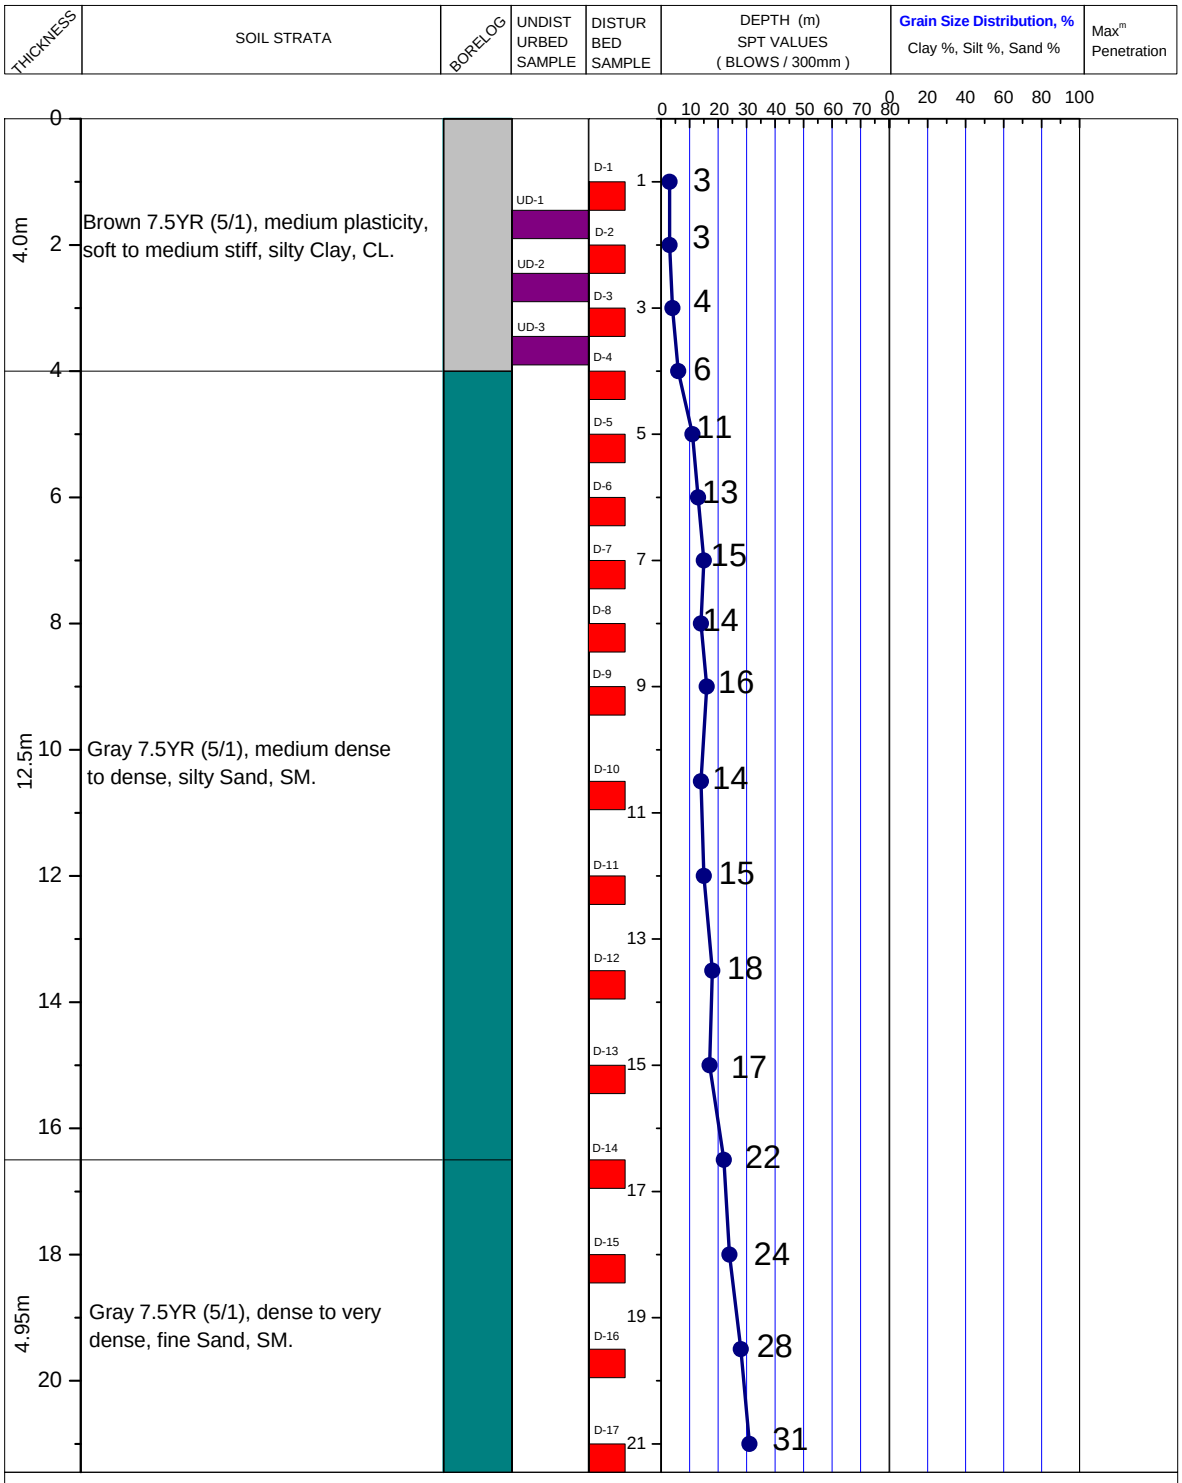

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SAND | SILT | SHALE

PEAT/HIGHLY ORGANIC SOIL | MICACEOUS FINE SAND/SILT | UNDISTURBED SAMPLE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS

AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED

PROSOIL FOUNDATION CONSULTANT DHAKA-1205 68/B, INDIRA ROAD

Md. Shamsul Islam

(Engr. Md. Shamsul Islam)
B. Sc. Engg. (Civil, BUET),
M. Engg. (Geotech), MCSD, FIEB, CCPE
Chief Executive
Prosoil Foundation Consultant

A5: (TABLE - 2) SKIN FRICTION & END-BEARING

PILE SIZE 1.667 FT F.S. 3 upto 7.0m 3 below 7.0m
CROSS SECTIONAL AREA 2.18 SFT
BH NO 1

CUM. DEPTH IN METER	DEFTH IN FT.	CUM. DEPTH IN FT	S.P.T. VALUE	CORRECTED S.P.T. VALUE N-(N-15)/2	AVERAGE SPT VALUE	SURFACE AREA IN PILE (SFT)	TOTAL SURFACE AREA IN PILE (SFT)	SKIN FRICTION ALLOWABLE Qa=.02N/F.S. TSF	SKIN FRICTION (TONS) TOTAL ALLOWABLE Qa=.02N/F.S. TSF	END BEARING CAPACITY(TONS) Qa=4N/F.S. TSF	WORKING LOAD OF PILE (TONS) ALLOWABLE	SKIN FRICTION (TSF) ALLOWABLE Qa=.02N/F.S. TSF	END BEARING CAPACITY(TSF) Qa=4N/F.S. TSF
1	3.281	3.28	3	3	1.5	17.186	17.18619	0.171862	0.171862	8.73	8.90	0.01	4
2	3.281	6.56	3	3	3	17.186	34.37238	0.343724	0.515586	8.73	9.25	0.02	4
3	3.281	9.84	4	4	3.5	17.186	51.55857	0.401011	0.916597	11.64	12.56	0.023333	5.333333
4	3.281	13.1	8	8	6	17.186	68.74476	0.687448	1.604044	23.28	24.88	0.04	10.66667
5	3.281	16.4	9	9	8.5	17.186	85.93095	0.973884	2.577929	26.19	28.77	0.056667	12
6	3.281	19.7	11	11	10	17.186	103.1171	1.145746	3.723675	32.01	35.73	0.066667	14.66667
7	3.281	23	10	10	10.5	17.186	120.3033	1.203033	4.926708	29.10	34.03	0.07	13.33333
8	3.281	26.2	11	11	10.5	17.186	137.4895	1.203033	6.129741	32.01	38.14	0.07	14.66667
9	3.281	29.5	12	12	11.5	17.186	154.6757	1.317608	7.447349	34.92	42.37	0.076667	16
10.5	4.922	34.5	14	14	13	25.779	180.455	2.234205	9.681554	40.74	50.42	0.086667	18.66667
12	4.922	39.4	15	15	14.5	25.779	206.2343	2.491998	12.17355	43.65	55.82	0.096667	20
13.5	4.922	44.3	16	15.5	15.25	25.779	232.0136	2.620894	14.79445	45.11	59.90	0.101667	20.66667
15	4.922	49.2	18	17	16	25.779	257.7929	2.74979	17.54424	48.02	65.56	0.106667	22
16.5	4.922	54.1	21	18	17.25	25.779	283.5721	2.964618	20.50885	52.38	72.89	0.115	24
18	4.922	59.1	23	19	18.5	25.779	309.3514	3.179445	23.6883	55.29	78.98	0.123333	25.33333
19.5	4.922	64	27	21	20	25.779	335.1307	3.437238	27.12554	61.11	88.24	0.133333	28
21	4.922	68.9	31	23	22	25.779	360.91	3.780962	30.9065	66.93	97.84	0.146667	30.66667

Md. Shamsul Islam

(Engr. Md. Shamsul Islam)
B. Sc. Engg. (Civil, BUET),
M. Engg. (Geotech), MCSD, FIEB, CCPE
Chief Executive
Prosoil Foundation Consultant

A5: (TABLE - 2) SKIN FRICTION & END-BEARING

PILE SIZE 1.667 FT F.S. 3 upto 7.0m 3 below 7.0m
CROSS SECTIONAL AREA 2.18 SFT
BH NO 2

CUM. DEPTH IN METER	DEFTH IN FT.	CUM. DEPTH IN FT	S.P.T. VALUE	CORRECTED S.P.T. VALUE N-(N-15)/2	AVERAGE SPT VALUE	SURFACE AREA IN PILE (SFT)	TOTAL SURFACE AREA IN PILE (SFT)	SKIN FRICTION ALLOWABLE Qa=.02N/F.S. TSF	SKIN FRICTION (TONS) TOTAL ALLOWABLE Qa=.02N/F.S. TSF	END BEARING CAPACITY(TONS) Qa=4N/F.S. TSF	WORKING LOAD OF PILE (TONS) ALLOWABLE	SKIN FRICTION (TSF) ALLOWABLE Qa=.02N/F.S. TSF	END BEARING CAPACITY(TSF) Qa=4N/F.S. TSF
1	3.281	3.28	2	2	1	17.186	17.18619	0.114575	0.114575	5.82	5.93	0.006667	2.666667
2	3.281	6.56	4	4	3	17.186	34.37238	0.343724	0.458298	11.64	12.10	0.02	5.333333
3	3.281	9.84	4	4	4	17.186	51.55857	0.458298	0.916597	11.64	12.56	0.026667	5.333333
4	3.281	13.1	7	7	5.5	17.186	68.74476	0.63016	1.546757	20.37	21.92	0.036667	9.333333
5	3.281	16.4	9	9	8	17.186	85.93095	0.916597	2.463354	26.19	28.65	0.053333	12
6	3.281	19.7	12	12	10.5	17.186	103.1171	1.203033	3.666387	34.92	38.59	0.07	16
7	3.281	23	14	14	13	17.186	120.3033	1.48947	5.155857	40.74	45.90	0.086667	18.66667
8	3.281	26.2	13	13	13.5	17.186	137.4895	1.546757	6.702614	37.83	44.53	0.09	17.33333
9	3.281	29.5	12	12	12.5	17.186	154.6757	1.432183	8.134797	34.92	43.06	0.083333	16
10.5	4.922	34.5	13	13	12.5	25.779	180.455	2.148274	10.28307	37.83	48.11	0.083333	17.33333
12	4.922	39.4	15	15	14	25.779	206.2343	2.406067	12.68914	43.65	56.34	0.093333	20
13.5	4.922	44.3	17	16	15.5	25.779	232.0136	2.66386	15.353	46.56	61.91	0.103333	21.33333
15	4.922	49.2	20	18	16.75	25.779	257.7929	2.878687	18.23168	50.93	69.16	0.111667	23.33333
16.5	4.922	54.1	23	19	18.25	25.779	283.5721	3.13648	21.36816	55.29	76.66	0.121667	25.33333
18	4.922	59.1	27	21	20	25.779	309.3514	3.437238	24.8054	61.11	85.92	0.133333	28
19.5	4.922	64	30	23	21.75	25.779	335.1307	3.737996	28.5434	65.48	94.02	0.145	30
21	4.922	68.9	33	24	23.25	25.779	360.91	3.995789	32.53919	69.84	102.38	0.155	32

NOTE:
a) fsa = Allowable value of skin friction (F.S. =3.0)
b) qpa = Allowable value of point bearing capacity (F. S. = 3.0)
c) The above value of fsa and qpa are for driven piles. For bored pile values may be taken as 3/4th in making preliminary estimate.
d) Final estimates of pile load carrying capacity should be confirmed by load test



A5: (TABLE - 2) SKIN FRICTION & END-BEARING

PILE SIZE 1.667 FT F.S. 3 upto 7.0m 3 below 7.0m

CROSS SECTIONAL AREA 2.18 SFT

BH NO 3

CUM. DEPTH IN METER	DEFTH IN FT.	CUM. DEPTH IN FT	S.P.T. VALUE	CORRECTED S.P.T. VALUE N-(N-15)/2	AVERAGE SPT VALUE	SURFACE AREA IN PILE (SFT)	TOTAL SURFACE AREA IN PILE (SFT)	SKIN FRICTION (TONS) ALLOWABLE Qa=.02N/F.S. TSF	TOTAL SKIN FRICTION (TONS) ALLOWABLE Qa=.02N/F.S. TSF	ALLOWABLE END BEARING CAPACITY(TONS) Qa=4N/F.S. TSF	WORKING LOAD OF PILE (TONS) ALLOWABLE	SKIN FRICTION (TSF) ALLOWABLE Qa=.02N/F.S. TSF	ALLOWABLE END BEARING CAPACITY(TSF) Qa=4N/F.S. TSF
1	3.281	3.28	3	3	1.5	17.186	17.18619	0.171862	0.171862	8.73	8.90	0.01	4
2	3.281	6.56	3	3	3	17.186	34.37238	0.343724	0.515586	8.73	9.25	0.02	4
3	3.281	9.84	4	4	3.5	17.186	51.55857	0.401011	0.916597	11.64	12.56	0.023333	5.333333
4	3.281	13.1	6	6	5	17.186	68.74476	0.572873	1.48947	17.46	18.95	0.033333	8
5	3.281	16.4	11	11	8.5	17.186	85.93095	0.973884	2.463354	32.01	34.47	0.056667	14.66667
6	3.281	19.7	13	13	12	17.186	103.1171	1.374895	3.838249	37.83	41.67	0.08	17.33333
7	3.281	23	15	15	14	17.186	120.3033	1.604044	5.442294	43.65	49.09	0.093333	20
8	3.281	26.2	14	14	14.5	17.186	137.4895	1.661332	7.103625	40.74	47.84	0.096667	18.66667
9	3.281	29.5	16	15.5	14.75	17.186	154.6757	1.689975	8.793601	45.11	53.90	0.098333	20.66667
10.5	4.922	34.5	14	14	14.75	25.779	180.455	2.534963	11.32856	40.74	52.07	0.098333	18.66667
12	4.922	39.4	15	15	14.5	25.779	206.2343	2.491998	13.82056	43.65	57.47	0.096667	20
13.5	4.922	44.3	18	16.5	15.75	25.779	232.0136	2.706825	16.52739	48.02	64.54	0.105	22
15	4.922	49.2	17	16	16.25	25.779	257.7929	2.792756	19.32014	46.56	65.88	0.108333	21.33333
16.5	4.922	54.1	22	19	17.25	25.779	283.5721	2.964618	22.28476	53.84	76.12	0.115	24.66667
18	4.922	59.1	24	20	19	25.779	309.3514	3.265376	25.55014	56.75	82.30	0.126667	26
19.5	4.922	64	28	22	20.5	25.779	335.1307	3.523169	29.07331	62.57	91.64	0.136667	28.66667
21	4.922	68.9	31	23	22.25	25.779	360.91	3.823927	32.89723	66.93	99.83	0.148333	30.66667

NOTE:

a) fsa = Allowable value of skin friction (F.S. =3.0)

b) qpa = Allowable value of point bearing capacity (F. S. = 3.0)

c) The above value of fsa and qpa are for driven piles. For bored pile values may be taken as 3/4th in making preliminary estimate.

d) Final estimates of pile load carrying capacity should be confirmed by load test



Md. Shamsul Islam

(Engr. Md. Shamsul Islam)
B. Sc. Engg. (Civil, BUET),
M. Engg. (Geotech), MCSD, FIEB, CCPE
Chief Executive
Prosoil Foundation Consultant