A2	PROSOIL	BOREHOLE NO: BH_BRRL_COX_12	Longitude: E 92°8'40.05	Latitude: N 21°4'21.05
		Name of Project: Engineering Soil mapping of Noakhali & Duptila as per soil classification of Road Master Plan Noakhali, Feni, Bhola, Chittagong, Dohazari & Cox's Bazar		
CLIENT : BRRL.		Type of Drill Rig: Mechanical Rotary	Borehole Depth: 51.0m	RL: 2.07m Below from Road Level.
Location: Shamlapur, Pacharchara, Teknaf, Cox's Bazar.		Commencement Date: 31-05-2016	Completed Date: 04-06-2016	G. W. T : 2.44m below from E.G.L.

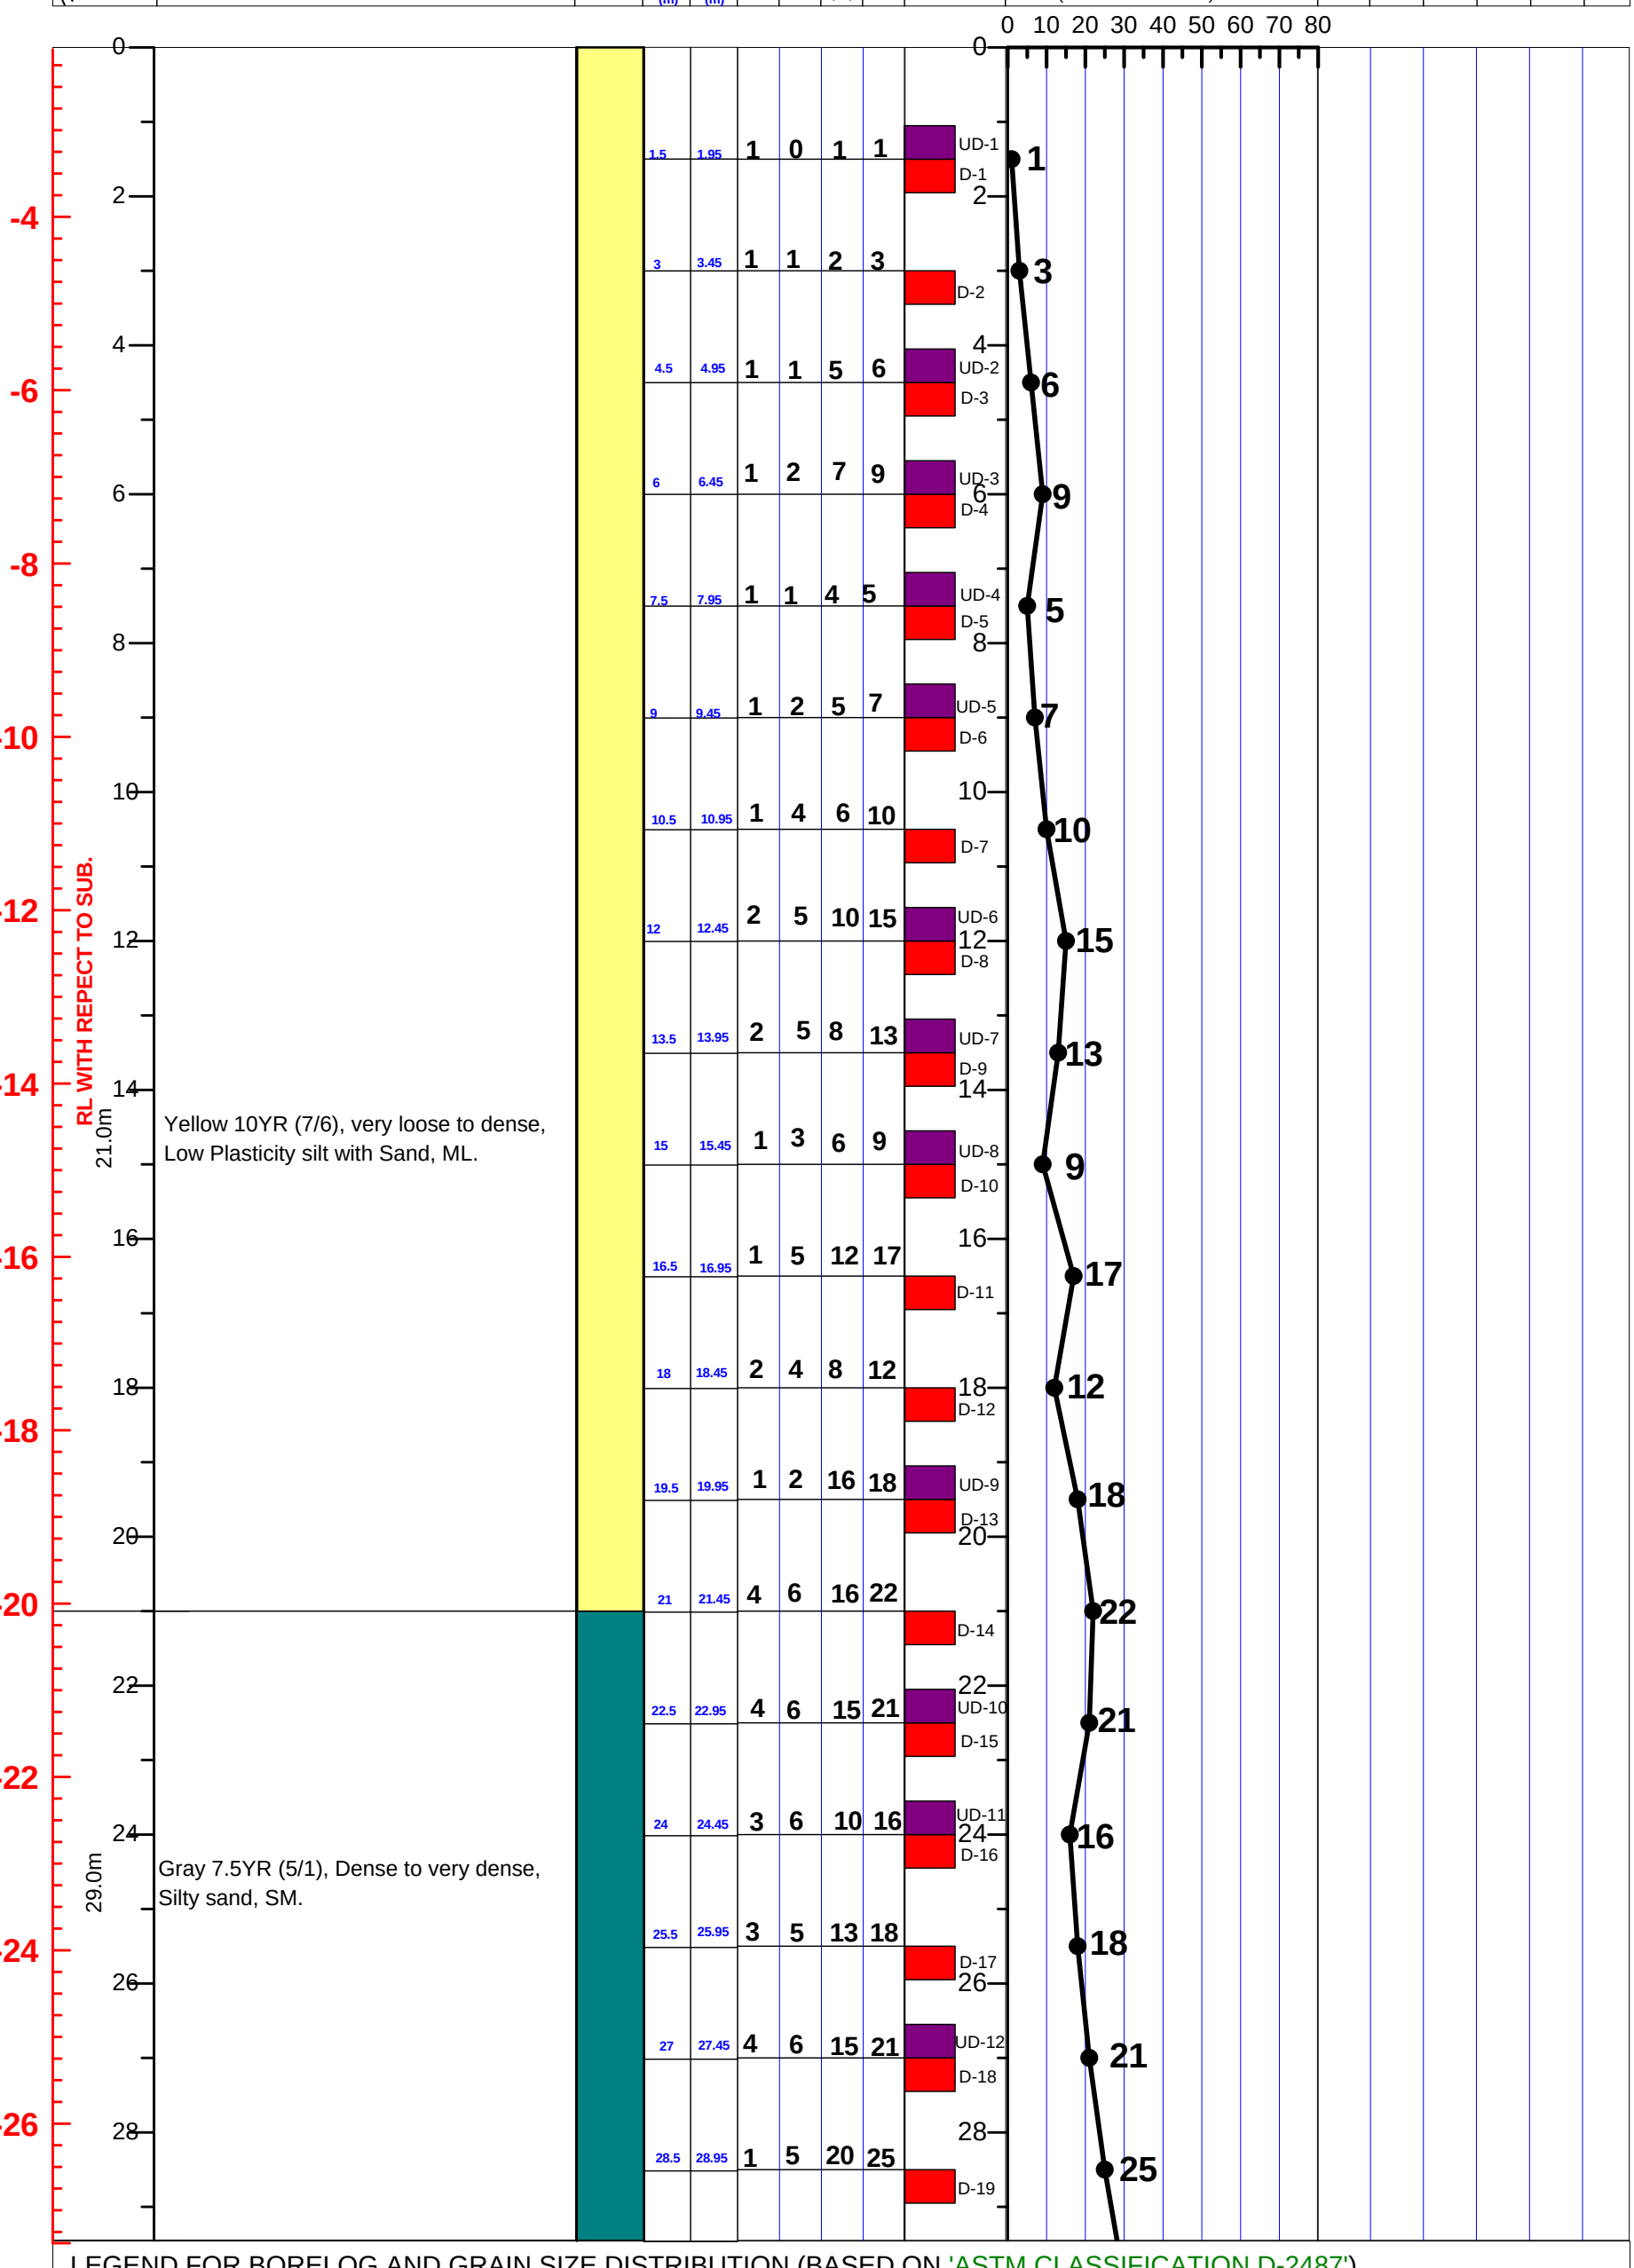

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SILT | PEAT/HIGHLY ORGANIC SOIL | UNDISTURBED SAMPLE

MICACEOUS FINE SAND/SILT | SAND | SHALE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED 50/X = BLOWS 50, "X" MM PENETRATION left of 300 mm

01	BRRL PROSOIL	BOREHOLE NO: BH_BRRL_COX_12	Longitude: E 92°8'40.05	Latitude: N 21°4'21.05
		Name of Project: Engineering Soil Mapping of Meghna as per Soil Classification of road master plan (Dhaka, Comilla, Narayangonj, Munshigonj).		
CLIENT : BRRL.		Type of Drill Rig: Mechanical Rotary	Borehole Depth: 51.0m	RL: 2.07m Below from Road Level.
Location: Shamlapur, Pacharchara, Teknaf, Cox's Bazar.		Commencement Date: 31-05-2015	Completed Date: 04-06-2016	G. W. T : 2.44m below from E.G.L.

THICKNESS	SOIL STRATA	BORE LOG	SAMPLING From (m)	SAMPLING To (m)	SPT-N Value Blow/300mm N1=150 (mm)	N2=300 (mm)	N3=450 (mm)	N=N2+N3	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	% Sand	% Passing 200	% LL	% PI	SP Gravity	% W_n
29.0m	Gray 7.5YR (5/1), Dense to very dense, Silty sand, SM.		28.5	28.95	1	9	16	25	D-19	25						
			30	30.45	4	12	18	30	D-20	30						
			31.5	31.95	2	7	15	22	UD-13	22						
									D-21							
			33	33.45	1	7	21	28	UD-14	28						
									D-22							
			34.5	34.95	5	5	25	30	D-23	30						
			36	36.45	5	5	30	35	UD-15	35						
									D-24							
			37.5	37.95	4	14	14	31	D-25	31						
			39	39.45	2	5	28	33	D-26	33						
			40.5	40.95	3	10	26	36	D-27	36						
			42	42.45	2	10	30	40	UD-16	40						
									D-28							
			43.5	43.95	5	14	28	42	D-29	42						
			45	45.45	8	8	37	45	D-30	45						
			46.5	46.95	12	12	38	50	UD-17	50						
									D-31							
			48	48.45	14	14	36	50	D-32	50						
			49.5	49.95	14	14	36	50	D-33	50						
			51	51.45	13	13	37	50	UD-18	50						
									D-34							

RL WITH REPECT TO SUB.

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SILT | PEAT/HIGHLY ORGANIC SOIL | UNDISTURBED SAMPLE

MICACEOUS FINE SAND/SILT | SAND | SHALE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX[m] PENETRATION= 50 BLOWS. AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED 50/X = BLOWS 50, "X" MM PENETRATION left of 300 mm