
## **CSE 322**

## **Cisco Packet Tracer Online**

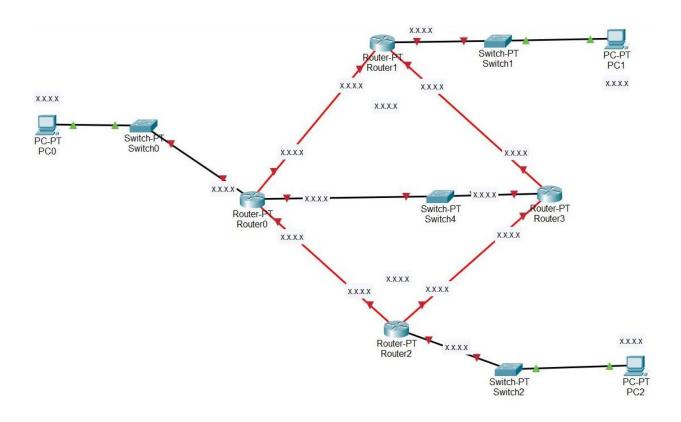

## Tasks:

- Network Configuration: Assign appropriate and unique ip addresses to all devices. For this, replace 'x.x.x.x' with appropriate ip addresses. Configure the network properly to enable communication among all devices.
- Routing Configuration: You cannot use static routing. Use dynamic routing in such a way to achieve the following:
  - o all packets from PC2 to PC1 will pass through Router0, Router3.
  - o all packets from PC1 to PC2 will pass through Router3, Router0. 20
- ACL: You need to implement ACL in such a way that:
  - o PC0 cannot ping PC2.
  - PC0 cannot send ftp requests to PC1 (port number 21)