



Semester: V

Subject: Computer Network

Academic Year: 2023-24

## Distance Vector Routing (DVR) Protocol

A **distance-vector routing (DVR)** protocol requires that a router inform its neighbors of topology changes periodically also known as Bellman-Ford algorithm.

**Bellman Ford Basics** – Each router maintains a Distance Vector table containing the distance between itself and ALL possible destination nodes. Distances, based on a chosen metric, are computed using information from the neighbors' distance vectors.

Information kept by DV router -

- Each router has an ID
- Associated with each link connected to a router,
- there is a link cost (static or dynamic).
- Intermediate hops


Distance Vector Table Initialization -

- Distance to itself = 0
- Distance to ALL other routers = infinity number.

**Distance Vector Algorithm** –

1. A router transmits its distance vector to each of its neighbors in a routing packet.
2. Each router receives and saves the most recently received distance vector from each of its neighbors.
3. A router recalculates its distance vector when:
  - It receives a distance vector from a neighbor containing different information than before.
  - It discovers that a link to a neighbor has gone down.

**Example** – Consider 3-routers X, Y and Z as shown in figure. Each router has their routing table. Every routing table will contain distance to the destination nodes.

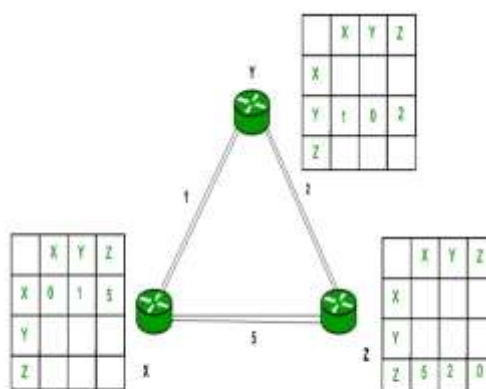

Consider router X, X will share its routing table to neighbors and neighbors will share their routing table to it to X and distance from node X to destination will be calculated using Bellman-Ford equation.

$$D_x(y) = \min \{ C(x,v) + D_v(y) \} \text{ for each node } y \in N$$




**Semester: V**


**Subject: Computer Network**

**Academic Year: 2023-24**

As we can see that distance will be less going from X to Z when Y is intermediate node(hop) so it will be update in routing table X.

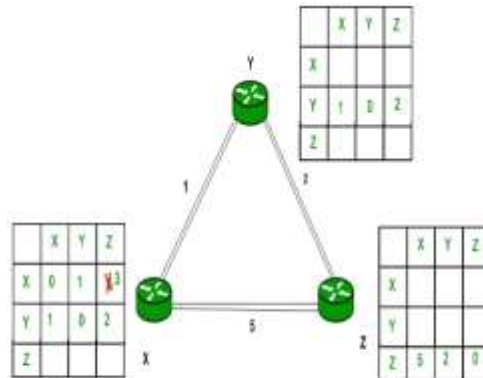

Similarly for Z also –

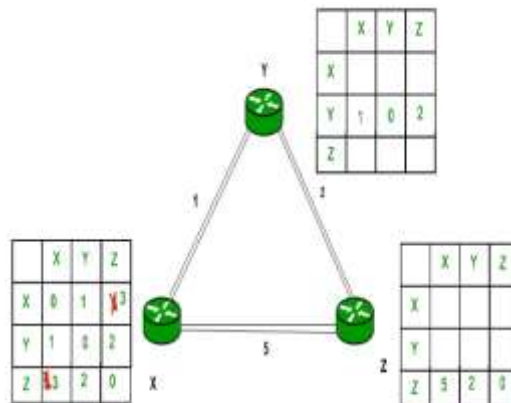


Finally the routing table for all –



Semester: V

Subject: Computer Network

Academic Year: 2023-24

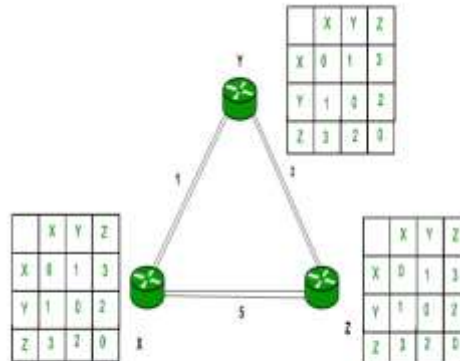

#### Advantages of Distance Vector routing –

- It is simpler to configure and maintain than link state routing.

#### Disadvantages of Distance Vector routing –

- It is slower to converge than link state.
- It is at risk from the count-to-infinity problem.
- It creates more traffic than link state since a hop count change must be propagated to all routers and processed on each router. Hop count updates take place on a periodic basis, even if there are no changes in the network topology, so bandwidth-wasting broadcasts still occur.
- For larger networks, distance vector routing results in larger routing tables than link state since each router must know about all other routers. This can also lead to congestion on WAN links.