

1-Wire® Communication with PIC® Microcontroller

*Author: Sashavalli Maniyar
Microchip Technology Inc.*

INTRODUCTION

This application note introduces the user to the 1-Wire® communication protocol and describes how a 1-Wire device can be interfaced to the PIC® microcontrollers.

1-Wire protocol is a registered trade mark of Maxim/Dallas Semiconductor.

A software stack for the basic, standard speed, 1-Wire master communication is provided with this application note along with an example application.

Note: 1-Wire is not related to the UNI/O™ bus. The UNI/O serial EEPROM family uses a single wire communication protocol developed by Microchip. For UNI/O protocol related application notes, visit the Microchip web site: <http://www.microchip.com>.

OVERVIEW OF THE 1-Wire BUS

The PIC microcontrollers have multiple General Purpose Input/Output (GPIO) pins, and can be easily configured to implement Maxim/Dallas Semiconductor's 1-Wire protocol.

The 1-Wire protocol allows interaction with many Maxim/Dallas Semiconductor parts, including battery and thermal management devices, memory, iButtons®, etc.

1-Wire devices provide solutions for identification, memory, timekeeping, measurement and control. The 1-Wire data interface is reduced to the absolute minimum (single data line with a ground reference). As most 1-Wire devices provide a relatively small amount of data, the typical data rate of 16 kbps is sufficient for the intended tasks. It is often convenient to use a GPIO pin of an 8-bit or 16-bit microcontroller in a "bit banging" manner to act as the bus master. 1-Wire devices communicate using a single data line and well-defined, time tested protocols.

Note: The Idle state for the 1-Wire bus is high. If, for any reason, a transaction needs to be suspended, the bus must be left in the Idle state. If this does not occur and the bus is left low for more than 120 μ s, one or more of the devices on the bus may be reset.

1-Wire Protocol

- The protocol is called 1-Wire because it uses 1 wire to transfer data. 1-Wire architecture uses a pull-up resistor to pull voltage off the data line at the master side.
- 1-Wire protocol uses CMOS/TTL logic and operates at a supply voltage ranging from 2.8V to 6V.
- Master and slave can be receivers and transmitters, but transfer only one direction at a time (half duplex). The master initiates and controls all 1-Wire operations.
- It is a bit-oriented operation with data read and write, Least Significant bit (LSb) first, and is transferred in time slots.
- The system clock is not required as each part is self-clocked and synchronized by the falling edge of the master.

Prerequisites


The requirements of any 1-Wire bus are:

- The system must be capable of generating an accurate and repeatable 1 μ s delay for standard speed and 0.25 μ s delay for overdrive speed.
- The communication port must be bidirectional; its output must be open-drain and there should be a weak pull-up on the line.
- The communication operations should not be interrupted while being generated.

Note: Most PIC microcontrollers allow the user to configure any I/O pin to open-drain as it is one of the prerequisites.

For recommended pull-up resistance value, refer to the specific slave device data sheet

FIGURE 1: HARDWARE INTERFACE

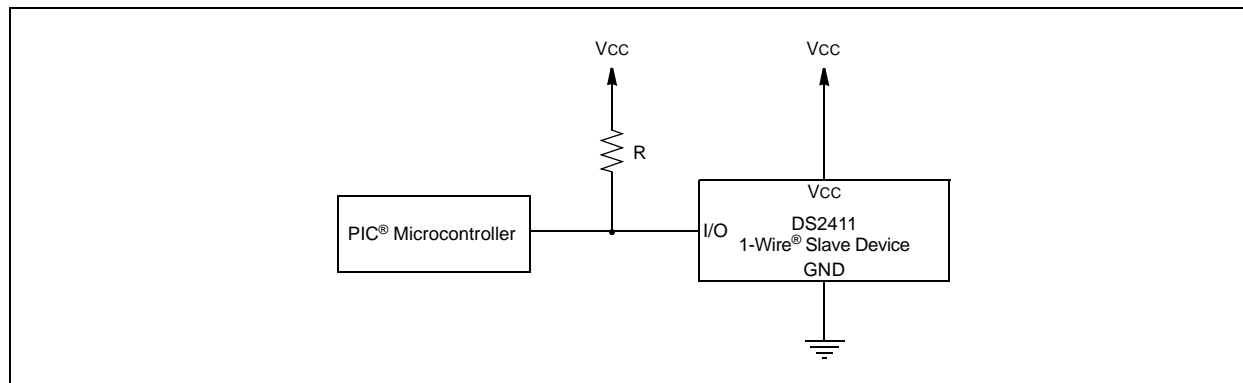

OPERATIONS OF THE 1-Wire BUS

The four basic operations of a 1-Wire bus are Reset, Write 0 bit, Write 1 bit and Read bit.

Using these bit operations, one has to derive a byte or a frame of bytes.

The bus master initiates and controls all of the 1-Wire communication. Figure 2 illustrates the 1-Wire communication timing diagram. It is similar to Pulse-Width Modulation (PWM) because, the data is transmitted by wide (logic '0') and narrow (logic '1') pulse widths during data bit time periods or time slots. The timing diagram also contains the recommended time values for robust communication across various line conditions.

Table 1 provides a list of operations with descriptions and also implementation steps; this is for standard speed.

A communication sequence starts when the bus master drives a defined length "Reset" pulse that synchronizes the entire bus. Every slave responds to the "Reset" pulse with a logic-low "Presence" pulse.


To write the data, the master first initiates a time slot by driving the 1-Wire line low, and then, either holds the line low (wide pulse) to transmit a logic '0' or releases the line (short pulse) to allow the bus to return to the logic '1' state. To read the data, the master again initiates a time slot by driving the line with a narrow low pulse. A slave can then either return a logic '0' by turning on its open-drain output and holding the line low to extend the pulse, or return a logic '1' by leaving its open-drain output off to allow the line to recover.

- Most 1-Wire devices support two data rates: standard speed of about 15 kbps and overdrive speed of about 111 kbps.

The protocol is self-clocking and tolerates long inter-bit delays, which ensures smooth operation in interrupted software environments.

TABLE 1: 1-Wire® OPERATIONS

Operation	Description	Implementation
Reset	Reset the 1-Wire bus slave devices and get them ready for a command.	Drive bus low, delay 480 μ s. Release bus, delay 70 μ s. Sample bus: 0 = device(s) present, 1 = no device present Delay 410 μ s.
Write 0 bit	Send '0' bit to the 1-Wire slaves (Write 0 slot time).	Drive bus low, delay 60 μ s. Release bus, delay 10 μ s.
Write 1 bit	Send '1' bit to the 1-Wire slaves (Write 1 slot time).	Drive bus low, delay 6 μ s. Release bus, delay 64 μ s.
Read bit	Read a bit from the 1-Wire slaves (Read time slot).	Drive bus low, delay 6 μ s. Release bus, delay 9 μ s. Sample bus to read bit from slave. Delay 55 μ s.



1-Wire APIs FOR PIC MICROCONTROLLERS

Table 2 provides the 1-Wire functions.

TABLE 2: 1-Wire® API FUNCTIONS

Function Name	Description
drive_OW_low	This function configures the 1-Wire port pin as an output and drives the port pin to LOW.
drive_OW_high	This function configures the 1-Wire port pin as an output and drives the port pin to HIGH.
read_OW	This function configures the 1-Wire port pin as an input and reads the status of the port pin.
OW_write_byte	This function is used to transmit a byte of data to a slave device.
OW_read_byte	This function is used for reading a complete byte from the slave device.
OW_reset_pulse	This function describes the protocol to produce a Reset pulse to a slave device and also to detect the presence pulse from the slave device. The 1-Wire slave device is identified using this function.
OW_write_bit	This function describes the protocol to write bit information to a slave device.
OW_read_bit	This function describes the protocol to read bit information from a slave device.

CONCLUSION

This application note provides an overview of a 1-Wire protocol and also can be used as a building block to develop a sophisticated 1-Wire application using API developed on PIC microcontrollers.

REFERENCES

- <http://www.maxim-ic.com/1-Wire>
- http://www.maxim-ic.com/appnotes.cfm?appnote_number=126
- http://www.maxim-ic.com/quick_view2.cfm/qv_pk/3711/t/al

APPENDIX A: 1-Wire FUNCTIONS

drive_OW_low

Configures the 1-Wire port pin as an output and drives the port pin to LOW.

Syntax

```
void drive_OW_low (void)
```

Parameter

None

Return Values

None

Precondition

None

Side Effects

None

Example

```
// Driving the 1-Wire bus low
drive_OW_low();
```

drive_OW_high

Configures the 1-Wire port pin as an output and drives the port pin to HIGH.

Syntax

```
void drive_OW_high (void)
```

Parameter

None

Return Values

None

Precondition

None

Side Effects

None

Example

```
// Driving the 1-Wire bus High
drive_OW_high();
```

read_OW

Configures the 1-Wire port pin as an input and reads the status of the port pin.

Syntax

```
unsigned char read_OW (void)
```

Parameters

None

Return Values

Return the status of OW pin.

Precondition

None

Side Effects

None

Example

```
unsigned char presence_detect ;

// Return the status of OW pin.
presence_detect = read_OW();           // Get the presence pulse from 1-Wire slave device.
```

AN1199

OW_write_byte

Transmits 8-bit data to the 1-Wire slave device.

Syntax

```
void OW_write_byte (unsigned char write_data)
```

Parameters

Send byte to the 1-Wire slave device.

Return Values

None

Precondition

None

Side Effects

None

Example

```
#define READ_COMMAND_DS2411 0x33

//Send read command to 1-Wire Device DS2411 to get serial number.
OW_write_byte (READ_COMMAND_DS2411);
```


OW_read_byte

Reads the 8-bit information from the 1-Wire slave device.

Syntax

```
unsigned char OW_read_byte (void)
```

Parameters

None

Return Values

Returns the read byte from the slave device.

Precondition

None

Side Effects

None

Example

```
// To receive 64-bit registration number ( 8-bit CRC Code, 48-bit Serial  
//Number, 8-bit family code) from the 1-Wire slave device.
```

```
unsigned char serial_number [8];  
unsigned char temp;  
  
for(temp = 0; temp<8; temp++)  
    serial_number[temp] = OW_read_byte();
```

AN1199

OW_reset_pulse

Describes 1-Wire protocol to generate Reset pulse to detect the presence of the 1-Wire slave device.

Syntax

```
unsigned char OW_reset_pulse(void)
```

Parameters

None

Return Values

Return '0' if the slave device presence pulse is detected, return '1' otherwise.

Precondition

None

Side Effects

None

Example

```
// OW_reset_pulse function return the presence pulse from the slave device

    if (!OW_reset_pulse())
        return HIGH;           // Slave Device is detected
    else
        return LOW;            // Slave Device is not detected
```

OW_write_bit

Describes 1-Wire protocol to write 1 bit of information to the 1-Wire slave device.

Syntax

```
void OW_write_bit (unsigned char write_bit)
```

Parameters

Send one bit to the 1-Wire slave device.

Return Values

None

Precondition

None

Side Effects

None

Example

```
unsigned char loop;

for (loop = 0; loop < 8; loop++)
{
    OW_write_bit(write_data & 0x01); //Sending LS-bit first
    write_data >>= 1;                // shift the data byte for the next bit to send
}
```

OW_read_bit

Describes 1-Wire protocol to read 1 bit of information from the 1-Wire slave device.

Syntax

```
unsigned char OW_read_bit (void)
```

Parameters

None

Return Values

Return the read bit transmitted by a slave device.

Precondition

None

Side Effects

None

Example


```
unsigned char loop;
unsigned char result = 0;

for (loop = 0; loop < 8; loop++)
{
    result >>= 1;    // shift the result to get it ready for the next bit to receive
    if (OW_read_bit())
        result |= 0x80;    // if result is one, then set MS-bit
}
return (result);
```

APPENDIX B: APPLICATION FLOWCHART

This flowchart illustrates how to use the library functions.

FIGURE B-1: LIBRARY USE FLOWCHART

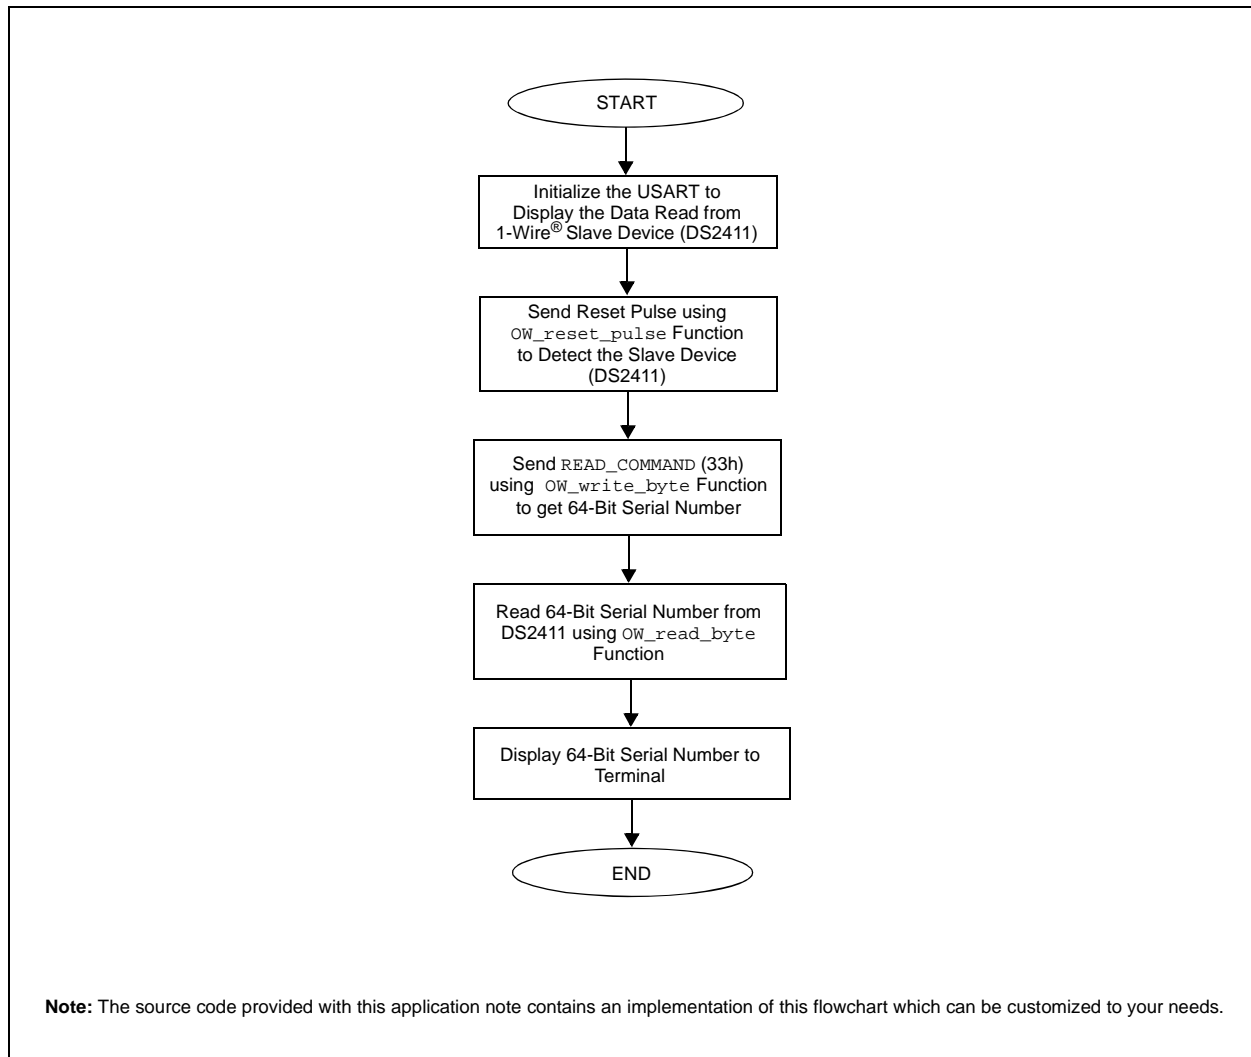

NOTES:

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, Accuron, dsPIC, KEELoQ, KEELoQ logo, MPLAB, PIC, PICmicro, PICSTART, PRO MATE, rPIC and SmartShunt are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.


FilterLab, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL, SmartSensor and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, In-Circuit Serial Programming, ICSP, ICEPIC, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, PICkit, PICDEM, PICDEM.net, PICtail, PIC³² logo, PowerCal, PowerInfo, PowerMate, PowerTool, REAL ICE, rLAB, Select Mode, Total Endurance, UNI/O, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2008, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO/TS 16949:2002 ==

Microchip received ISO/TS-16949:2002 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELoQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.



Worldwide Sales and Service

AMERICAS

Corporate Office

2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://support.microchip.com>
Web Address:
www.microchip.com

Atlanta

Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Boston

Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago

Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Dallas

Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit

Farmington Hills, MI
Tel: 248-538-2250
Fax: 248-538-2260

Kokomo

Kokomo, IN
Tel: 765-864-8360
Fax: 765-864-8387

Los Angeles

Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

Santa Clara

Santa Clara, CA
Tel: 408-961-6444
Fax: 408-961-6445

Toronto

Mississauga, Ontario,
Canada
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office

Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon
Hong Kong
Tel: 852-2401-1200
Fax: 852-2401-3431

Australia - Sydney

Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing

Tel: 86-10-8528-2100
Fax: 86-10-8528-2104

China - Chengdu

Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Hong Kong SAR

Tel: 852-2401-1200
Fax: 852-2401-3431

China - Nanjing

Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao

Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai

Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang

Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen

Tel: 86-755-8203-2660
Fax: 86-755-8203-1760

China - Wuhan

Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xiamen

Tel: 86-592-2388138
Fax: 86-592-2388130

China - Xian

Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

China - Zhuhai

Tel: 86-756-3210040
Fax: 86-756-3210049

ASIA/PACIFIC

India - Bangalore

Tel: 91-80-4182-8400
Fax: 91-80-4182-8422

India - New Delhi

Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune

Tel: 91-20-2566-1512
Fax: 91-20-2566-1513

Japan - Yokohama

Tel: 81-45-471- 6166
Fax: 81-45-471-6122

Korea - Daegu

Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul

Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur

Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang

Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila

Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore

Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu

Tel: 886-3-572-9526
Fax: 886-3-572-6459

Taiwan - Kaohsiung

Tel: 886-7-536-4818
Fax: 886-7-536-4803

Taiwan - Taipei

Tel: 886-2-2500-6610
Fax: 886-2-2508-0102

Thailand - Bangkok

Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels

Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen

Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris

Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Munich

Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Italy - Milan

Tel: 39-0331-742611
Fax: 39-0331-466781

Netherlands - Drunen

Tel: 31-416-690399
Fax: 31-416-690340

Spain - Madrid

Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

UK - Wokingham

Tel: 44-118-921-5869
Fax: 44-118-921-5820