
MECWIN®

EMPOWERING FUTURE

# PMSM MID MOTOR



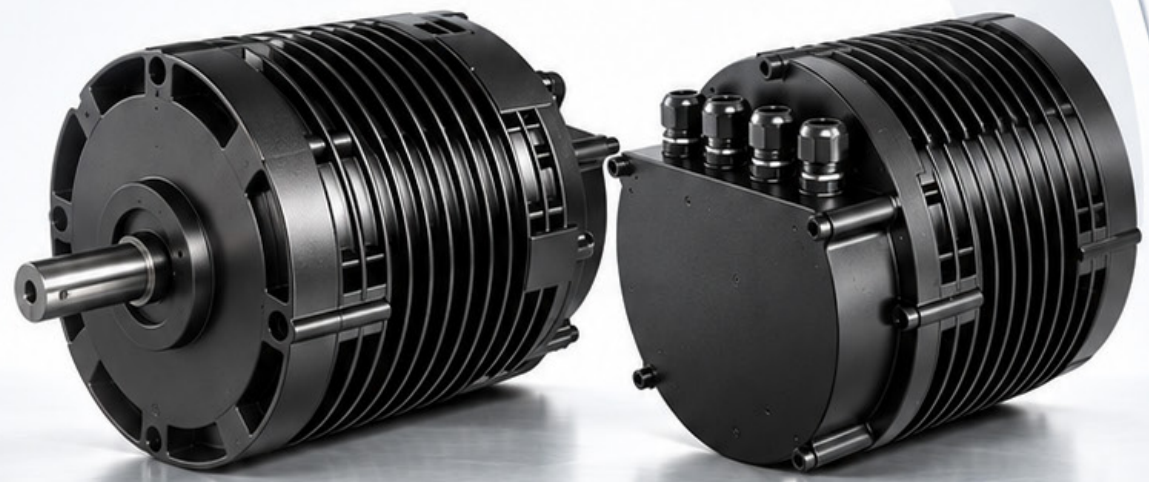

www.mecwinindia.com

# COMPANY OVERVIEW

## About us

Mecwin Group is a Bengaluru-based engineering and manufacturing company specializing in motors, controllers, powertrains, wiring harnesses, SCADA automation and IoT solutions. We develop customized solutions for electric mobility, industrial automation, agriculture, renewable energy, aerospace, defence and other demanding applications.Our 50,000 sq. ft. manufacturing facility is equipped with modern machinery, engineering laboratories and advanced testing facilities. With strong in-house engineering capabilities, we manage the complete product journey — from design and prototyping to testing, validation and production.We work closely with OEMs to provide high-performance, reliable and application-specific solutions.

Our growth is driven by innovation, engineering excellence, quality, integrityand long-term partnerships with our customers, suppliers and employees.

## Vision

To become the preferred global technology partner for high-efficiency motors, controllers and powertrains—from agriculture to aviation—by delivering innovation, quality, reliability, on-time service and environmentally responsible manufacturing.


## Mission


To become the preferred global technology partner for high-efficiency motors, controllers and powertrains—from agriculture to aviation—by delivering innovation, quality, reliability, on-time service and environmentally responsible manufacturing.

## Core Values

Customer Success | Innovation | Excellence | Integrity | People & Partnerships | Environmental Responsibility.

# MT-RF-1.5/48/72

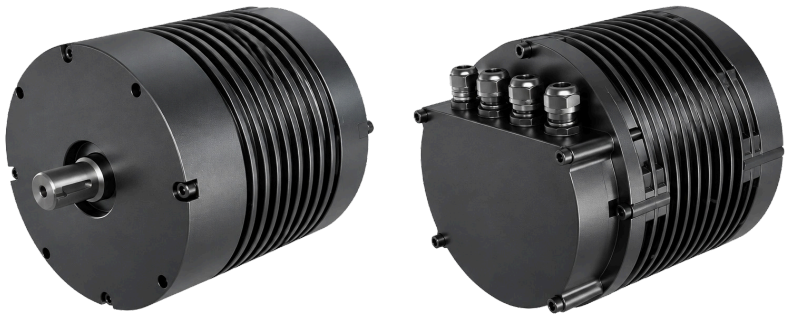


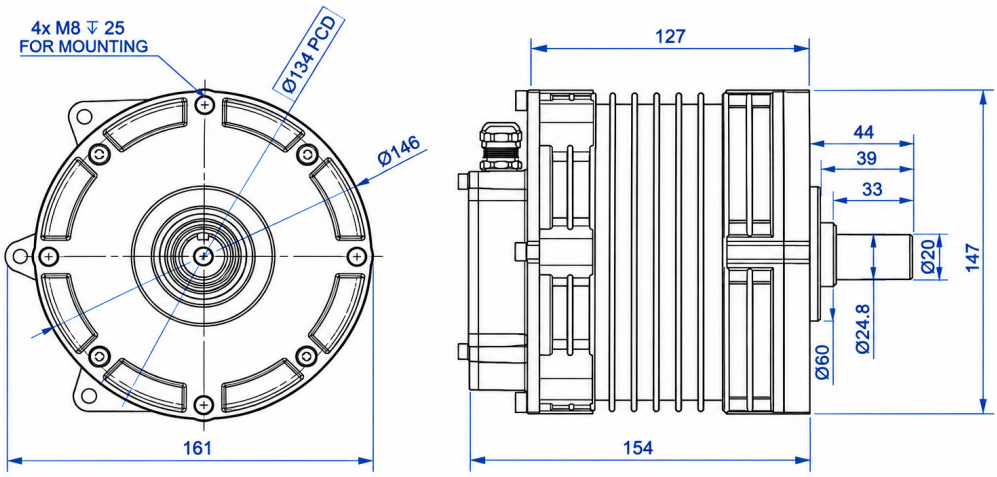



## Technical Specifications

| Specification | 48V Model | 72V Model |
|---|---|---|
| Rated Voltage (V DC) | 48 | 72 |
| Rated Power (kW) | 1.5 | 1.5 |
| Peak Power (kW) | 3.0 | 3.0 |
| Peak Speed (RPM) | 4000 | 5000 |
| Rated Torque (Nm) | 6.5 | 6.5 |
| Peak Torque (Nm) | 45 | 50 |
| Peak Efficiency | >94% | >94% |
| Cooling Method | Air Cooled | Air Cooled |
| Mass | 7.5 kg | 7.5 kg |
| Insulation Class | F Class | F Class |
| Sensor Type | Enc (hall signals) | Enc (hall signals) |
| IP Rating | IP67 | IP67 |
| Communication Mode | CAN / one-line | CAN / one-line |

# MT-RF-2.2/48/72/96

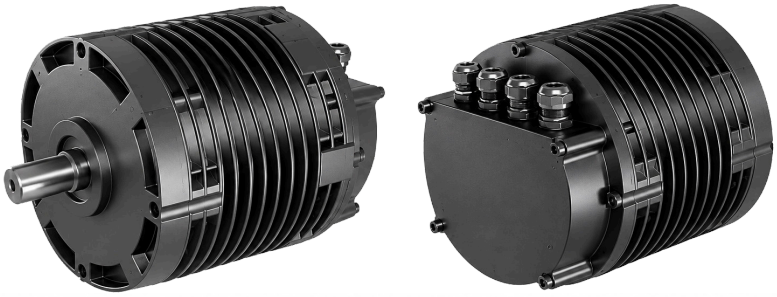


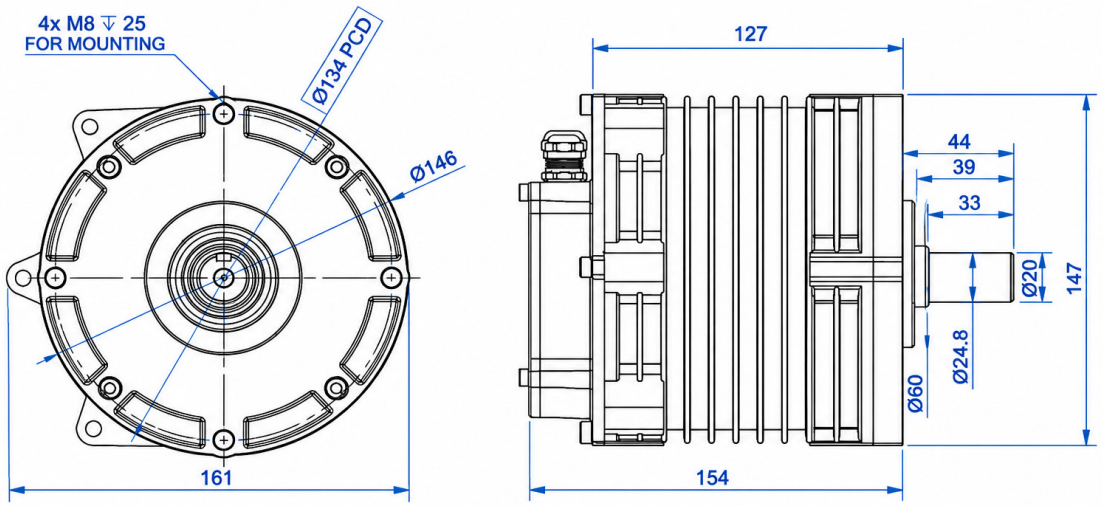



## Technical Specifications

| Specification | 48V Model | 72V Model | 96V Model |
|---|---|---|---|
| Rated Voltage (V DC) | 48 | 72 | 96 |
| Rated Power (kW) | 2.2 | 2.2 | 2.5 |
| Peak Power (kW) | 3.5 | 4.0 | 4.5 |
| Peak Speed (RPM) | 5000 | 5000 | 5000 |
| Rated Torque (Nm) | 9.5 | 9.5 | 9 |
| Peak Torque (Nm) | 31.5 | 36.2 | 32 |
| Peak Efficiency | >92% | >92% | >92% |
| Cooling Method | Air Cooled | Air Cooled | Air Cooled |
| Mass | 6.5 kg | 6.5 kg | 6.5 kg |
| Insulation Class | F Class | F Class | F Class |
| Sensor Type | Enc (hall signals) | Enc (hall signals) | Enc (hall signals) |
| IP Rating | IP67 | IP67 | IP67 |
| Communication Mode | CAN / one-line | CAN / one-line | CAN / one-line |

# MT-RF-3.3/48/72/96

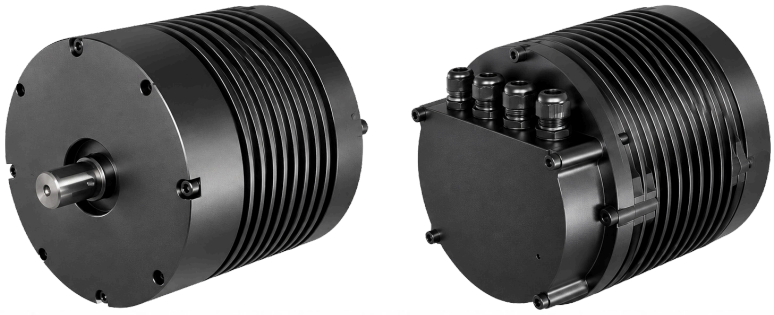


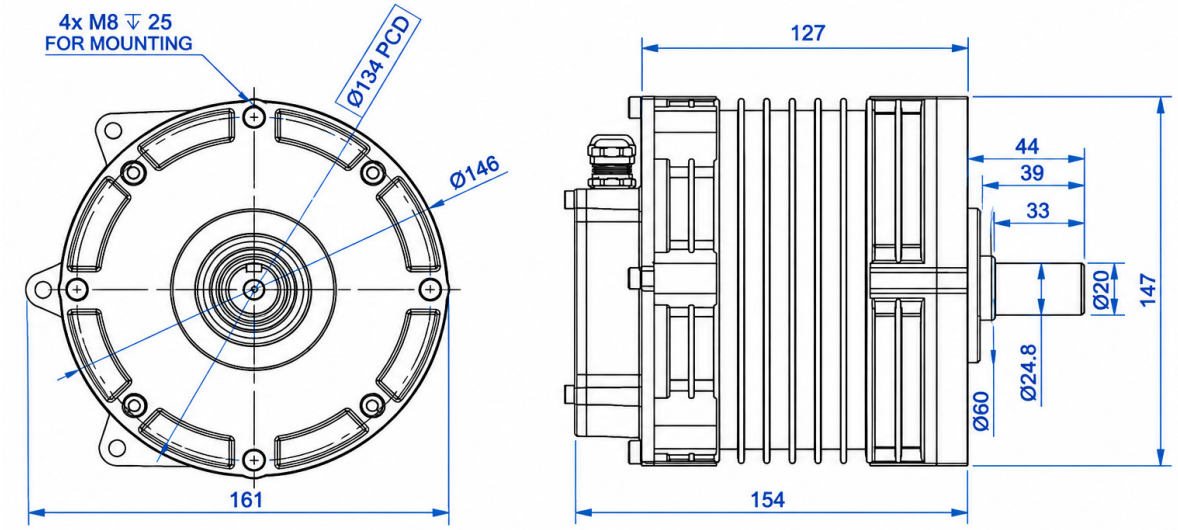



## Technical Specifications

| Specification | 48V Model | 72V Model | 96V Model |
|---|---|---|---|
| Rated Voltage (V DC) | 48 | 72 | 96 |
| Rated Power (kW) | 3.3 | 3.3 | 3 |
| Peak Power (kW) | 6 | 6.5 | 4.8 |
| Peak Speed (RPM) | 5000 | 5000 | 5000 |
| Rated Torque (Nm) | 12.5 | 12.5 | 14.5 |
| Peak Torque (Nm) | 47.5 | 54.5 | 50 |
| Peak Efficiency | >93% | >93% | >90% |
| Cooling Method | Air Cooled | Air Cooled | Air Cooled |
| Mass | 7.5 kg | 7.5 kg | 7.7 kg |
| Insulation Class | F Class | F Class | F Class |
| Sensor Type | Enc (hall signals) | Enc (hall signals) | Enc (hall signals) |
| IP Rating | IP67 | IP67 | IP67 |
| Communication Mode | CAN / one-line | CAN / one-line | CAN / one-line |

# MT-RF-5.5/48/72/96

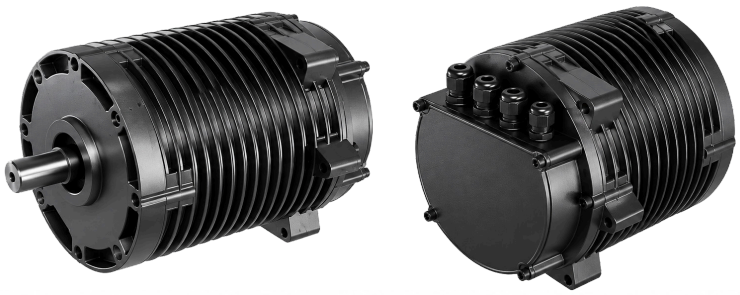

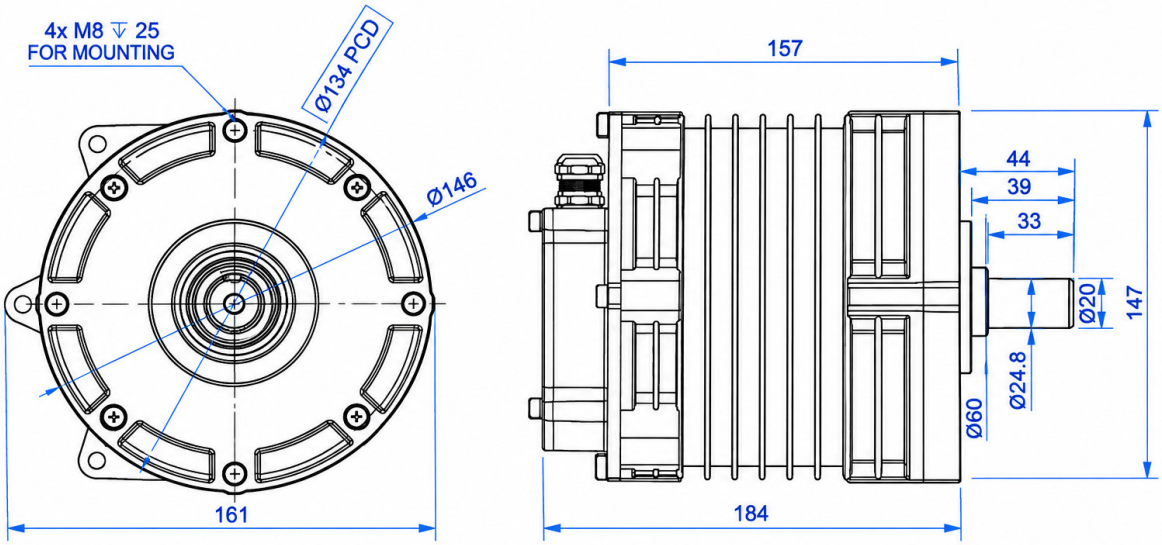



## Technical Specifications

| Specification | 48V Model | 72V Model | 96V Model |
|---|---|---|---|
| Rated Voltage (V DC) | 48 | 72 | 96 |
| Rated Power (kW) | 5.5 | 5.5 | 5.5 |
| Peak Power (kW) | 8.5 | 10.5 | 9 |
| Peak Speed (RPM) | 5000 | 5000 | 5500 |
| Rated Torque (Nm) | 17.5 | 17.5 | 19.5 |
| Peak Torque (Nm) | 44.5 | 68.64 | 65 |
| Peak Efficiency | >94% | >94% | >92% |
| Cooling Method | Air Cooled | Air Cooled | Air Cooled |
| Mass | 10.5 kg | 10.5 kg | 10.5 kg |
| Insulation Class | F Class | F Class | F Class |
| Sensor Type | Enc (hall signals) | Enc (hall signals) | Enc (hall signals) |
| IP Rating | IP67 | IP67 | IP67 |
| Communication Mode | CAN / one-line | CAN / one-line | CAN / one-line |

# MT-RF-6.5/48/72



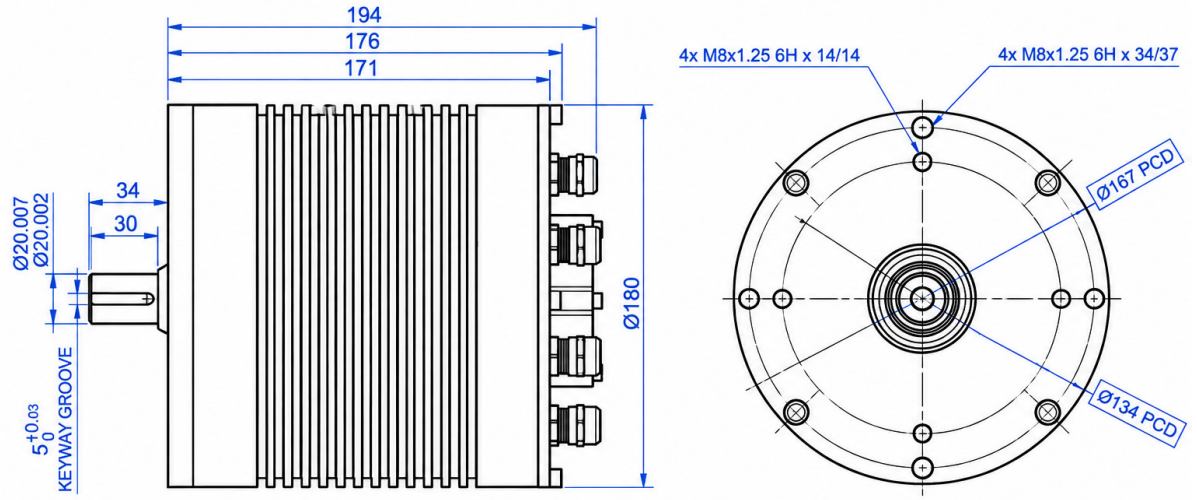



## Technical Specifications

| Specification | 48V Model | 72V Model |
|---|---|---|
| Rated Voltage (V DC) | 48 | 72 |
| Rated Power (kW) | 6.5 | 6.5 |
| Peak Power (kW) | 12.5 | 12.5 |
| Peak Speed (RPM) | 6500 | 6500 |
| Rated Torque (Nm) | 14 | 14 |
| Peak Torque (Nm) | 60 | 75 |
| Peak Efficiency | >92% | >93% |
| Cooling Method | Air Cooled | Air Cooled |
| Mass | 13.6 kg | 13.6 kg |
| Insulation Class | F Class | F Class |
| Sensor Type | Enc (hall signals) | Enc (hall signals) |
| IP Rating | IP67 | IP67 |
| Communication Mode | CAN / one-line | CAN / one-line |

# MT-RF-7.0/48/72



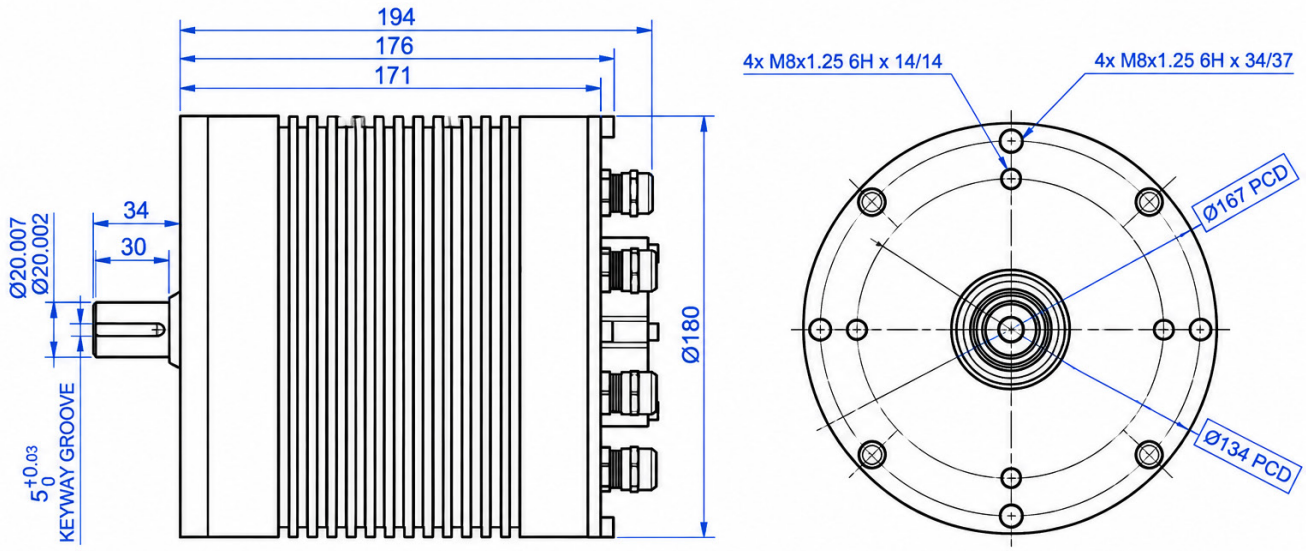


## Technical Specifications

| Specification | 48V Model | 72V Model |
|---|---|---|
| Rated Voltage (V DC) | 48 | 72 |
| Rated Power (kW) | 7 | 7 |
| Peak Power (kW) | 14 | 14 |
| Peak Speed (RPM) | 6500 | 6500 |
| Rated Torque (Nm) | 16 | 16 |
| Peak Torque (Nm) | 80 | 85 |
| Peak Efficiency | >93% | >94% |
| Cooling Method | Air Cooled | Air Cooled |
| Mass | 14.5 kg | 14.5 kg |
| Insulation Class | F Class | F Class |
| Sensor Type | Enc (hall signals) | Enc (hall signals) |
| IP Rating | IP67 | IP67 |
| Communication Mode | CAN / one-line | CAN / one-line |

# MECWIN Global Customers




## International Compliance Support

- Products can be designed and validated for applicable:
- IEC and EN standards
- CE conformity requirements
- UL and CSA requirements
- RoHS and REACH compliance
- ATEX requirements for hazardous-area applications
- MIL-STD environmental testing requirements
- Customer-specific testing and qualification standards

Certifications and third-party testing can be undertaken based on product application, destination country and customer requirements.

Partner with Mecwin

**From Agriculture to Aviation, Mecwin delivers engineered motor solutions for global applications.Design in India. Manufacture in Bengaluru. Supply to the World.**

# CONTACT US

Our Service & Support team are directly accessible in 18+ states in India. MECWIN's trained service engineers can help with site survey, system sizing, installation, commissioning and on time service support.






## Mecwin Technologies India Pvt.Ltd

**Manufacturing Plant**

Mecwin Infinity Tech Park, #42/2, Opp. Machohalli Lake, K.G. Lakkenahalli Road, Machohalli Village, Dasanapura-2 Hobli, Bengaluru North Taluk, 560091, India

**Overseas Office**

12 Amber Close, Rugby CV22 5GE, United Kingdom.

Customer Care No : + 91 97412 29797

Email : marketing@mecwinindia.com

Scan to Reach Us

www.mecwinindia.com