


Hub Motor

Technical Data Sheet



Overview

The Mecwin 10-Inch Hub Motor is a powerful and efficient BLDC motor engineered for advanced electric mobility applications. Featuring an integrated wheel design, it delivers smooth acceleration, high torque, and minimal maintenance, making it ideal for electric scooters, bikes, and compact EVs. Built with cutting-edge technology and robust materials, the motor ensures superior performance, energy efficiency, and long-lasting reliability — showcasing Mecwin's dedication to innovation and sustainable mobility solutions.

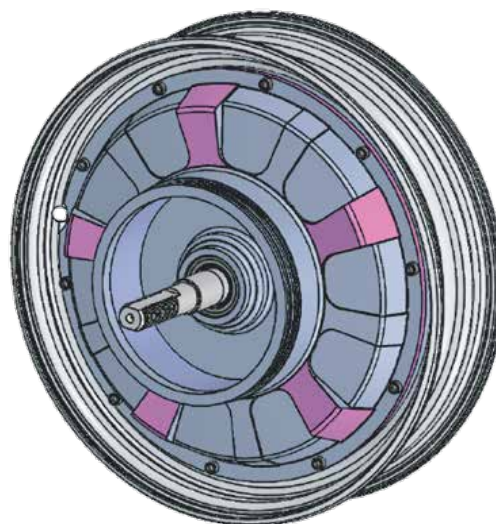

Motor Specification :

Motor Specification			
Parameters	Specifications	Parameters	Specifications
Outer Diameter	272 mm	Break Size	110 mm
Shaft Length	270 mm	Swing Arm Distance	173 mm
IP Level	IP67	Application	2 wheeler

Motor Specification			
Parameters	Specifications	Parameters	Specifications
Operating Voltage	60 V	Rated Torque	22 Nm
Rated Power	1.5 kW	Peak Torque	90 Nm
Peak Power	2.4 kW	Max Speed	675 Rpm
Max. DC Current	45 A		

Performance Details :

Parameter	DC Voltage	DC Current	RMS Line to Line Voltage	RMS Line Current	Input Power	Torque	Speed	Output power	System Efficiency
	V	A	V	A	W	N-m	RPM	W	%
No Load	60	2.12	43.71	5.49	127.52	0	675	0.33	0.26
Max Torque	60	42.98	16.58	88.15	2574.66	90	105	986.86	38.33
Max Input Power	60	44.63	40.38	44.35	268.07	42	527	2318.9	86.46
Max Output Power	60	44.2	43.65	41.08	2654.8	38	584	2322.4	87.48
Max Efficiency	60	33.35	43.64	29.09	2002	28	609	1787	89.26

For More Information, Contact Mecwin :



Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com



Hub Motor

Technical Data Sheet

Performance Curves :

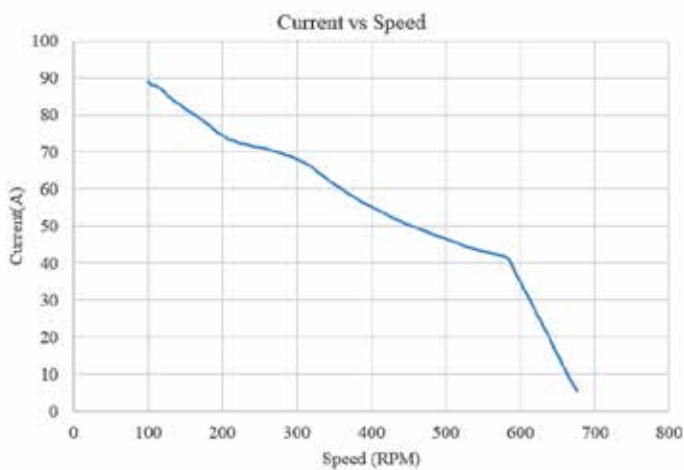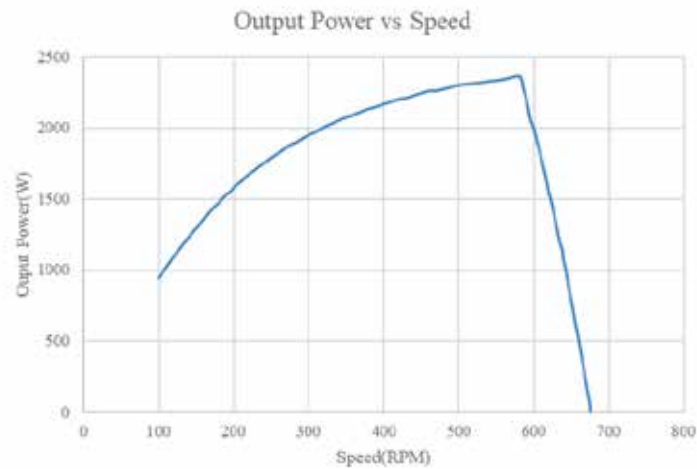

Mechanical 2D Diagram :

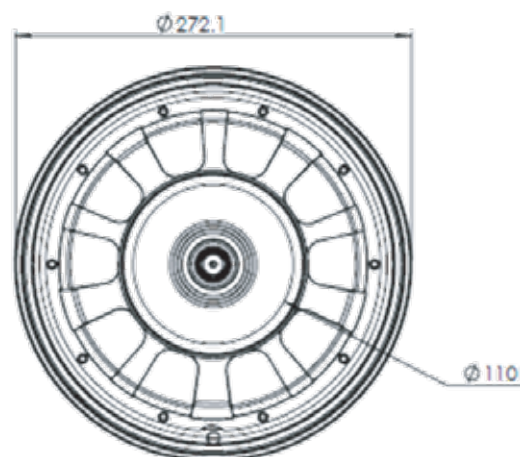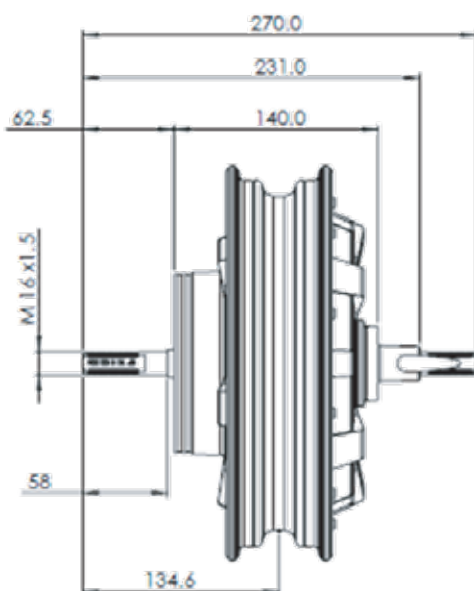

For More Information, Contact Mecwin :


Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com

Hub Motor

Technical Data Sheet

Exploded View :

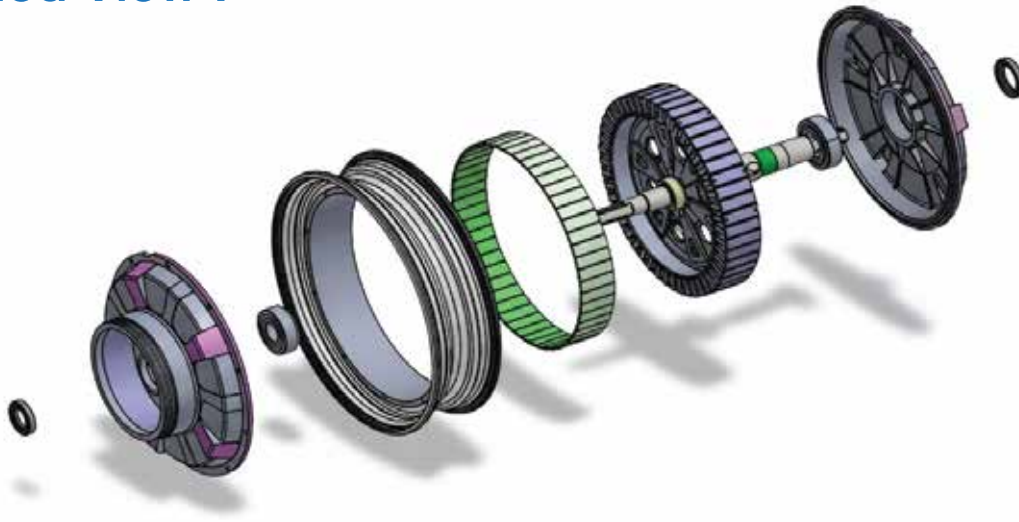

Technical Data :

DC Voltage	DC Current	RMS Line to Line Voltage	RMS Line Current	Input Power	Torque	Speed	Output power	System Efficiency
V	A	W	V	A	N-m	RPM	W	%
60.15	2.12	43.71	5.49	128	0	675	0	0.3
60.13	5.28	43.68	7.76	317	3.01	669	211	66.5
60.13	6.37	43.67	8.47	383	4	667	280	73
60.12	9.85	43.67	11.36	592	7	660	484	81.7
60.09	14.44	43.68	14.6	868	10.99	651	749	86.4
60.08	20.47	43.67	19.44	1230	16	639	1071	87.1
60.07	23.68	43.68	22.33	1423	19.01	632	1257	88.4
60.07	27	43.65	25.23	1622	22.01	625	1440	88.8
60.06	31.53	43.66	29.09	1894	26.03	615	1675	88.5
60.03	33.35	43.64	31.07	2002	28	609	1787	89.3
60.19	39.15	43.65	36.12	2357	33.01	595	2057	87.3
60.07	44.2	43.65	41.08	2655	37.98	584	2322	87.5
60.1	44.63	40.38	44.35	2682	42	527	2319	86.5
60.08	44.44	35.56	50.72	2670	48	445	2238	83.8
60.08	44.82	34.2	52.95	2693	50.01	421	2205	81.9
60.11	44.11	31.18	59.24	2651	55	365	2105	79.4
60.11	43.97	29.44	63.29	2643	58	337	2044	77.3
60.06	44.26	27.02	67.91	2658	62	301	1951	73.4
60.08	44.04	24.1	71.18	2646	68	253	1799	68
60.1	43.51	21.47	75.21	2617	76	194	1545	59.1
60.22	43.16	19.63	80.26	2599	80.98	161	1362	52.4
60.33	42.84	18.5	83.46	2584	84	137	1205	46.6
60.03	43.12	17.81	85.39	2589	86	125	1124	43.4
60.06	42.87	16.85	88	2575	90	106	987	38.3

For More Information, Contact Mecwin :

Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com

Motor Specification :

Motor Specification			
Parameters	Specifications	Parameters	Specifications
Outer Diameter	272 mm	Break Size	110 mm
Shaft Length	270 mm	Swing Arm Distance	173 mm
IP Level	IP67	Application	2 wheeler

Motor Specification			
Parameters	Specifications	Parameters	Specifications
Operating Voltage	60 V	Rated Torque	20.5 Nm
Rated Power	1.0 kW	Peak Torque	90 Nm
Peak Power	2.3 kW	Max Speed	675 Rpm
Max. DC Current	45 A		

Performance Details :

Parameter	DC Voltage	DC Current	RMS Line to Line Voltage	RMS Line Current	Input Power	Torque	Speed	Output power	System Efficiency
	V	A	W	V	A	N-m	RPM	W	%
No Load	60	2.12	43.71	5.49	127.52	0	675	0.33	0.26
Max Torque	60	42.98	16.58	88.15	2574.66	90	105	986.86	38.33
Max Input Power	60	44.63	40.38	44.35	268.07	42	527	2318.9	86.46
Max Output Power	60	44.2	43.65	41.08	2654.8	38	584	2322.4	87.48
Max Efficiency	60	33.35	43.64	29.09	2002	28	609	1787	89.26