


Hub Motor

Technical Data Sheet



Overview

The Mecwin 14-Inch Hub Motor is a high-performance and efficient BLDC motor designed for advanced electric mobility. Its integrated wheel design delivers smooth operation, strong torque, and minimal maintenance, making it ideal for electric scooters, e-bikes, and compact EVs. Engineered with cutting-edge technology and durable materials, it ensures reliable performance, energy efficiency, and long-lasting service—reflecting Mecwin's dedication to innovation and sustainable mobility solutions.

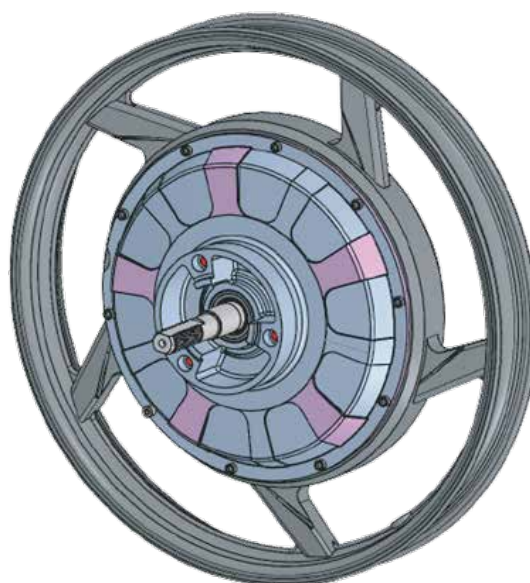

Motor Specification :

Motor Specification			
Parameters	Specifications	Parameters	Specifications
Operating Voltage	72 V	Rated Torque	28 Nm
Rated Power	1.5 kW	Peak Torque	95 Nm
Peak Power	2.1 kW	Max Speed	580 Rpm
Max. DC Current	35 A		

Motor Specification			
Parameters	Specifications	Parameters	Specifications
Outer Diameter	370 mm	Break Type	Disc
Shaft Length	270 mm	Swing Arm Distance	173 mm
IP Level	IP67	Application	2 wheeler

Performance Details :

Parameter	DC Voltage	DC Current	RMS Line to Line Voltage	RMS Line Current	Input Power	Torque	Speed	Output power	System Efficiency
	V	A	W	V	A	N-m	RPM	W	%
No Load	72	2.9	60.43	2.61	209	1	580	60	29.06
Max Torque	72	34.03	20.93	57.19	2449	95	100	996	40.66
Max Input Power	72	34.88	57.47	28.84	2510	42	482	2119	84.43
Max Output Power	72	34.88	57.47	28.84	2510	42	482	2119	84.43
Max Efficiency	72	24.3	58.43	20.66	1749	29	516	1567	89.56

For More Information, Contact Mecwin :





Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com



Hub Motor

Technical Data Sheet

Performance Curves :

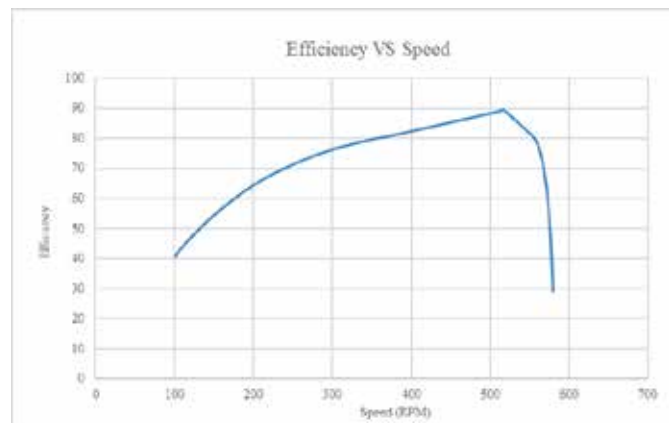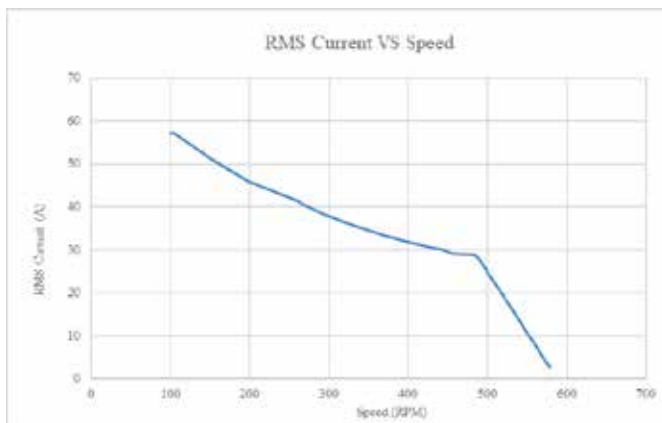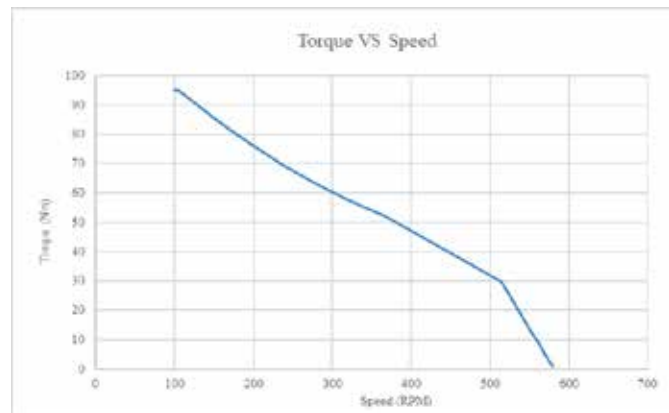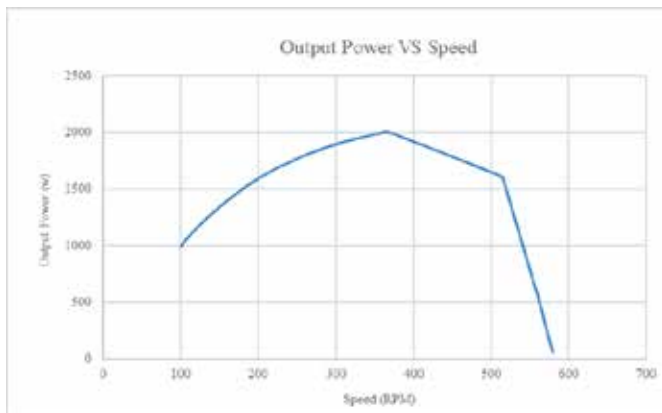

Mechanical 2D Diagram :

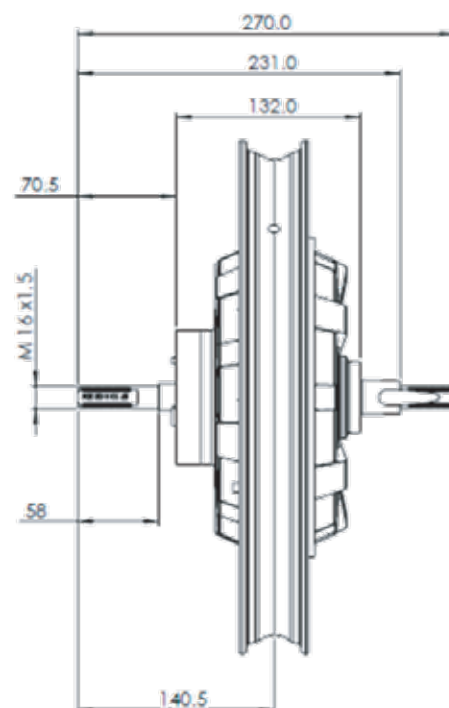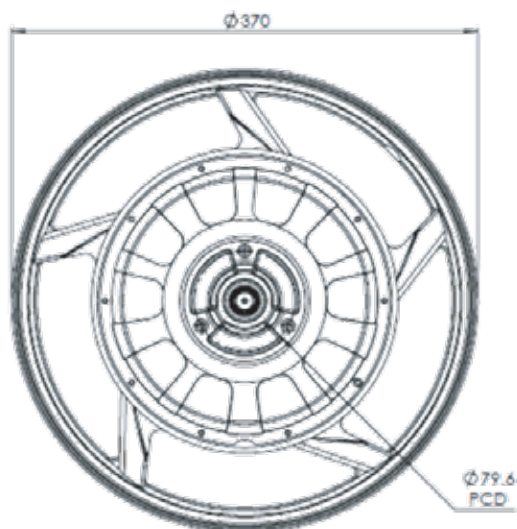

For More Information, Contact Mecwin :

Tel : +91 80500 84932, +91 81239 67692


Email : sales@mecwinindia.com

Hub Motor

Technical Data Sheet



Exploded View :

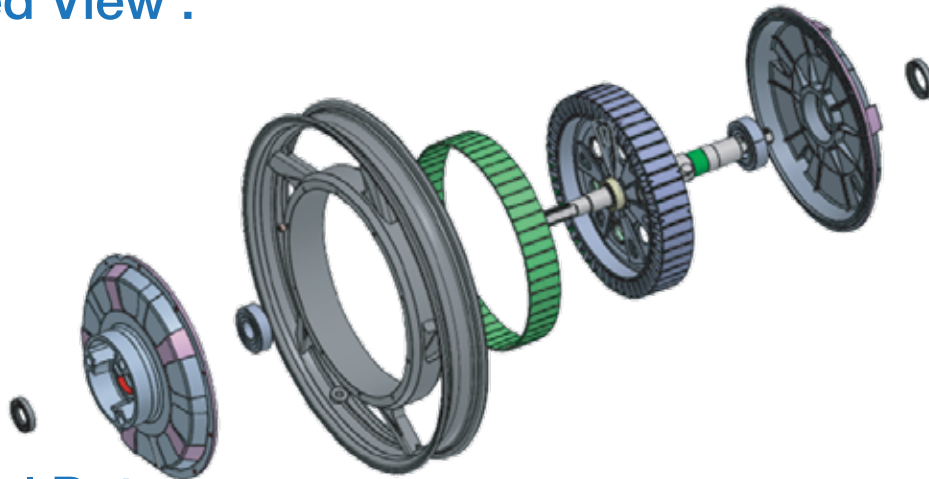

Technical Data :

DC Voltage	DC Current	RMS Line to Line Voltage	RMS Line Current	Input Power	Torque	Speed	Output power	System Efficiency
V	A	W	V	A	N-m	RPM	W	%
72	2.9	60.43	2.61	208.99	1	580	60.73	29.06
72	3.76	60.34	3.22	270.54	2	577	121.01	44.73
72	4.58	60.26	3.88	329.6	3	574	180.43	54.74
72	5.41	60.17	4.51	389.66	4	572	239.45	61.45
72	6.25	60.1	5.17	449.69	5	570	298.45	66.37
72	7.06	60.02	5.81	508.39	6	567	356.48	70.12
72	7.92	59.96	6.48	570.15	7	566	414.82	72.76
72	8.73	59.89	7.13	628.4	8	563	471.78	75.08
72	9.53	59.8	7.77	686.31	9	561	528.61	77.02
72	10.34	59.73	8.41	744.71	10	559	585.35	78.6
72	11.17	59.66	9.07	803.86	11	556	640.63	79.69
72	11.97	59.6	9.74	862.06	12	554	695.9	80.73
72	12.78	59.52	10.39	920.24	13	551	750.42	81.55
72	13.57	59.46	11.04	977.12	14	549	804.59	82.34
72	14.35	59.39	11.71	1033.55	15	546	858.35	83.05
72	15.16	59.3	12.34	1091.32	16	544	911.88	83.56
72	15.95	59.26	12.98	1148.58	17	542	965.72	84.08
72	16.75	59.19	13.65	1206.24	18	540	1018.06	84.4
72	17.54	59.12	14.27	1262.98	19	538	1070.05	84.72
72	18.33	59.05	14.93	1320.01	20	536	1121.66	84.97
72	19.12	58.97	15.57	1376.48	21	534	1173.89	85.28
72	19.91	58.91	16.19	1433.06	22	531	1224.26	85.43
72	20.67	58.83	16.85	1488.24	23	529	1274.14	85.61
72	21.47	58.77	17.48	1545.84	24	527	1324.25	85.67
72	22.22	58.7	18.11	1599.84	25	524	1372.59	85.8
72	22.98	58.62	18.76	1654.33	26	522	1420.42	85.86

For More Information, Contact Mecwin :

Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com

72	23.76	58.55	19.39	1710.48	27	520	1470.77	85.99
72	24.18	58.49	20.02	1740.72	28	518	1518.29	87.22
72	24.3	58.43	20.66	1749.84	29	516	1567.23	89.56
72	25.12	58.35	21.29	1808.89	30	513	1610.47	89.03
72	26.05	58.28	21.96	1875.6	31	511	1658.62	88.43
72	27.55	58.21	22.58	1983.32	32	508	1703.45	85.89
72	28.29	58.15	23.2	2036.88	33	506	1747.91	85.81
72	29.03	58.07	23.86	2090.16	34	504	1793.3	85.8
72	29.76	58.01	24.49	2142.72	35	501	1835.06	85.64
72	30.53	57.94	25.14	2198.16	36	500	1884.51	85.73
72	31.31	57.9	25.75	2254.32	37	498	1929.01	85.57
72	32.04	57.84	26.35	2306.88	38	496	1972.09	85.49
72	32.5	57.77	27.02	2340	39	493	2012.77	86.02
72	33.23	57.7	27.62	2392.56	40	490	2054.11	85.85
72	34.05	57.64	28.27	2451.26	41	488	2095.55	85.49
72	34.88	57.47	28.84	2510.21	42	482	2119.36	84.43
72	34.64	54.88	29.09	2475.21	43	457	2058.66	83.17
72	34.57	53.8	29.59	2477.12	44	450	2073.32	83.7
72	34.57	52.67	30.21	2489.01	45	440	2072.36	83.26
72	34.56	51.59	30.56	2488.14	46	429	2065.48	83.01
72	34.56	50.26	31.07	2488.25	47	417	2053.42	82.52
72	34.56	49.07	31.52	2488.1	48	408	2049.15	82.36
72	34.55	47.87	31.97	2487.38	49	397	2036	81.85
72	34.54	46.76	32.5	2487.06	50	387	2025.14	81.43
72	34.54	45.77	32.99	2486.67	51	378	2016.4	81.09
72	34.54	44.75	33.5	2486.53	52	367	2000.07	80.44
72	34.53	43.78	34.04	2486.22	53	359	1993.31	80.17
72	34.53	42.89	34.54	2485.96	54	350	1979.78	79.64
72	34.51	41.98	35.06	2484.82	55	341	1965.07	79.08
72	34.5	41.11	35.61	2483.98	56	333	1952.91	78.62
72	34.49	40.32	36.1	2483.61	57	325	1939.54	78.09
72	34.48	39.51	36.68	2482.51	58	317	1923.66	77.49
72	34.48	38.73	37.19	2482.46	59	310	1912.61	77.04
72	34.47	38.04	37.69	2482.19	60	302	1898.59	76.49
72	34.46	37.23	38.29	2481.02	61	294	1879.03	75.74
72	34.45	36.54	38.86	2480.24	62	287	1864.99	75.19
72	34.44	35.86	39.51	2479.55	63	280	1849.18	74.58
72	34.43	35.18	40.11	2478.78	64	273	1827.74	73.74
72	34.42	34.57	40.66	2478.28	65	266	1812.89	73.15
72	34.41	33.95	41.48	2477.87	66	260	1796.86	72.52
72	34.3	28.67	45.85	2469.5	76	200	1594.01	64.55
72	34.29	28.18	46.46	2468.7	77	194	1563.47	63.33
72	34.27	27.72	47.05	2467.08	78	189	1544.76	62.61
72	34.26	27.26	47.65	2466.81	79	184	1518.26	61.55
72	34.24	26.79	48.25	2465.33	80	178	1491.54	60.5

72	34.23	26.33	48.84	2464.3	81	173	1464.77	59.44
72	34.21	25.88	49.43	2463.43	82	167	1435.65	58.28
72	34.19	25.46	50	2461.93	83	162	1412.08	57.36
72	34.18	25.04	50.57	2461.13	84	157	1381.75	56.14
72	34.17	24.63	51.22	2460.07	85	152	1349.85	54.87
72	34.15	24.23	51.8	2459.01	86	147	1324.03	53.84
72	34.15	23.87	52.45	2458.76	87	143	1298.98	52.83
72	34.15	23.5	53.02	2458.5	88	138	1268.72	51.61
72	34.13	23.13	53.65	2457.33	89	133	1235.61	50.28
72	34.13	22.78	54.28	2457.19	90	128	1205.23	49.05
72	34.12	22.45	54.84	2456.32	91	123	1175.1	47.84
72	34.08	22.08	55.46	2453.96	92	118	1140.16	46.46
72	34.06	21.75	56.04	2452.54	93	114	1108.9	45.21
72	34.05	21.36	56.7	2451.62	94	108	1067.79	43.55
72	34.04	21.06	57.19	2450.7	95	104	1034.14	42.2