

PERMANENT MAGNET DC MOTORS

PMDC/Brushed Motors

Custom Motors for Your Application



MECWIN®
EMPOWERING FUTURE

COMPANY OVERVIEW

About Us

Mecwin Group is a Bengaluru-based engineering and manufacturing company specializing in motors, controllers, powertrains, wiring harnesses, SCADA automation and IoT solutions. We develop **customized solutions for electric mobility, industrial automation, agriculture, renewable energy, aerospace, defence and other demanding applications**. Our 50,000 sq. ft. manufacturing facility is equipped with modern machinery, engineering laboratories and advanced testing facilities. With strong in-house engineering capabilities, we manage the complete product journey – from design and prototyping to testing, validation and production. We work closely with OEMs to provide high-performance, reliable and application-specific solutions.

Our growth is driven by innovation, engineering excellence, quality, integrity and long-term partnerships with our customers, suppliers and employees.

Vision

To become the preferred global technology partner for high-efficiency motors, controllers and powertrains—from agriculture to aviation—by delivering innovation, quality, reliability, on-time service and environmentally responsible manufacturing.

Mission

To become the preferred global technology partner for high-efficiency motors, controllers and powertrains—from agriculture to aviation—by delivering innovation, quality, reliability, on-time service and environmentally responsible manufacturing.


Core Values

Customer Success | Innovation | Excellence | Integrity | People & Partnerships | Environmental Responsibility.

Motor Typespecification	3
31MET	4
40MET/42MEN	5
50MET/52MET	6
50MEC/52MEC/54MEC	7
63MET	8
63MEC	9
68MET	10
76MEC	11
77MEC	12
80MET	13
80MEC	14
82MEC	15
90MEC	16
100MEC/100MET/100MEN	17
101MET	18
110MEC	19
114MET	20
Mecwin Global Customers	21
Contact Information	22

PERMANENT MAGNET DC MOTORS(PMDC MOTORS)

MOTOR TYPE SPECIFICATION

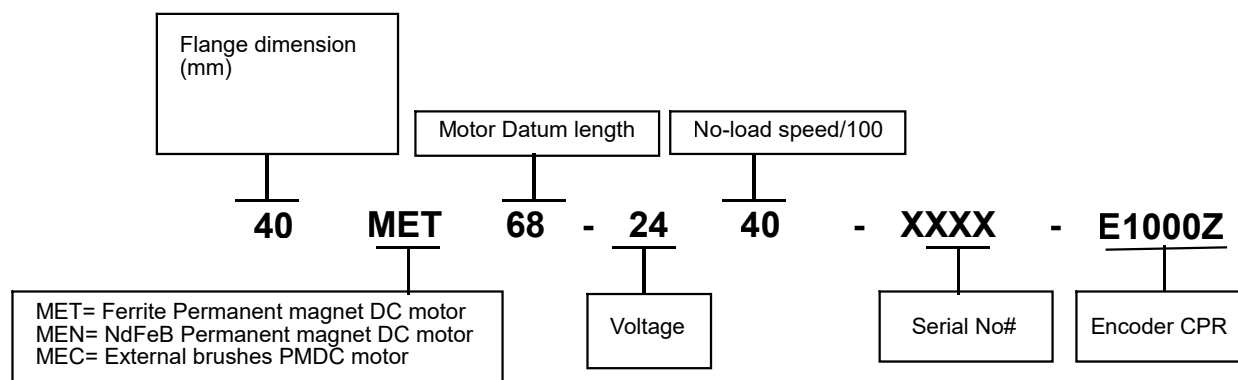

- The Permanent Magnet Brushed DC motor technology offers the distinct advantages of;
- High efficiency,
- High power density,
- Absence of iron losses,
- Linear torque-speed function.
- They are applied to:
 1. In Automobile industry: various fan, wiper, spray pump, turbo timer, rearview mirror etc;
 2. In Hotel: automatic door, automatic door locks, automatic curtain, automatic water supply system etc;
 3. In Industry and agriculture: PMDC motors are widely used in electrical and automation control and instrumentation;
 4. In Medical and healthcare industry: PMDC motors are used more widely, such as medical instruments, surgical tools, electric saws in open-brain surgery treatment;
- The brushed DC motors range can be offered with a wide variety of spur, planetary and custom gearheads and encoders or brakes.

The brushed DC motor range offers you:

1. Frame sizes from 31 to 114mm
 2. Speeds from 1,000 to 10,000 rpm.
 3. Power from 10W to 1500W
 4. Continuous motor torque from 0.03Nm to 3Nm
- Neodymium magnets on selected motors
 - High motion efficiency, that allows you to build the most compact, precise and energy-efficient solution.

PMDC Motor

» 31MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min
Dielectric Strength	500V DC
Max Radial Force	600VAC 1 minute
Max Axial Force	15N (10mm from front flange)
	10N



Technical Specifications


Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N	I _N	n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
31MET046-2460	24	0.15	6000	0.028	1	3000	9	46
31MET046-2495	24	0.2	9500	0.055	2.8	4800	28	46
31MET053-1870	18	0.13	7000	0.048	2.2	3550	18	53
31MET053-2460	24	0.1	6000	0.034	1.7	3000	11	53
31MET053-2480	24	0.15	8000	0.05	2.3	4000	21	53
31MET070-2466	24	0.22	6600	0.078	3	3300	27	70
31MET070-2486	24	0.3	8600	0.08	3.6	4300	36	70

Remark:


1. This motor can be customized with special request.
2. Options: Planetary gearhead, encoder and brake.

Dimensions

TERMINAL OPTION

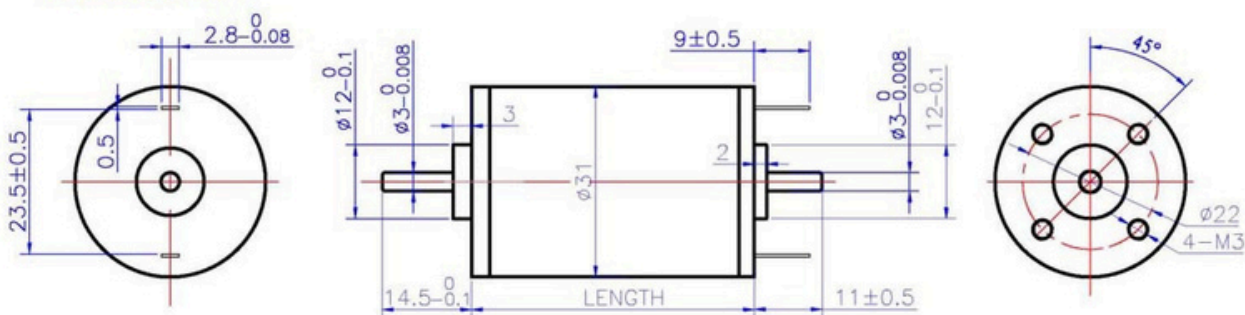

LEAD-WIRE OPTION

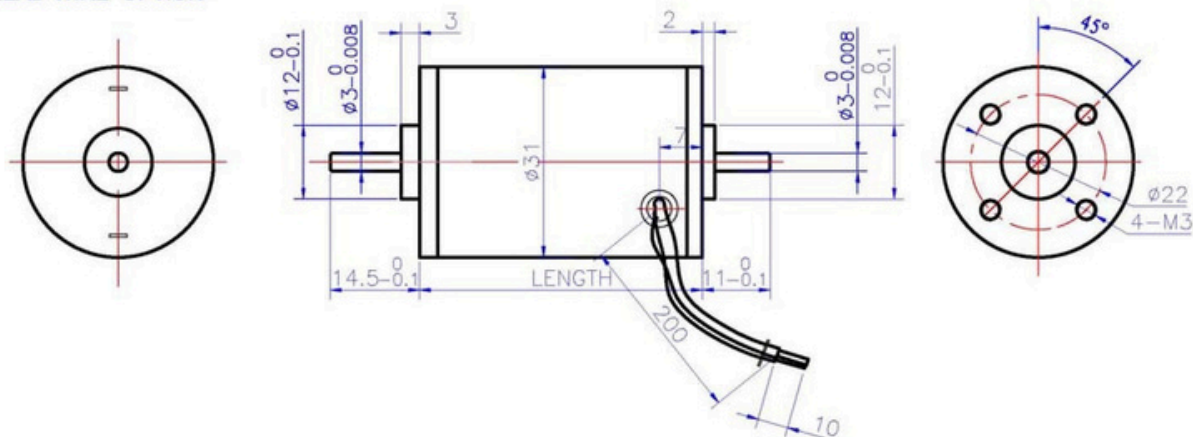

PMDC Motor

» 40MET/42MEN

General Specification

Insulation Class	B
Ambient Temperature	-20 ~ +50°C
Insulation Resistance	50MΩ Min
Dielectric Strength	500V DC
Max Radial Force	600VAC 1 minute
Max Axial Force	15N (10mm from front flange)
	10N




Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N	I _N	n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
40MET63-2460	24	0.25	6000	0.033	1.3	4800	16.6	63
40MET85-1242	12	0.3	4200	0.075	3.4	3300	26	85
40MET85-2440	24	0.25	4000	0.09	1.7	3000	28	85
42MEN85-2434	24	0.4	3400	0.14	2.1	2300	34	85
42MEN115-2434	24	0.4	3440	0.14	2.1	2700	40	115

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead, encoder and brake.

Dimensions

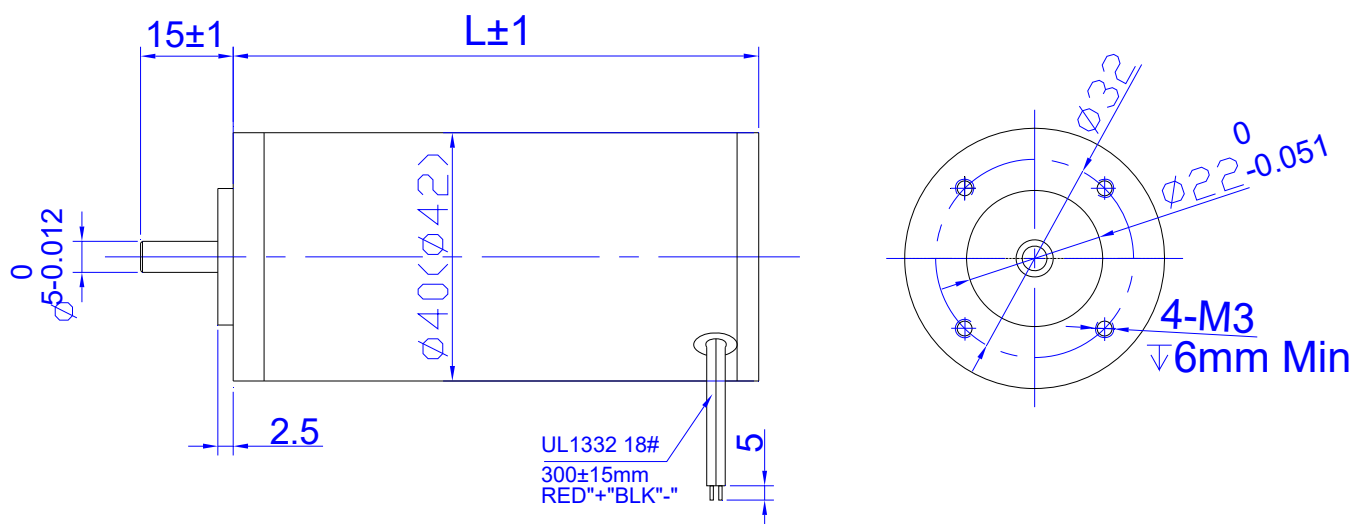

PMDC Motor

» 50MET / 52MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min
Dielectric Strength	500V DC
Max Radial Force	1500VAC 1 minute
Max Axial Force	75N (10mm from front flange)
	15N





Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N	I _N	n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
50MET77-2470	24	0.6	7000	0.08	3	6000	50	77
52MET86-1227	12	0.3	3000	0.1	3	2200	23	86
52MET95-2442	24	0.3	4200	0.12	2.7	3700	47	95
52MET105-22050	220	0.05	5000	0.10	0.35	4000	42	105
52MET115-2442	24	0.3	4200	0.20	4.2	3700	78	115
52MET125-2442	24	0.3	4200	0.30	7	3700	116	125

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

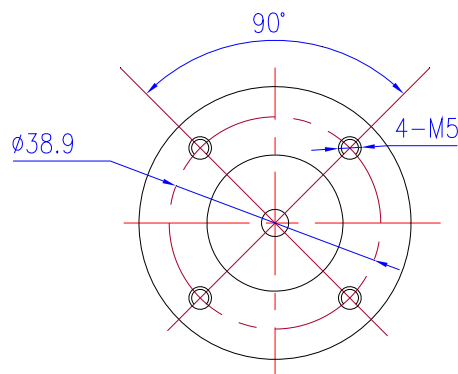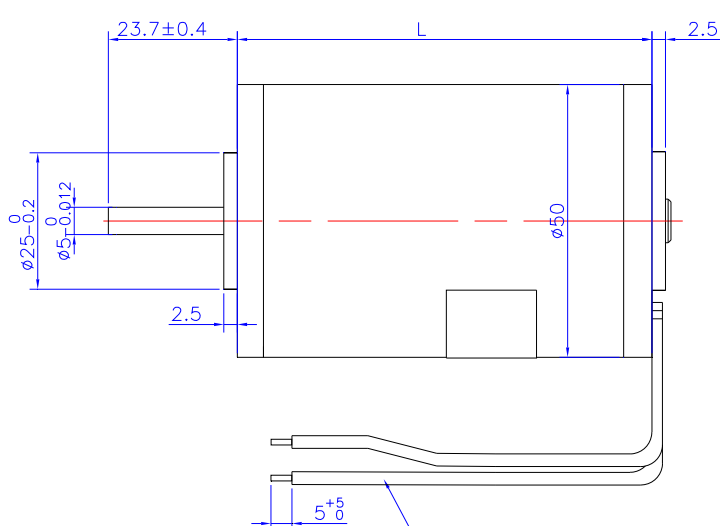

AWG18 UL1007 L:900±15
RED "+" BLACK"-"

PMDC Motor

» 50MEC / 52MEC / 54MEC

GeneralSpecification

Insulation Class	B
Ambient Temperature	-20 ~ +50°C
Insulation Resistance	50MΩ Min
Dielectric Strength	500V DC
Max Radial Force	600VAC 1 minute
Max Axial Force	75N (10mm from front flange)
	15N

External carbon brushes




Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current IN	Rated speed	Rated output power	Motor Length
	U	I0	n0	TN		nN	Pout	L
	V	A	rpm	N.m	A	rpm	W	mm
50MEC85-1242	12	0.6	4200	0.1	4.2	3000	32	85
52MEC98-1225	12	0.5	2500	0.2	3.5	1500	32	98
52MEC100-2440	24	0.3	4000	0.14	1.4	3000	45	100
54MEC95-3833	38	0.25	3300	0.15	2.1	2640	42	95
54MEC104-3837	38	0.25	3700	0.18	2.8	3000	57	104
54MEC126-4832	48	0.25	3250	0.26	2.5	2600	70	126

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

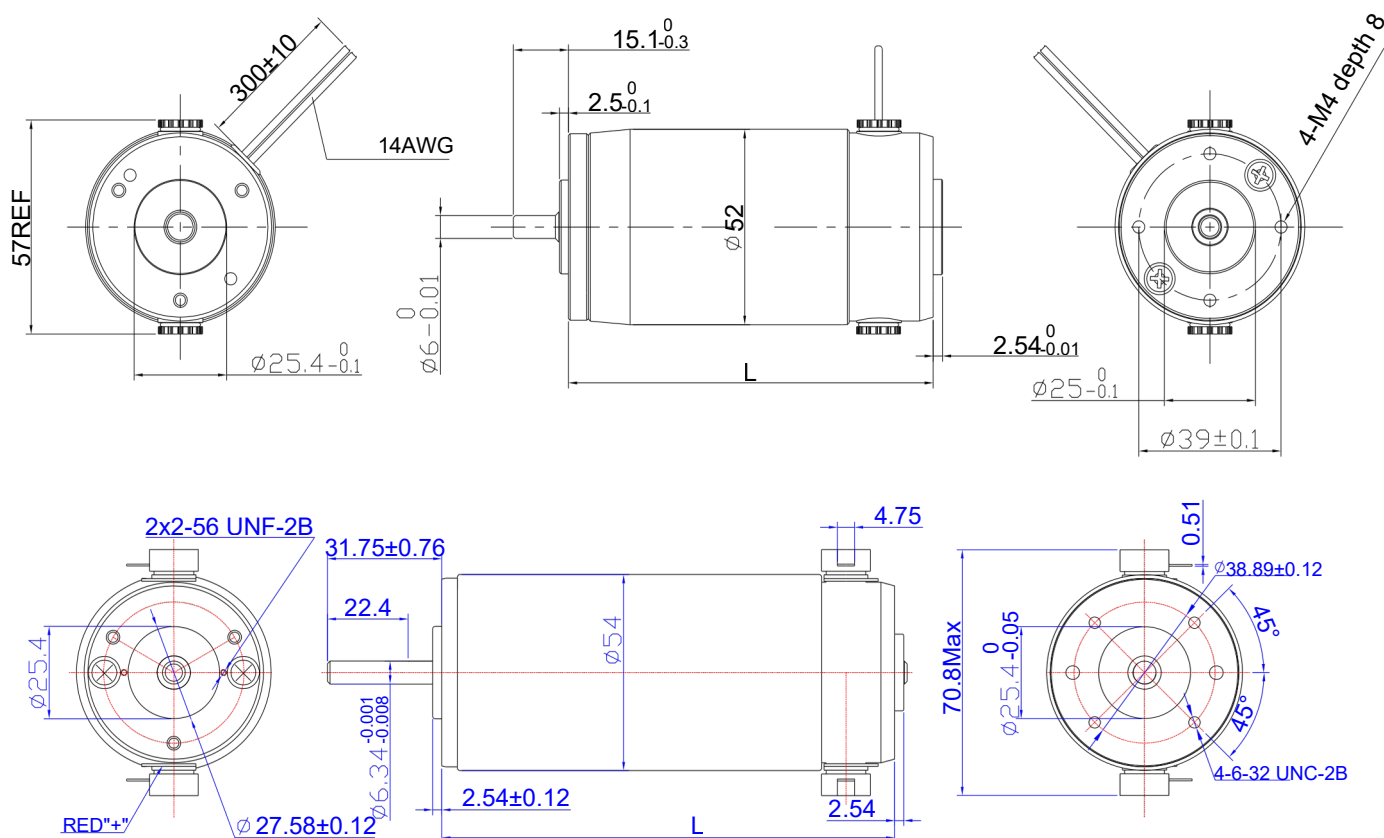

PMDC Motor

» 63MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min 500V DC
Dielectric Strength	600VAC 1 minute
Max Radial Force	115N (10mm from front flange)
Max Axial Force	45N





Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current I_N	Rated speed	Rated output power	Motor Length
	U	I_0	n_0	TN		n_N	Pout	L
	V	A	rpm	N.m	A	rpm	W	mm
63MET86-2437	24	0.3	3660	0.17	3.5	2770	50	86
63MET100-2433	24	0.3	3300	0.18	2.8	2800	53	100
63MET105-2436	24	0.3	3600	0.23	3.8	3000	72	105
63MET120-2436	24	0.3	3600	0.32	5.4	3000	100	120
63MET125-4845	48	0.5	4500	0.42	4.5	3600	158	125

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

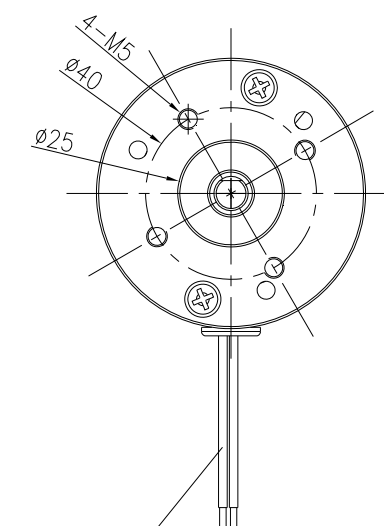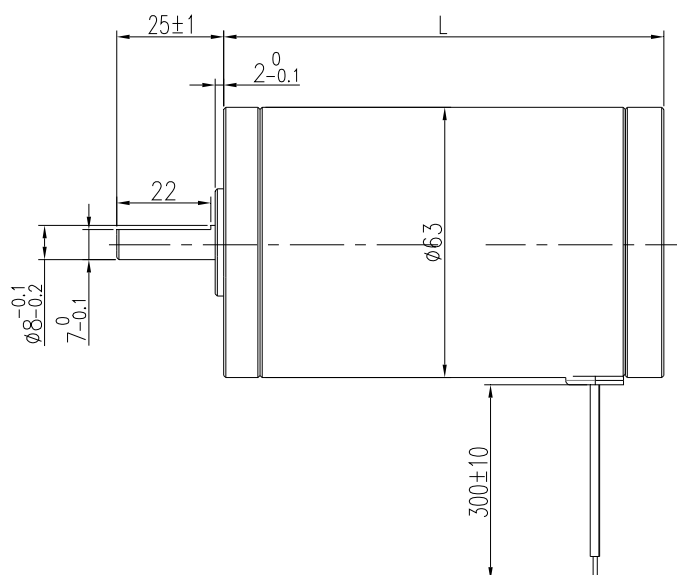

PMDC Motor

» 63MET

General Specification

Insulation Class	B
Ambient Temperature	-20 °C ~ +50 °C
Insulation Resistance	50MΩ Min 500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	115N (10mm from front flange)
Max Axial Force	45N

External carbon brushes




Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N	I _N	n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
63MEC100-10038	100	0.2	3800	0.11	1	3000	35	100
63MEC122-21030	210	0.2	3000	0.2	0.3	2200	46	122
63MEC122-22035	220	0.2	3500	0.42	1.2	2800	123	122
63MEC122-22049	220	0.3	4900	0.26	1.2	4300	117	122

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

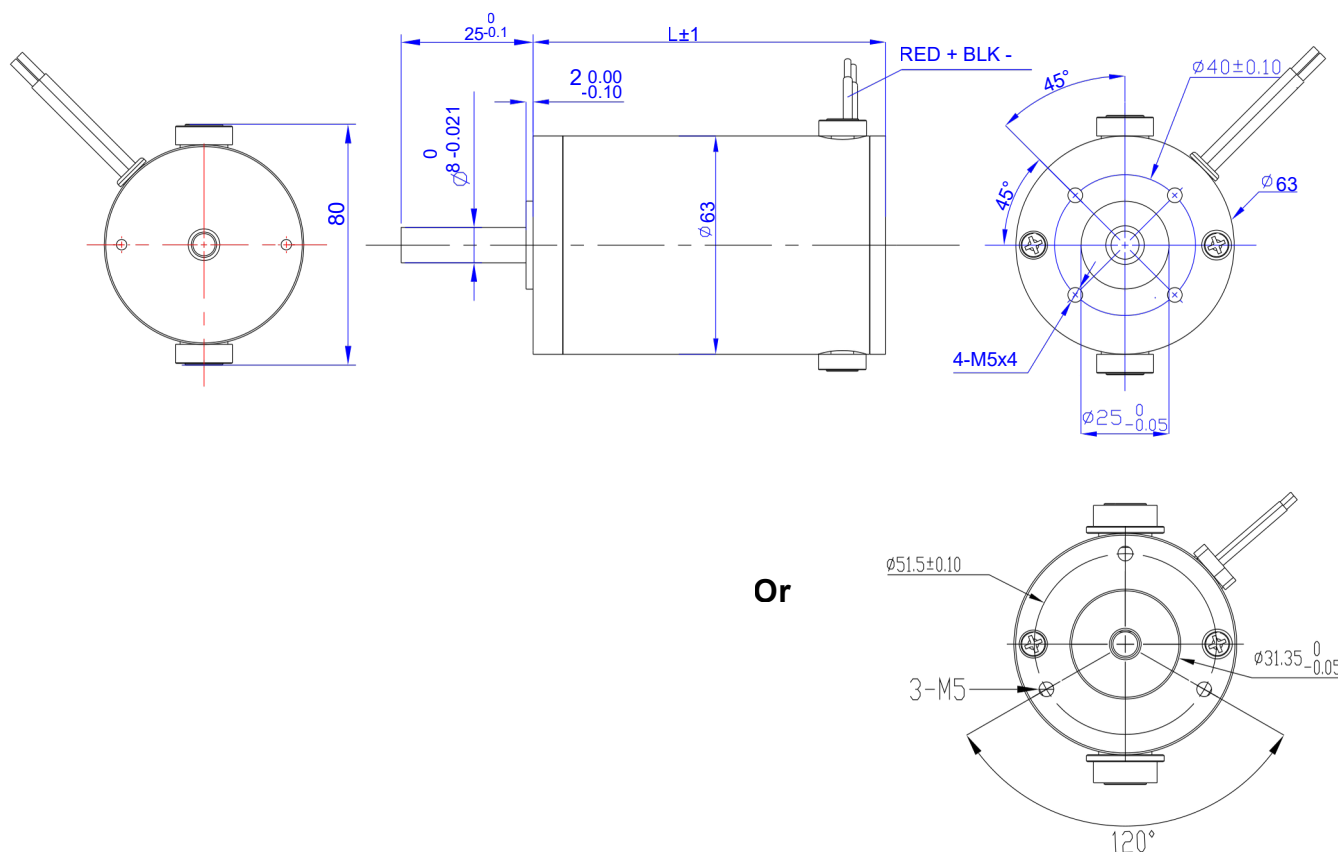

PMDC Motor

» 68MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min.500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	115N (10mm from front flange)
Max Axial Force	45N




Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current IN	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N		n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
68MET92-1245	12	2	4500	0.2	10	3600	75	92
68TME100-2433	24	1	3300	0.3	5	2800	88	100
68MET110-16245	162	0.5	4500	0.47	1.5	3700	185	105
68MET125-16245	162	0.5	4500	0.52	1.6	3700	200	125
68MET178-9035	90	0.3	3500	0.32	1	2900	98	178

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

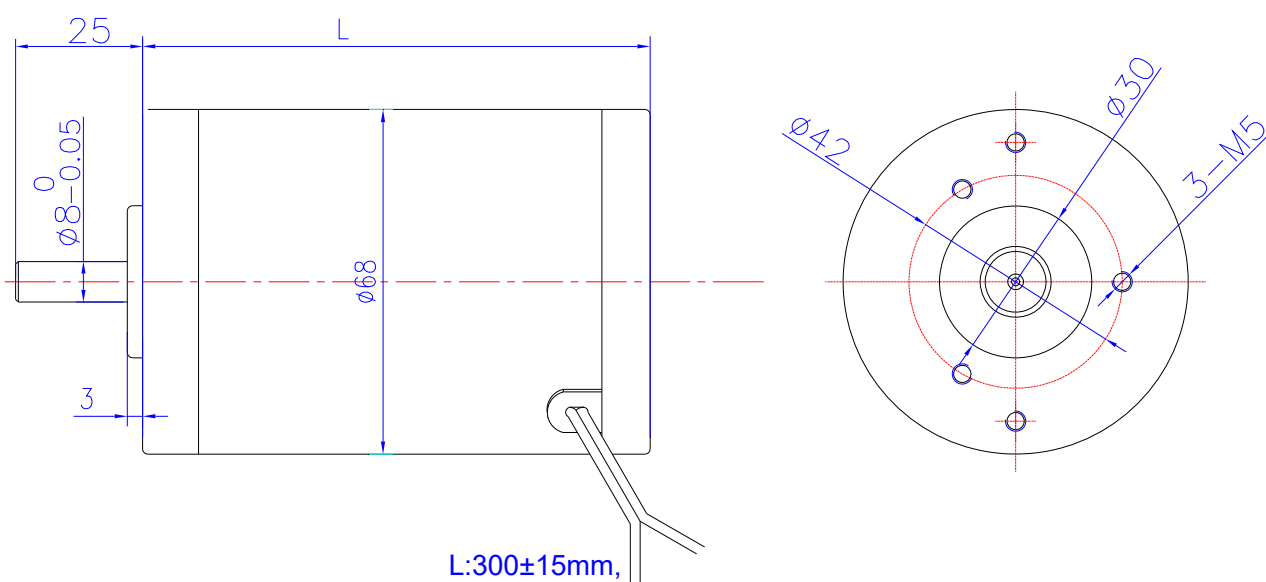

PMDC Motor

» 76MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min
Dielectric Strength	500V DC
Max Radial Force	1500VAC 1 minute
Max Axial Force	115N (10mm from front flange)
	45N




Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current IN	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N		n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
76MET100-1248	12	1.1	4800	0.25	14.5	3800	100	100
76MET110-2425	24	1.0	2500	0.4	4.7	2000	85	110
76MET120-2450	24	1.8	5000	0.5	12	4000	200	120
76MET135-28060	280	0.2	6000	0.4	1.2	5000	220	135
76MET135-2434	24	0.7	3400	0.7	11	3000	220	135

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

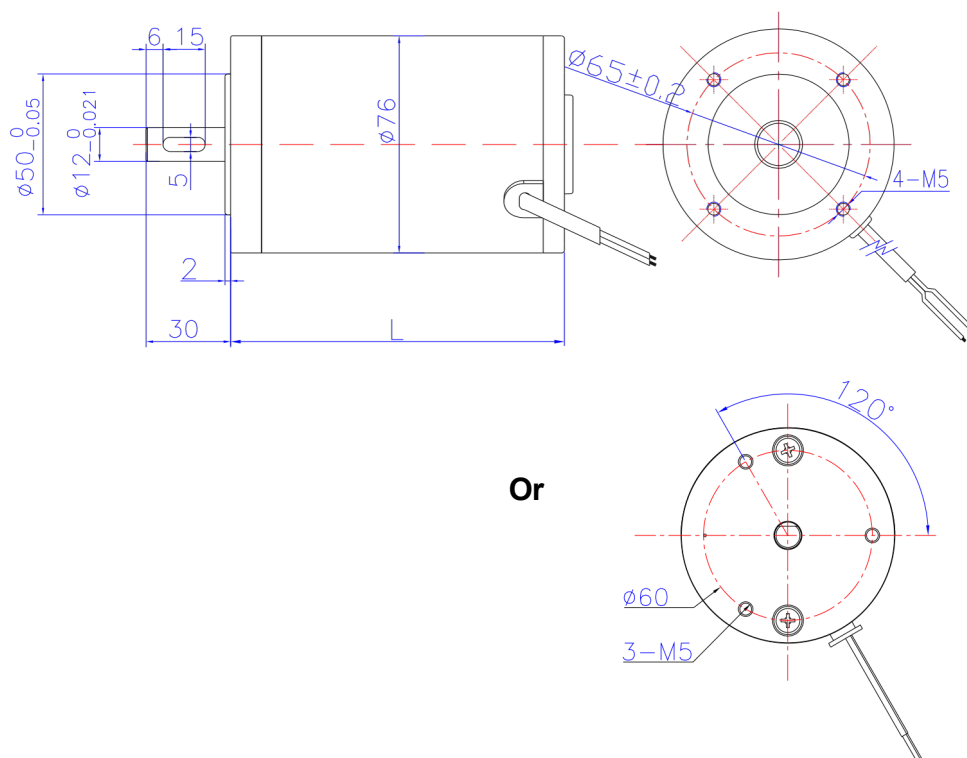

PMDC Motor

» 77MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	115N (10mm from front flange)
Max Axial Force	45N
External carbon brushes	




Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N	I _N	n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
77MEC110-1260	12	1.2	6000	0.4	12	2500	105	110
77MEC125-2438	24	1.0	3800	0.5	8.7	3000	157	125
77MEC135-1226	12	1.2	2600	0.6	13	2100	132	135
77MEC150-2434	24	1.0	3400	0.7	11	3000	220	150

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

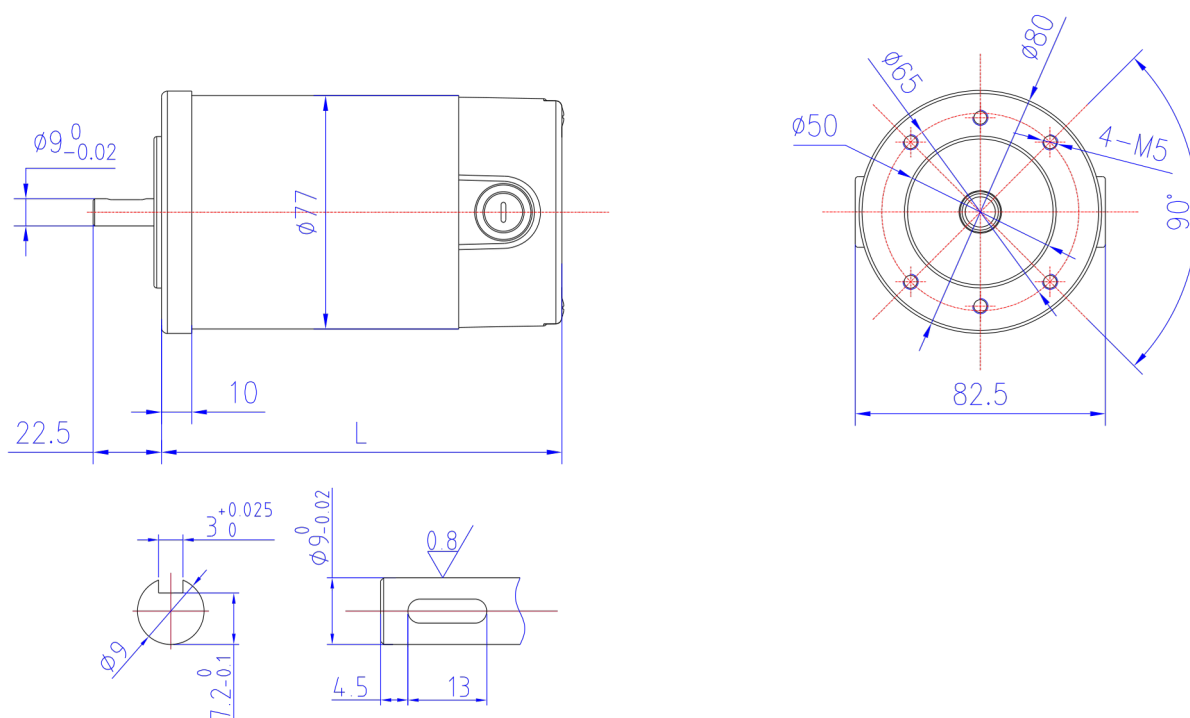

PMDC Motor

» 80MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min.500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	220N (10mm from front flange)
Max Axial Force	60N



Technical Specifications


Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	TN		nN	Pout	L
	V	A	rpm	N.m	A	rpm	W	mm
80MET100-2440	24	1.0	4000	0.4	5.6	2400	100	100
80MET105-2422	24	1.0	2200	0.5	4.5	1500	80	105
80T1ME15-2431	24	1.0	3100	0.5	7.5	2500	130	115
80MET130-2438	24	1.0	3800	0.7	13.5	3300	240	130
80MET140-2438	24	1.0	3800	0.8	14	3000	250	140
80MET165-2420	24	1.0	2000	1.4	12	1500	220	165
80MET165-2438	24	1.0	3800	1.4	23	3000	440	165
80MET180-2436	24	1.0	3600	1.7	32	2600	470	180
80MET190-2418	24	1.0	1800	1.5	12	1400	220	190

Remark:


1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

63B14

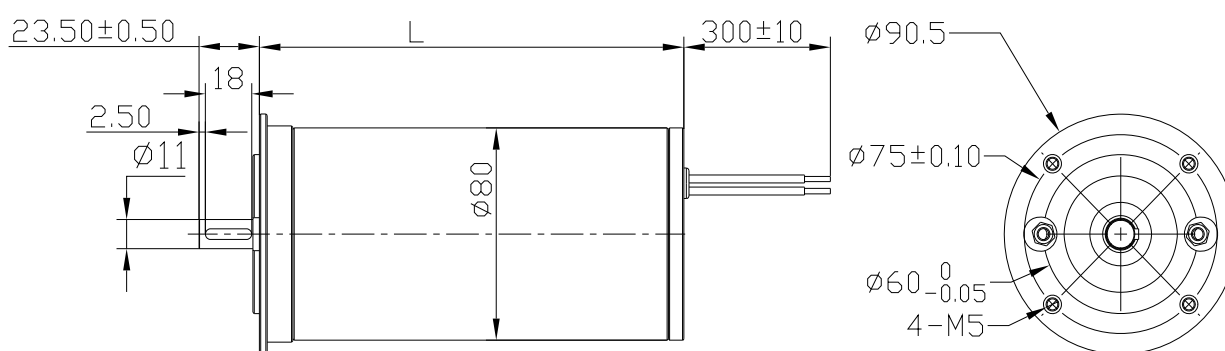

56B14

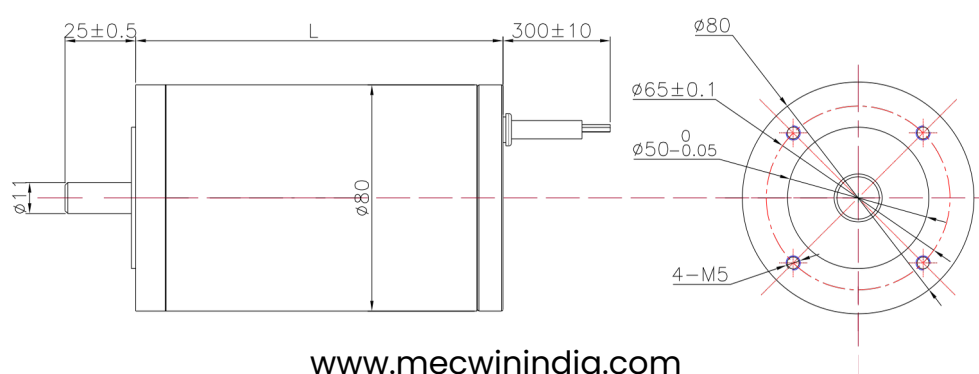

PMDC Motor

» 80MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min.500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	220N (10mm from front flange)
Max Axial Force	60N
External carbon brushes	




Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current IN	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N		n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
80MEC136-1230	12	3	3000	0.4	10	2500	105	136
80MEC142-2430	24	1.0	3000	0.5	5	2900	150	142
80MEC147-2440	24	1.0	4000	0.6	13	3500	220	147
80MEC150-4875	48	1.5	7500	0.4	9	7000	300	150
80MEC160-1236	12	4.5	3600	0.7	28	3000	220	160
80MEC198-9035	90	1.0	3500	1.58	8.5	3000	500	198
80MEC208-9020	90	1.0	2000	0.72	2.2	1728	130	208

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

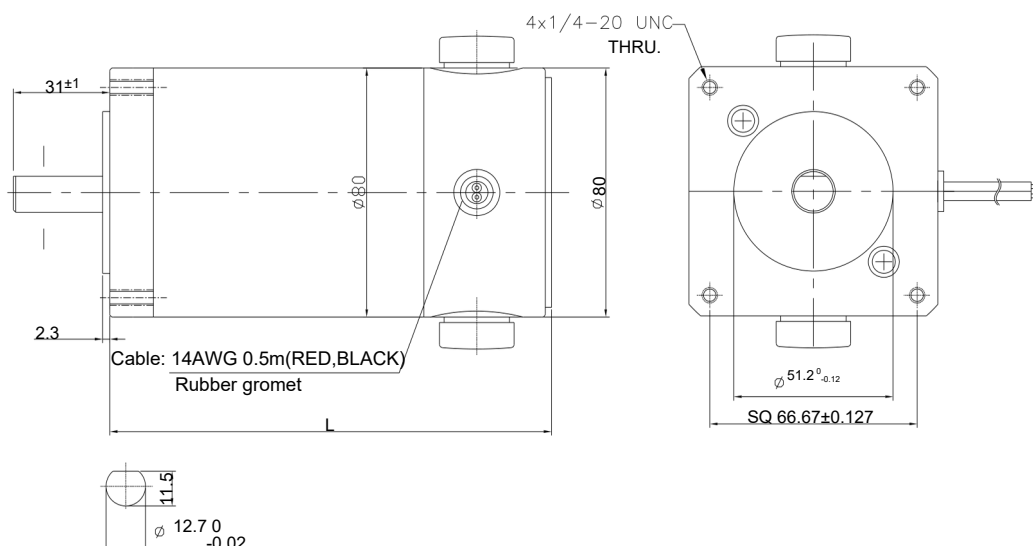

PMDC Motor

» 82MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min.500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	220N (10mm from front flange)
Max Axial Force	60N

External carbon brushes



Technical Specifications



Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N		n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
82MEC143-2435	24	1.4	3500	0.55	8	3000	173	143
82MEC147-2435	24	1.4	3500	0.7	11	3000	220	147
82MEC147-22048	220	0.2	4800	0.7	1.8	4000	293	147
82MEC152-2435	24	1.5	3500	0.9	16	3000	283	152
82MEC157-2435	24	1.5	3500	1.1	19	3000	346	157
82MEC157-22036	220	0.5	3600	1.1	2.3	3000	346	157
82MEC170-4836	48	1.6	3600	1.4	11	3000	440	170

Remark:



1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

56B14

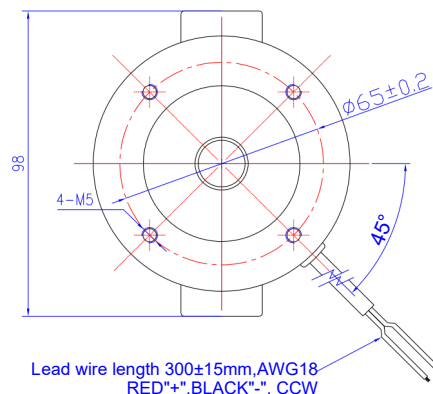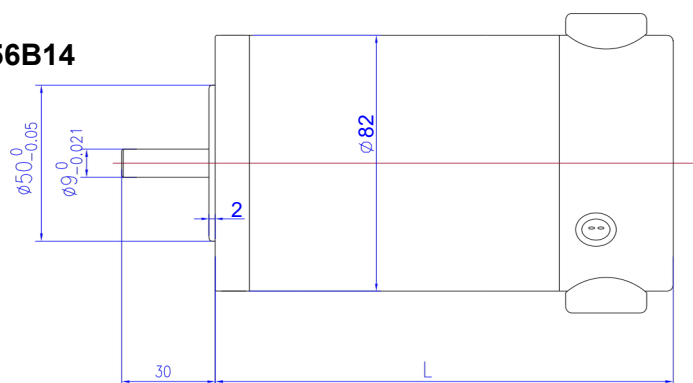

63B14

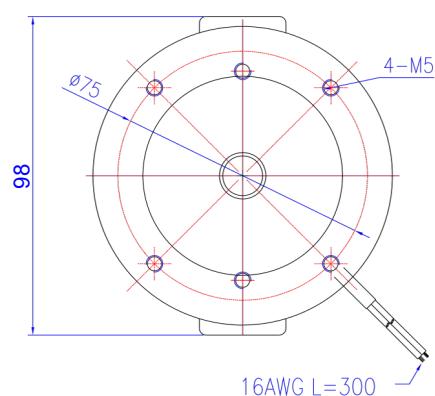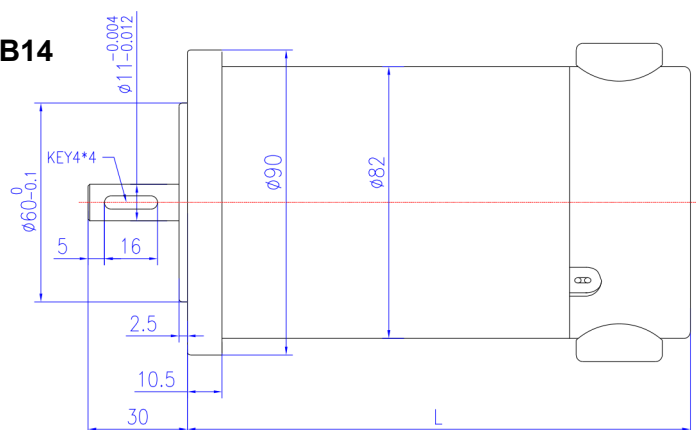

PMDC Motor

» 90MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min.500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	220N (10mm from front flange)
Max Axial Force	60N
External carbon brushes	




Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N	I _N	n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
90MEC140-18036	180	0.2	3600	0.9	2	3150	297	140
90MEC155-18038	180	0.2	3800	1.1	3.2	3400	390	155
90MEC165-3623	36	1.2	2300	1.2	10	1600	200	165
90MEC175-23050	230	0.2	5000	1.4	3.2	4000	586	175
90MEC195-2424	24	1.0	2400	2.2	21	1500	346	195

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

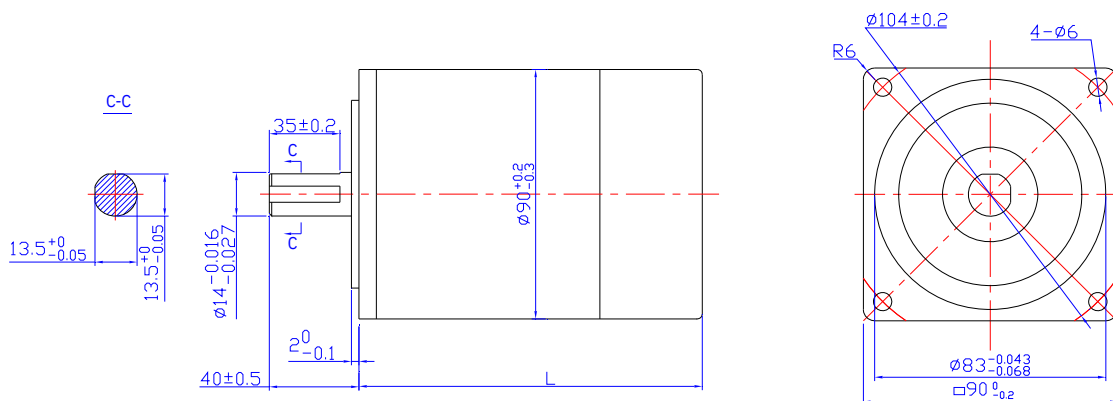

PMDC Motor

» 100MEC/100MET/100MEN

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min.500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	330N (10mm from front flange)
Max Axial Force	100N

External carbon brushes




Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current IN	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N		n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
100MEC166-2462-1.4	24	5	6200	1.4	44	5300	776	166
100MEC166-2415-1.8	24	2.3	1500	1.8	15	1000	188	166
100MEC166-2438-2.0	24	3	3800	2	38	3000	630	166
100MEC166-2448-2.2	24	2.5	4800	2.2	48	3500	810	166
100MEC166-4840-2.4	48	2.5	4000	2.4	22	3000	754	166
100MEC150-7508-3.7	75	0.19	750	3.7	4.2	490	190	150

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

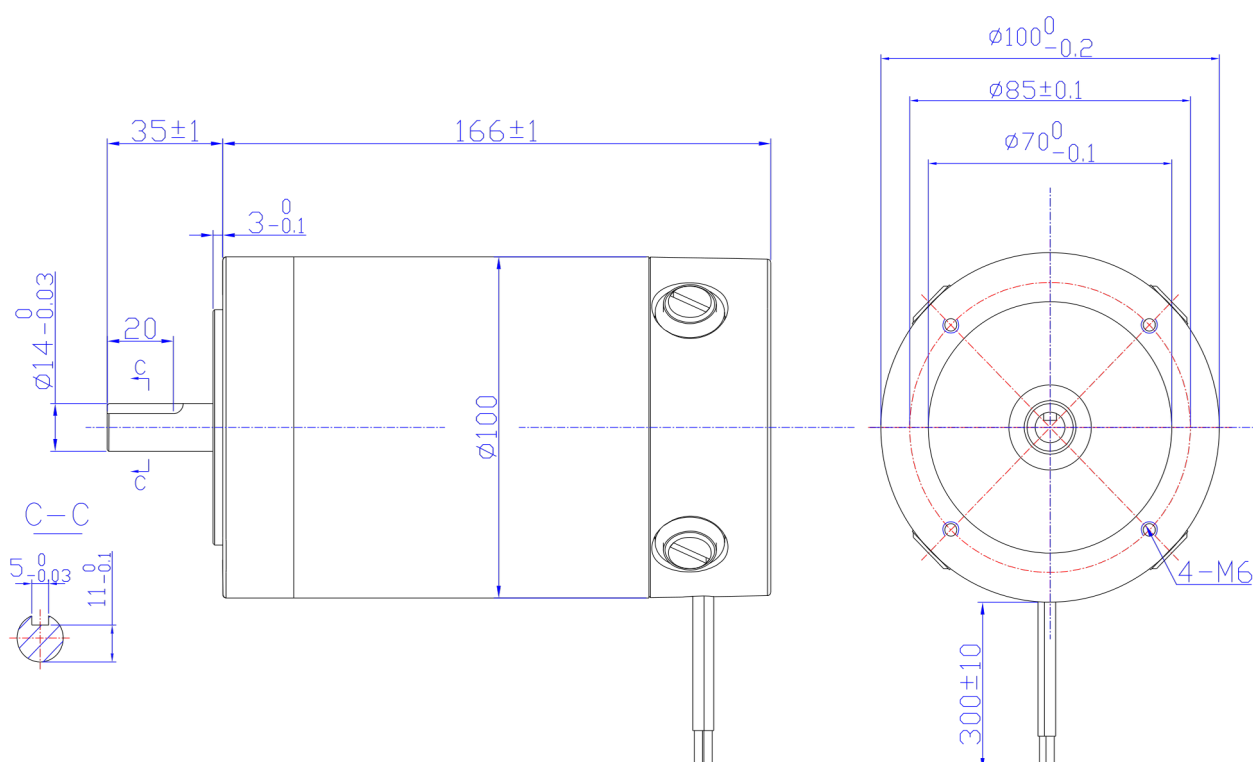


PMDC Motor

» 101MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min.500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	220N (10mm from front flange)
Max Axial Force	60N

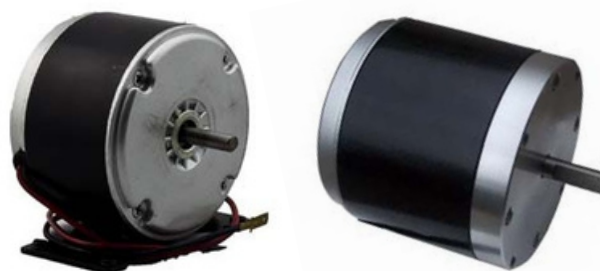

Technical Specifications


Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N	I _N	n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
101MET76-2434	24	1.2	3400	0.7	10.5	2800	205	76/A
101MET86-2434	24	1.2	3400	0.9	13.5	2800	264	86/A
101MET91-2434	24	1.6	3400	1.1	16	2800	322	91/A
101MET100-2440	24	1.5	4000	1.2	22	3000	377	100/B
101MET120-3620	36	1.8	2000	1.25	7.5	1500	200	120/B
101MET130-3620	36	1.8	2000	2	12.5	1500	314	130/B
101MET145-2433	24	2.0	3300	1.6	28	2900	485	145/B
101MET150-2438	24	2.0	3800	1.8	33	3000	570	150/B

Remark:


1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

A

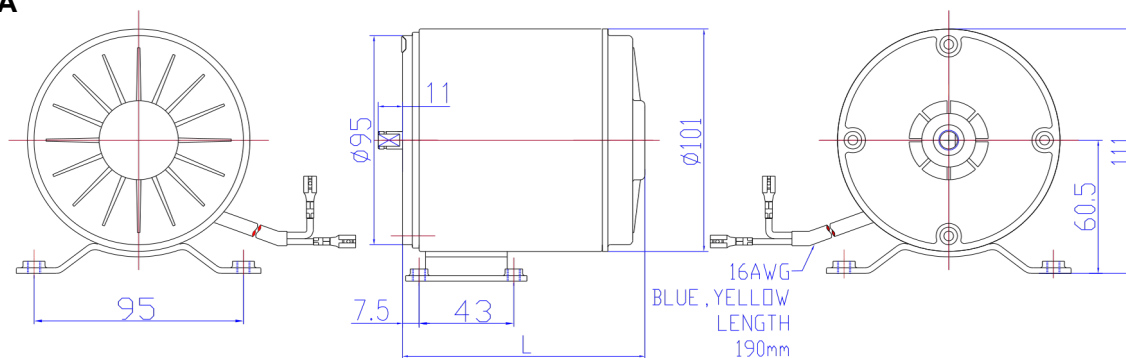

B.

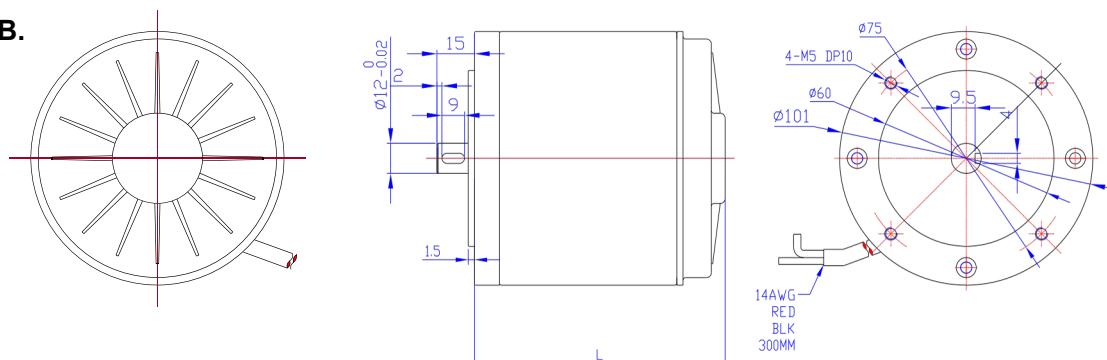

PMDC Motor

» 110MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min.500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	330N (10mm from front flange)
Max Axial Force	100N
External carbon brushes	



Technical Specifications


Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N	I _N	n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
110MEC210-2434-1.6	24	4	3400	1.6	30	3100	520	210
110MEC210-1218-1.7	12	6	1800	1.7	30	1500	267	210
110MEC210-22053-2.2	220	0.3	5300	2.2	7.0	4700	1000	210
110MEC210-22033-2.5	220	0.3	3300	2.5	4.5	3000	785	210

Remark:


- This motor can be customized with special request.
- Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.

Dimensions

A.

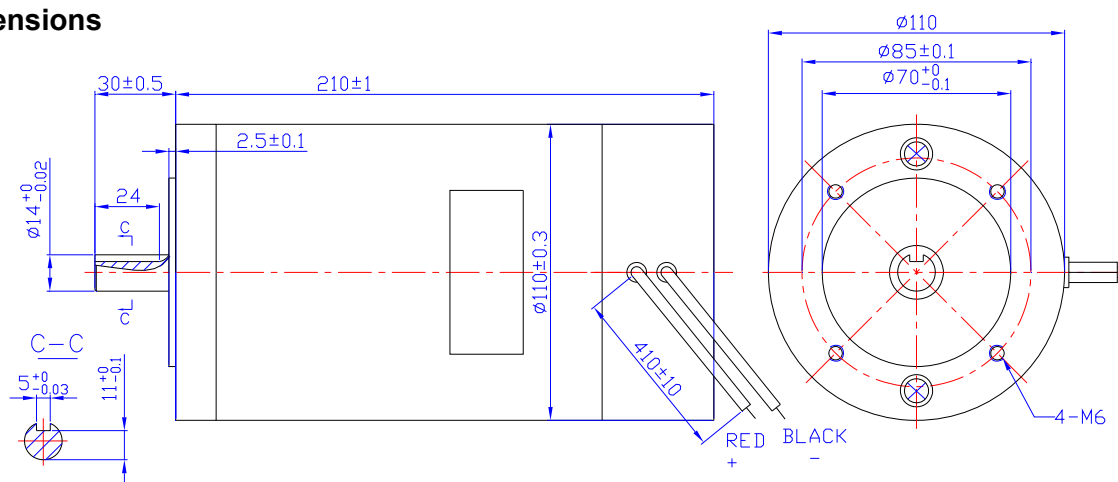

B.

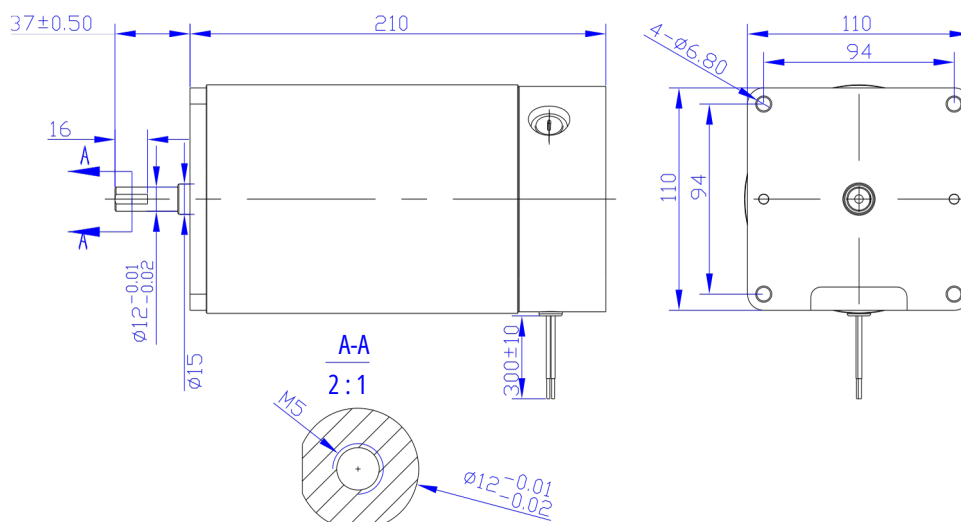

PMDC Motor

» 114MEC

General Specification

Insulation Class	B
Ambient Temperature	-20 °C~+50°C
Insulation Resistance	50MΩ Min.500V DC
Dielectric Strength	1500VAC 1 minute
Max Radial Force	220N (10mm from front flange)
Max Axial Force	60N




Technical Specifications

Model	Rated voltage	No-load current	No-load speed	Rated torque	Rated current	Rated speed	Rated output power	Motor Length
	U	I ₀	n ₀	T _N	I _N	n _N	P _{out}	L
	V	A	rpm	N.m	A	rpm	W	mm
114MET145-1232	12	2.8	3200	1.1	35	2800	322	145
114MET156-4840	48	1.8	4000	1.7	16	3500	623	156
*114MET165-4845	48	1.8	4500	2.6	28	4000	1100	165
*114MET170-2445	24	4	4500	2.6	60	4000	1100	170
114MET170-1218	12	3	1800	2.0	32	1500	315	170
114MET190-2430	24	4	3000	4.0	45	1800	750	190
114MET190-4840	48	3	4000	2.2	21	3500	800	190

Remark:

1. This motor can be customized with special request.
2. Options: Planetary gearhead; Round or square front flanges; Encoder; Brake.
3. * Working duty cycle: S2-3 minutes

Dimensions

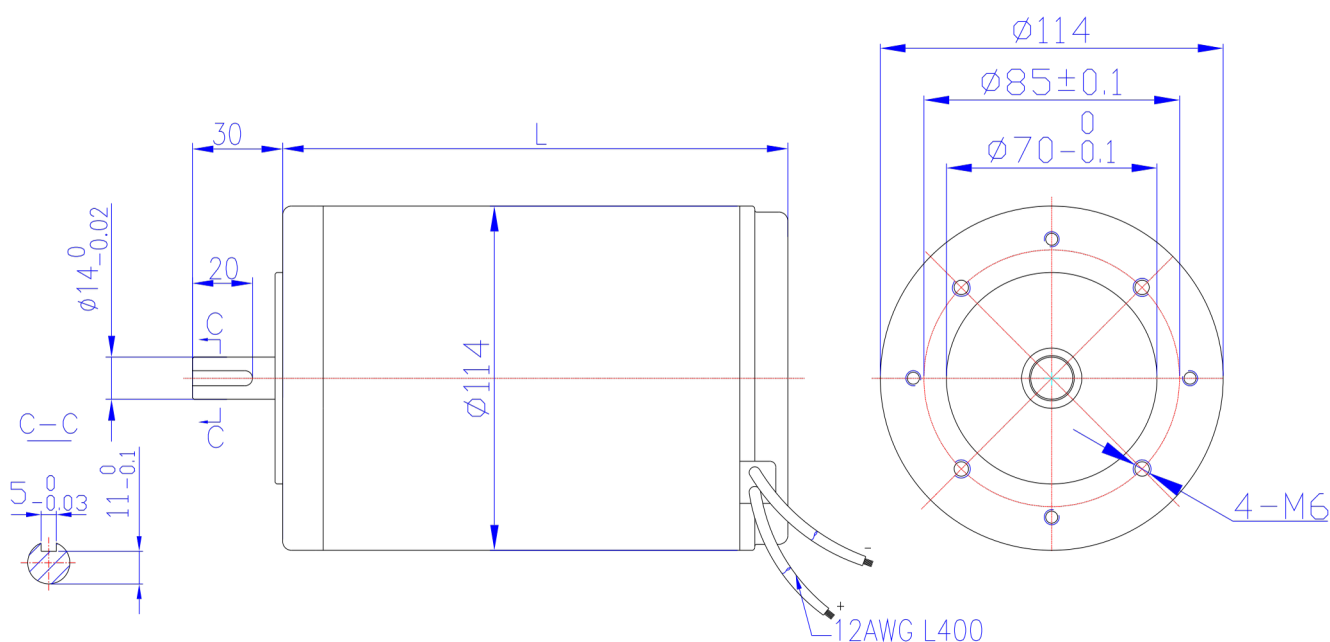

MECWIN Global Customers



International Compliance Support

- Products can be designed and validated for applicable:
- IEC and EN standards
- CE conformity requirements
- UL and CSA requirements
- RoHS and REACH compliance
- ATEX requirements for hazardous-area applications
- MIL-STD environmental testing requirements
- Customer-specific testing and qualification standards

Certifications and third-party testing can be undertaken based on product application, destination country and customer requirements.

Partner with Mecwin

From Agriculture to Aviation, Mecwin delivers engineered motor solutions for global applications. Design in India. Manufacture in Bengaluru. Supply to the World.

CONTACT US

Our Service & Support team are directly accessible in 18+ states in India.

MECWIN's trained service engineers can help with site survey, system sizing, installation, commissioning and on time service support.



Mecwin Technologies India Pvt.Ltd

Manufacturing Plant

Mecwin Infinity Tech Park, #42/2, Opp. Machohalli Lake, K.G. Lakkenahalli Road, Machohalli Village, Dasanapura-2 Hobli, Bengaluru North Taluk, 560091, India

Overseas Office

12 Amber Close, Rugby CV22 5GE, United Kingdom.

Customer Care No : + 91 97412 29797

Email : marketing@mecwinindia.com



Scan to Reach Us