

Hub Motor

Technical Data Sheet



Overview

The Mecwin 12-Inch Hub Motor is a robust and efficient BLDC motor designed for modern electric mobility solutions. With its integrated wheel design, it provides smooth performance, high torque, and low maintenance, making it perfect for electric scooters, e-bikes, and lightweight EVs. Built using advanced technology and durable materials, it ensures reliable operation, energy efficiency, and long service life—demonstrating Mecwin’s commitment to innovation and sustainable mobility.



Motor Specification :

Motor Specification			
Parameters	Specifications	Parameters	Specifications
Operating Voltage	72 V	Rated Torque	24 Nm
Rated Power	1.8 kW	Peak Torque	108 Nm
Peak Power	2.8 kW	Max Speed	740 Rpm
Max. DC Current	50 A		

Motor Specification			
Parameters	Specifications	Parameters	Specifications
Outer Diameter	332 mm	Break Type	Disc Brake
Shaft Length	275 mm	Swing Arm Distance	192.5 mm
IP Level	IP67	Application	2 wheeler

Performance Details :

Parameter	DC Voltage	DC Current	RMS Line to Line Voltage	RMS Line Current	Input Power	Torque	Speed	Output power	System Efficiency
	V	A	W	V	A	N-m	RPM	W	%
No Load	72	2.96	47.07	11.45	213	0	740	0	0
Max Torque	72	47.97	17.81	108.96	3454	108	142	1605	46.5
Max Input Power	72	49.96	30.8	75.08	3597	72.16	367	2773	85.95
Max Output Power	72	49.81	32.06	73.92	3586	71	375	2788	77.7
Max Efficiency	72	38.9	47.1	40.44	2801	36	652	2461	88

For More Information, Contact Mecwin :





Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com



Hub Motor

Technical Data Sheet

Performance Curves :

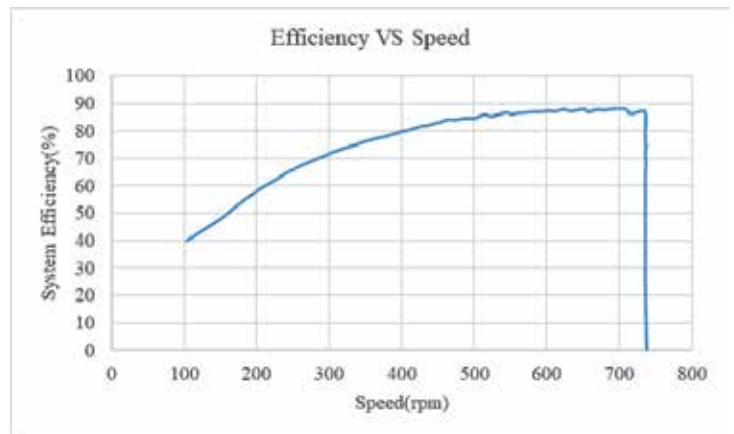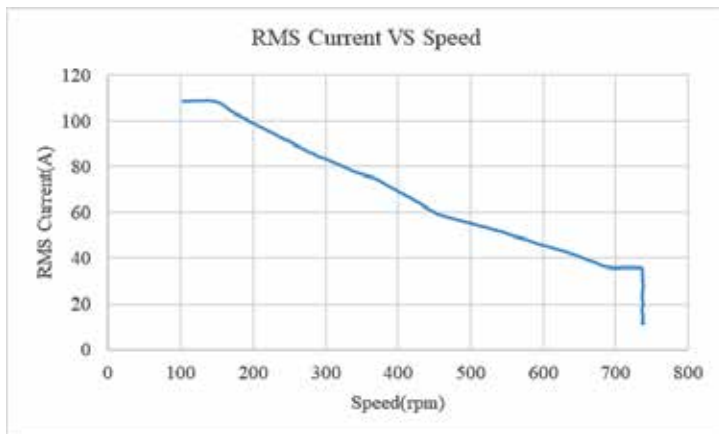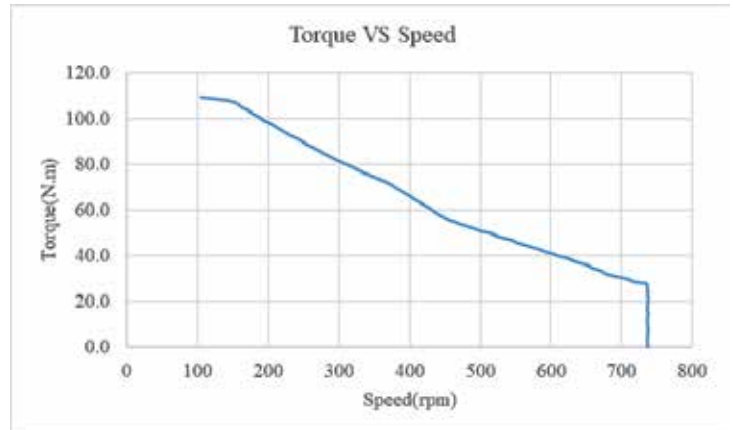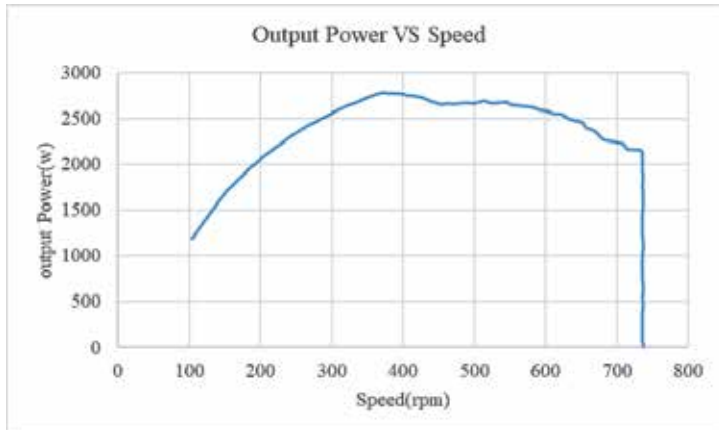

Mechanical 2D Diagram :

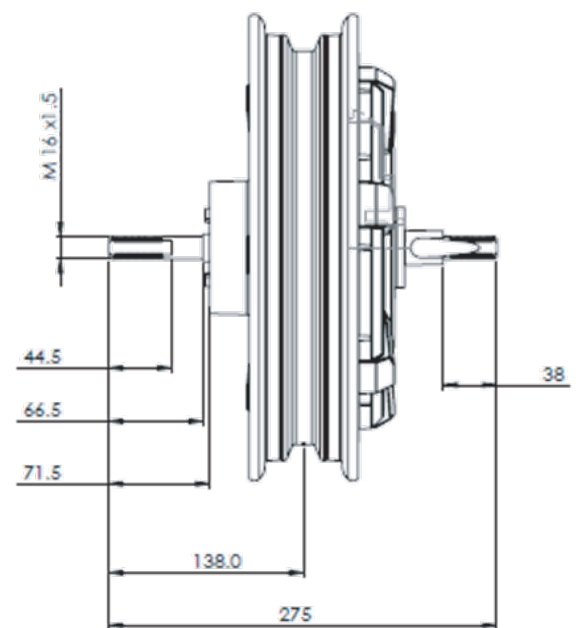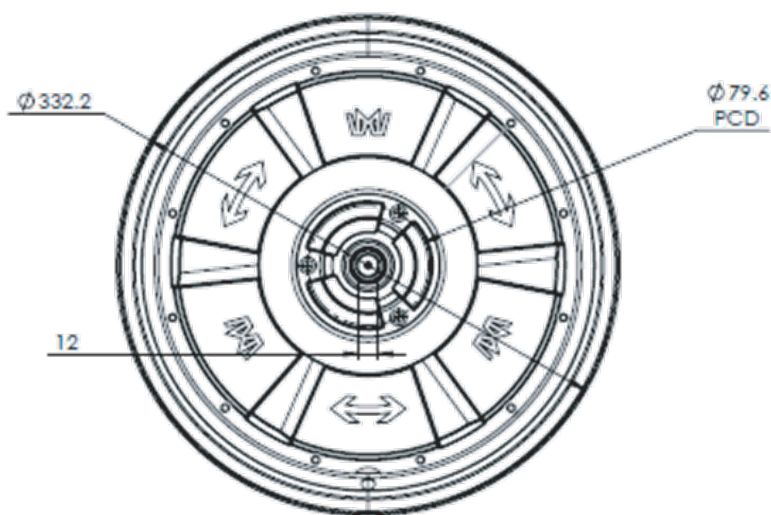

For More Information, Contact Mecwin :


Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com

Hub Motor

Technical Data Sheet

Exploded View :

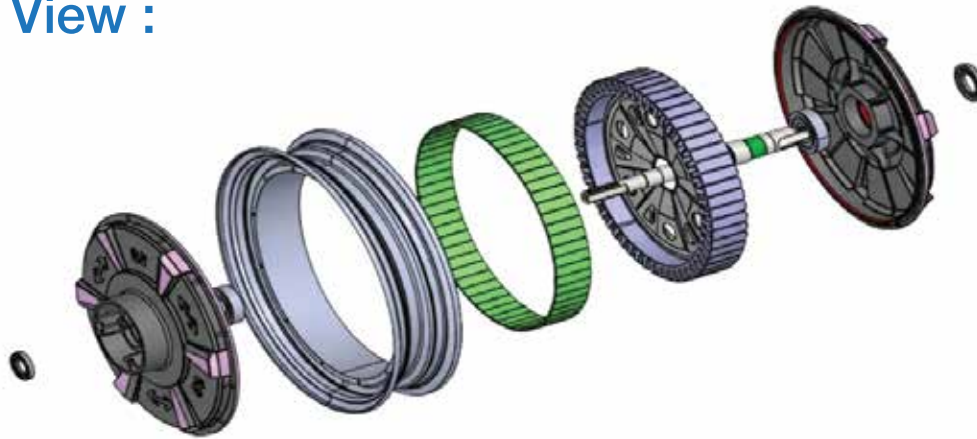

Technical Data :

DC Voltage	DC Current	RMS Line to Line Voltage	RMS Line Current	Input Power	Torque	Speed	Output power	System Efficiency
V	A	W	V	A	N-m	RPM	W	%
72	2.96	47.07	11.45	213	0	740	0	0
72	4.63	46.91	11.38	333	1	736	76	22.9
72	6.94	46.74	11.8	500	2.9	736	226	45.2
72	9.29	46.59	12.6	669	6	737	461	68.9
72	10.71	46.57	13.48	771	7	736	540	70
72	17.42	46.35	19	1254	13	736	1004	80
72	19.27	46.28	20.65	1387	15	737	1159	83.6
72	22.1	46.24	23.37	1591	17	736	1307	82.2
72	26.57	46.23	27.78	1913	21.1	737	1625	85
72	30.1	46.04	31.49	2167	24	737	1851	85.4
72	34.37	46	35.83	2475	28.1	734	2158	87.2
72	35.22	46.2	35.92	2536	30	709	2226	87.8
72	36.21	46.7	36.78	2607	32	680	2279	87.4
72	37.69	46.87	38.57	2714	34	667	2376	87.6
72	38.9	47.1	40.44	2801	36	652	2461	87.9
72	39.99	46.49	42.86	2879	38	631	2508	87.1
72	41.17	45.55	45.66	2964	41	602	2586	87.2
72	43.03	43.19	51.4	3098	47	545	2683	86.6
72	43.89	40.79	55.36	3160	51	500	2670	84.5
72	45.27	36.57	61.62	3259	58	442	2684	82.4
72	47.65	34.47	67.34	3431	64	411	2755	80.3
72	48.97	33.09	71.12	3526	68	390	2777	78.8
72	49.81	32.06	73.92	3586	71	375	2788	77.7
72	49.9	30.64	76.38	3593	74	354	2743	76.4
72	49.8	28.66	80.02	3593	78	325	2655	73.9
72	49.74	27.71	81.86	3581	80	311	2605	72.8
72	49.68	26.74	84.08	3577	82	296	2542	71.1
72	49.46	22.44	95.24	3561	94	224	2205	61.9
72	49.35	21.23	98.91	3553	98	203	2084	58.6
72	49.27	19.85	102.76	3547	102	179	1912	53.9
72	49.14	18.46	108.05	3538	107	153	1714	48.5
72	41.31	14.98	108.74	2974	109.4	104	1192	40.1

For More Information, Contact Mecwin :

Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com