



EMPOWERING FUTURE

Reliable, Efficient & Advanced Motor Solutions
for the Next Generation of Drones

2306 BRUSHLESS OUTRUNNER MOTOR 1900KV



www.mecwinindia.com

Overview :


The Mecwin 2306 Drone Motor is a high-performance brushless motor designed for drones. It delivers strong thrust, smooth operation, and quick response, ensuring stable flights. Built with durable materials and precision engineering, it provides long life and low vibration. Lightweight and energy-efficient, it is ideal for 5-inch propellers and reliable drone performance.

Key Features :


- High RPM & Fast Response – Designed for quick throttle changes and stable flight.
- Lightweight Design – Compact and optimized for drones to reduce overall weight.
- Durable Build – Uses high-quality materials like aluminum alloy and strong magnets for long life.
- Efficient Cooling – Open design or special ventilation to prevent overheating.
- Smooth Performance – Precision bearings for reduced vibration and stable footage.



Outline Drawing :

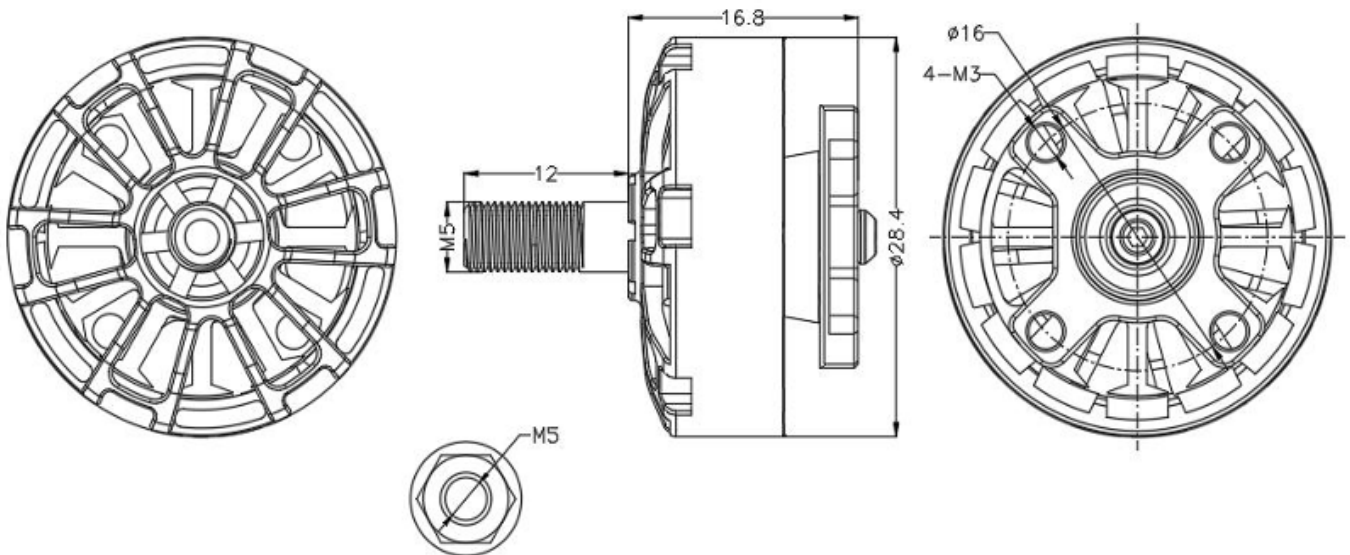

Schematic diagram of the line :

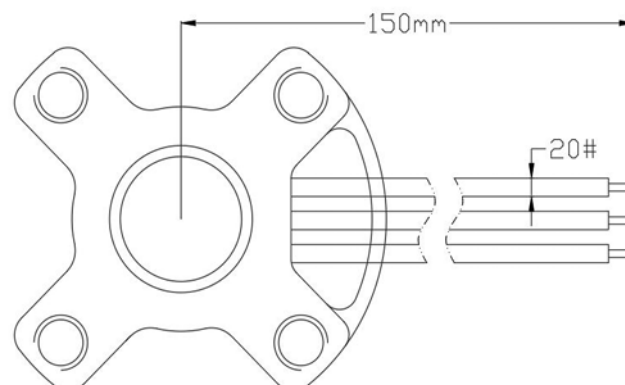

Basic Parameters :

MECWIN 2306 - 1900KV BASIC PARAMETERS			
Product	F2306-V2	Slot&Pole	12N14P
Motor Size	Φ28.4×H16.8mm	Magnet	150 C
Enamelled wire	180 C	Isolation test	500V Pressure resistance test
Motor mounting dimensions	4×M3@D16mm	Props mounting dimensions	M5

Technical Parameters :

MECWIN 2306 - 1900KV TECHNICAL PARAMETERS			
KV	1900KV	Battery (LiPo)	4S-LiPo
No-load current /16V	≤1.5A	Resistance	88.31mΩ±3%
Max thrust / kg	1.21kg	Max power	581.96W
Wire Size	20#	Wire length	150mm±3
Dynamic balance	≤5mg	Weight (With wire) / g	31g

Load Performance Parameters :

Propeller	Throttle %	Volts (V)	Current (A)	Thrust (gf)	Watts (W)	Thrust Efficiency (G/W)	Copper Wire Temperature (°C)
5-inch 3-blade	20	23.28	1.59	0.163	37.09	4.39	The inside of motor copper wire (75°C)
	30	23.18	2.92	0.282	67.67	4.17	
	40	23.04	4.65	0.393	107.18	3.67	
	50	22.9	6.78	0.503	155.31	3.24	
	59	22.62	10.2	0.663	230.87	2.87	
	70	22.31	14.22	0.826	317.26	2.6	Ambient temperature is (25°C)
	80	21.92	18.22	0.962	399.26	2.41	
	89	21.54	22.7	1.093	488.83	2.24	
	100	21.04	27.66	1.212	581.96	2.08	

NOTE : Copper wire temperature inside the motor after 2 minutes of running at full load (100% throttle)