


Overview

The Mecwin 5-Inch Hub Motor is a compact and efficient BLDC motor designed for modern electric mobility. With its integrated wheel design, it delivers smooth performance, high torque, and low maintenance, making it ideal for e-bikes, scooters, and lightweight EVs. Built with advanced technology and durable materials, it ensures reliable operation, energy efficiency, and long service life—reflecting Mecwin’s commitment to innovation and sustainable mobility solutions.

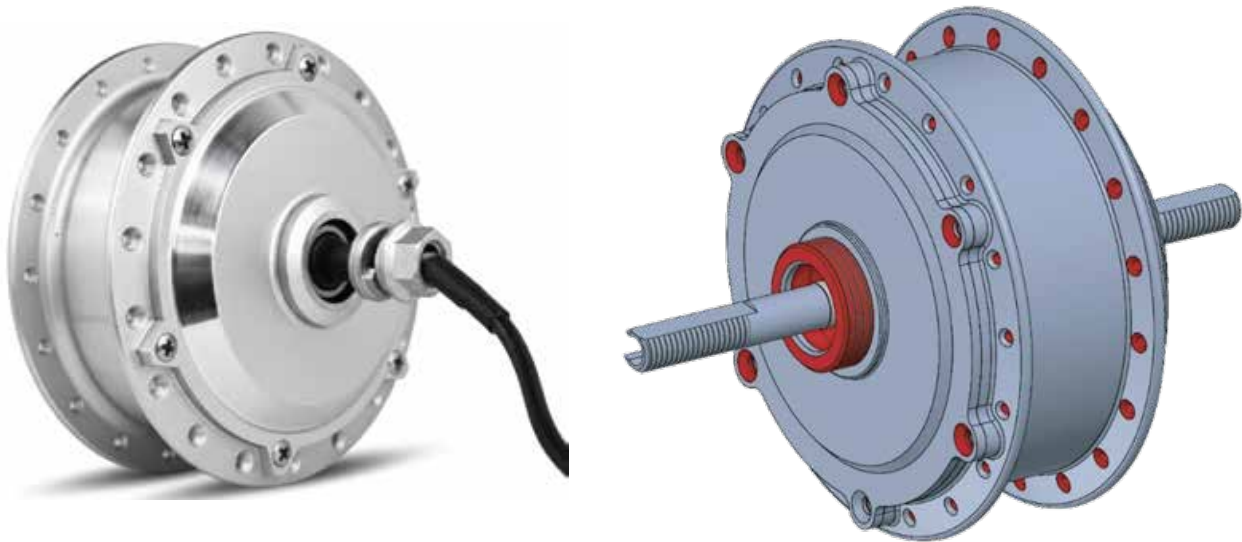

Motor Specification :

Motor Specification			
Parameters	Specifications	Parameters	Specifications
Operating Voltage	36 V	Rated Torque	10 Nm
Rated Power	250 kW	Peak Torque	50 Nm
Peak Power	520 kW	Max Speed	255 Rpm
Max. DC Current	250 A		

Performance Details :

Parameter	DC Voltage	DC Current	Input Power	Torque	Speed	Output Power	System Efficiency
	V	A	W	N-m	RPM	W	%
No Load	36	1.3528	48.818	0	255.2	0.3171	0.6
Max Torque	36	18.688	674.56	50.8	3	15.892	2.4
Max Input Power	36	20.565	742.29	33.1	139.7	483.72	65.2
Max Output Power	36	19.744	712.63	27.4	183.8	526.88	73.9
Max Efficiency	36	6.2679	226.25	8.1	234.8	211.32	90

For More Information, Contact Mecwin :




Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com



Hub Motor

Technical Data Sheet

Performance Curves :

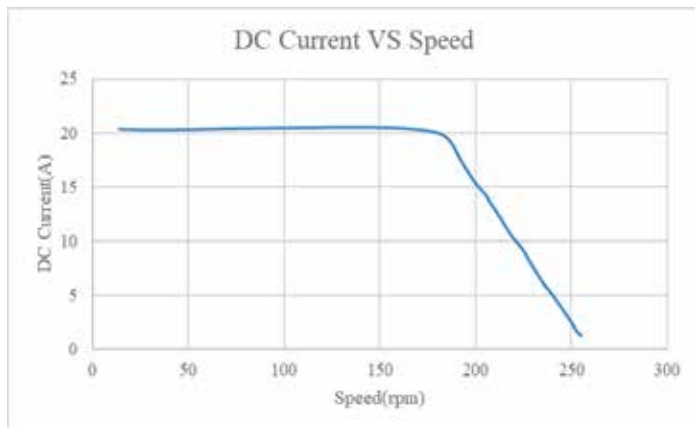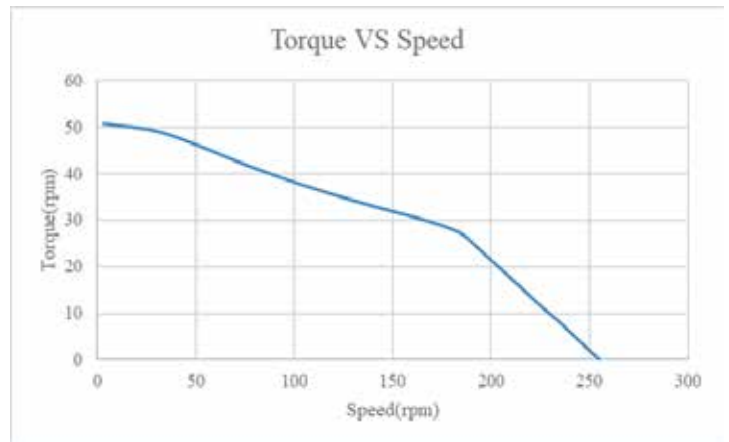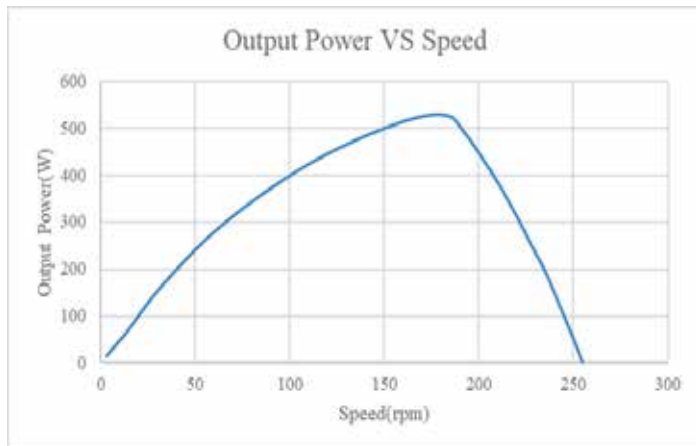

Mechanical 2D Diagram :

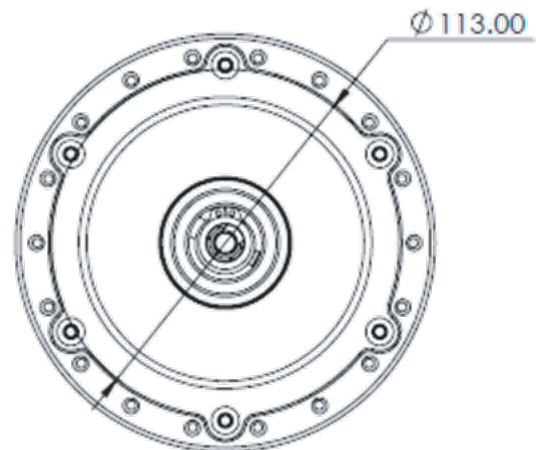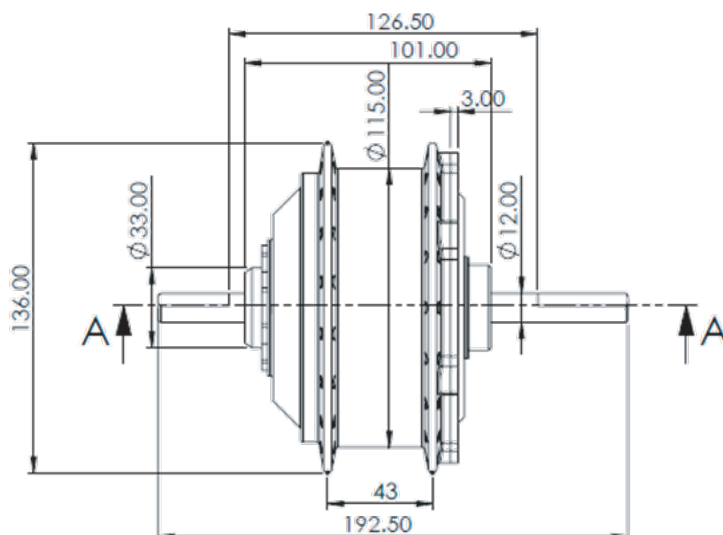

For More Information, Contact Mecwin :


Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com

Hub Motor

Technical Data Sheet

Exploded View :

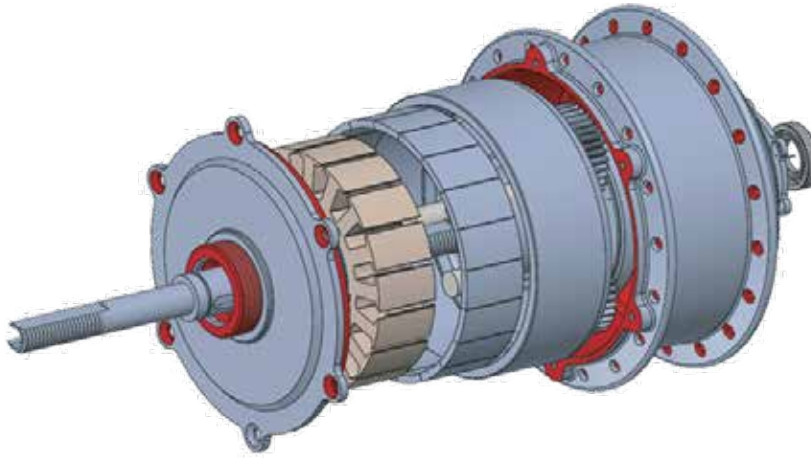

Technical Data :

DC Voltage	DC Current	Input Power	Torque	Speed	Output Power	System Efficiency
(V)	(A)	(W)	(N-m)	(RPM)	(W)	(%)
36.087	1.3528	48.818	0	255.2	0.3171	0.6
36.085	1.3972	50.42	0.2	254.6	4.8594	9.6
36.076	1.54	55.556	0.6	253.7	14.888	26.8
36.066	1.8446	66.527	1.1	252.3	29.458	44.3
36.031	3.1301	112.78	2.9	247.7	76.14	67.5
36.095	5.1171	184.7	6	240	150.41	81.4
36.097	6.2679	226.25	8.1	234.8	211.32	90
36.098	7.8029	281.67	10	229.4	240.25	85.3
36.098	8.184	295.43	10.5	228.1	250	84.7
36.097	9.4495	341.1	12	224	281.73	82.6
36.097	10.565	381.36	14.2	218.5	325.27	85.3
36.096	12.337	445.3	16.6	212.4	369.09	82.9
36.095	14.169	511.44	19.2	205.7	413.01	80.8
36.09	14.607	527.16	20	203.7	425.54	80.8
36.078	15.538	560.58	21.7	199.3	452.18	80.7
36.091	17.6	635.22	24.5	192.1	492.99	77.6
36.094	19.744	712.63	27.4	183.8	526.88	73.9
36.093	20.392	736.03	30	166.7	522.69	71
36.095	20.565	742.29	33.1	139.7	483.72	65.2
36.095	20.522	740.73	36.3	114.2	433.77	58.6
36.095	20.47	738.87	39.4	91.7	377.8	51.1
36.104	20.412	736.95	42.9	69.7	312.95	42.5
36.096	20.335	733.99	46.2	50.6	244.87	33.4
36.094	20.301	732.75	49.3	29	149.93	20.5
36.094	20.381	735.63	47.2	14.1	69.731	9.5
36.095	18.688	674.56	50.8	3	15.892	2.4

For More Information, Contact Mecwin :

Tel : +91 80500 84932, +91 81239 67692

Email : sales@mecwinindia.com