


Outer Rotor BLDC Motors

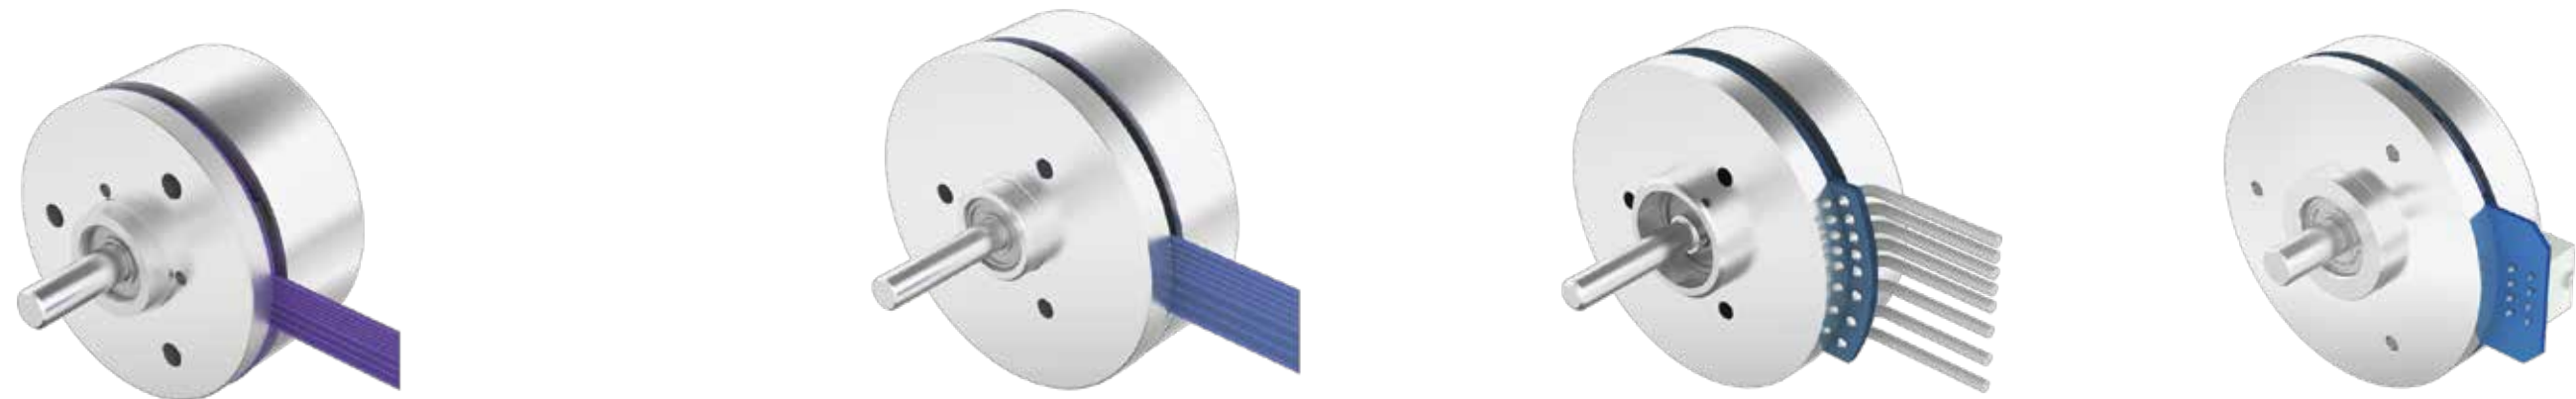

Parameter	Models
Number of Poles (—)	8
Number of Phases (—)	3
Rated Voltage (VDC)	9 / 12 / 24 / 48
Rated Torque (mN·m)	29.5 / 25.1 / 25.5 / 24.7
Continuous Stall Torque (mN·m)	35.4 / 30.1 / 30.6 / 29.6
Rated Speed (RPM)	2100 / 2800 / 2760 / 2950
Rated Power (W)	6 / 7 / 7 / 8
Peak Torque (mN·m)	73.8 / 75.3 / 76.5 / 74.1
Peak Current (A)	3.4 / 3.2 / 1.7 / 0.97
Line-to-Line Resistance (Ω @20°C)	2.87 / 3.43 / 13.7 / 53
Line-to-Line Inductance (mH)	1.61 / 1.87 / 7.73 / 27.8
Torque Constant (mN·m/A)	23 / 24.8 / 51 / 96.1
Back EMF (Vrms/KRPM)	1.7 / 1.83 / 3.77 / 7.1
Rotor Inertia (g·cm²)	35
Motor Length (mm)	18
Weight (g)	50

Parameter	Models
Number of Poles (—)	16
Number of Phases (—)	3
Rated Voltage (VDC)	24
Rated Torque (mN·m)	50 / 84 / 130
Continuous Stall Torque (mN·m)	60 / 100 / 156
Rated Speed (RPM)	5000 / 5260 / 4840
Rated Power (W)	30 / 50 / 70
Peak Torque (mN·m)	150 / 250 / 390
Peak Current (A)	4.3 / 7.4 / 11
Line-to-Line Resistance (Ω @20°C)	1.42 / 0.72 / 0.56
Line-to-Line Inductance (mH)	0.59 / 0.33 / 0.27
Torque Constant (mN·m/A)	35.2 / 34.4 / 37.1
Back EMF (Vrms/KRPM)	2.61 / 2.55 / 2.75
Rotor Inertia (g·cm²)	100 / 135 / 180
Motor Length (mm)	18 / 21.6 / 27
Weight (kg)	0.08 / 0.12 / 0.15

Parameter	Models
Number of Poles (—)	14
Number of Phases (—)	3
Rated Voltage (VDC)	24
Rated Torque (mN·m)	112
Continuous Stall Torque (mN·m)	135
Rated Speed (RPM)	4400
Rated Power (W)	50
Peak Torque (mN·m)	336
Peak Current (A)	9
Line-to-Line Resistance (Ω @20°C)	0.75
Line-to-Line Inductance (mH)	0.42
Torque Constant (mN·m/A)	37
Back EMF (Vrms/KRPM)	3.1
Rotor Inertia (g·cm²)	135
Motor Length (mm)	21.5
Weight (kg)	0.13

Parameter	Models
Number of Poles (—)	22
Number of Phases (—)	3
Rated Voltage (VDC)	48
Rated Torque (mN·m)	964
Continuous Stall Torque (mN·m)	1156
Rated Speed (RPM)	1670
Rated Power (W)	169
Peak Torque (mN·m)	3000
Peak Current (A)	13
Line-to-Line Resistance (Ω @20°C)	0.64
Line-to-Line Inductance (mH)	0.65
Torque Constant (mN·m/A)	230
Back EMF (Vrms/KRPM)	17.7
Rotor Inertia (g·cm²)	5000
Motor Length (mm)	41.5
Weight (kg)	1.1