MECWIN®

EMPOWERING FUTURE

YE/YE4/YE5 SERIES LOW-VOLTAGE SQIRREL-CAGE MOTOR



www.mecwinindia.com

COMPANY OVERVIEW

About Us

Mepwin is a Bengaluru-based engineering and manufacturing company specializing in **motors, controllers, powertrains, wiring harnesses, SCADA automation and IoT solutions.** We develop customized solutions for **electric mobility, industrial automation, agriculture, renewable energy, Oil & Gas, aerospace, defence** and other demanding applications.

Our 50,000 sq. ft. manufacturing facility is equipped with modern machinery, engineering laboratories and advanced testing facilities. With strong in-house engineering capabilities, we manage the complete product journey from design and prototyping to testing, validation and production. We work closely with OEMs to provide high-performance, reliable and application-specific solutions.

Our growth is driven by innovation, engineering excellence, quality, integrity and long-term partnerships with our customers, suppliers and employees.

Vision

To becomethe preferred global technology partner for high-efficiency motors, controllers and powertrains—from agriculture to aviation—by delivering innovation, quality, reliability, on-time service and environmentally responsible manufacturing.

Mission

Tobecome the preferred global technology partner for high-efficiency motors, controllers and powertrains—from agriculture to aviation—by delivering innovation, quality, reliability, on-time service and environmentally responsible manufacturing.

Core Values

CustomerSuccess | Inn ovation | Excellence | Integrity | People & Partnerships | Environmental Responsibility.

YE3, YE4 and YE5 Series

Three-Phase Asynchronous Motors



1. Product Overview

Mecwin offers high-efficiency three-phase induction motors, YE3, YE4 and YE5 series, which meet IEC60034-30 standard energy efficiency levels. These motors are designed for energy saving, using high magnetic conductivity and low loss cold rolled silicon steel sheets and oxygen free copper enameled wires, along with advanced winding technology to reduce stray losses. They feature a compact, robust and efficient design with 155 (F) class insulation and IP55 protection level.

The motors are low noise, low vibration and built for reliable operation. The cooling method is IC411, and the installation dimensions and efficiency levels comply with IEC standards and DIN42673 standards.

2. Example of Motor Product Model

YEX - 132 M - 4

- 4 — Number of poles
- M — Core length
- 132 — Base number
- YEX — Three-phase asynchronous motor (x=3, 4 or 5)

MECWIN®
EMPOWERING FUTURE

Technical Requirements and Operating Conditions of Motors

Item	Standard Motor	Optional
Base Number	80–355	–
Rated Power	0.18–355 kW	–
Number of Poles	2P 4P 6P 8P 10P	–
Rated Voltage	380 V	220/380 V 230/400 V 240/415 V 380/660 V 400/690 V Other voltages up to 1000 V on request, subject to design confirmation
Frequency	50 Hz	60 Hz
Energy Efficiency Level	IE3 IE4 IE5	
Working System	S1	S2, S3, etc., customizable
Installation Method	B3 B5 B35	V1 B14 B34, etc., according to customer requirements
Insulation Level	Class F (temperature rise 80K)	Class H
Wiring Method	3 kW and below: 380 V Y connection Above 3 kW: 380 V Δ connection	–
Protection Level	IP55	IP65 IP56 IP66
Cooling Method	IC411	IC416
Junction Box Location	On top of the motor (terminal facing drive end)	Left side, right side, or top of the motor (terminal facing drive end), customizable
Bearing Configuration	Frame 80–200: Ball bearing (grease lubricated) Frame 225 and above: Roller bearing (oil lubricated)	Frame 160, 180, 200 can also use open bearings (oil lubricated)
Ambient Temperature	–20°C to +40°C	> 40°C to 55°C
Altitude	≤1000 m	> 1000 m to 5000 m


* For on-site operating conditions with deviations, adjustments shall be made in accordance with the provisions of GB/T755-2019.
* Customizable according to customer usage environment requirements (F1, F2, WF1, WF2, THWF1, THWF2).



Comparison Table of Efficiency Values for Mecwin Series Motors

Series	IEC60034-30-1 (International Standard)	GB18613-2020 (China Standard)
YE5	IE5	Energy Efficiency Grade 1
YE4	IE4	Energy Efficiency Grade 2
YE3	IE3	Energy Efficiency Grade 3

Curve Chart of Motor Efficiency Value

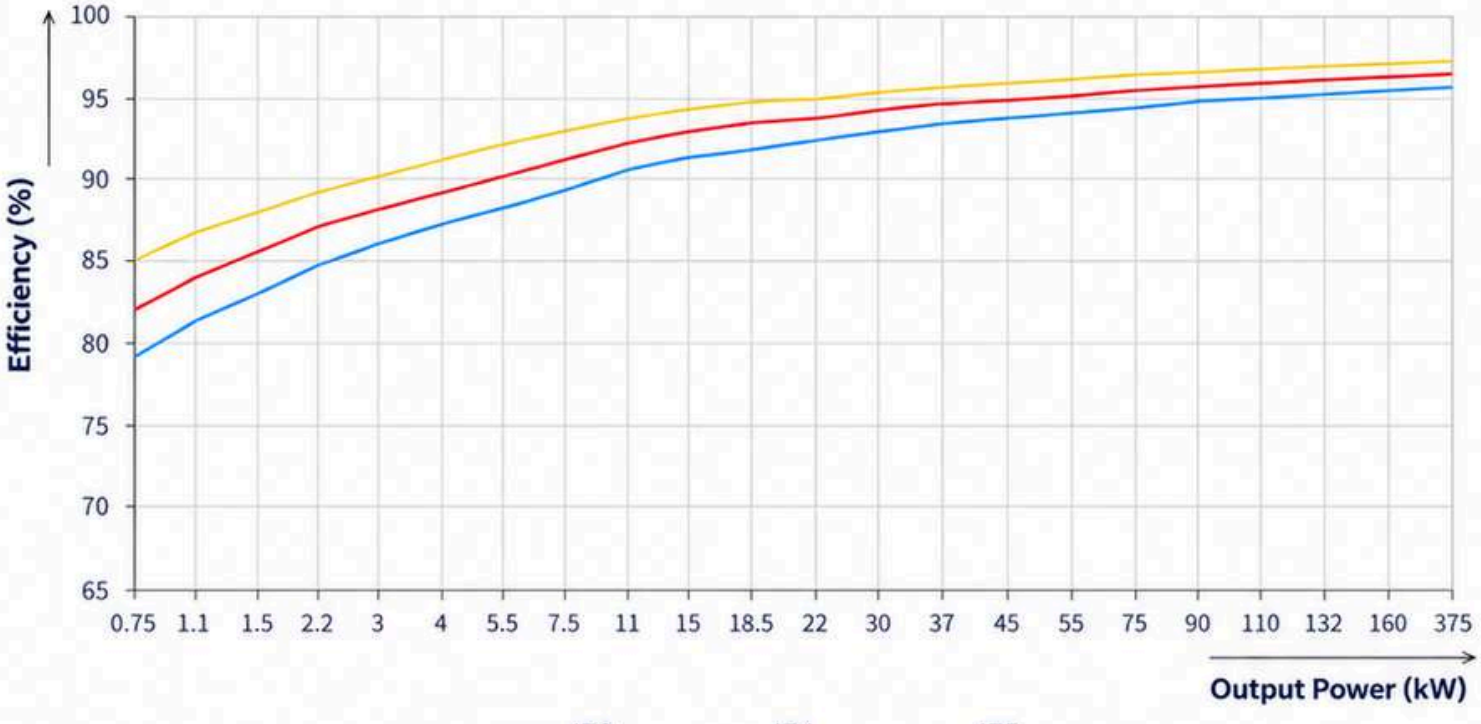







MECWIN®
EMPOWERING FUTURE

IEC60034-30 Energy Efficiency Levels and Values




Output Power kW	Efficiency (%)											
	IE1				IE2				IE3			
	2 pole	4 pole	6 pole	8 pole	2 pole	4 pole	6 pole	8 pole	2 pole	4 pole	6 pole	8 pole
0.18	75.2	78.7	74.6	71.9	70.8	74.7	70.1	67.2	65.9	69.9	63.9	58.7
0.25	78.3	81.5	78.1	75.2	74.3	77.9	74.1	70.8	69.7	73.5	68.6	64.1
0.37	81.7	84.3	81.6	78.4	78.1	81.1	78.0	74.3	73.8	77.3	73.5	69.3
0.55	84.6	86.7	84.2	80.6	81.5	83.9	80.9	77.0	77.8	80.8	77.2	73.0
0.75	86.3	88.2	85.7	82.0	83.5	85.7	82.7	78.4	80.7	82.5	78.9	75.0
1.1	87.8	89.5	87.2	84.0	85.2	87.2	84.5	80.8	82.7	84.1	81.0	77.7
1.5	88.9	90.4	88.4	85.5	86.5	88.2	85.9	82.6	84.2	85.3	82.5	78.7
2.2	90.2	91.4	89.7	87.2	88.0	89.5	87.4	84.5	85.9	86.7	84.3	81.9
3	91.1	92.1	90.6	88.4	89.1	90.4	88.6	85.9	87.1	87.7	85.6	83.5
4	91.8	92.8	91.4	89.4	90.0	91.1	89.5	87.1	88.1	88.6	86.8	84.8
5.5	92.6	93.4	92.2	90.4	90.9	91.9	90.5	88.3	89.2	89.6	88.0	86.2
7.5	93.3	94.0	92.9	91.3	91.7	92.6	91.3	89.3	90.1	90.4	89.1	87.3
11	94.0	94.6	93.7	92.2	92.6	93.3	92.3	90.4	91.2	91.4	90.3	88.6
15	94.5	95.1	94.3	92.9	93.3	93.9	92.9	91.2	91.9	92.1	91.2	89.6
18.5	94.9	95.3	94.6	93.3	93.7	94.2	93.4	91.7	92.4	92.6	91.7	90.1
22	95.1	95.5	94.9	93.6	94.0	94.5	93.7	92.1	92.7	93.0	92.2	90.6
30	95.5	95.9	95.3	94.1	94.5	94.9	94.2	92.7	93.3	93.6	92.9	91.3
37	95.8	96.1	95.6	94.4	94.8	95.2	94.5	93.1	93.7	93.9	93.3	91.8
45	96.0	96.3	95.8	94.7	95.0	95.4	94.8	93.4	94.0	94.2	93.7	92.2
55	96.2	96.5	96.0	94.9	95.3	95.7	95.1	93.7	94.3	94.6	94.1	92.5
75	96.5	96.7	96.3	95.3	95.6	96.0	95.4	94.2	94.7	95.0	94.6	93.1
90	96.6	96.9	96.5	95.5	95.8	96.1	95.6	94.4	95.2	95.2	94.9	93.4
110	96.8	97.0	96.6	95.7	96.0	96.3	95.8	94.7	95.2	95.4	95.1	93.7
132	96.9	97.1	96.8	95.9	96.2	96.4	96.0	94.9	95.4	95.6	95.4	94.0
160	97.0	97.2	96.9	96.1	96.3	96.6	96.2	95.1	95.6	95.8	95.6	94.3
200	97.2	97.4	97.0	96.3	96.5	96.7	96.3	95.4	95.8	96.0	95.8	94.6
250	97.2	97.4	97.0	96.3	96.5	96.7	96.5	95.4	95.8	96.0	95.8	94.6
315–1000	97.2	97.4	97.0	96.3	96.5	96.7	96.6	95.4	95.8	96.0	95.8	94.6

Basic Structure Diagram




B3 – Foot mounted, no flange (standard structure)

IM B3 80–355		IM B6 80–160		IM B7 80–160	
IM B8 80–160		IM V5 80–160		IM V6 80–160	

B5 – Flange mounted, no foot, with top terminal box (through-hole)




IM B5 80–280		IM V1 80–355		IM V3 80–160	

B35 – Foot and flange mounted, with top terminal box (through-hole)

IM B35 80–355		IM V15 80–160		IM V35 80–160	

B14 – Flange mounted, no foot, with top terminal box (tapped hole)

B34 – Foot and flange mounted, with top terminal box (tapped hole)

IM B14 80–112		IM V18 80–112		IM B34 80–112	

Notes:

1. The installation height of the motor base varies by frame size.
2. IM B3, IM B35, IM B5 (80–280) and IM V1 are the basic structures of the motor, which can be ordered directly.
3. When other installation methods with a base number greater than 160 are required, users must implement effective reinforcement measures for the motor to ensure its safety during operation.

Correspondence between the base number, power and speed of the YE3 / YE4 / YE5 series

Frame	Synchronous Speed (r/min)				
	3000	1500	1000	750	600
	Rated Power (kW)				
80M1	0.75	0.55	0.37	0.18	
80M2	1.1	0.75	0.55	0.25	
90S	1.5	1.1	0.75	0.37	
90L	2.2	1.5	1.1	0.55	
100L1	3	2.2	1.5	0.75	
100L2		3		1.1	
112M	4	4	2.2	1.5	
132S1	5.5	5.5	3	2.2	
132S2	7.5				
132M1	—	7.5	4	3	
132M2			5.5		
160M1	11		7.5	4	—
160M2	15	11		5.5	
160L	18.5	15	11	7.5	
180M	22	18.5	—	—	
180L	—	22	15	11	
200L1	30	30	18.5	15	
200L2	37		22		
225S	—	37	—	18.5	
225M	45	45	30	22	
250M	55	55	37	30	
280S	75	75	45	37	
280M	90	90	55	45	
315S	110	110	75	55	45
315M	132	132	90	75	55
315L1	160	160	110	90	75
315L	185	185	—	—	—
315L2	200	200	132	110	90
355M1	220	220	160	132	110
355M	250	250	185	—	—
355M2	—	—	200	160	132
355L1	280	280	220	—	—
355L	315	315	250	200	160
355I	355	355	280	—	—

Note: YE4 and YE5 motors do not include motors with a synchronous speed of 600.

MECWIN®
EMPOWERING FUTURE

YE3 Performance Data 2P Synchronous Speed 3000 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	Rated Current A		Speed (rpm)	Torque (Nm)	Starting Current Ratio Ts/Tn	Starting Torque Ratio Tnmax/Tn	Pull-out Torque Ratio Is/In	Moment of Inertia kg·m²	Noise Lp dB (A)	Weight kg
	kW	HP			380V	400V								
YE3-80M-2	0.75	1	80.7	0.82	1.72	1.64	2880	2.49	2.3	2.3	7.0	0.0011	62	23
YE3-80M-2-2	1.1	1.5	82.7	0.83	2.43	2.31	2890	3.63	2.2	2.3	7.6	0.0016	62	26
YE3-90S-2	1.5	2	84.2	0.84	3.22	3.06	2895	4.95	2.2	2.3	7.9	0.0023	67	30
YE3-90L-2	2.2	3	85.9	0.85	4.58	4.35	2895	7.26	2.2	2.3	7.9	0.0031	67	34
YE3-100L-2	3	4	87.1	0.87	6.02	5.71	2895	9.90	2.2	2.3	8.5	0.0051	70	45
YE3-112M-2	4	5.5	88.1	0.88	7.84	7.45	2910	13.1	2.2	2.3	8.5	0.0082	71	58
YE3-132S-2	5.5	7.5	89.2	0.88	10.6	10.1	2920	18.0	2.0	2.3	8.5	0.0161	72	67
YE3-132S-2-2	7.5	10	90.1	0.88	14.4	13.7	2930	24.4	2.0	2.3	8.5	0.01954	72	74
YE3-160M-2	11	15	91.2	0.89	20.6	19.6	2940	35.7	2.0	2.3	8.5	0.0566	73	125
YE3-160M-2-2	15	20	91.9	0.89	27.9	26.5	2940	48.7	2.0	2.3	8.5	0.0722	73	142
YE3-160L-2	18.5	25	92.4	0.89	34.2	32.5	2945	60.0	2.0	2.3	8.5	0.0839	73	165
YE3-180M-2	22	30	92.7	0.89	40.5	38.5	2955	71.1	2.0	2.3	8.5	0.125	75	198
YE3-200L-2	30	40	93.3	0.89	54.9	52.1	2965	96.6	2.0	2.3	8.5	0.183	76	264
YE3-200L-2-2	37	50	93.7	0.89	67.4	64	2965	119	2.0	2.3	8.5	0.216	76	284
YE3-225M-2	45	60	94	0.9	80.8	76.8	2970	145	2.0	2.3	8.0	0.30	78	310
YE3-250M-2	55	75	94.3	0.9	98.5	93.5	2975	177	2.0	2.3	8.0	0.435	81	446
YE3-280S-2	75	100	94.7	0.9	134	127	2980	240	1.8	2.3	7.5	0.766	82	557
YE3-280M-2	90	125	95	0.9	160	152	2980	288	1.8	2.3	7.5	0.896	82	600
YE3-315S-2	110	150	95.2	0.9	195	185	2980	353	1.8	2.3	7.5	1.71	85	890
YE3-315M-2	132	180	95.4	0.9	234	222	2980	422	1.8	2.3	7.5	1.87	85	964
YE3-315L1-2	160	220	95.6	0.91	279	265	2980	513	1.8	2.3	7.5	2.15	85	1027
YE3-315L-2	185	250	95.7	0.91	323	307	2980	593	1.8	2.3	7.5	2.46	85	1090
YE3-315L-2-2	200	270	95.8	0.91	349	331	2985	640	1.8	2.2	7.5	2.46	85	1097
YE3-355M1-2	220	300	95.8	0.91	383	364	2985	704	1.8	2.2	7.5	3.61	90	1610
YE3-355M-2	250	340	95.8	0.91	436	414	2985	800	1.6	2.2	7.5	3.96	90	1655
YE3-355L1-2	280	375	95.8	0.91	488	464	2985	896	1.6	2.2	7.5	4.36	90	1750
YE3-355L-2	315	430	95.8	0.91	549	522	2985	1008	1.6	2.2	7.5	4.40	90	1760
YE3-355H-2	355	470	95.8	0.91	619	588	2985	1136	1.6	2.2	7.2	4.76	90	1860

MECWIN®
EMPOWERING FUTURE

YE3 Performance Data 4P Synchronous Speed 1500 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	Rated Current A		Speed (rpm)	Torque (Nm)	Starting Current Ratio Ts/Tn	Starting Torque Ratio Tmax/Tn	Pull-out Torque Ratio Is/In	Moment of Inertia kg·m²	Noise Lp dB (A)	Weight kg
	kW	HP			380V	400V								
YE3-80M-4	0.55	0.75	80.8	0.75	1.38	1.31	1430	3.67	2.4	2.3	6.6	0.0028	58	24
YE3-80M2-4	0.75	1	82.5	0.75	1.84	1.75	1430	5.01	2.3	2.3	6.6	0.0030	58	27
YE3-90S-4	1.1	1.5	84.1	0.76	2.61	2.48	1435	7.35	2.3	2.3	6.8	0.0040	66	30
YE3-90L-4	1.5	2	85.3	0.77	3.47	3.3	1435	9.98	2.3	2.3	7.0	0.0052	66	34
YE3-100L-4	2.2	3	86.7	0.81	4.76	4.52	1450	14.5	2.3	2.3	7.6	0.0098	66	44
YE3-100L2-4	3	4	87.7	0.82	6.34	6.02	1450	19.8	2.3	2.3	7.6	0.0131	66	49
YE3-112M-4	4	5.5	88.6	0.82	8.37	7.95	1455	26.3	2.2	2.3	7.8	0.0192	67	65
YE3-132S-4	5.5	7.5	89.6	0.83	11.2	10.7	1460	36.0	2.0	2.3	7.9	0.0383	67	72
YE3-132M-4	7.5	10	90.4	0.84	15	14.3	1460	49.1	2.0	2.3	7.5	0.0488	67	94
YE3-160M-4	11	15	91.4	0.85	21.5	20.4	1465	71.7	2.2	2.3	7.7	0.1255	69	138
YE3-160L-4	15	20	92.1	0.86	28.8	27.3	1465	97.8	2.2	2.3	7.8	0.1545	69	165
YE3-180M-4	18.5	25	92.6	0.86	35.3	33.5	1470	120	2.0	2.3	7.8	0.2238	72	175
YE3-180L-4	22	30	93.0	0.86	41.8	39.7	1470	143	2.0	2.3	7.8	0.2675	72	200
YE3-200L-4	30	40	93.6	0.86	56.6	53.8	1475	194	2.0	2.3	7.3	0.4333	70	295
YE3-225S-4	37	50	93.9	0.86	69.6	66.1	1480	239	2.0	2.3	7.4	0.7169	71	312
YE3-225M-4	45	60	94.2	0.86	84.4	80.2	1480	290	2.0	2.3	7.4	0.8472	71	345
YE3-250M-4	55	75	94.6	0.86	103	97.6	1485	355	2.2	2.3	7.4	1.06	73	412
YE3-280S-4	75	100	95.0	0.88	136	129	1485	482	2.0	2.3	6.9	2.01	76	575
YE3-280M-4	90	125	95.2	0.88	163	155	1485	579	2.0	2.3	6.9	2.25	76	625
YE3-315S-4	110	150	95.4	0.89	197	187	1485	707	2.0	2.2	7.0	3.24	83	878
YE3-315M-4	132	180	95.6	0.89	236	224	1485	849	2.0	2.2	7.0	3.64	83	978
YE3-315L-4	160	220	95.8	0.89	285	271	1485	1029	2.0	2.2	7.1	4.57	83	1073
YE3-315L2-4	185	250	95.9	0.89	329	313	1485	1190	2.0	2.2	7.1	5.03	83	1128
YE3-315L2-2	200	270	96.0	0.90	352	334	1485	1286	2.0	2.2	7.1	5.44	83	1178
YE3-355M1-4	220	300	96.0	0.90	387	368	1490	1410	2.0	2.2	7.1	7.79	85	1552
YE3-355M-4	250	340	96.0	0.90	440	418	1490	1602	2.0	2.2	7.1	8.29	85	1557
YE3-355L1-4	280	375	96.0	0.90	492	468	1490	1789	2.0	2.2	7.1	9.27	85	1647
YE3-355L-4	315	430	96.0	0.90	554	526	1490	2019	2.0	2.2	7.1	10.3	85	1778
YE3-355H-4	355	470	96.0	0.88	638	607	1490	2268	1.7	2.2	7.0	12.2	85	1998
YE3-3552-4	375	500	96.0	0.88	674	641	1490	2404	1.7	2.2	7.0	13.8	85	2050

MECWIN®
EMPOWERING FUTURE

YE3 Performance Data 6P Synchronous Speed 1000 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	Rated Current A		Speed (rpm)	Torque (Nm)	Starting Current Ratio Ts/Tn	Starting Torque Ratio Tmax/Tn	Pull-out Torque Ratio Is/In	Moment of Inertia kg·m²	Noise Lp dB (A)	Weight kg
	kW	HP			380V	400V								
YE3-80M-6	0.37	0.5	73.5	0.70	1.09	1.04	935	3.78	1.9	2.0	6.0	0.0036	54	25
YE3-80M2-6	0.55	0.75	77.2	0.72	1.50	1.43	935	5.59	1.9	2.1	6.0	0.0042	54	28
YE3-90S-6	0.75	1	78.9	0.71	2.03	1.93	950	7.54	2.0	2.1	6.0	0.0055	63	30
YE3-90L-6	1.1	1.5	81.0	0.73	2.83	2.69	950	11.1	2.0	2.1	6.0	0.0077	63	36
YE3-100L-6	1.5	2	82.5	0.73	3.78	3.59	955	15.0	2.0	2.1	6.5	0.0137	63	44
YE3-112M-6	2.2	3	84.3	0.74	5.36	5.09	960	21.9	2.0	2.1	6.6	0.0208	63	58
YE3-132S-6	3	4	85.6	0.74	7.20	6.84	965	29.7	2.0	2.1	6.8	0.0369	65	65
YE3-132M1-6	4	5.5	86.8	0.74	9.46	8.99	965	39.6	2.0	2.1	6.8	0.0518	65	76
YE3-132M2-6	5.5	7.5	88.0	0.75	12.7	12	970	54.1	2.0	2.1	7.0	0.0684	65	85
YE3-160M-6	7.5	10	89.1	0.79	16.2	15.4	975	73.5	2.0	2.1	7.0	0.1254	65	125
YE3-160L-6	11	15	90.3	0.8	23.1	22	975	108	2.0	2.1	7.2	0.1658	65	155
YE3-180L-6	15	20	91.2	0.81	30.9	29.3	980	146	2.0	2.1	7.3	0.2858	68	191
YE3-200L1-6	18.5	25	91.7	0.81	37.8	35.9	985	179	2.0	2.1	7.3	0.4205	68	260
YE3-200L2-6	22	30	92.2	0.81	44.8	42.5	985	213	2.0	2.1	7.4	0.485	68	283
YE3-225M-6	30	40	92.9	0.83	59.1	56.2	985	291	2.0	2.1	6.9	0.6691	69	300
YE3-250M-6	37	50	93.3	0.84	71.7	68.1	985	359	2.0	2.1	7.1	1.17	70	397
YE3-280S-6	45	60	93.7	0.85	85.8	81.6	990	434	2.0	2.0	7.3	1.89	70	503
YE3-280M-6	55	75	94.1	0.86	103	98.1	990	531	2.0	2.0	7.3	2.28	70	547
YE3-315S-6	75	100	94.6	0.84	143	136	990	723	2.0	2.0	6.6	4.11	75	860
YE3-315M-6	90	125	94.9	0.85	170	161	990	868	2.0	2.0	6.7	4.65	75	940
YE3-315L1-6	110	150	95.1	0.85	207	196	990	1061	2.0	2.0	6.7	5.79	75	1043
YE3-315L2-6	132	180	95.4	0.86	244	232	990	1273	2.0	2.0	6.8	7.01	75	1133
YE3-355M1-6	160	220	95.6	0.86	296	281	990	1543	1.8	2.0	6.8	10.9	75	1600
YE3-355M-6	185	250	95.7	0.86	342	324	990	1785	1.8	2.0	6.8	13.8	82	1793
YE3-355M2-6	200	270	95.8	0.87	365	346	990	1929	1.8	2.0	6.8	14.1	82	1807
YE3-355L1-6	220	300	95.8	0.87	401	381	990	2112	1.8	2.0	6.8	14.8	82	1827
YE3-355L-6	250	340	95.8	0.87	456	433	990	2412	1.8	2.0	6.8	15.0	82	1830
YE3-355H-6	280	375	95.8	0.86	516	491	990	2701	1.8	2.0	6.8	16.0	82	2030
YE3-3552-6	315	430	95.8	0.86	581	552	990	3039	1.8	2.0	6.8	15.0	82	2150

MECWIN®
EMPOWERING FUTURE

YE3 Performance Data 8P Synchronous Speed 750 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	Rated Current A		Speed (rpm)	Torque (Nm)	Starting Current Ratio Ts/Tn	Starting Torque Ratio Tmax/Tn	Pull-out Torque Ratio Is/In	Moment of Inertia kg·m²	Noise Lp dB (A)	Weight kg
	kW	HP			380V	400V								
YE3-80M-8	0.18	0.25	58.7	0.61	0.76	0.73	650	2.64	1.8	1.9	5.2	0.0021	52	18
YE3-80M2-8	0.25	0.34	64.1	0.61	0.97	0.92	650	3.67	1.8	1.9	5.7	0.0028	52	19
YE3-90S-8	0.37	0.5	69.3	0.61	1.33	1.26	660	5.35	1.8	1.9	6.2	0.0055	56	27
YE3-90L-8	0.55	0.75	73.0	0.61	1.88	1.78	660	7.96	1.8	2.0	5.9	0.0066	56	29
YE3-100L-8	0.75	1	75.0	0.67	2.27	2.15	700	10.2	1.8	2.0	6.2	0.0085	59	35
YE3-100L2-8	1.1	1.52	77.7	0.69	3.12	2.96	690	15.2	1.8	2.0	6.2	0.0111	59	42
YE3-112M-8	1.5	3	79.7	0.70	4.08	3.88	700	20.5	1.8	2.0	6.7	0.0159	61	55
YE3-132S-8	2.2	4	81.9	0.71	5.75	5.46	710	29.6	1.8	2.0	6.7	0.0333	64	70
YE3-132M-8	3	4	83.5	0.73	7.48	7.10	710	40.4	1.8	2.0	6.9	0.0462	64	87
YE3-160M-8	4	5.5	84.8	0.73	9.82	9.33	730	52.3	1.9	2.0	6.9	0.0687	65	112
YE3-160M2-8	5.5	7.5	86.2	0.74	13.1	12.4	725	72.4	1.9	2.0	6.9	0.0971	65	120
YE3-160L-8	7.5	10	87.3	0.75	17.4	16.5	720	99.5	1.9	2.0	6.6	0.1375	65	140
YE3-180L-8	11	15	88.6	0.75	25.2	23.9	725	145	2.0	2.0	6.6	0.2314	68	185
YE3-200L-8	15	20	89.6	0.76	33.5	31.8	730	196	2.0	2.0	6.8	0.3882	69	225
YE3-225S-8	18.5	25	90.1	0.76	41.0	39.0	730	242	1.9	2.0	6.8	0.5987	69	276
YE3-225M-8	22	30	90.6	0.78	47.3	44.9	730	288	1.9	2.0	7.0	0.7044	69	312
YE3-250M-8	30	40	91.3	0.79	63.2	60.0	730	392	1.9	2.0	6.7	1.07	71	400
YE3-280S-8	37	50	91.8	0.79	77.5	73.6	735	481	1.9	2.0	6.7	1.85	71	560
YE3-280M-8	45	60	92.2	0.79	93.9	89.2	735	585	1.9	2.0	6.7	2.15	72	665
YE3-315S-8	55	75	92.5	0.81	112	106	740	710	1.8	2.0	6.8	4.28	78	940
YE3-315M-8	75	100	93.1	0.81	151	144	740	968	1.8	2.0	6.3	5.70	78	1050
YE3-315L1-8	90	125	93.4	0.82	179	170	740	1161	1.8	2.0	6.4	6.77	78	1070
YE3-315L2-8	110	150	93.7	0.82	218	207	740	1420	1.8	2.0	6.4	8.02	78	1090
YE3-355M1-8	132	180	94.0	0.82	260	247	740	1704	1.8	2.0	6.4	12.4	80	1550
YE3-355M2-8	160	220	94.3	0.82	314	299	740	2065	1.8	2.0	6.4	15.1	80	1590
YE3-355L-8	200	270	94.6	0.83	387	368	740	2581	1.8	2.0	6.4	18.3	80	1850


YE3 Performance Data 10P Synchronous Speed 600 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	Rated Current A		Speed (rpm)	Torque (Nm)	Starting Current Ratio Ts/Tn	Starting Torque Ratio Tmax/Tn	Pull-out Torque Ratio Is/In	Moment of Inertia kg·m²	Noise Lp dB (A)	Weight kg
	kW	HP			380V	400V								
YE3-315S-10	45	60	92.0	0.75	99.1	94.1	590	728	1.5	2.0	6.2	4.02	82	780
YE3-315M-10	55	75	92.0	0.75	121	115	590	890	1.5	2.0	6.2	4.89	82	870
YE3-315L-10	75	100	92.8	0.76	162	153	590	1214	1.5	2.0	5.8	6.55	82	1045
YE3-315L2-10	90	125	93.0	0.77	191	181	590	1456	1.5	2.0	5.9	7.68	90	1100
YE3-355M-10	110	150	93.3	0.78	230	218	590	1780	1.3	2.0	6.0	11.3	90	1500
YE3-355M2-10	132	180	93.8	0.78	274	260	590	2136	1.3	2.0	6.1	13.5	90	1640
YE3-355L-10	160	220	93.8	0.78	332	316	590	2589	1.3	2.0	6.1	16.6	90	1800

YE3 Motor Installation and Boundary Dimensions B3


H80-90

Frame

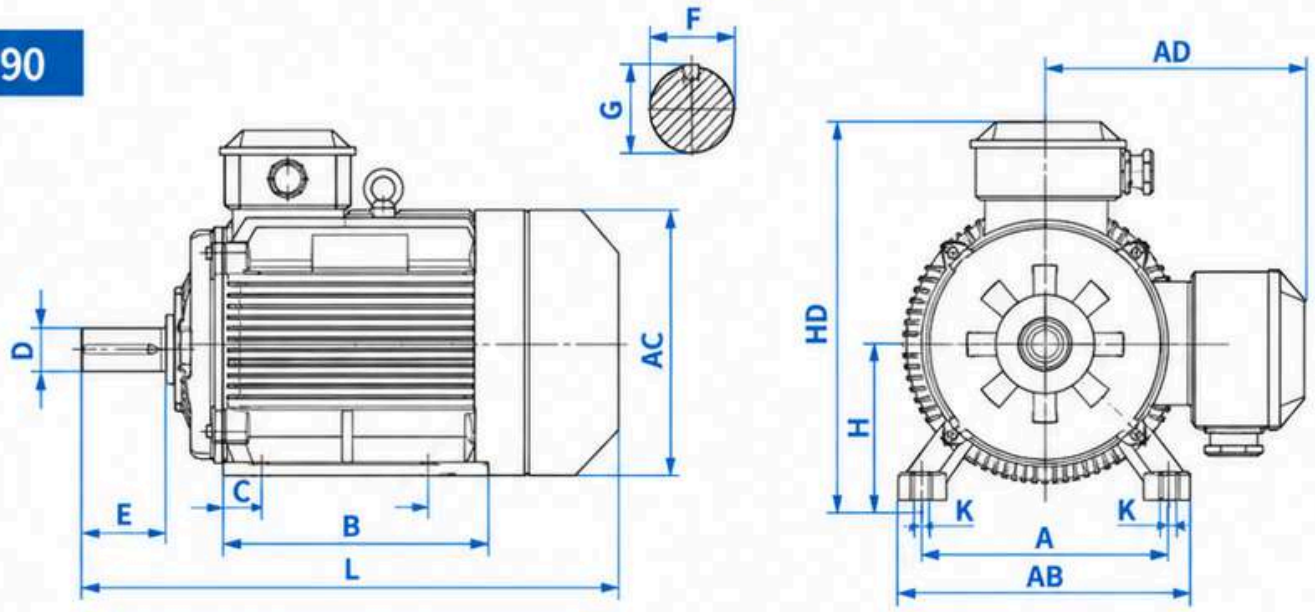


H100-280

Frame

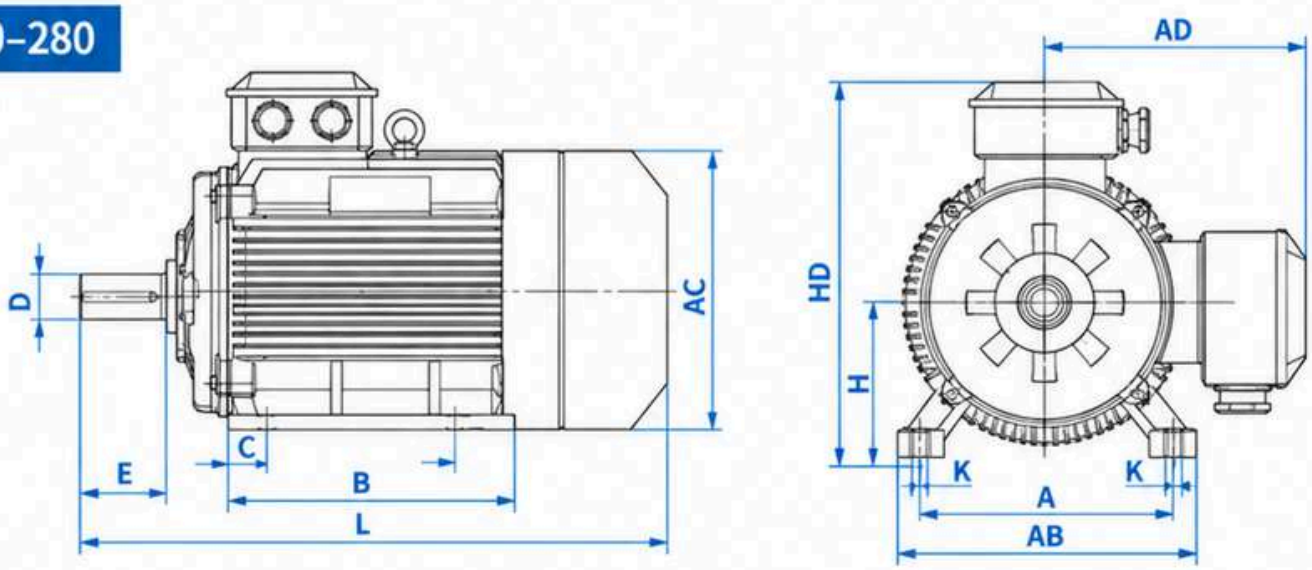

H315-355

Frame

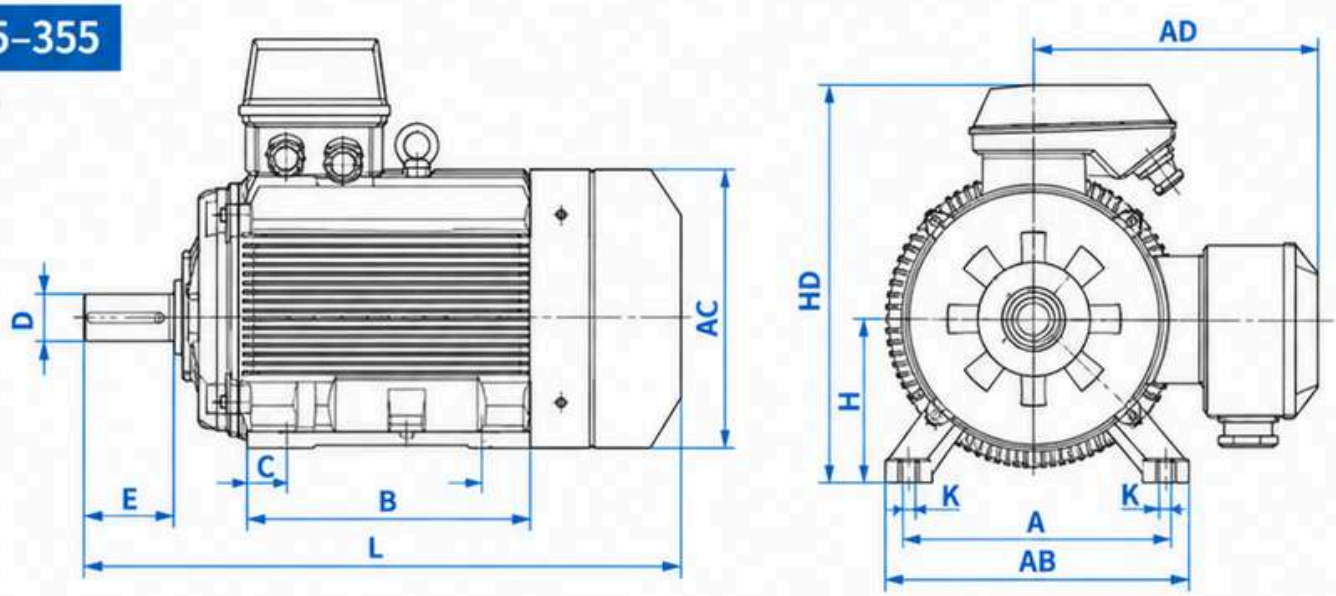


MECWIN®
EMPOWERING FUTURE


YE3 Motor Installation and Boundary Dimensions B3

Type	Pole	A	B	B2	C	D	F	GD	G	E	H	K	AA	AB	AC	AD	BB	HA	HD	L
80M	2,4,6	125	100	15	50	19	6	6	15.5	40	80	10	34	160	175	150	167	10	230	320
90S	2,4,6	140	100	20	56	24	8	7	20	50	90	10	36	176	205	155	180	12	245	350
90L	2,4,6	140	125	20	56	24	8	7	20	50	90	10	36	176	205	155	210	12	245	380
100L	2,4,6	160	140	18	63	28	8	7	24	60	100	12	40	200	215	170	233	14	270	440
112M	2,4,6,8	190	140	20	70	28	8	7	24	60	112	12	45	226	240	193	248	15	315	470
132S	2,4,6,8	216	140	22	89	38	10	8	33	80	132	12	55	262	275	213	224	18	345	505
132M	4,6,8	216	178	22	89	38	10	8	33	80	132	12	55	262	275	213	266	18	345	545
160M	2,4,6,8	254	210	25	108	42	12	8	37	110	160	14.5	65	314	330	265	304	20	430	680
160L	2,4,6,8	254	254	25	108	42	12	8	37	110	160	14.5	65	314	330	265	340	20	430	715
180M	2,4	279	241	33	121	48	14	9	42.5	110	180	14.5	70	349	380	280	345	22	470	740
180L	4,6,8	279	279	33	121	48	14	9	42.5	110	180	14.5	70	349	380	280	383	22	470	780
200L	2,4,6,8	318	305	32	133	55	16	10	49	110	200	18.5	70	388	420	315	389	25	520	850
225M	2	356	311	45	149	55	16	10	49	110	225	18.5	75	431	470	345	390	28	570	820
225S	4,8	356	286	45	149	60	18	11	53	140	225	18.5	75	431	470	345	390	28	570	850
225M	4,6,8	356	311	45	149	60	18	11	53	140	225	18.5	75	431	470	345	390	28	570	850
250M	2	406	349	52	168	60	18	11	53	140	250	24	80	484	510	380	440	30	635	950
250M	4,6,8	406	349	52	168	65	18	11	58	140	250	24	80	484	510	380	440	30	635	950
280S	2	457	368	68	190	65	18	11	58	140	280	24	85	542	547	410	530	35	695	1060
280S	4,6,8	457	368	68	190	75	20	12	67.5	140	280	24	85	542	580	410	530	35	695	1060
280M	2	457	419	68	190	65	18	11	58	140	280	24	85	542	580	410	530	35	695	1060
280M	4,6,8	457	419	68	190	75	20	12	67.5	140	280	24	85	542	580	410	530	35	695	1060
315S	2	508	406	84	216	65	18	11	58	140	315	28	120	628	645	550	570	45	870	1190
315S	4,6,8,10	508	406	84	216	80	22	14	71	170	315	28	120	628	645	550	570	45	870	1250
315M	2	508	457	84	216	65	18	11	58	140	315	28	120	628	645	550	680	45	870	1300
315M	4,6,8,10	508	457	84	216	80	22	14	71	170	315	28	120	628	645	550	680	45	870	1360
315L	2	508	508	84	216	65	18	11	58	140	315	28	120	628	645	550	680	45	870	1300
315L	4,6,8,10	508	508	84	216	80	22	14	71	170	315	28	120	628	645	550	680	45	870	1360
355M	2	610	560	68	254	75	20	12	67.5	140	355	28	116	726	710	665	750	52	1030	1520
355M	4,6,8,10	610	560	68	254	95	25	14	86	170	355	28	116	726	710	665	750	52	1030	1550
355L	2	610	560	68	254	75	20	12	67.5	140	355	28	116	726	710	665	750	52	1030	1520
355L	4,6,8,10	610	630	68	254	95	25	14	86	170	355	28	116	726	710	665	750	52	1030	1550
355I	2	610	560	68	254	75	20	12	67.5	140	355	28	116	726	710	665	750	52	1030	1660
355I	4,6	610	630	68	254	95	25	14	86	170	355	28	116	726	710	665	750	52	1030	1690


YE3 Motor Installation and Boundary Dimensions B35

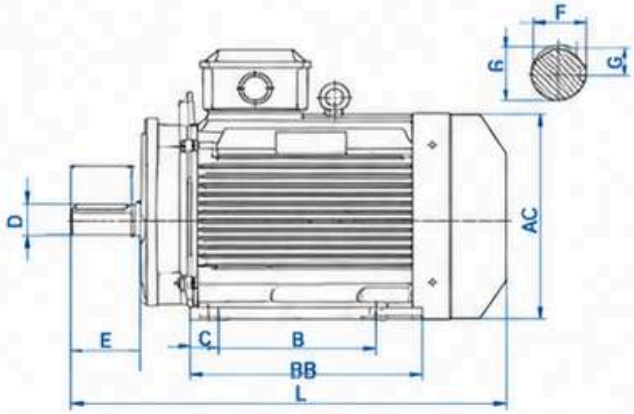


H80–100

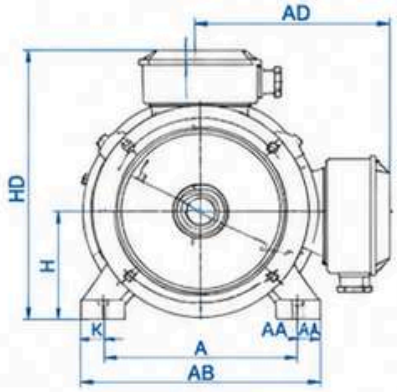


H80–100

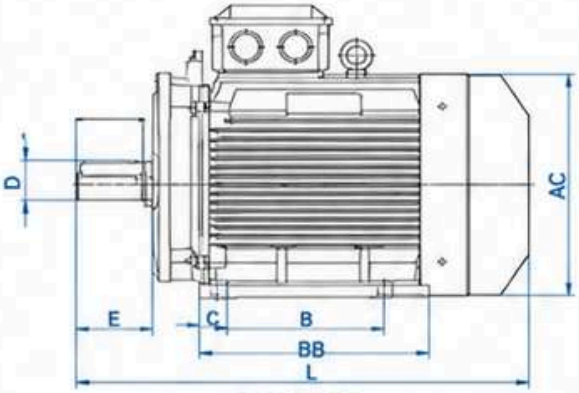


H112–200

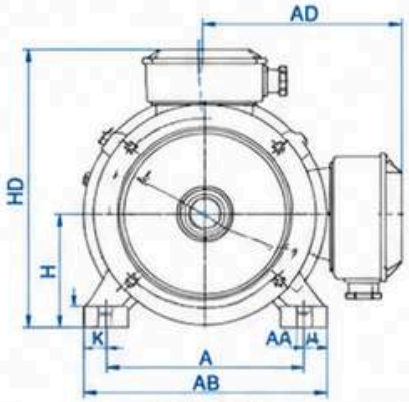


H112–200

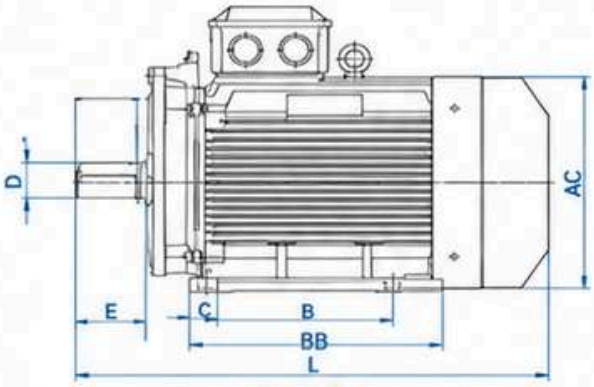


H225–280

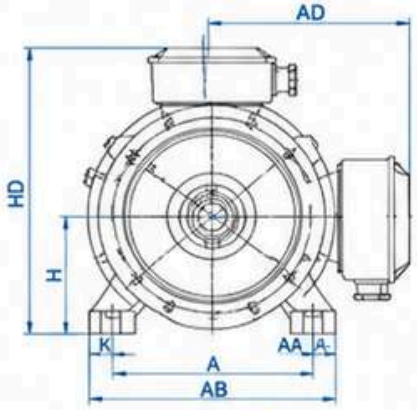

H225–280

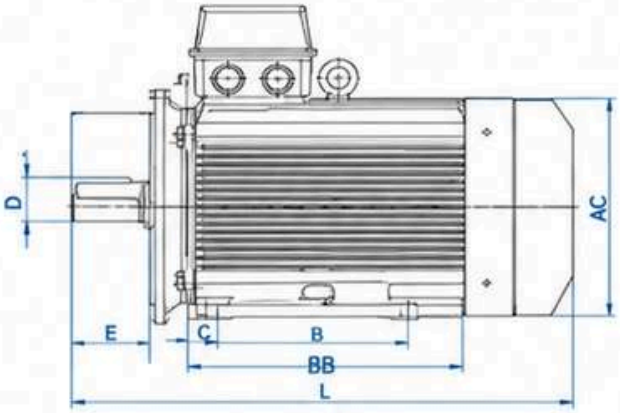

H315–355

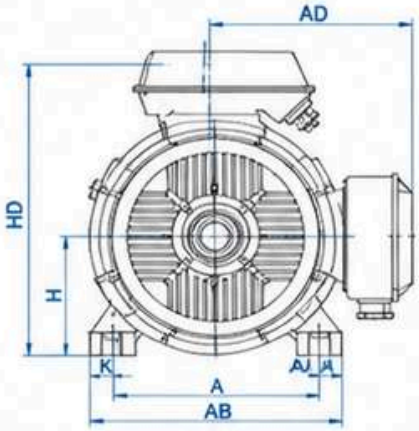


H315–355

MECWIN®
EMPOWERING FUTURE


YE3 Motor Installation and Boundary Dimensions B35

Type	Pole	A	B	B2	C	D	F	GD	G	E	H	K	M	N	P	S	AA	AB	AC	AD	BB	HA	HD	LA	T	L
80M	2,4,6	125	100	15	50	19	6	6	15.5	40	80	10	165	130	200	4-Φ12	34	160	175	150	167	10	230	12	3.5	320
90S	2,4,6	140	100	20	56	24	8	7	20	50	90	10	165	130	200	4-Φ12	36	176	205	155	180	12	245	12	3.5	350
90L	2,4,6	140	125	20	56	24	8	7	20	50	90	10	165	130	200	4-Φ12	36	176	205	155	210	12	245	12	3.5	380
100L	2,4,6	160	140	18	63	28	8	7	24	60	100	12	215	180	250	4-Φ14.5	40	200	215	170	233	14	270	13	4	440
112M	2,4,6,8	190	140	20	70	28	8	7	24	60	112	12	215	180	250	4-Φ14.5	45	226	240	193	248	15	315	14	4	470
132S	2,4,6,8	216	140	22	89	38	10	8	33	80	132	12	265	230	300	4-Φ14.5	55	262	275	213	224	18	345	14	4	505
132M	4,6,8	216	178	22	89	38	10	8	33	80	132	12	265	230	300	4-Φ14.5	55	262	275	213	266	18	345	14	4	545
160M	2,4,6,8	254	210	25	108	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	65	314	330	265	304	20	430	16	5	680
160L	2,4,6,8	254	254	25	108	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	65	314	330	265	340	20	430	16	5	715
180M	2,4	279	241	33	121	48	14	9	42.5	110	180	14.5	300	250	350	4-Φ18.5	70	349	380	280	345	22	470	15	5	740
180L	4,6,8	279	279	33	121	48	14	9	42.5	110	180	14.5	300	250	350	4-Φ18.5	70	349	380	280	383	22	470	15	5	780
200L	2,4,6,8	318	305	32	133	55	16	10	49	110	20	18.5	350	300	400	4-Φ18.5	70	388	420	315	389	25	520	17	5	850
225M	2	356	311	45	149	55	16	10	49	110	225	18.5	400	350	450	8-Φ18.5	75	431	470	345	390	28	570	20	5	820
225S	4,8	356	286	45	149	60	18	11	53	140	225	18.5	400	350	450	8-Φ18.5	75	431	470	345	390	28	570	20	5	850
225M	4,6,8	356	311	45	149	60	18	11	53	140	225	18.5	400	350	450	8-Φ18.5	75	431	470	345	390	28	570	20	5	850
250M	2	406	349	52	168	60	18	11	53	140	250	24	500	450	550	8-Φ18.5	80	484	510	380	440	30	635	22	5	950
250M	4,6,8	406	349	52	168	65	18	11	58	140	250	24	500	450	550	8-Φ18.5	80	484	510	380	440	30	635	22	5	950
280S	2	457	368	68	190	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	85	542	580	410	530	35	695	22	5	1060
280S	4,6,8	457	368	68	190	75	20	12	67.5	140	280	24	500	450	550	8-Φ18.5	85	542	580	410	530	35	695	22	5	1060
280M	2	457	419	68	190	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	85	542	580	410	530	35	695	22	5	1060
280M	4,6,8	457	419	68	190	75	20	12	67.5	140	280	24	500	450	550	8-Φ18.5	85	542	580	410	530	35	695	22	5	1060
315S	2	508	406	84	216	65	18	11	58	140	315	28	550	550	660	8-Φ24	120	628	645	550	570	45	870	22	6	1190
315S	4,6,8,10	508	406	84	216	80	22	14	71	170	315	28	600	550	660	8-Φ24	120	628	645	550	570	45	870	22	6	1250
315M	2	508	457	84	216	65	18	11	58	140	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6	1300
315M	4,6,8,10	508	457	84	216	80	22	14	71	170	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6	1360
315L	2	508	508	84	216	65	18	11	58	140	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6	1300
315L	4,6,8,10	508	508	84	216	80	22	14	71	170	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6	1360
355M	2	610	560	68	254	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6	1520
355M	4,6,8,10	610	560	68	254	95	25	14	86	170	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6	1550
355L	2	610	560	68	254	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6	1520
355L	4,6,8,10	610	630	68	254	95	25	14	86	170	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6	1550
355I	2	610	560	68	254	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6	1660
355I	4,6	610	630	68	254	95	25	14	86	170	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6	1690


YE3 Motor Installation and Boundary Dimensions B5 (H80~280)

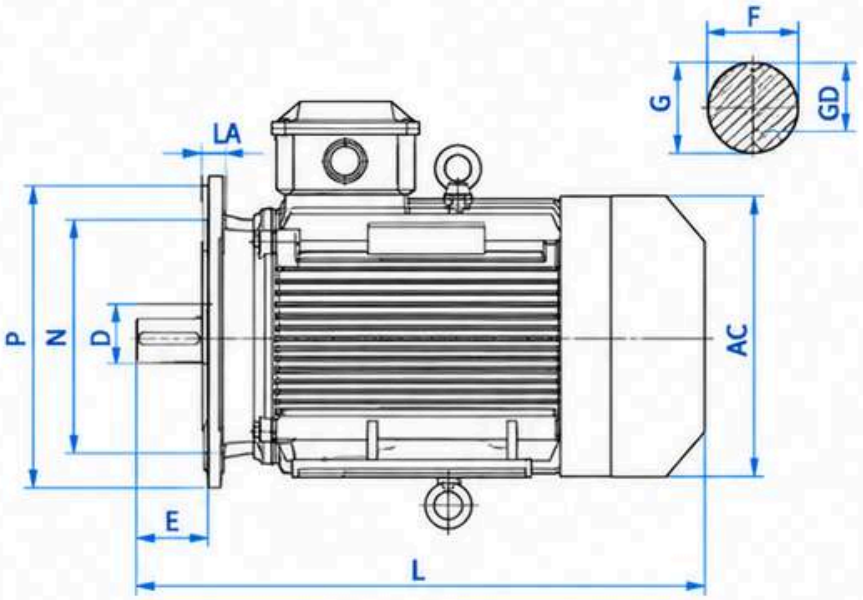


H80–100

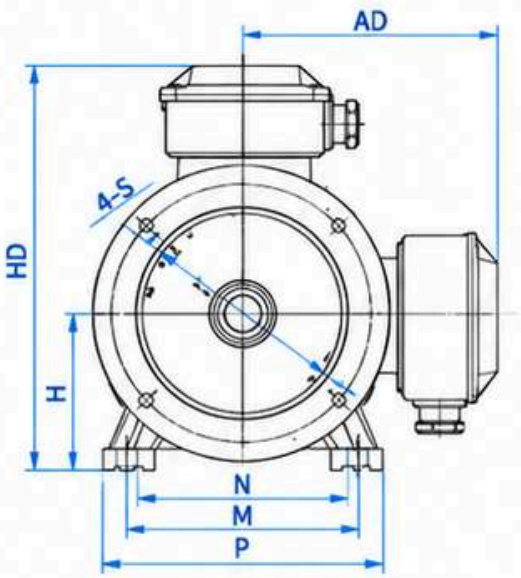


H80–100

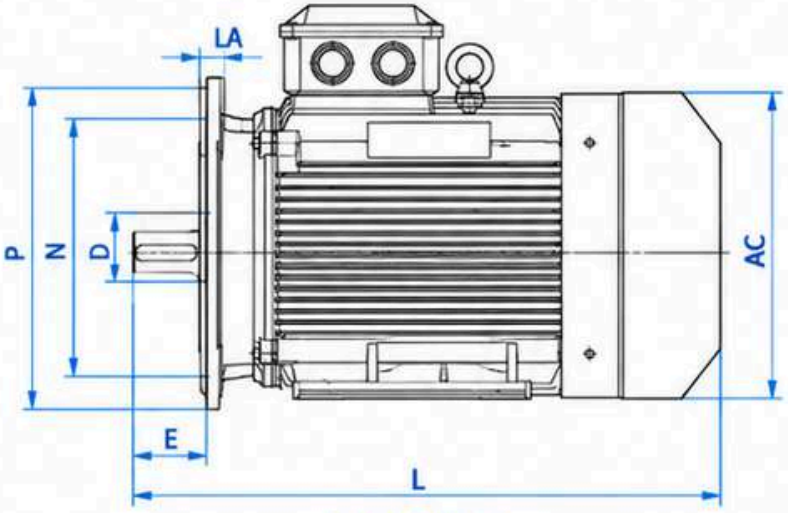


H112–200

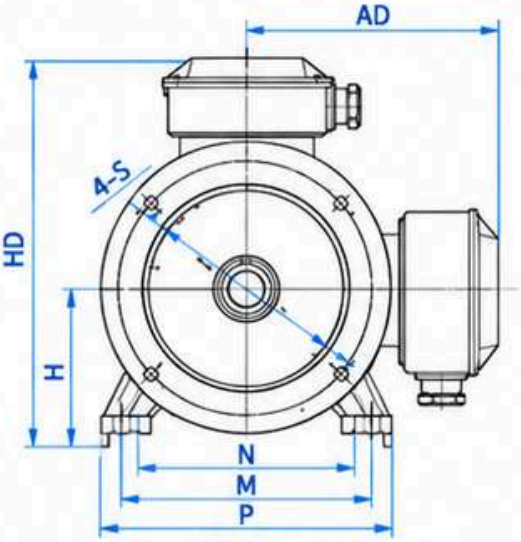

H112–200

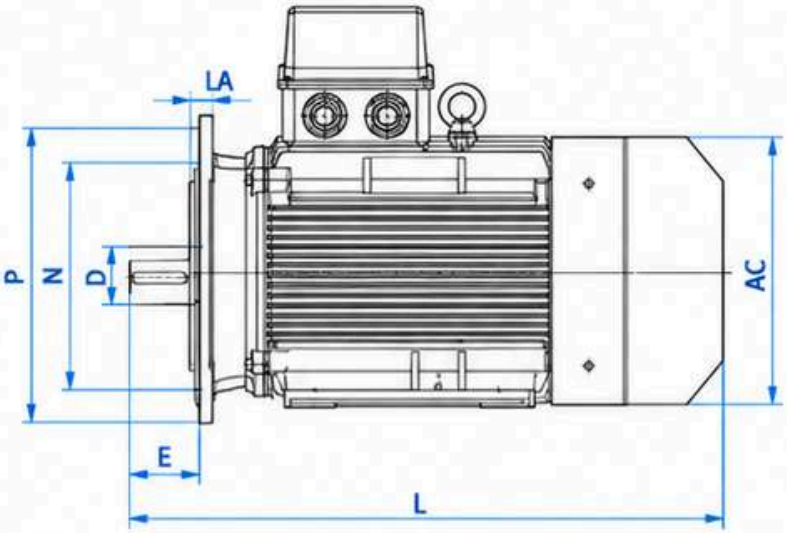

H225–280

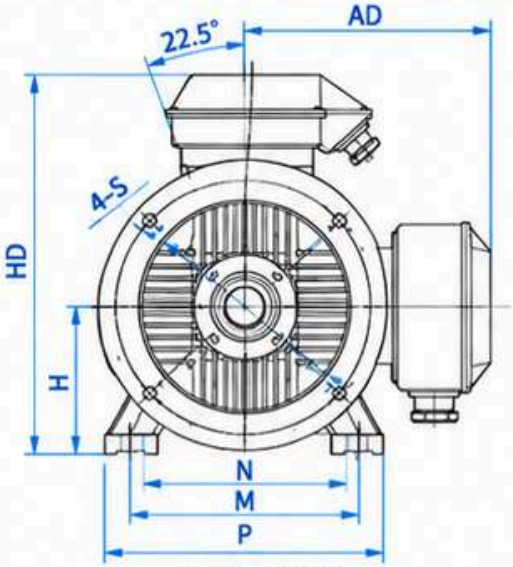


H225–280


YE3 Motor Installation and Overall Dimensions B5 (H80~280)

Type	Pole	C	D	F	GD	G	E	H	M	N	P	S	AC	AD	HF	LA	T	L
80M	2,4,6	50	19	6	6	15.5	40	80	165	130	200	4-Φ12	175	150	-	12	3.5	320
90S	2,4,6	56	24	8	7	20	50	90	165	130	200	4-Φ12	205	155	-	12	3.5	350
90L	2,4,6	56	24	8	7	20	50	90	165	130	200	4-Φ12	205	155	-	12	3.5	380
100L	2,4,6	63	28	8	7	24	60	100	215	180	250	4-Φ14.5	215	170	145	13	4	440
112M	2,4,6,8	70	28	8	7	24	60	112	215	180	250	4-Φ14.5	240	193	155	14	4	470
132S	2,4,6,8	89	38	10	8	33	80	132	265	230	300	4-Φ14.5	275	213	180	14	4	505
132M	4,6,8	89	38	10	8	33	80	132	265	230	300	4-Φ14.5	275	213	180	14	4	545
160M	2,4,6,8	108	42	12	8	37	110	160	300	250	350	4-Φ18.5	330	270	225	16	5	680
160L	2,4,6,8	108	42	12	8	37	110	160	300	250	350	4-Φ18.5	330	270	225	16	5	715
180M	2,4	121	48	14	9	42.5	110	180	300	250	350	4-Φ18.5	380	280	240	15	5	740
180L	4,6,8	121	48	14	9	42.5	110	180	300	250	350	4-Φ18.5	380	280	240	15	5	780
200L	2,4,6,8	133	55	16	10	49	110	200	350	300	400	4-Φ18.5	420	315	265	17	5	850
225M	2	149	55	16	10	49	110	225	400	350	450	8-Φ18.5	470	345	290	20	5	820
225S	4,8	149	60	18	11	53	140	225	400	350	450	8-Φ18.5	470	345	290	20	5	850
225M	4,6,8	149	60	18	11	53	140	225	400	350	450	8-Φ18.5	470	345	290	20	5	850
250M	2	168	60	18	11	53	140	250	500	450	550	8-Φ18.5	510	380	320	22	5	950
250M	4,6,8	168	65	18	11	58	140	250	500	450	550	8-Φ18.5	510	380	320	22	5	950
280S	2	190	65	18	11	58	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1060
280S	4,6,8	190	75	20	12	67.5	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1060
280M	2	190	65	18	11	58	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1060
280M	4,6,8	190	75	20	12	67.5	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1060


YE3 Motor Installation and Overall Dimensions V1 (H80~355)

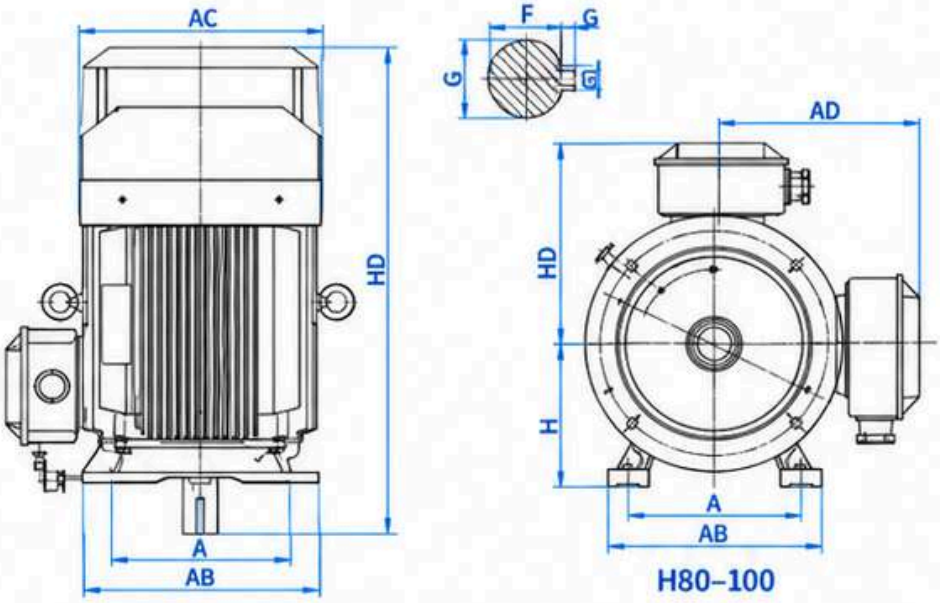


H80–100

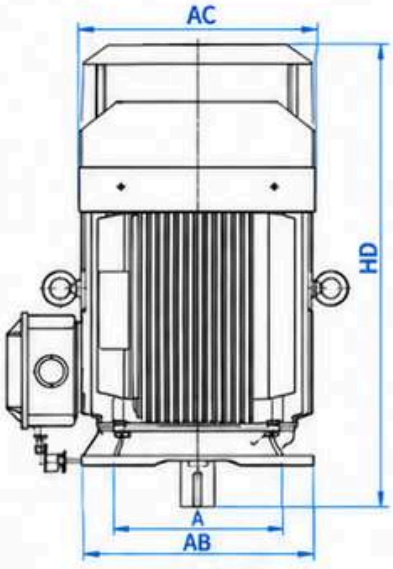


H112–200

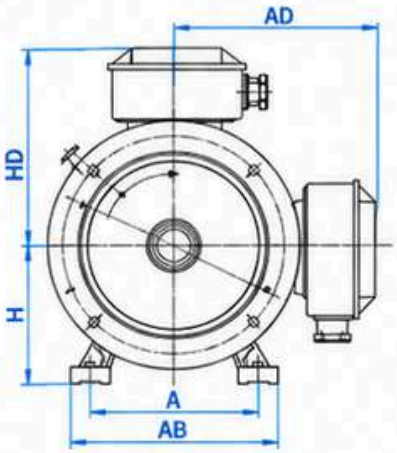


H112–200

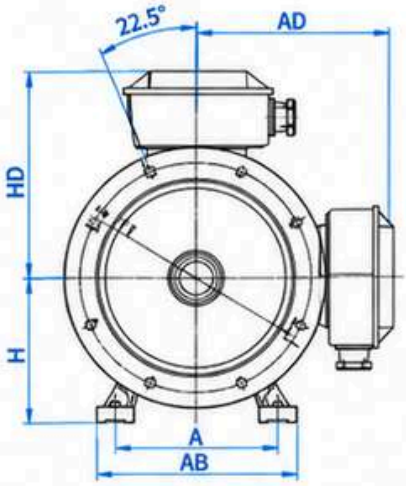

H225–280

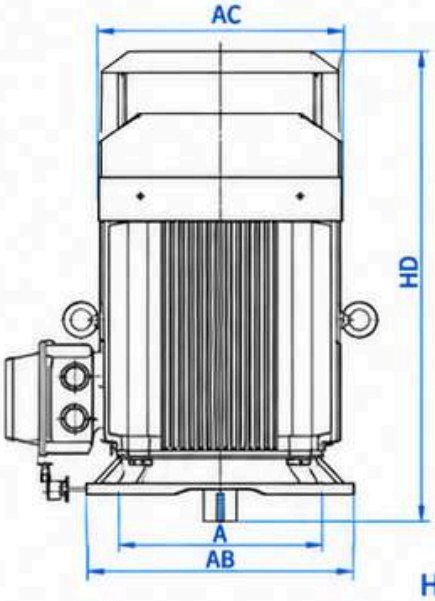

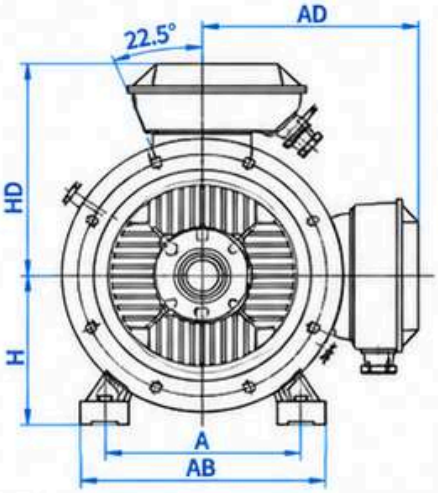


H315–355

MECWIN®
EMPOWERING FUTURE

YE3 Motor Installation and Overall Dimensions V1 (H80~355)


Type	Pole	C	D	F	GD	G	E	H	M	N	P	S	AC	AD	HF	LA	T	L
80M	2,4,6	50	19	6	6	15.5	40	80	165	130	200	4-Φ12	175	150	-	12	3.5	380
90S	2,4,6	56	24	8	7	20	50	90	165	130	200	4-Φ12	205	155	-	12	3.5	410
90L	2,4,6	56	24	8	7	20	50	90	130	130	200	4-Φ12	205	155	-	12	3.5	440
100L	2,4,6	63	28	8	7	24	60	100	215	180	250	4-Φ14.5	215	170	145	13	4	500
112M	2,4,6,8	70	28	8	7	24	60	112	215	180	250	4-Φ14.5	240	193	155	14	4	530
132S	2,4,6,8	89	38	10	8	33	80	132	265	230	300	4-Φ14.5	275	213	180	14	4	565
132M	4,6,8	89	38	10	8	33	80	132	265	230	300	4-Φ14.5	275	213	180	14	4	605
160M	2,4,6,8	108	42	12	8	37	110	160	300	250	350	4-Φ18.5	330	265	230	16	5	780
160L	2,4,6,8	108	42	12	8	37	110	160	200	250	350	4-Φ18.5	330	265	230	16	5	815
180M	2,4	121	48	14	9	42.5	110	180	300	250	350	4-Φ18.5	380	280	240	15	5	840
180L	4,6,8	121	48	14	9	42.5	110	180	300	250	350	4-Φ18.5	380	280	240	15	5	880
200L	2,4,6,8	133	55	16	10	49	110	200	350	300	400	4-Φ18.5	420	315	265	17	5	950
225M	2	149	55	16	10	49	110	225	400	350	450	8-Φ18.5	470	345	290	20	5	920
225S	4,8	149	60	18	11	53	140	225	400	350	450	8-Φ18.5	470	345	290	20	5	950
225M	4,6,8	149	60	18	11	53	140	225	400	350	450	8-Φ18.5	470	345	290	20	5	950
250M	2	168	60	18	11	53	140	250	500	450	550	8-Φ18.5	510	380	320	22	5	1050
250M	4,6,8	168	65	18	11	58	140	250	500	450	550	8-Φ18.5	510	380	320	22	5	1050
280S	2	190	65	18	11	58	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1160
280S	4,6,8	190	75	20	12	67.5	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1160
280M	2	190	65	18	11	58	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1160
280M	4,6,8	190	75	20	12	67.5	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1160
315S	2	216	65	18	11	58	140	315	600	550	660	8-Φ24	645	550	430	22	6	1310
315S	4,6,8,10	216	80	22	14	71	170	315	600	550	660	8-Φ24	645	550	430	22	6	1390
315M	2	216	65	18	11	58	140	315	600	550	660	8-Φ24	645	550	430	22	6	1420
315M	4,6,8,10	216	80	22	14	71	170	315	600	550	660	8-Φ24	645	550	430	22	6	1500
315L	2	216	65	18	11	58	140	315	600	550	660	8-Φ24	645	550	430	22	6	1420
315L	4,6,8,10	216	80	22	14	71	170	315	600	550	660	8-Φ24	645	550	430	22	6	1500
355M	2	254	75	20	12	67.5	140	355	740	680	800	8-Φ24	710	665	490	25	6	1660
355M	4,6,8,10	254	95	25	14	86	170	355	740	680	800	8-Φ24	710	665	490	25	6	1690
355L	2	254	75	20	12	67.5	140	355	740	680	800	8-Φ24	710	665	490	25	6	1660
355L	4,6,8,10	254	95	25	14	86	170	355	740	680	800	8-Φ24	710	665	490	25	6	1690
355I	2	254	75	20	12	67.5	140	355	740	680	800	8-Φ24	710	665	490	25	6	1800
355I	4,6	254	95	25	14	86	170	355	740	680	800	8-Φ24	710	665	490	25	6	1830

YE3 Motor Installation and Overall Dimensions B14 (H80~132)

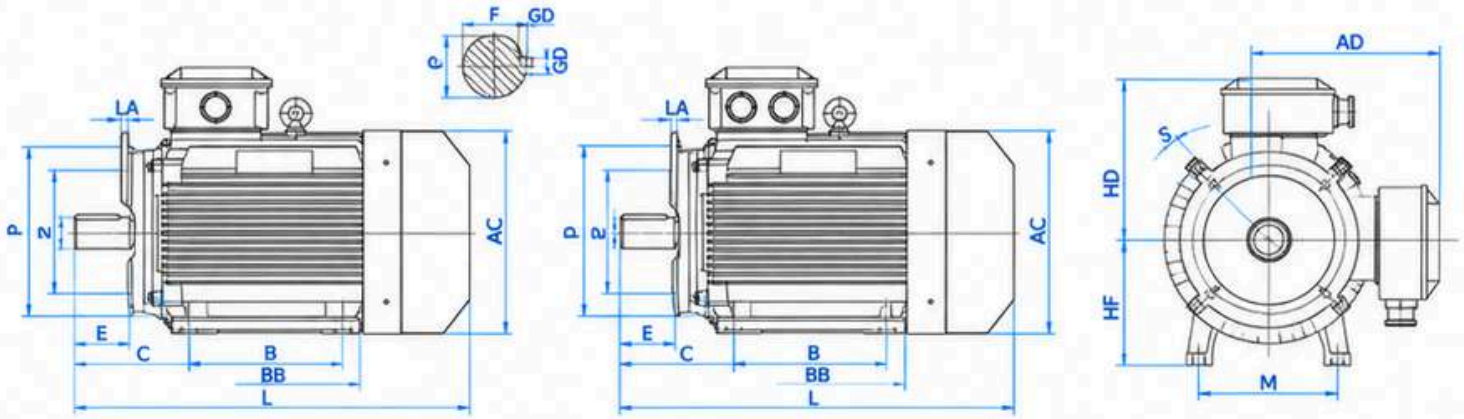

Type	Pole	C	D	F	GD	G	E	H	M	N	P	S	AC	AD	HF	T	L
80M	2,4,6	50	19	6	6	15.5	40	80	100	80	120	4-M6	170	150	-	3.5	320
90S	2,4,6	56	24	8	7	20	50	90	115	95	140	4-M8	195	155	-	3.5	350
90L	2,4,6	56	24	8	7	20	50	90	115	95	140	4-M8	195	155	-	3.5	380
100L	2,4,6	63	28	8	7	24	60	100	130	110	160	4-M8	215	170	145	4	440
112M	2,4,6,8	70	28	8	7	24	60	112	130	110	160	4-M8	240	193	155	4	470
132S	2,4,6,8	89	38	10	8	33	80	132	165	130	200	4-M8	275	213	180	4	505
132M	4,6,8	89	38	10	8	33	80	132	165	130	200	4-M8	275	213	180	4	545

YE3 Motor Installation and Overall Dimensions B34 (H80~132)

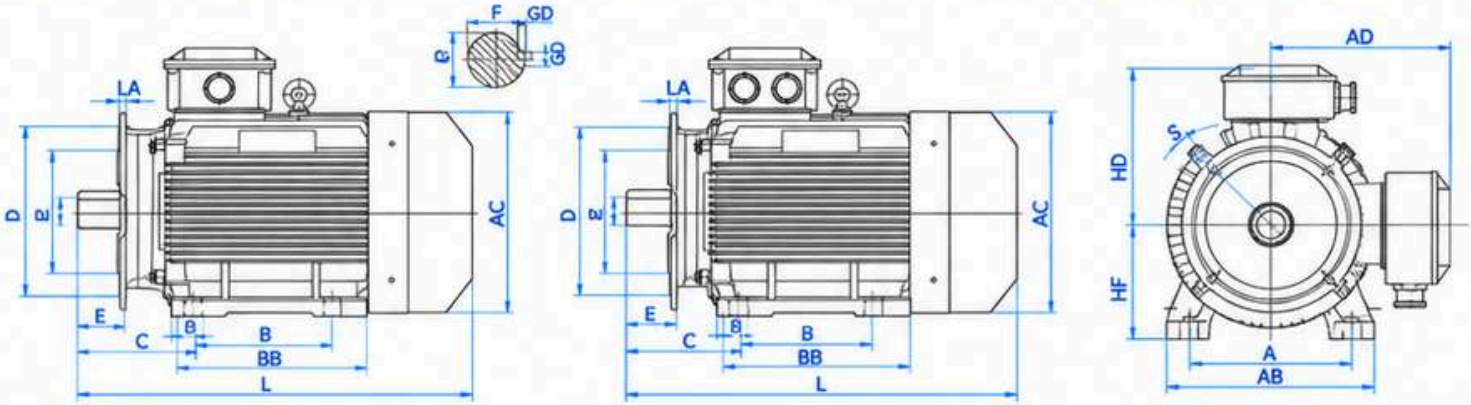

Type	Pole	A	B	B2	C	D	F	GD	G	E	H	K	M	N	P	S	AA	AB	AC	AD	BB	HA	HD	T	L
80M	2,4,6	125	100	15	50	19	6	6	15.5	40	80	10	100	80	120	4-M6	34	160	170	150	167	10	230	3.5	320
90S	2,4,6	140	100	20	56	24	8	7	20	50	90	10	115	95	140	4-M8	36	176	195	155	180	12	245	3.5	350
90L	2,4,6	140	125	20	56	24	8	7	20	50	90	10	115	95	140	4-M8	36	176	195	155	210	12	245	3.5	380
100L	2,4,6	160	140	18	63	28	8	7	24	60	100	12	130	110	160	4-M8	40	200	215	170	233	14	270	4	440
112M	2,4,6,8	190	140	20	70	28	8	7	24	60	112	12	130	110	160	4-M8	45	226	240	193	248	15	315	4	470
132S	2,4,6,8	216	140	22	89	38	10	8	33	80	132	12	165	130	200	4-M8	55	262	275	213	224	18	345	4	505
132M	4,6,8	216	178	22	89	38	10	8	33	80	132	12	165	130	200	4-M8	55	262	275	213	266	18	345	4	545

MECWIN®
EMPOWERING FUTURE

YE4 Performance Data 2P Synchronous Speed 3000 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	Rated Current		Speed (rpm)	Torque (N·m)	Starting Current Ts/Tn	Maximum Torque Tmax/Tn	Starting Torque Is/In	Moment of Inertia kg·m²	Weight kg
	kW	HP			380V	400V							
YE4-80M1-2	0.75	1	83.5	0.83	1.64	1.56	2890	2.48	2.2	2.3	8.5	0.0016	24
YE4-80M2-2	1.1	1.5	85.2	0.83	2.36	2.25	2890	3.63	2.2	2.3	8.5	0.0022	27
YE4-90S-2	1.5	2	86.5	0.85	3.10	2.94	2900	4.94	2.2	2.3	9	0.0026	31
YE4-90L-2	2.2	3	88.0	0.86	4.42	4.20	2900	7.24	2.2	2.3	9	0.0033	36
YE4-100L-2	3	4	89.1	0.87	5.88	5.59	2900	9.88	2.2	2.3	9.5	0.0063	47
YE4-112M-2	4	5.5	90.0	0.88	7.67	7.29	2910	13.1	2.2	2.3	9.5	0.0103	60
YE4-132S1-2	5.5	7.5	90.9	0.88	10.4	9.92	2940	17.9	2.0	2.3	9.5	0.0175	70
YE4-132S2-2	7.5	10	91.7	0.89	14.0	13.3	2940	24.3	2.0	2.3	9.5	0.0237	80
YE4-160M1-2	11	15	92.6	0.89	20.3	19.3	2955	35.5	2.0	2.3	9.5	0.0566	128
YE4-160M2-2	15	20	93.3	0.89	27.4	26.1	2955	48.5	2.0	2.3	9.5	0.0761	146
YE4-160L-2	18.5	25	93.7	0.89	33.7	32.0	2955	59.8	2.0	2.3	9.5	0.0897	170
YE4-180M-2	22	30	94.0	0.89	40.0	38.0	2965	70.9	2.0	2.3	9.5	0.1314	210
YE4-200L1-2	30	40	94.5	0.89	54.2	51.5	2970	96.5	2.0	2.3	9	0.1932	278
YE4-200L2-2	37	50	94.8	0.89	66.6	63.3	2970	119	2.0	2.3	9	0.2168	296
YE4-225M-2	45	60	95.0	0.89	80.9	76.8	2975	144	2.0	2.3	9	0.3597	338
YE4-250M-2	55	75	95.3	0.89	98.5	93.6	2980	176	2.0	2.3	9	0.4740	430
YE4-280S-2	75	100	95.6	0.89	134	127	2980	240	1.8	2.3	8.5	0.7658	563
YE4-280M-2	90	125	95.8	0.89	160	152	2980	288	1.8	2.3	8.5	0.9124	605
YE4-315S-2	110	150	96.0	0.89	196	186	2985	352	1.8	2.3	8.5	1.717	930
YE4-315M-2	132	180	96.2	0.89	234	222	2985	422	1.8	2.3	8.5	1.873	1000
YE4-315L1-2	160	220	96.3	0.89	284	270	2985	512	1.8	2.2	8.5	2.153	1060
YE4-315L2-2	185	250	96.3	0.89	328	312	2985	592	1.8	2.2	8.5	2.466	1130
YE4-315L2-2	200	270	96.5	0.89	354	336	2985	640	1.8	2.2	8.5	2.622	1130
YE4-355M-2	220	300	96.5	0.91	381	362	2985	704	1.6	2.2	8.5	3.524	1680
YE4-355M-2	250	340	96.5	0.91	433	411	2985	800	1.6	2.2	8.5	4.053	1698
YE4-355L1-2	280	375	96.5	0.91	484	460	2985	896	1.6	2.2	8.5	4.252	1760
YE4-355L2-2	315	430	96.5	0.91	545	518	2985	1008	1.6	2.2	8.5	4.362	1770
YE4-355L2-2	355	470	96.5	0.90	621	590	2985	1136	0.9	1.8	8.6	4.935	1910

MECWIN®
EMPOWERING FUTURE

YE4 Performance Data 4P Synchronous Speed 1500 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	Rated Current		Speed (rpm)	Torque (N·m)	Starting Current Ts/Tn	Maximum Torque Tmax/Tn	Starting Torque Is/In	Moment of Inertia kg·m²	Weight kg
	kW	HP			380V	400V							
YE4-80M-4	0.55	0.75	83.9	0.72	1.38	1.31	1425	3.69	2.3	2.3	8.0	0.0028	25
YE4-80M2-4	0.75	1	85.7	0.74	1.80	1.71	1435	4.99	2.3	2.3	8.5	0.0030	28
YE4-90S-4	1.1	1.5	87.2	0.75	2.56	2.43	1445	7.27	2.3	2.3	8.5	0.0094	31
YE4-90L-4	1.5	2	88.2	0.76	3.40	3.23	1445	10.3	2.3	2.3	9	0.03849	35
YE4-100L-4	2.2	3	89.5	0.79	4.73	4.49	1460	14.4	2.3	2.3	9	0.0098	46
YE4-100L2-4	3	4	90.4	0.80	6.30	5.99	1460	19.6	2.3	2.3	9.5	0.0131	52
YE4-112M-4	4	5.5	91.1	0.80	8.34	7.92	1460	26.2	2.3	2.3	9.5	0.0192	67
YE4-132S-4	5.5	7.5	91.9	0.80	11.4	10.8	1475	35.6	2.0	2.3	9.5	0.0382	76
YE4-132M-4	7.5	10	92.6	0.81	15.2	14.4	1475	48.6	2.0	2.3	9.5	0.0488	87
YE4-160M-4	11	15	93.3	0.83	21.6	20.5	1475	71.2	2.0	2.3	9.5	0.1255	148
YE4-160L-4	15	20	93.9	0.84	28.9	27.4	1475	97.1	2.0	2.3	9.5	0.1545	174
YE4-180M-4	18.5	25	94.2	0.85	35.1	33.3	1480	119	2.0	2.3	9.5	0.1932	205
YE4-180L-4	22	30	94.5	0.85	41.6	39.5	1480	142	2.0	2.3	9.5	0.2309	225
YE4-200L-4	30	40	94.9	0.85	56.5	53.7	1485	193	2.0	2.3	9	0.3597	280
YE4-225S-4	37	50	95.2	0.85	69.5	66.0	1485	238	2.0	2.3	9	0.6109	325
YE4-225M-4	45	60	95.4	0.85	84.3	80.1	1485	289	2.0	2.3	9	0.7220	356
YE4-250M-4	55	75	95.7	0.86	102	96.5	1485	354	2.0	2.3	9	0.8452	436
YE4-280S-4	75	100	96.0	0.87	136	130	1490	481	2.0	2.3	8.5	1.810	586
YE4-280M-4	90	125	96.1	0.88	162	154	1490	577	2.0	2.3	8.5	2.029	635
YE4-315S-4	110	150	96.3	0.89	195	185	1490	707	1.8	2.2	8.5	3.238	935
YE4-315M-4	132	180	96.4	0.89	234	222	1490	849	1.8	2.2	8.5	3.643	1004
YE4-315L-4	160	220	96.6	0.90	280	266	1490	1029	1.8	2.2	8.5	4.568	1128
YE4-315L2-4	185	250	96.6	0.90	323	307	1490	1190	1.8	2.2	8.5	5.031	1150
YE4-355M-4	200	270	96.7	0.90	349	332	1490	1286	1.8	2.2	8.5	5.436	1190
YE4-355M-4	220	300	96.7	0.90	384	365	1490	1410	1.8	2.2	8.5	7.793	1552
YE4-355M-4	250	340	96.7	0.90	436	415	1490	1602	1.8	2.2	8.5	8.286	1626
YE4-355L-4	280	375	96.7	0.90	489	464	1490	1795	1.8	2.2	8.5	9.273	1700
YE4-355L-4	315	430	96.7	0.90	550	522	1490	2019	1.8	2.2	8.5	10.259	1800
YE4-355L-4	355	470	96.7	0.88	634	602	1490	2283	0.9	1.8	8.6	12.232	2050

MECWIN®
EMPOWERING FUTURE


YE4 Performance Data 6P Synchronous Speed 1000 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	Rated Current		Speed (rpm)	Torque (N·m)	Starting Current Ts/Tn	Maximum Torque Tmax/Tn	Starting Torque Is/In	Moment of Inertia kg·m²	Weight kg
	kW	HP			380V	400V							
YE4-80M-6	0.37	0.5	78.0	0.66	1.09	1.04	930	3.80	2.0	2.1	8.5	0.0023	26
YE4-80M2-6	0.55	0.75	80.9	0.67	1.54	1.46	930	5.65	2.0	2.1	8.5	0.0036	29
YE4-90S-6	0.75	1	82.7	0.70	1.97	1.87	955	7.50	2.1	2.1	7.5	0.0064	31
YE4-90L-6	1.1	1.5	84.5	0.70	2.83	2.68	955	10.0	2.1	2.1	7.5	0.0083	38
YE4-100L-6	1.5	2	85.9	0.71	3.74	3.55	960	14.9	2.1	2.1	7.5	0.0169	48
YE4-112M-6	2.2	3	87.4	0.71	5.39	5.12	970	21.7	2.1	2.1	7.5	0.0262	64
YE4-132S-6	3	4	88.6	0.71	7.25	6.88	975	29.4	2.0	2.1	7.5	0.0481	69
YE4-132M1-6	4	5.5	89.5	0.72	9.43	8.96	975	39.2	2.0	2.1	7.5	0.0592	79
YE4-132M2-6	5.5	7.5	90.5	0.72	12.8	12.2	975	53.9	2.0	2.1	8.0	0.0740	87
YE4-160M-6	7.5	10	91.3	0.76	16.4	15.6	980	73.1	2.0	2.1	8.0	0.1497	134
YE4-160L-6	11	15	92.3	0.77	23.5	22.3	980	107	2.0	2.1	8.5	0.1942	166
YE4-180L-6	15	20	92.9	0.80	30.7	29.1	985	145	2.0	2.1	8.5	0.3199	201
YE4-200L1-6	18.5	25	93.4	0.80	37.6	35.7	985	179	2.0	2.1	8.5	0.4853	281
YE4-200L2-6	22	30	93.7	0.81	44.0	41.8	985	213	2.0	2.1	8.5	0.5715	312
YE4-225M-6	30	40	94.2	0.82	59.0	56.1	985	291	2.0	2.1	8.3	0.7924	325
YE4-250M-6	37	50	94.5	0.83	71.7	68.1	990	357	2.0	2.1	8.3	1.17	402
YE4-280S-6	45	60	94.8	0.83	86.9	82.6	990	434	2.0	2.0	8.5	1.892	510
YE4-280M-6	55	75	95.1	0.84	105	99.8	990	531	2.0	2.0	8.5	2.28	554
YE4-315S-6	75	100	95.4	0.84	142	135	990	723	1.6	2.0	8.0	4.27	870
YE4-315M-6	90	125	95.6	0.85	168	160	990	868	1.6	2.0	8.0	5.33	990
YE4-315L1-6	110	150	95.8	0.85	205	195	990	1061	1.6	2.0	8.0	6.02	1063
YE4-315L2-6	132	180	96.0	0.86	243	231	990	1273	1.6	2.0	8.0	7.16	1148
YE4-355M-6	160	220	96.2	0.86	294	279	990	1543	1.6	2.0	8.0	11.3	1620
YE4-355M1-6	185	250	96.2	0.86	340	323	990	1785	1.6	2.0	8.0	14.3	1800
YE4-355M2-6	200	270	96.3	0.86	367	349	990	1929	1.6	2.0	8.0	14.3	1820
YE4-355L1-6	220	300	96.3	0.86	404	383	990	2122	1.6	2.0	8.0	15.3	1857
YE4-355L2-6	250	340	96.5	0.86	458	435	990	2412	1.6	2.0	8.0	16.0	1860
YE4-355L3-6	280	375	96.6	0.82	537	510	990	2701	0.9	2.0	8.0	17.0	2050


YE4 Performance Data 8P Synchronous Speed 750 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	Rated Current		Speed (rpm)	Torque (N·m)	Starting Current Ts/Tn	Maximum Torque Tmax/Tn	Starting Torque Is/In	Moment of Inertia kg·m²	Weight kg
	kW	HP			380V	400V							
YE4-112M-8	1.5	3	82.6	0.69	4.00	3.80	700	20.5	2.0	2.0	7.0	0.0176	57
YE4-132S-8	2.2	4	84.5	0.70	5.65	5.37	710	29.6	1.8	2.0	7.5	0.0407	75
YE4-132M-8	3	4	85.9	0.70	7.58	7.20	710	40.4	1.8	2.0	7.8	0.0517	91
YE4-160M1-8	4	5.5	87.1	0.71	9.83	9.34	730	52.3	1.8	2.0	7.9	0.0971	133
YE4-160M2-8	5.5	7.5	88.3	0.72	13.1	12.5	725	72.4	1.8	2.0	8.1	0.13751	135
YE4-160L-8	7.5	10	89.3	0.74	17.2	16.4	720	99.5	1.8	2.0	7.8	0.1537	147
YE4-180L-8	11	15	90.4	0.74	25.0	23.7	725	145	1.8	2.0	7.9	0.2450	191
YE4-200L-8	15	20	91.2	0.75	33.3	31.7	730	196	1.8	2.0	8.0	0.4098	249
YE4-225S-8	18.5	25	91.7	0.75	40.9	38.8	730	242	1.8	2.0	8.1	0.6691	291
YE4-225M-8	22	30	92.1	0.76	47.8	45.4	730	288	1.8	2.0	8.3	0.7396	322
YE4-250M-8	30	40	92.7	0.77	63.9	60.7	730	392	1.8	2.0	7.9	1.322	440
YE4-280S-8	37	50	93.1	0.78	77.4	73.5	735	481	1.8	2.0	7.9	2.021	576
YE4-280M-8	45	60	93.4	0.78	93.9	89.2	735	585	1.8	2.0	7.9	2.579	715
YE4-315S-8	55	75	93.7	0.80	111	106	740	710	1.6	2.0	8.2	5.616	1010
YE4-315M-8	75	100	94.2	0.80	151	144	740	968	1.6	2.0	7.6	6.008	1104
YE4-315L1-8	90	125	94.4	0.81	179	170	740	1161	1.6	2.0	7.7	7.844	1135
YE4-315L2-8	110	150	94.7	0.81	218	207	740	1420	1.6	2.0	7.7	8.557	1160
YE4-355M1-8	132	180	94.9	0.81	261	248	740	1704	1.6	2.0	7.7	13.75	1596
YE4-355M2-8	130	280	95.1	0.82	261	296	740	2065	1.6	2.0	7.7	13.71	1635
YE4-355M2-8	160	220	95.1	0.82	312	296	740	2065	1.6	2.0	7.7	15.71	1635
YE4-355L-8	200	270	95.4	0.82	388	369	740	2581	1.6	2.0	7.8	21.15	2060


YE4 Motor Installation and Boundary Dimensions B3

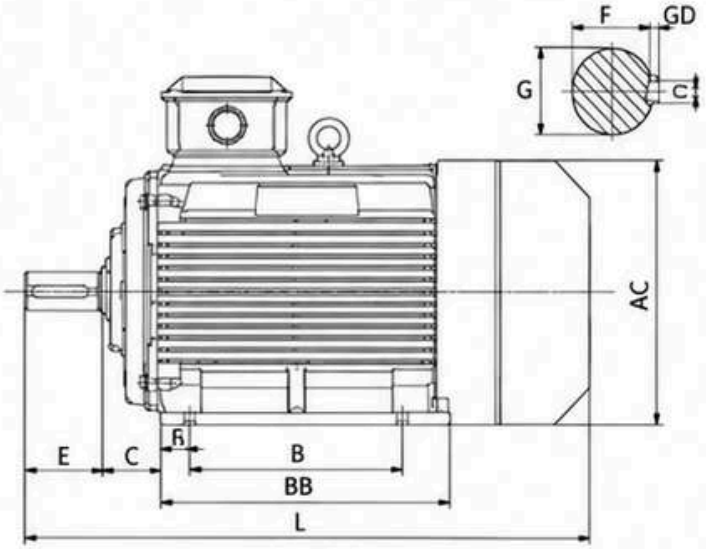


H80-100

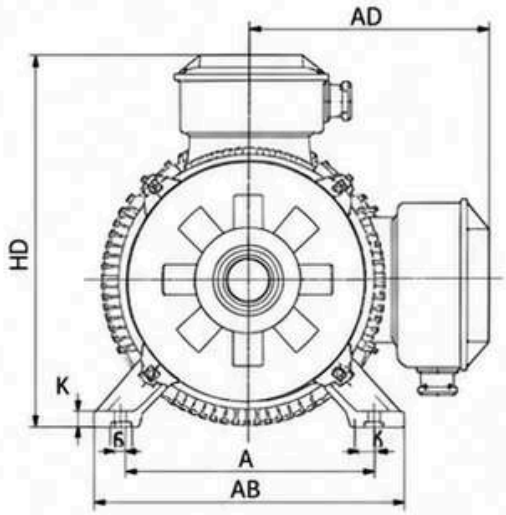


H80-100

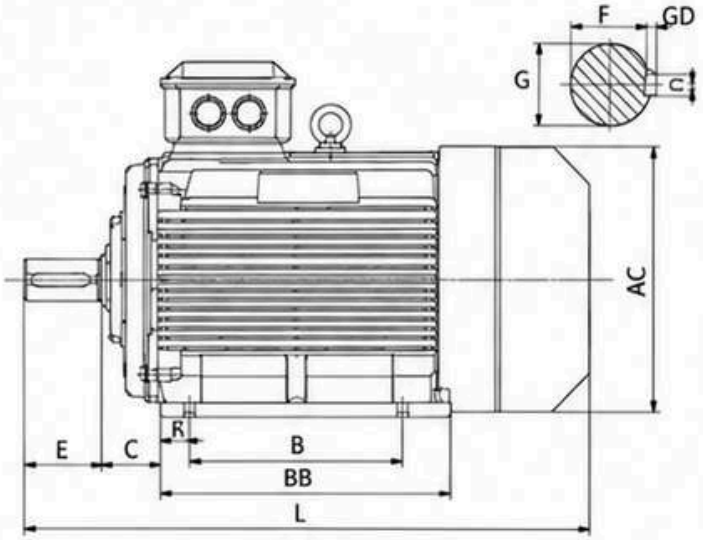


H112-280

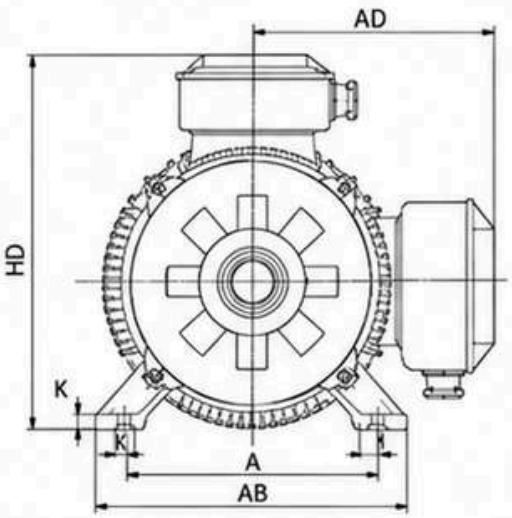

H112-280

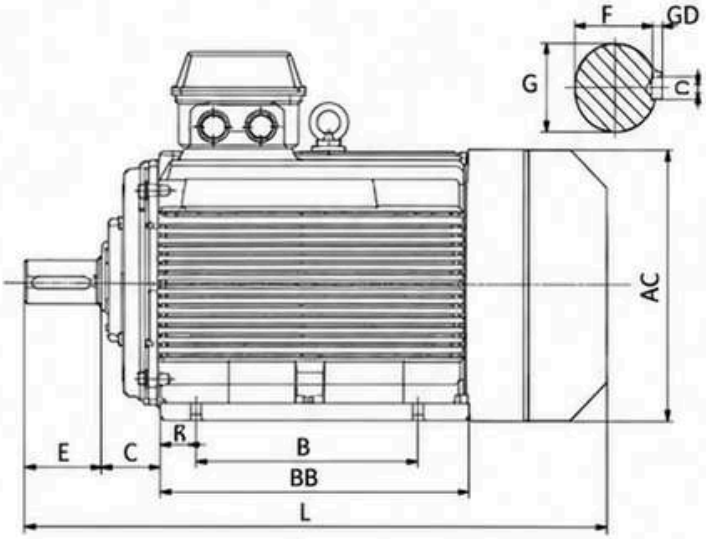

H315-355

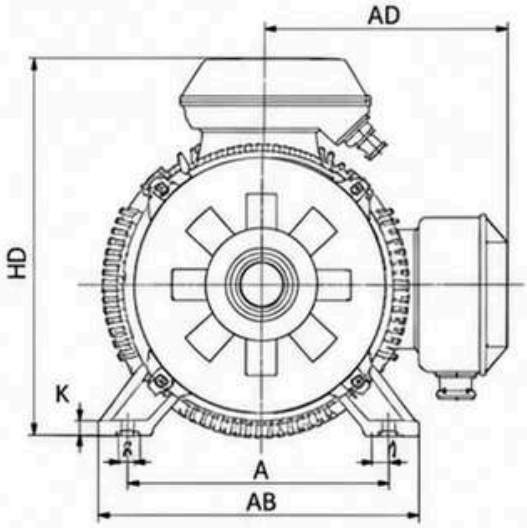


H315-355

MECWIN®
EMPOWERING FUTURE


YE4 Motor Installation and Boundary Dimensions B3

Type	Pole	A	B	B2	C	D	F	GD	G	E	H	K	AA	AB	AC	AD	BB	HA	HD	L
80M	2,4,6	125	100	15	50	19	6	6	15.5	40	80	10	34	160	175	150	167	10	230	330
90S	2,4,6	140	100	20	56	24	8	7	20	50	90	10	36	176	205	155	180	12	245	350
90L	2,4,6	140	125	20	56	24	8	7	20	50	90	10	36	176	205	155	210	12	245	380
100L	2,4,6	160	140	18	63	28	8	7	24	60	100	12	40	200	215	170	233	14	270	440
112M	2,4,6,8	190	140	20	70	28	8	7	24	60	112	12	45	226	240	193	248	15	315	470
132S	2,4,6,8	216	140	22	89	38	10	8	33	80	132	12	55	262	275	213	266	18	345	545
132M	4,6,8	216	178	22	89	38	10	8	33	80	132	12	55	262	275	213	266	18	345	545
160M	2	254	210	25	108	42	12	8	37	110	160	145	65	314	330	265	304	20	430	680
160M	4,6,8	254	210	25	108	42	12	8	37	110	160	145	65	314	330	265	340	20	430	715
160L	2,4,6,8	254	254	25	108	42	12	8	37	110	160	145	65	314	330	265	340	20	430	715
180M	2,4	279	241	33	121	48	14	9	42.5	110	180	145	70	349	380	280	345	22	470	740
180L	4,6,8	279	279	33	121	48	14	9	42.5	110	180	145	70	349	380	280	383	22	470	780
200L	2,4,6,8	318	305	32	133	55	16	10	49	110	200	185	70	388	420	315	389	25	520	850
225M	2	356	311	45	149	55	16	10	49	110	225	18.5	75	431	470	345	390	28	570	820
225S	4,8	356	286	45	149	60	18	11	53	140	225	18.5	75	431	470	345	390	28	570	855
225M	4,6,8	356	311	45	149	60	18	11	53	140	225	18.5	75	431	470	345	390	28	570	855
250M	2	406	349	52	168	60	18	11	53	140	250	24	80	484	510	380	440	30	635	955
250M	4,6,8	406	349	52	168	65	18	11	58	140	250	24	80	484	510	340	440	30	635	955
280S	2	457	368	68	190	65	18	11	58	140	280	24	85	542	580	410	530	35	695	1060
280M	4,6,8	457	419	68	190	75	20	12.5	59	140	280	24	85	542	580	410	530	35	695	1060
280M	2	457	419	68	190	65	18	11	58	140	280	24	85	542	580	410	530	35	695	1060
280M	4,6,8	457	419	68	190	75	20	12	67.5	140	280	24	85	542	580	410	530	35	695	1060
315S	2	508	406	84	216	65	18	11	58	140	315	28	120	628	645	550	570	45	870	1190
315S	4,6,8	508	406	84	216	80	22	14	71	170	315	28	120	628	645	550	570	45	870	1250
315M	2	508	457	84	216	65	18	11	58	140	315	28	120	628	645	550	680	45	870	1300
315M	4,6,8	508	457	84	216	80	22	14	71	170	315	28	120	628	645	550	680	45	870	1360
315L	2	508	508	84	216	65	18	11	58	140	315	28	120	628	645	550	680	45	870	1300
315L	4,6,8	508	508	84	216	80	22	14	71	170	315	28	120	628	645	550	680	45	870	1360
355M	2	610	560	68	254	75	20	12	67.5	140	355	28	116	726	710	665	750	52	1030	1520
355M	4,6,8	610	560	68	254	95	25	14	86	170	355	28	116	726	710	665	750	52	1030	1550
355L	2	610	560	68	254	75	20	12	67.5	140	355	28	116	726	710	665	750	52	1030	1520
355L	4,6,8	610	630	68	254	95	25	14	86	170	355	28	116	726	710	665	750	52	1030	1550
355I	2	610	560	68	254	75	20	12	67.5	140	355	28	116	726	710	665	750	52	1030	1660
355I	4,6	610	630	68	254	95	25	14	86	170	355	28	116	726	710	665	750	52	1030	1690


YE4 Installation and overall dimensions of YE4 motor B35

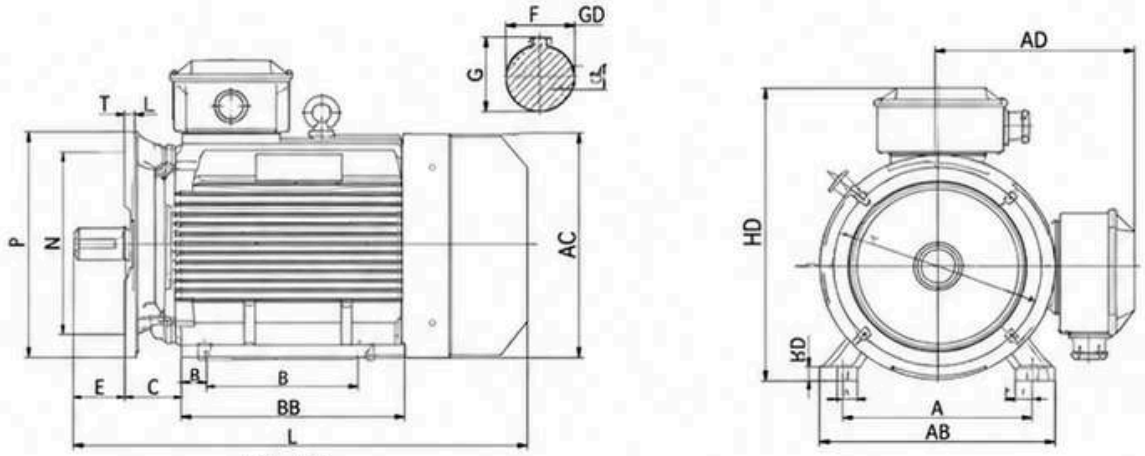


H80-100

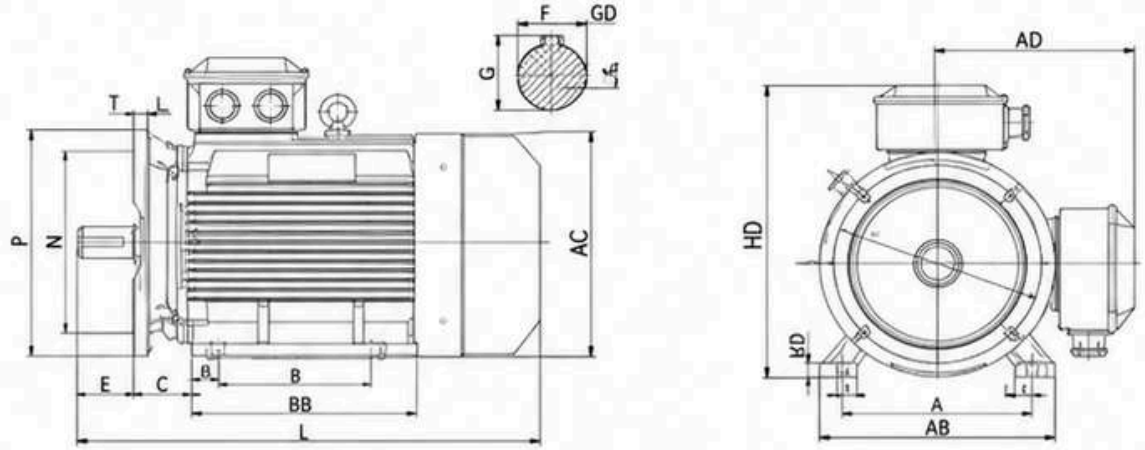

H112-200

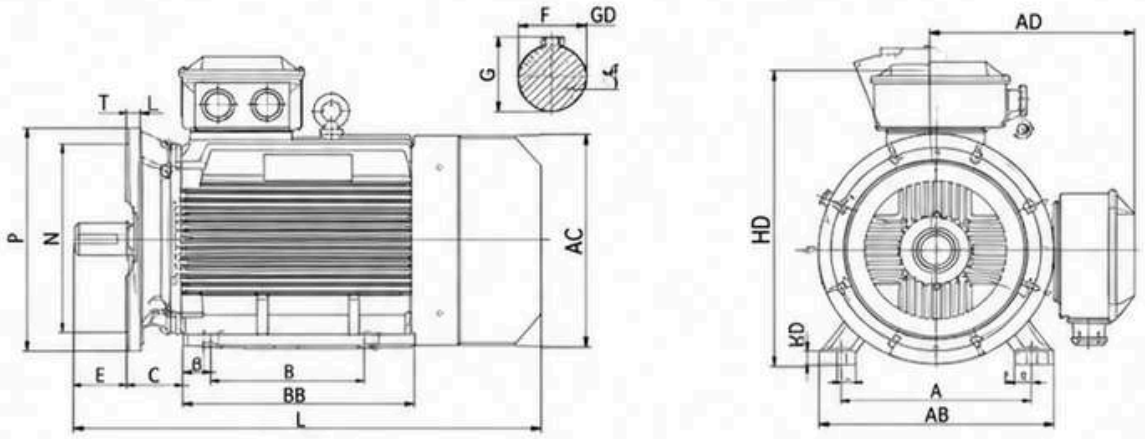

H225-280

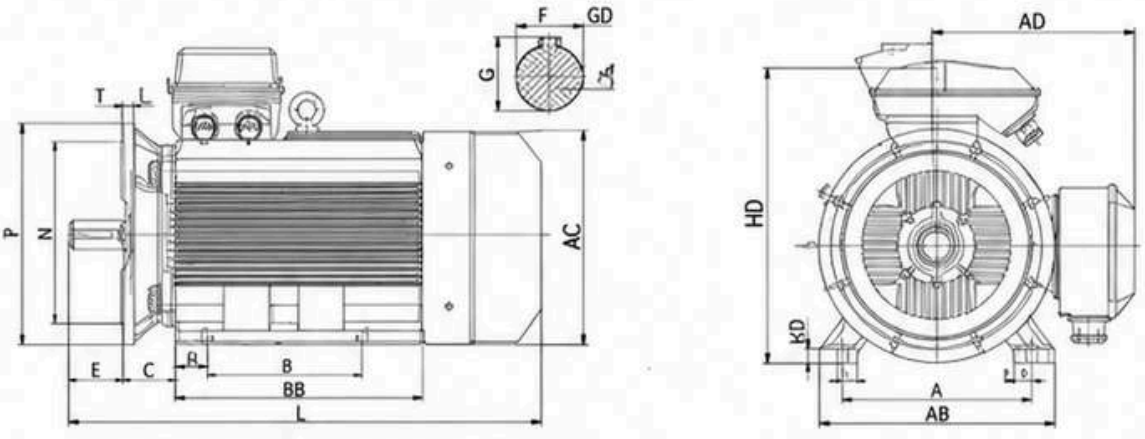


H315-355

MECWIN®
EMPOWERING FUTURE


YE4 Installation and overall dimensions of YE4 motor B35

Type	Pole	A	B	B2	C	D	F	GD	G	E	H	K	M	N	P	S	AA	AB	AC	AD	BB	HA	HD	L	T
80M	2,4,6	125	100	15	50	19	6	6	15.5	40	80	10	165	130	200	4-Φ12	34	160	175	150	167	10	230	12	3.5
90S	2,4,6	140	100	20	56	24	8	7	20	50	90	10	165	130	200	4-Φ12	36	176	205	155	180	12	245	12	3.5
90L	2,4,6	140	125	20	56	24	8	7	20	50	90	10	165	130	200	4-Φ12	36	176	205	155	210	12	245	12	3.5
100L	2,4,6	160	140	18	63	28	8	7	24	60	100	12	215	180	250	4-Φ14.5	40	200	215	170	233	14	270	13	4
112M	2,4,6,8	190	140	20	70	28	8	7	24	60	112	12	215	180	250	4-Φ14.5	45	226	240	193	248	15	315	14	4
132S	2,4,6,8	216	140	22	89	38	10	8	33	80	132	12	265	230	300	4-Φ14.5	55	262	275	213	266	18	345	14	4
132M	4,6,8	216	178	22	89	38	10	8	33	80	132	12	265	230	300	4-Φ14.5	55	262	275	213	266	18	345	14	4
160M	2	254	210	25	108	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	65	314	330	265	304	20	430	16	5
160M	4,6,8	254	210	25	108	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	65	314	330	265	340	20	430	16	5
160L	2,4,6,8	254	254	25	108	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	65	314	330	265	340	20	430	16	5
180M	2,4	279	241	33	121	48	14	9	42.5	110	180	14.5	300	250	350	4-Φ18.5	70	349	380	280	345	22	470	15	5
180L	4,6,8	279	279	33	121	48	14	9	42.5	110	180	14.5	300	250	350	4-Φ18.5	70	349	380	280	383	22	470	15	5
200L	2,4,6,8	318	305	32	133	55	16	10	49	110	200	18.5	350	300	400	4-Φ18.5	70	388	420	315	389	25	520	17	5
225M	2	356	311	45	149	55	16	10	49	110	225	18.5	400	350	450	8-Φ18.5	75	431	470	345	390	28	570	20	5
225S	4,8	356	286	45	149	60	18	11	53	140	225	18.5	400	350	450	8-Φ18.5	75	431	470	345	390	28	570	20	5
225M	4,6,8	356	311	45	149	60	18	11	53	140	225	18.5	400	350	450	8-Φ18.5	75	431	470	345	390	28	570	20	5
250M	2	406	349	52	168	60	18	11	53	140	250	24	500	450	550	8-Φ18.5	80	484	510	380	440	30	635	22	5
250M	4,6,8	406	349	52	168	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	80	484	580	380	440	30	635	22	5
280S	2	457	368	68	190	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	85	542	580	410	530	35	695	22	5
280S	4,6,8	457	368	68	190	75	20	12.5	59	140	280	24	500	450	550	8-Φ18.5	85	542	580	410	530	35	695	22	5
280M	2	457	419	68	190	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	85	542	580	410	530	35	695	22	5
280M	4,6,8	457	419	68	190	75	20	12	67.5	140	280	24	500	450	550	8-Φ18.5	85	542	580	410	530	35	695	22	5
315S	2	508	406	84	216	65	18	11	58	140	315	28	600	550	660	8-Φ24	120	628	645	550	570	45	870	22	6
315S	4,6,8	508	406	84	216	80	22	14	71	170	315	28	600	550	660	8-Φ24	120	628	645	550	570	45	870	22	6
315M	2	508	457	84	216	65	18	11	58	140	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6
315M	4,6,8	508	457	84	216	80	22	14	71	170	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6
315L	2	508	508	84	216	65	18	11	58	140	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6
315L	4,6,8	508	508	84	216	80	22	14	71	170	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6
355M	2	610	560	68	254	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6
355M	4,6,8	610	560	68	254	95	25	14	86	170	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6
355L	2	610	560	68	254	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6
355L	4,6,8	610	630	68	254	95	25	14	86	170	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6
355I	2	610	560	68	254	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6
355I	4,6	610	630	68	254	95	25	14	86	170	355	28	740	680	800	8-Φ24	116	726	710	665	750	52	1030	25	6


YE4 Installation and overall dimensions of YE4 motor B5 (H80~280)

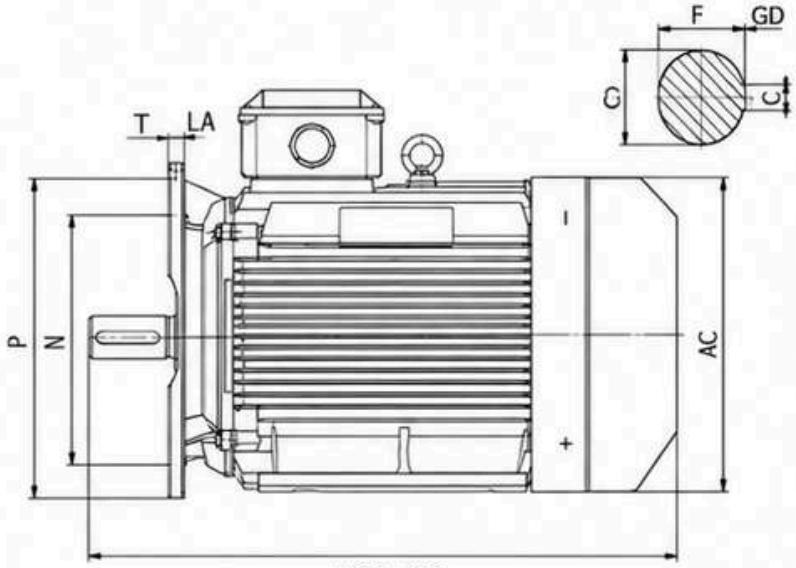


H80-100

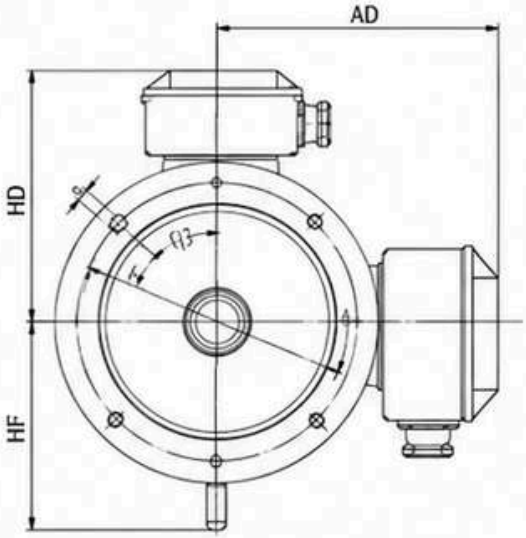


H80-100

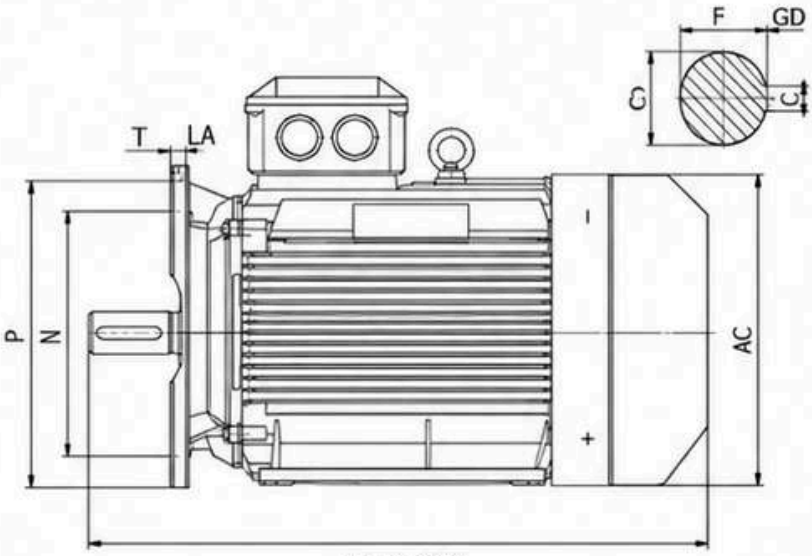


H112-200

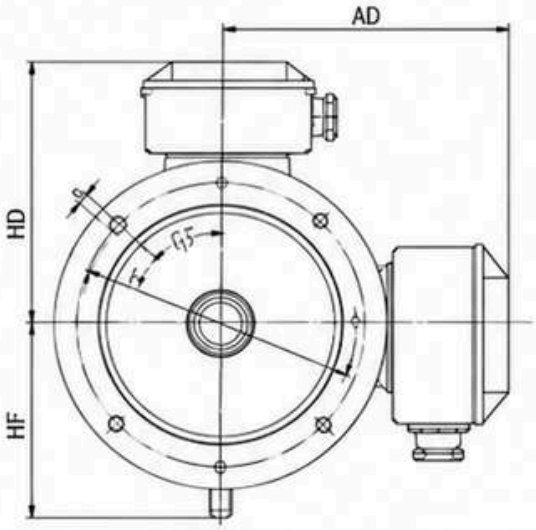

H112-200

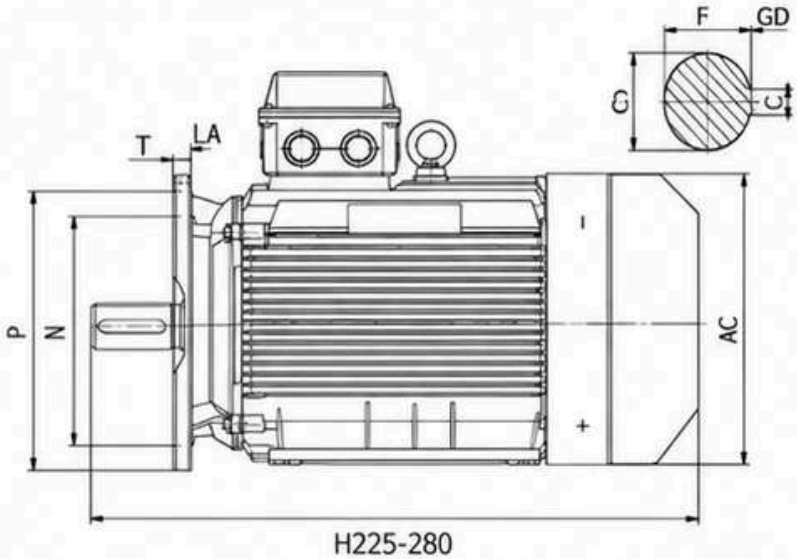

H225-280

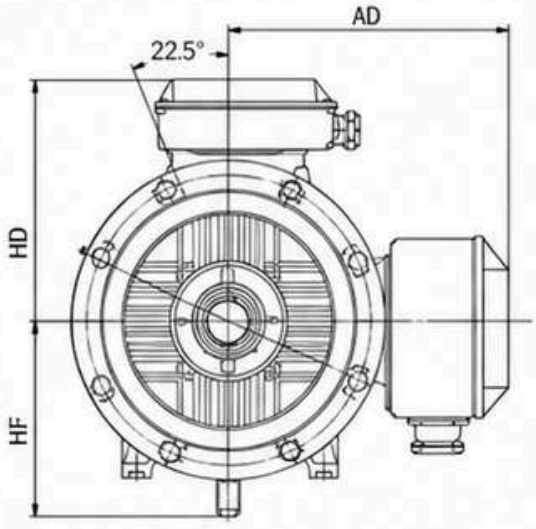


H225-280


YE4 Installation and overall dimensions of YE4 motor B5 (H80~280)

Type	Pole	C	D	F	GD	G	E	H	M	N	P	S	AC	AD	HF	LA	T	L
80M	2,4,6	50	19	6	6	15.5	40	80	165	130	200	4-Φ12	175	150	-	12	3.5	330
90S	2,4,6	56	24	8	7	20	50	90	165	130	200	4-Φ12	205	155	-	12	3.5	350
90L	2,4,6	56	24	8	7	20	50	90	165	130	200	4-Φ12	205	155	-	12	3.5	380
100L	2,4,6	63	28	8	7	24	60	100	215	180	250	4-Φ14.5	215	170	145	13	4	440
112M	2,4,6,8	70	28	8	7	24	60	112	215	180	250	4-Φ14.5	240	193	155	14	4	470
132S	2,4,6,8	89	38	10	8	33	80	132	265	230	300	4-Φ14.5	275	213	180	14	4	545
132M	4,6,8	89	38	10	8	33	80	132	265	230	300	4-Φ14.5	275	213	180	14	4	545
160M	2	108	42	12	8	37	110	160	300	250	350	4-Φ18.5	330	265	230	16	5	680
160M	4,6,8	108	42	12	8	37	110	160	300	250	350	4-Φ18.5	330	265	230	16	5	715
160L	2,4,6,8	108	42	12	8	37	110	160	300	250	350	4-Φ18.5	330	265	230	16	5	715
180M	2,4	121	48	14	9	42.5	110	180	300	250	350	4-Φ18.5	380	280	240	15	5	740
180L	4,6,8	121	48	14	9	42.5	110	180	300	250	350	4-Φ18.5	380	280	240	15	5	780
200L	2,4,6,8	133	55	16	10	49	110	200	350	300	400	4-Φ18.5	420	315	265	17	5	850
225M	2	149	55	16	10	49	110	225	400	350	450	8-Φ18.5	470	345	290	20	5	820
225S	4,8	149	60	18	11	53	140	225	400	350	450	8-Φ18.5	470	345	290	20	5	855
225M	4,6,8	149	60	18	11	53	140	225	400	350	450	8-Φ18.5	470	345	290	20	5	855
250M	2	168	60	18	11	53	140	250	500	450	550	8-Φ18.5	510	380	320	22	5	955
250M	4,6,8	168	65	18	11	58	140	250	500	450	550	8-Φ18.5	510	380	320	22	5	955
280S	2	190	65	18	11	58	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1060
280S	4,6,8	190	75	20	12	67.5	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1060
280M	2	190	65	18	11	58	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1060
280M	4,6,8	190	75	20	12	67.5	140	280	500	450	550	8-Φ18.5	580	410	368	22	5	1060


YE4 Installation and overall dimensions YE4 motor V1 (H80~355)

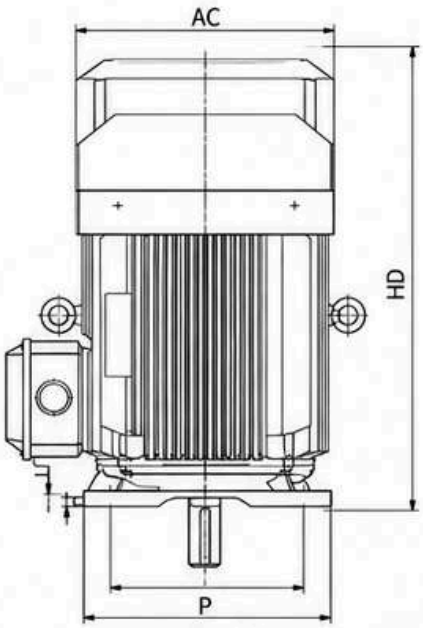


H80-100

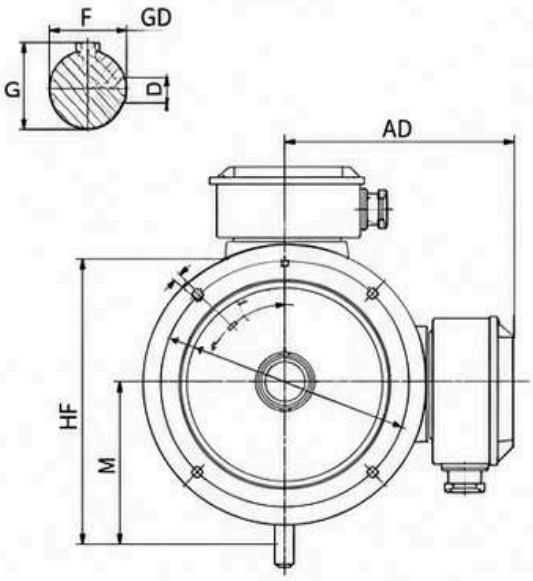


H80-100

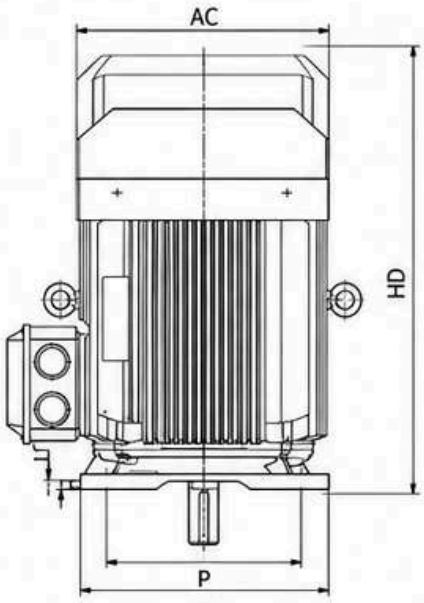


H112-280

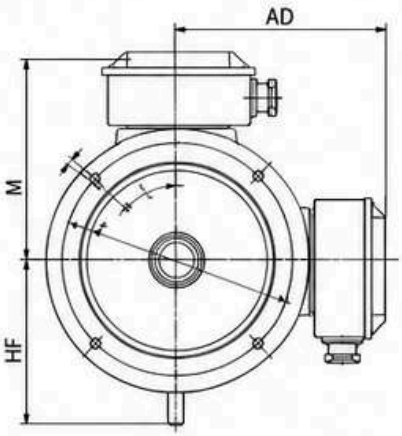


H112-280

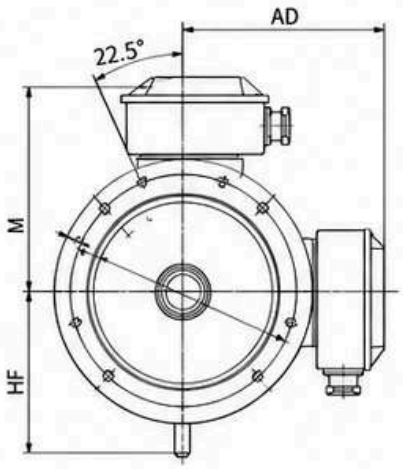

H225-280

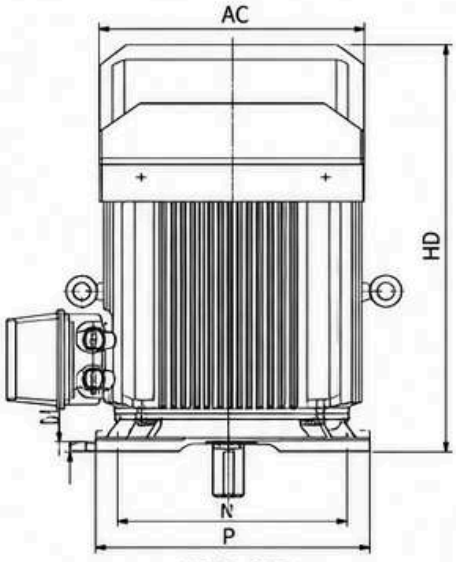

H315-355

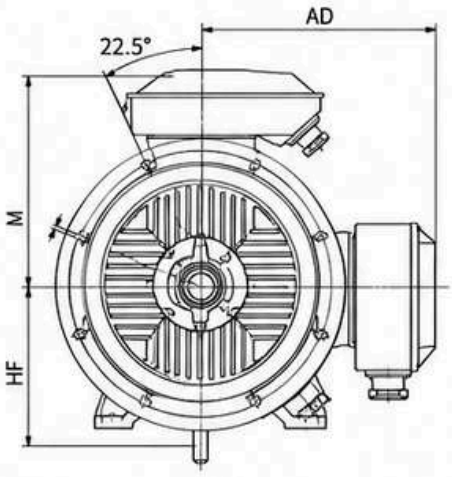


H315-355


YE4 Installation and overall dimensions YE4 motor V1 (H80~355)

Type	Pole	C	D	F	GD	G	E	H	M	N	P	S	AC	AD	HF	LA	T	L
80M	2,4,6	50	19	6	6	15.5	40	80	165	130	200	4-Φ12	175	150	-	12	3.5	380
90S	2,4,6	56	24	8	7	20	50	90	165	130	200	4-Φ12	205	155	-	12	3.5	410
90L	2,4,6	56	24	8	7	20	50	90	165	130	200	4-Φ12	205	155	-	12	3.5	440
100L	2,4,6	63	28	8	7	24	60	100	215	180	250	4-Φ14.5	215	170	145	13	4	500
112M	2,4,6,8	70	28	8	7	24	60	112	215	180	250	4-Φ14.5	240	193	155	14	4	530
132S	2,4,6,8	70	28	8	7	33	60	112	215	230	250	4-Φ14.5	275	213	150	14	4	565
132M	4,6,8	89	38	8	7	37	80	132	265	230	300	4-Φ14.5	275	213	150	16	4	605
160M	2	108	42	12	8	37	110	160	265	230	350	4-Φ18.5	330	265	265	16	5	780
160M	4,6,8	108	42	12	8	37	110	160	265	230	350	4-Φ18.5	330	265	265	16	5	815
160L	4,6,8	108	42	12	8	37	110	160	265	230	350	4-Φ18.5	330	265	280	16	5	815
180M	4,8	121	48	14	9	42.5	100	180	300	300	350	4-Φ18.5	330	280	245	15	5	840
180L	4,6,8	121	48	14	9	42.5	100	180	350	300	350	4-Φ18.5	380	335	305	15	5	880
200L	2,4,6,8	133	55	14	10	49	100	200	400	400	400	4-Φ18.5	570	380	345	17	5	920
225M	2	143	55	18	11	49	100	225	400	450	450	8-Φ18.5	470	345	360	20	5	950
225S	4,8	143	55	18	11	58	100	225	400	350	400	8-Φ18.5	470	345	380	12	5	950
225M	4,6,8	149	60	18	11	49	100	225	400	350	450	8-Φ18.5	470	530	305	20	5	1050
250M	2	148	65	18	11	57	140	250	400	450	450	8-Φ18.5	470	330	280	22	5	1050
250M	4,6,8	168	60	18	11	53	140	250	400	450	550	8-Φ18.5	670	330	380	22	5	1050
280S	2	149	65	18	11	53	140	250	500	450	550	8-Φ18.5	530	430	380	22	5	1160
280S	4,6,8	168	65	18	11	58	140	280	500	450	550	8-Φ18.5	570	430	380	22	5	1300
280M	2	190	60	18	11	58	140	280	500	450	550	8-Φ18.5	580	430	388	22	5	1390
315S	2	216	65	22	11	58	170	315	600	450	550	8-Φ18.5	686	430	380	22	6	1420
315S	4,6,8	190	80	22	11	71	170	315	600	450	550	8-Φ18.5	645	430	380	22	6	1360
315M	2	216	60	22	11	58	170	315	600	450	550	8-Φ18.5	645	430	430	22	6	1500
315L	4,8	216	75	22	11	68	170	315	600	550	660	8-Φ18.5	645	430	430	22	6	1560
315L	4,6,8	216	80	22	11	71	140	315	600	550	660	8-Φ24	645	430	430	22	6	1660
355M	2	254	75	20	14	67.5	170	355	600	680	660	8-Φ24	710	630	430	25	6	1660
355M	4,6,8	254	95	20	12	86	170	355	600	680	660	8-Φ24	710	430	430	25	6	1690
355L	2	254	95	20	12	67.5	170	355	600	680	660	8-Φ24	710	630	430	25	6	1690
355L	4,6,8	254	95	20	12	86	170	355	740	680	660	8-Φ24	710	630	430	25	6	1800
355I	2	254	95	25	12	67.5	170	355	740	680	800	8-Φ24	710	490	490	25	6	1800
355I	4,6	254	95	25	12	86	170	355	740	680	800	8-Φ24	710	490	490	25	6	1830


YE4 Installation and overall dimensions YE4 motor B14 (H80~132)

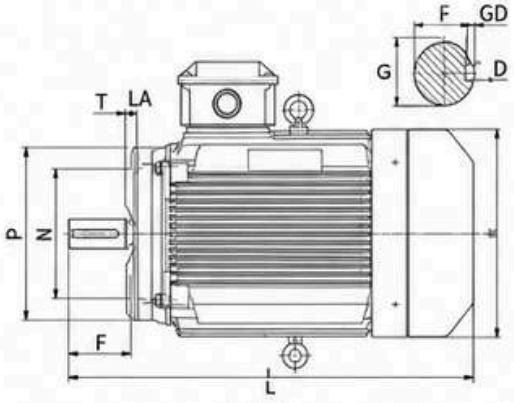

H80-100

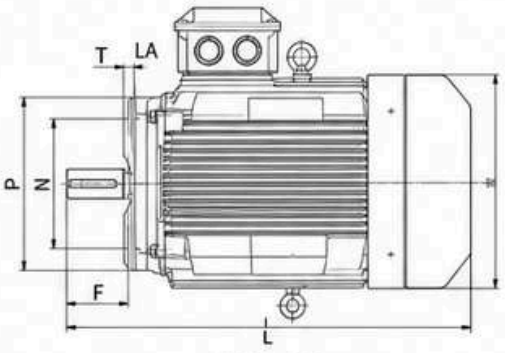


H112-132

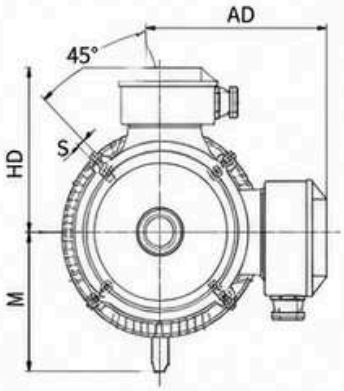


H80-132

型号 Type	极数 Pole	C	D	F	GD	G	E	H	M	N	P	S	AC	AD	HF	T	L
80M	2,4,6	50	19	6	6	15.5	40	80	100	80	120	4-M6	170	150	-	3.5	320
90S	2,4,6	56	24	8	7	20	50	90	115	95	140	4-M8	195	155	-	3.5	350
90L	2,4,6	56	24	8	7	20	50	90	115	95	140	4-M8	195	155	-	3.5	380
100L	2,4,6	63	28	8	7	24	60	100	130	110	160	4-M8	215	170	145	4	440
112M	2,4,6,8	70	28	8	7	24	60	112	130	110	160	4-M8	240	193	155	4	470
132S	2,4,6,8	89	38	10	8	33	80	132	165	130	200	4-M8	275	213	180	4	505
132M	4,6,8	89	38	10	8	33	80	132	165	130	200	4-M8	275	213	180	4	545


YE4 Installation and overall dimensions YE4 motor B34 (H80~132)

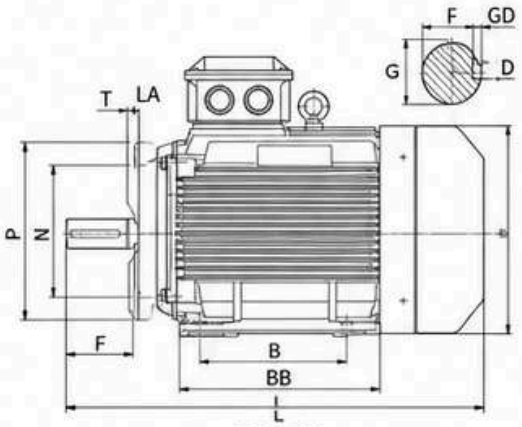

H80-100

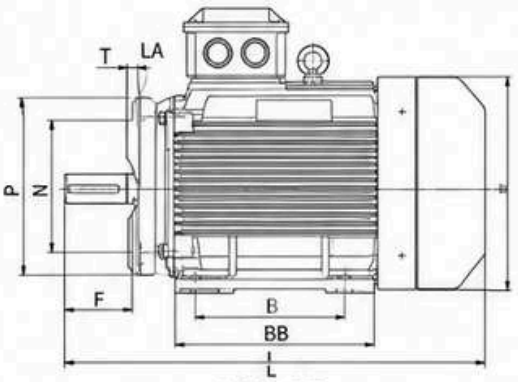

H112-132

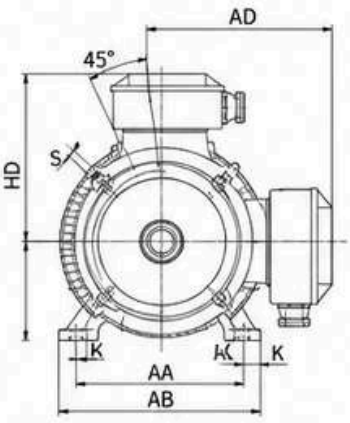

H80-132

型号 Type	极数 Pole	A	B	B2	C	D	F	GD	G	E	H	K	M	N	P	S	AA	AB	AC	AD	BB	HA	HD	T	L
80M	2,4,6	125	100	15	50	19	6	6	15.5	40	80	10	100	80	120	4-M6	34	160	170	150	167	10	230	3.5	320
90S	2,4,6	140	100	20	56	24	8	7	20	50	90	10	115	95	140	4-M8	36	176	195	155	180	12	245	3.5	350
90L	2,4,6	140	125	20	56	24	8	7	20	50	90	10	115	95	140	4-M8	36	176	195	155	210	12	245	3.5	380
100L	2,4,6	160	140	18	63	28	8	7	24	60	100	12	130	110	160	4-M8	40	200	215	170	233	14	270	4	440
112M	2,4,6,8	190	140	20	70	28	8	7	24	60	112	12	130	110	160	4-M8	45	226	240	193	248	15	315	4	470
132S	2,4,6,8	216	140	22	89	38	10	8	33	80	132	12	165	130	200	4-M8	55	262	275	213	224	18	345	4	505
132M	4,6,8	216	178	22	89	38	10	8	33	80	132	12	165	130	200	4-M8	55	262	275	213	266	18	345	4	545

YE5 Performance Data 2P Synchronous Speed 3000 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	A Rated Current		Speed (rpm)	Torque (Nm)	Ts/Tn	Tmax/Tn	Is/In	Moment of inertia (kg·m²)	Weight (kg)
	kW	HP			380V	400V							
YE5-80M1-2	0.75	1	86.3	0.80	1.65	1.57	2890	2.48	2.3	2.3	10	0.0022	26
YE5-80M2-2	1.1	1.5	87.8	0.80	2.38	2.26	2890	3.63	2.3	2.3	9.0	0.0029	30
YE5-90S-2	1.5	2	88.9	0.85	3.02	2.87	2900	4.94	2.2	2.3	9.0	0.0033	33
YE5-90L-2	2.2	3	90.2	0.85	4.36	4.14	2900	7.24	2.2	2.3	9.5	0.0039	37
YE5-100L-2	3	4	91.1	0.85	5.89	5.59	2900	9.88	2.2	2.3	9.5	0.0138	48
YE5-112M-2	4	5.5	91.8	0.87	7.61	7.23	2915	13.1	2.2	2.3	9.5	0.0103	62
YE5-132S1-2	5.5	7.5	92.6	0.86	10.5	9.97	2940	17.9	2.2	2.3	9.5	0.0356	80
YE5-132S2-2	7.5	10	93.3	0.86	14.2	13.5	2940	24.3	2.2	2.3	9.5	0.0422	96
YE5-160M1-2	11	15	94.0	0.87	20.4	19.4	2940	35.7	2.2	2.3	9.5	0.26	160
YE5-160M2-2	15	20	94.5	0.87	27.7	26.3	2940	48.7	2.2	2.3	9.5	0.33	177
YE5-160L-2	18.5	25	94.9	0.87	34.0	32.3	2940	60.1	2.2	2.3	9.5	0.39	195
YE5-180M-2	22	30	95.1	0.87	40.4	38.4	2945	71.3	2.2	2.3	9.5	0.66	210
YE5-200L1-2	30	40	95.5	0.88	54.2	51.5	2970	96.5	2.2	2.3	9.0	0.77	280
YE5-200L2-2	37	50	95.8	0.88	66.7	63.3	2970	119	2.2	2.3	9.0	1.34	310
YE5-225M-2	45	60	96.0	0.88	80.9	76.9	2970	145	2.2	2.3	9.0	1.63	415
YE5-250M-2	55	75	96.2	0.88	98.7	93.8	2970	177	2.2	2.3	9.0	1.98	490
YE5-280S-2	75	100	96.5	0.88	134	127	2980	240	2.0	2.3	8.5	2.12	660
YE5-280M-2	90	125	96.6	0.88	161	153	2980	288	2.0	2.3	8.5	2.37	700
YE5-315S-2	110	150	96.8	0.88	196	186	2985	352	1.9	2.3	8.5	2.54	1170
YE5-315M-2	132	180	96.9	0.88	235	223	2985	422	1.9	2.3	8.5	2.86	1300
YE5-315L1-2	160	220	97.0	0.88	285	271	2985	512	1.9	2.2	8.5	3.38	1360
YE5-315L2-2	185	250	97.2	0.88	329	312	2985	592	1.9	2.2	8.5	3.58	1410
YE5-315L2-2	200	270	97.2	0.88	355	337	2985	640	1.8	2.2	8.5	4.05	1540
YE5-355M-2	220	300	97.2	0.88	391	371	2990	703	1.8	2.2	8.5	6.53	1860
YE5-355M-2	250	340	97.2	0.90	434	412	2990	798	1.8	2.2	8.5	6.87	2200
YE5-355L1-2	280	375	97.2	0.90	486	462	2990	894	1.8	2.2	8.5	7.30	2160
YE5-355L-2	315	430	97.2	0.90	547	520	2990	1006	1.8	2.2	8.5	7.41	2450
YE5-355L-2	355	470	97.2	0.90	617	586	2990	1134	1.1	1.8	8.6	7.71	2450

MECWIN®
EMPOWERING FUTURE

YE5 Performance Data 4P Synchronous Speed 1500 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	A Rated Current		Speed (rpm)	Torque (Nm)	Ts/Tn	Tmax/Tn	Is/In	Moment of inertia (kg·m²)	Weight (kg)
	kW	HP			380V	400V							
YE5-80M-4	0.55	0.75	86.7	0.73	1.32	1.25	1425	3.69	2.3	2.3	10	0.0033	27
YE5-80M2-4	0.75	1	88.2	0.73	1.77	1.68	1435	4.99	2.3	2.3	8.0	0.0038	32
YE5-90S-4	1.1	1.5	89.5	0.73	2.56	2.43	1445	7.27	2.3	2.3	8.5	0.0050	34
YE5-90L-4	1.5	2	90.4	0.73	3.45	3.28	1445	10.3	2.3	2.3	8.5	0.0058	37
YE5-100L1-4	2.2	3	91.4	0.77	4.75	4.51	1460	14.4	2.3	2.3	9.0	0.0131	52
YE5-100L2-4	3	4	92.1	0.77	6.43	6.11	1460	19.6	2.3	2.3	9.0	0.0178	70
YE5-112M-4	4	5.5	92.8	0.76	8.62	8.19	1460	26.2	2.3	2.3	9.0	0.0243	70
YE5-132S-4	5.5	7.5	93.4	0.77	11.6	11.0	1475	35.6	2.0	2.3	9.5	0.0667	96
YE5-132M-4	7.5	10	94.0	0.77	15.7	15.0	1475	48.6	2.0	2.3	9.5	0.0801	110
YE5-160M-4	11	15	94.6	0.81	21.8	20.7	1470	71.5	2.0	2.3	9.5	0.44	170
YE5-160L-4	15	20	95.1	0.81	29.6	28.1	1470	97.4	2.0	2.3	9.5	0.71	200
YE5-180M-4	18.5	25	95.3	0.81	36.4	34.6	1475	120	2.0	2.3	9.5	0.76	210
YE5-180L-4	22	30	95.5	0.81	43.2	41.1	1475	142	2.0	2.3	9.5	0.85	235
YE5-200L-4	30	40	95.9	0.81	58.7	55.7	1475	194	2.0	2.3	9.0	1.27	300
YE5-225S-4	37	50	96.1	0.83	70.5	67.0	1480	239	2.0	2.3	9.0	1.94	400
YE5-225M-4	45	60	96.3	0.83	85.5	81.3	1480	290	2.0	2.3	9.0	2.44	440
YE5-250M-4	55	75	96.5	0.82	106	100	1480	355	2.0	2.3	9.0	3.00	550
YE5-280S-4	75	100	96.7	0.87	135	129	1485	482	2.0	2.3	8.5	3.51	700
YE5-280M-4	90	125	96.9	0.88	160	152	1485	579	2.0	2.3	8.5	4.91	800
YE5-315S-4	110	150	97.0	0.89	194	184	1490	705	2.0	2.2	8.5	5.21	1200
YE5-315M-4	132	180	97.1	0.89	232	220	1490	846	2.0	2.2	8.5	5.48	1300
YE5-315L-4	160	220	97.2	0.89	281	267	1490	1026	2.0	2.2	8.5	5.70	1320
YE5-315L-4	185	250	97.4	0.89	325	308	1490	1186	2.0	2.2	8.5	5.90	1360
YE5-315L2-4	200	270	97.4	0.89	351	333	1490	1282	2.0	2.2	8.5	6.77	1600
YE5-355M-4	220	300	97.4	0.87	386	366	1495	1405	2.0	2.2	8.5	7.58	2100
YE5-355M-4	250	340	97.4	0.89	438	416	1495	1597	2.0	2.2	8.5	7.83	2100
YE5-355L1-4	280	375	97.4	0.88	496	472	1495	1789	2.0	2.2	8.5	8.06	2220
YE5-355L-4	315	430	97.4	0.88	558	530	1495	2012	2.0	2.2	8.5	8.19	2400
YE5-355L-4	355	470	97.4	0.88	629	598	1495	2268	1.7	2.2	8.5	8.53	2420

YE5 Performance Data 6P Synchronous Speed 1000 50Hz


Type	Rated Output		Efficiency η%	Power Factor cosφ	A Rated Current		Speed (rpm)	Torque (Nm)	Ts/Tn	Tmax/Tn	Is/In	Moment of inertia (kg·m²)	Weight (kg)
	kW	HP			380V	400V							
YE5-80M1-6	0.37	0.5	81.6	0.70	0.98	0.93	930	3.82	1.9	2.0	9.0	0.0042	28
YE5-80M2-6	0.55	0.75	84.2	0.70	1.42	1.35	930	5.68	1.9	2.1	9.0	0.0053	33
YE5-90S-6	0.75	1	85.7	0.68	1.96	1.86	955	7.50	2.1	2.1	8.5	0.0064	31
YE5-90L-6	1.1	1.5	87.2	0.68	2.82	2.68	955	10.0	2.1	2.1	8.5	0.0083	38
YE5-100L-6	1.5	2	88.4	0.71	3.63	3.45	960	14.9	2.1	2.1	8.0	0.0169	48
YE5-112M-6	2.2	3	89.7	0.71	5.25	4.99	970	21.7	2.1	2.1	8.0	0.0262	64
YE5-132S-6	3	4	90.6	0.70	7.19	6.83	975	29.4	2.0	2.1	7.5	0.0481	69
YE5-132M-6	4	5.5	91.4	0.71	9.37	8.80	975	39.2	2.0	2.1	8.0	0.0592	79
YE5-132M2-6	5.5	7.5	92.2	0.71	12.8	12.1	975	53.9	2.0	2.1	8.0	0.0740	87
YE5-160M-6	7.5	10	92.9	0.76	16.1	15.3	970	73.8	2.1	2.1	8.0	1.27	150
YE5-160L-6	11	15	93.7	0.77	23.2	22.0	970	108	2.1	2.1	8.5	1.39	185
YE5-180L-6	15	20	94.3	0.80	30.2	28.7	975	147	2.0	2.1	8.5	1.70	235
YE5-200L-6	18.5	25	94.6	0.80	37.1	35.3	980	180	2.1	2.1	8.5	1.93	210
YE5-200L2-6	22	30	94.9	0.81	43.5	41.3	980	214	2.1	2.1	8.5	2.55	240
YE5-225M-6	30	40	95.3	0.82	58.3	55.4	980	292	2.0	2.1	8.3	2.81	375
YE5-250M-6	37	50	95.6	0.83	70.8	67.3	985	359	2.1	2.1	8.3	3.63	460
YE5-280S-6	45	60	95.8	0.83	86.0	81.7	985	436	2.1	2.0	8.5	4.17	605
YE5-280M-6	55	75	96.0	0.84	104	98.4	985	533	2.0	2.0	8.5	4.80	660
YE5-315S-6	75	100	96.3	0.84	141	134	990	723	2.0	2.0	8.0	5.07	1320
YE5-315M-6	90	125	96.5	0.85	167	158	990	868	2.0	2.0	8.0	5.59	1450
YE5-315L1-6	110	150	96.6	0.85	204	193	990	1061	2.0	2.0	8.0	6.25	1480
YE5-315L2-6	132	180	96.8	0.86	241	229	990	1273	2.0	2.0	8.0	7.69	1580
YE5-355M-6	160	220	96.9	0.85	295	280	995	1534	1.9	2.0	8.0	8.28	2100
YE5-355L-6	185	250	97.0	0.84	345	328	995	1776	1.9	2.0	8.0	8.58	2150
YE5-355M2-6	200	270	97.0	0.84	373	354	995	1920	1.9	2.0	8.0	8.66	2150
YE5-355L1-6	220	300	97.0	0.84	410	390	995	2112	1.9	2.0	8.0	8.78	2200
YE5-355L-6	250	340	97.0	0.84	466	443	995	2399	1.9	2.0	8.0	8.80	2330
YE5-355L-6	280	375	97.0	0.83	528	502	995	2687	1.6	2.0	8.0	8.94	2280

MECWIN®
EMPOWERING FUTURE


YE5 Performance Data 8P Synchronous Speed 750 50Hz

Type	Rated Output		Efficiency η%	Power Factor cosφ	A Rated Current		Speed (rpm)	Torque (Nm)	Ts/Tn	Tmax/Tn	Is/In	Moment of inertia (kg·m²)	Weight (kg)
	kW	HP			380V	400V							
YE5-100L-8	0.75	1	82.0	0.66	2.11	2.00	710	10.1	1.8	2.0	7.4	0.0124	42
YE5-100L1-8	1.1	1.5	84.0	0.66	3.01	2.86	710	14.8	1.8	2.0	7.1	0.0163	49
YE5-112M-8	1.5	3	85.5	0.67	3.98	3.78	710	20.2	1.8	2.0	7.2	0.0269	61
YE5-132S-8	2.2	4	87.2	0.69	5.56	5.28	710	29.2	1.9	2.0	7.4	0.0486	80
YE5-132M-8	3	4	89.4	0.69	7.47	7.10	720	39.8	1.9	2.0	7.8	0.0628	95
YE5-160M-8	4	5.5	89.4	0.69	9.85	9.36	730	52.3	1.9	2.0	7.9	0.48	125
YE5-160M2-8	5.5	7.5	90.4	0.70	13.2	12.5	730	72.0	2.0	2.0	8.1	0.64	135
YE5-160L-8	7.5	10	91.3	0.70	17.8	16.9	730	98.1	2.0	2.0	7.8	1.11	160
YE5-180L-8	11	15	92.2	0.72	25.2	23.9	735	143	1.9	2.0	7.9	1.68	190
YE5-200L-8	15	20	92.9	0.72	34.1	32.4	735	195	1.9	2.0	8.0	2.39	220
YE5-225S-8	18.5	25	93.3	0.75	40.2	38.2	740	239	1.9	2.0	8.0	2.88	310
YE5-225M-8	22	30	93.6	0.76	47.0	44.6	740	284	1.9	2.0	8.3	3.85	360
YE5-250M-8	30	40	94.1	0.77	62.9	59.8	740	387	1.9	2.0	7.8	5.42	400
YE5-280S-8	37	50	94.4	0.77	77.3	73.5	740	478	1.8	2.0	7.9	6.11	550
YE5-280M-8	45	60	94.7	0.78	92.6	87.9	740	581	1.8	2.0	7.9	7.08	600
YE5-315S-8	55	75	94.9	0.78	113	107	745	705	1.8	2.0	8.1	7.72	1140
YE5-315M-8	75	100	95.3	0.78	153	146	745	961	1.8	2.0	7.6	9.23	1180
YE5-315L1-8	90	125	95.5	0.78	184	174	745	1154	1.8	2.0	7.7	9.64	1350
YE5-315L2-8	110	150	95.7	0.78	224	213	745	1410	1.8	2.0	7.7	10.7	1480
YE5-355M1-8	132	180	95.9	0.79	265	251	745	1692	1.8	2.0	7.8	11.8	1900
YE5-355M2-8	160	220	96.1	0.79	320	304	745	2051	1.8	2.0	7.8	13.1	2050
YE5-355L-8	200	270	96.3	0.79	370	351	745	2564	1.8	2.0	7.8	14.4	2200


YE5 Motor Installation and Boundary Dimensions B3

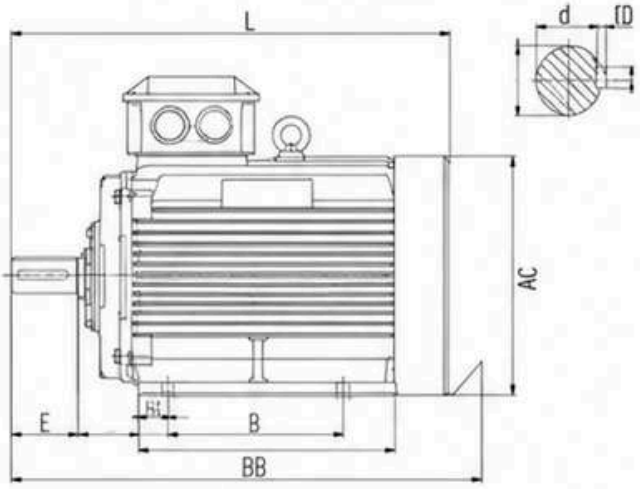


H80~100

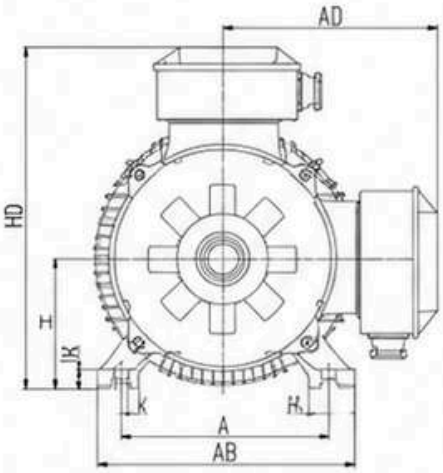


H80~100

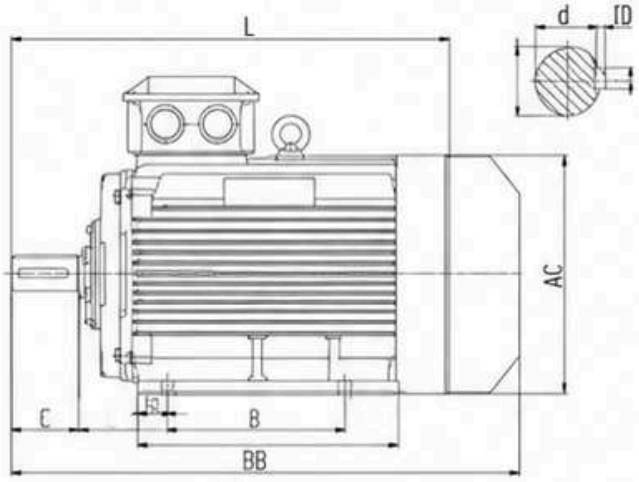


H112~280

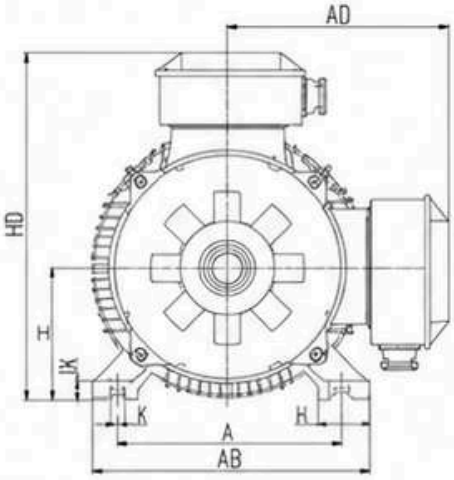

H112~280

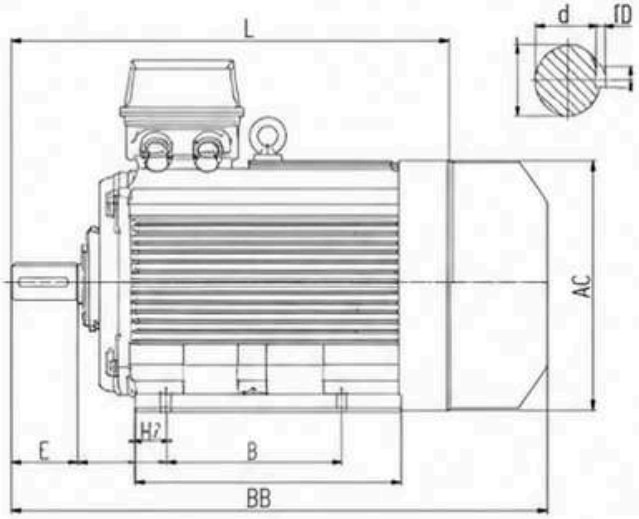

H315~355

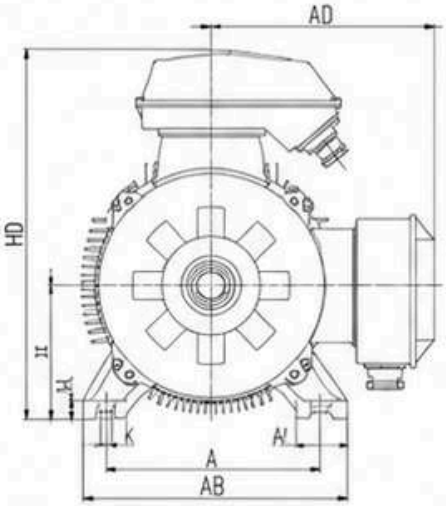

H315~355


MECWIN®
EMPOWERING FUTURE

YE5 Motor Installation and Overall Dimensions B3


Type	Pole	A	B	B2	C	D	F	GD	G	E	H	K	AA	AB	AC	AD	BB	HA	HD	L
80M	2,4,6	125	100	15	50	19	6	6	15.5	40	80	10	34	160	175	150	167	10	230	320
90S	2,4,6	140	100	20	56	24	8	7	20	50	90	10	36	176	205	155	180	12	245	350
90L	2,4,6	140	125	20	56	24	8	7	20	50	90	10	36	176	205	155	210	12	245	380
100L	2,4,6	160	140	18	63	28	8	7	24	60	100	12	40	200	215	170	233	14	270	440
112M	2,4,6,8	190	140	20	70	28	8	7	24	60	112	12	45	226	255	193	248	15	315	470
132S	2,4,6,8	216	140	23	89	38	10	8	33	80	132	12	55	262	310	240	256	18	365	550
132M	4,6,8	216	178	23	89	38	10	8	33	80	132	12	55	262	310	240	256	18	365	550
160M	2,4,6,8	254	210	25	108	42	12	8	37	110	160	14.5	65	314	340	270	315	20	440	730
160L	2,4,6,8	254	254	25	108	42	12	8	37	110	160	14.5	65	314	340	270	355	20	440	760
180M	2,4	279	241	35	121	48	14	9	42.5	110	180	14.5	70	349	390	300	359	22	480	780
180L	4,6,8	279	279	35	121	48	14	9	42.5	110	180	14.5	70	349	390	300	394	22	480	810
200L	2,4,6,8	318	305	30	133	55	16	10	49	110	200	18.5	70	388	445	335	454	25	585	885
225M	2	356	311	45	149	55	16	10	49	110	225	18.5	75	431	495	360	466	28	585	895
225S	4,8	356	286	45	149	60	18	11	53	140	225	18.5	75	431	495	360	431	28	585	890
225M	4,6,8	356	311	45	149	60	18	11	53	140	225	18.5	75	431	495	360	466	28	585	925
250M	2	406	349	60	148	60	18	11	53	140	250	24	80	484	550	405	515	30	655	1020
250M	4,6,8	406	349	60	168	65	18	11	58	140	250	24	80	484	550	405	515	30	655	1020
280S	2	457	368	78	190	65	18	11	58	140	280	24	85	542	630	540	550	35	720	1060
280S	4,6,8	457	368	78	190	75	20	12	67.5	140	280	24	85	542	630	540	550	35	720	1060
280M	2	457	419	78	190	65	18	11	58	140	280	24	85	542	630	540	550	35	720	1060
280M	4,6,8	457	419	78	190	75	20	12	67.5	140	280	24	85	542	630	540	550	35	720	1060
315S	2	508	406	84	216	65	18	11	58	140	315	28	120	628	645	550	680	45	870	1300
315S	4,6,8	508	457	84	216	80	22	14	71	170	315	28	120	628	645	550	680	45	870	1360
315M	2	508	457	84	216	65	18	11	58	140	315	28	120	628	645	550	680	45	870	1400
315M	4,6,8	508	508	84	216	80	22	14	71	170	315	28	120	628	645	550	680	45	870	1460
315L	2	508	508	84	216	65	18	11	58	140	315	28	120	628	645	550	680	45	870	1400
315L	4,6,8	508	508	84	216	80	22	14	71	170	315	28	120	628	645	550	680	45	870	1460
355M	2	610	560	41	254	75	20	12	67.5	140	355	28	150	766	740	665	985	52	1030	1620
355M	4,6,8	610	560	41	254	95	25	14	86	170	355	28	150	766	740	665	985	52	1030	1660
355L	2	610	560	41	254	75	20	12	67.5	140	355	28	150	766	740	665	985	52	1030	1690
355L	4,6,8	610	630	41	254	95	25	14	86	170	355	28	150	766	740	665	985	52	1030	1720
355I	2	610	560	41	254	75	20	12	67.5	140	355	28	150	766	740	665	985	52	1030	1690
355I	4,6	610	630	41	254	95	25	14	86	170	355	28	150	766	740	665	985	52	1030	1720

YE5 Motor Installation and Overall Dimensions B35


IMB35
H80~90 Frame

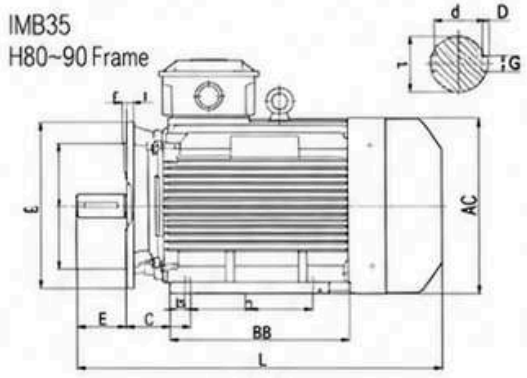


H80~100




H80~100

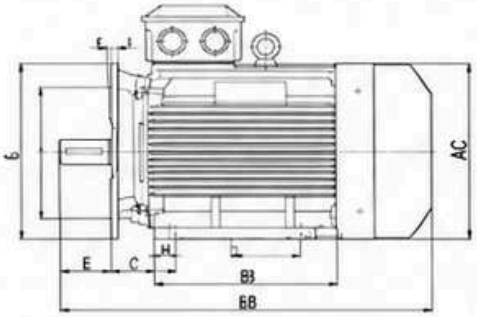


H112~200




H112~200

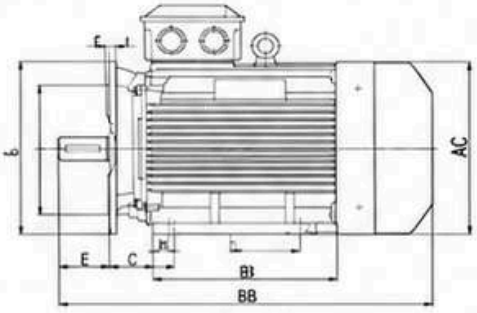


H225~280

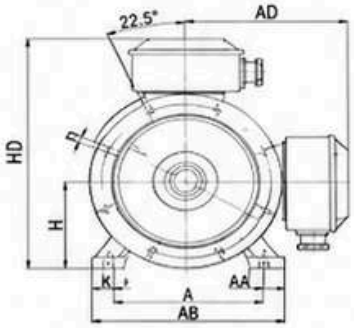

H225~280

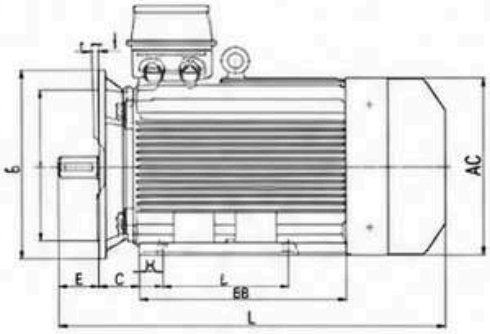

H315~355

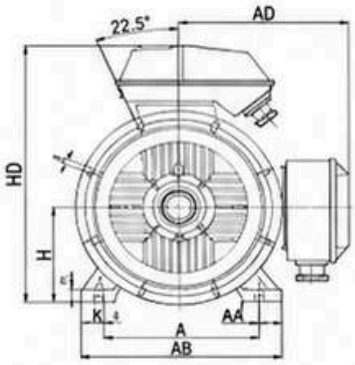


H315~355

MECWIN®
EMPOWERING FUTURE


YE5 Motor Installation and Overall Dimensions B35

Type	Pole	A	B	B2	C	D	F	GD	G	E	H	K	M	N	P	S	AA	AB	AC	AD	BB	HA	HD	LA	T	L
80M	2,4,6	125	100	15	50	19	6	6	15.5	40	80	10	165	130	200	4-Φ12	34	160	175	150	167	10	230	12	3.5	320
90S	2,4,6	140	100	20	56	24	8	7	20	50	90	10	165	130	200	4-Φ12	36	176	205	155	180	12	245	12	3.5	350
90L	2,4,6	140	125	20	56	24	8	7	20	50	90	10	165	130	200	4-Φ12	36	176	205	155	210	12	245	12	3.5	380
100L	2,4,6	160	140	18	63	28	8	7	24	60	100	12	215	180	250	4-Φ14.5	40	200	215	170	233	14	270	13	4	440
112M	2,4,6,8	190	140	20	70	28	8	7	24	60	112	12	215	180	250	4-Φ14.5	45	226	255	193	248	15	315	14	4	470
132S	2,4,6,8	216	140	23	89	38	10	8	33	80	132	12	265	230	300	4-Φ14.5	55	262	310	240	256	18	365	14	4	550
132M	4,6,8	216	178	23	89	38	10	8	33	80	132	12	265	230	300	4-Φ14.5	55	262	310	240	256	18	365	14	4	550
160M	2,4,6,8	254	210	25	108	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	65	314	340	270	315	20	440	16	5	730
160L	2,4,6,8	254	254	25	108	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	65	314	340	270	355	20	440	16	5	760
180M	2,4	279	241	35	121	48	14	9	42.5	110	180	14.5	300	250	350	4-Φ18.5	70	349	390	300	359	22	480	15	5	780
180L	4,6,8	279	279	35	121	48	14	9	42.5	110	180	14.5	300	250	350	4-Φ18.5	70	349	390	300	394	22	480	15	5	810
200L	2,4,6,8	318	305	30	133	55	16	10	49	110	200	18.5	350	300	400	4-Φ18.5	70	388	445	335	454	25	535	17	5	885
225M	2	356	311	45	149	55	16	10	49	110	225	18.5	400	350	450	8-Φ18.5	75	431	495	360	466	28	585	20	5	895
225S	4,8	356	286	45	149	60	18	11	53	140	225	18.5	400	350	450	8-Φ18.5	75	431	495	360	431	28	585	20	5	890
225M	4,6,8	356	311	45	149	60	18	11	53	140	225	18.5	400	350	450	8-Φ18.5	75	431	495	360	466	28	585	20	5	925
250M	2	406	349	60	168	60	18	11	53	140	250	24	500	450	550	8-Φ18.5	80	484	550	405	515	30	655	22	5	1020
250M	4,6,8	406	349	60	168	65	18	11	58	140	250	24	500	450	550	8-Φ18.5	80	542	630	540	550	35	720	22	5	1060
280S	2	457	368	78	190	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	85	542	630	540	550	35	720	22	5	1060
280S	4,6,8	457	368	78	190	75	20	12	67.5	140	280	24	500	450	550	8-Φ18.5	85	542	630	540	550	35	720	22	5	1060
280M	2	457	419	78	190	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	85	542	630	540	550	35	720	22	5	1060
280M	4,6,8	457	419	78	190	75	20	12	67.5	140	280	24	500	450	550	8-Φ18.5	85	542	630	540	550	35	720	22	5	1060
315S	2	508	406	84	216	65	18	11	58	140	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6	1300
315S	4,6,8	508	457	84	216	80	22	14	71	170	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6	1360
315M	2	508	457	84	216	65	18	11	58	140	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6	1400
315M	4,6,8	508	457	84	216	80	22	14	71	170	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6	1460
315L	2	508	508	84	216	65	18	11	58	140	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6	1400
315L	4,6,8	508	508	84	216	80	22	14	71	170	315	28	600	550	660	8-Φ24	120	628	645	550	680	45	870	22	6	1460
355M	2	610	560	41	254	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	150	766	740	665	985	52	1030	25	6	1620
355M	4,6,8	610	560	41	254	95	25	14	86	170	355	28	740	680	800	8-Φ24	150	766	740	665	985	52	1030	25	6	1660
355L	2	610	560	41	254	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	150	766	740	665	985	52	1030	25	6	1690
355L	4,6,8	610	630	41	254	95	25	14	86	170	355	28	740	680	800	8-Φ24	150	766	740	665	985	52	1030	25	6	1720
355I	2	610	560	41	254	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	150	766	740	665	985	52	1030	25	6	1690
355I	4,6	610	630	41	254	95	25	14	86	170	355	28	740	680	800	8-Φ24	150	766	740	665	985	52	1030	25	6	1720


YE5 Motor Installation and Overall Dimensions B5 (H80~280)

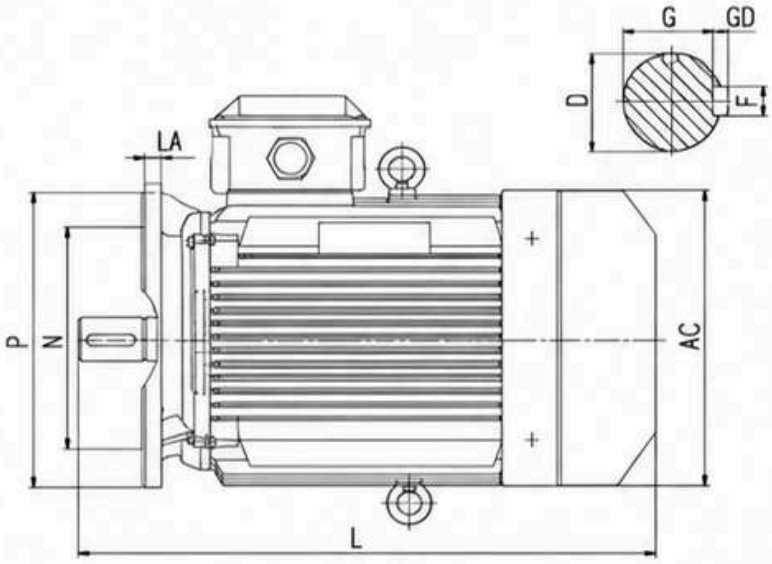


H80-100

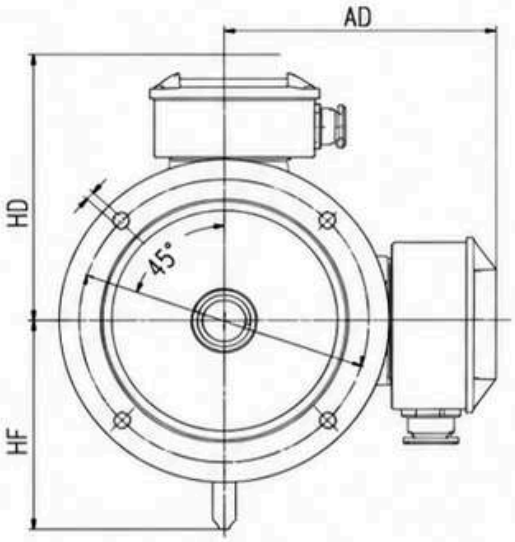


H80-100

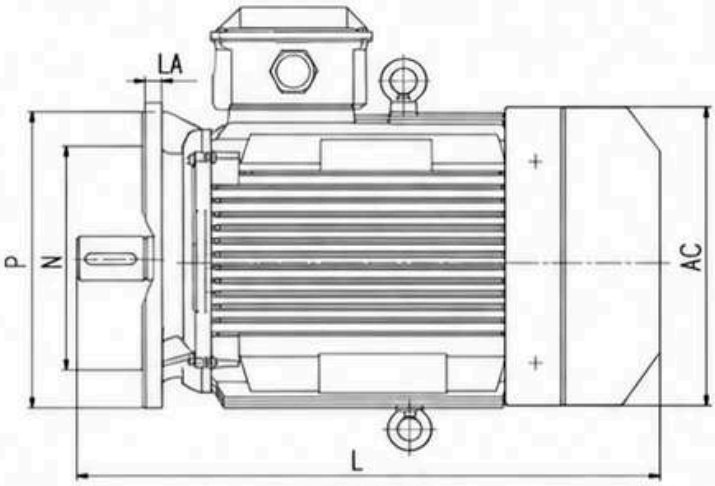


H112-200

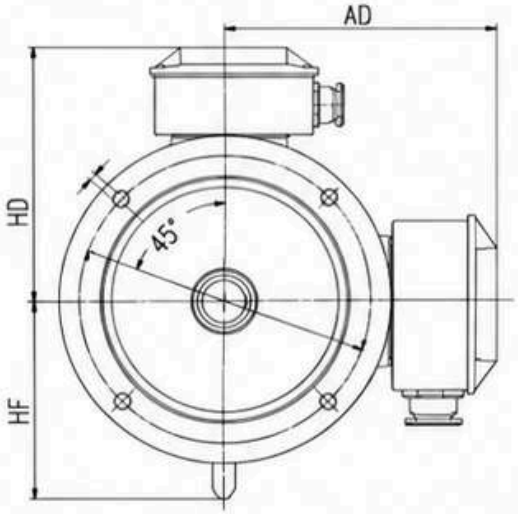

H112-200

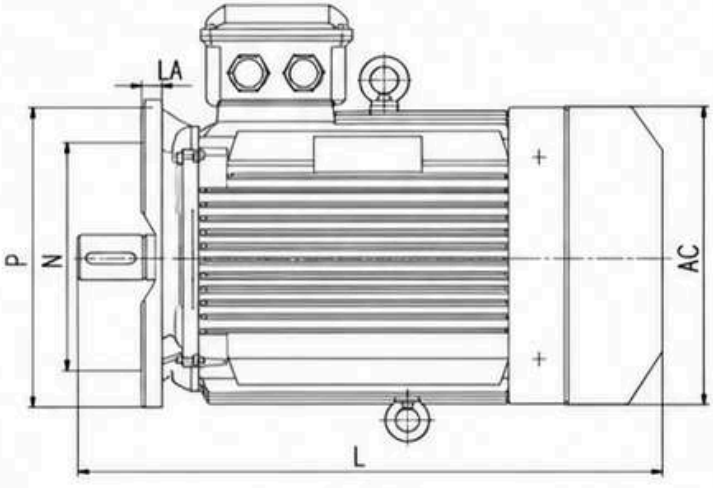

H225-280

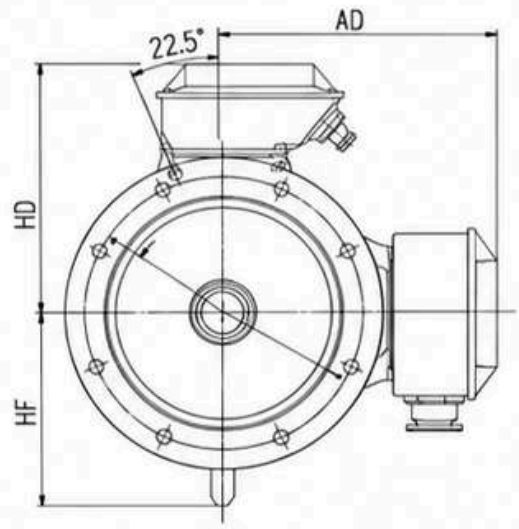


H225-280


YE5 Motor Installation and Overall Dimensions B5 (H80~280)


Type	Pole	D	F	GD	G	E	H	K	M	N	P	S	AC	AD	HF	LA	T	L
80M	2,4,6	19	6	6	15.5	40	80	10	165	130	200	4-Φ12	175	150	-	12	3.5	320
90S	2,4,6	24	8	7	20	50	90	10	165	130	200	4-Φ12	205	155	-	12	3.5	350
90L	2,4,6	24	8	7	20	50	90	10	165	130	200	4-Φ12	205	155	-	12	3.5	380
100L	2,4,6	28	8	7	24	60	100	12	215	180	250	4-Φ14.5	215	170	145	13	4	440
112M	2,4,6,8	28	8	7	24	60	112	12	215	180	250	4-Φ14.5	255	193	155	14	4	470
132S	2,4,6,8	38	10	8	33	80	132	12	265	230	300	4-Φ14.5	310	240	200	14	4	550
132M	4,6,8	38	10	8	33	80	132	12	265	230	300	4-Φ14.5	310	240	200	14	4	550
160M	2,4,6,8	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	340	270	230	16	5	730
160L	2,4,6,8	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	340	270	230	16	5	760
160L	2,4,6,8	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	340	270	230	16	5	760
180M	2,4	48	14	9	42.5	110	180	14.5	300	250	350	4-Φ18.5	390	300	245	15	5	780
180L	4,6,8	48	14	9	42.5	110	180	14.5	300	250	350	4-Φ18.5	390	300	245	15	5	810
200L	2,4,6,8	55	16	10	49	110	200	18.5	350	300	400	4-Φ18.5	445	335	260	17	5	885
225M	2	55	16	10	49	110	225	18.5	400	350	450	8-Φ18.5	495	360	305	20	5	895
225S	4,8	60	18	11	53	140	225	18.5	400	350	450	8-Φ18.5	495	360	305	20	5	890
225M	4,6,8	60	18	11	53	140	225	18.5	400	350	450	8-Φ18.5	495	360	305	20	5	925
250M	2	60	18	11	53	140	250	24	500	450	550	8-Φ18.5	550	405	330	22	5	1020
250M	4,6,8	65	18	11	58	140	250	24	500	450	550	8-Φ18.5	550	405	330	22	5	1020
280S	2	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	630	540	380	22	5	1060
280S	4,6,8	75	20	12	67.5	140	280	24	500	450	550	8-Φ18.5	630	540	380	22	5	1060
280M	2	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	630	540	380	22	5	1060
280M	4,6,8	75	20	12	67.5	140	280	24	500	450	550	8-Φ18.5	630	540	380	22	5	1060

YE5 Motor Installation and Overall Dimensions V1 (H80~355)

IMV1
H80~90&8#

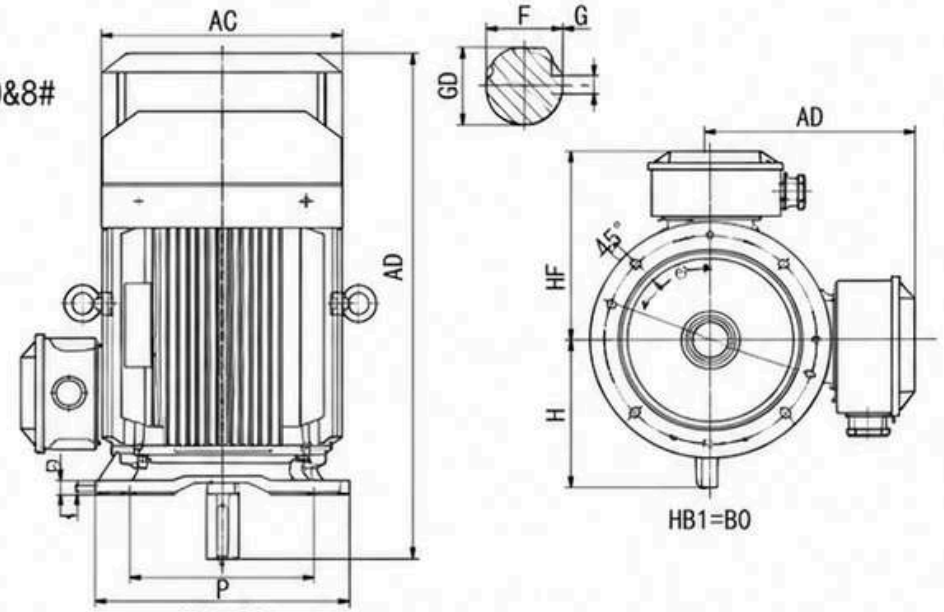

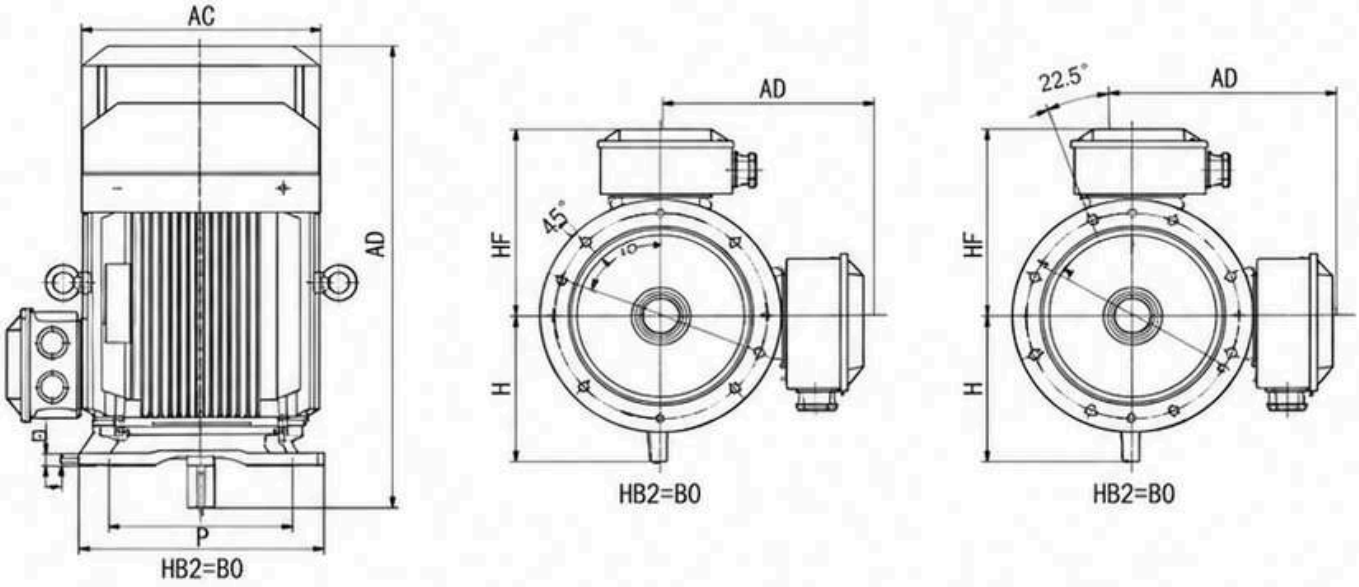

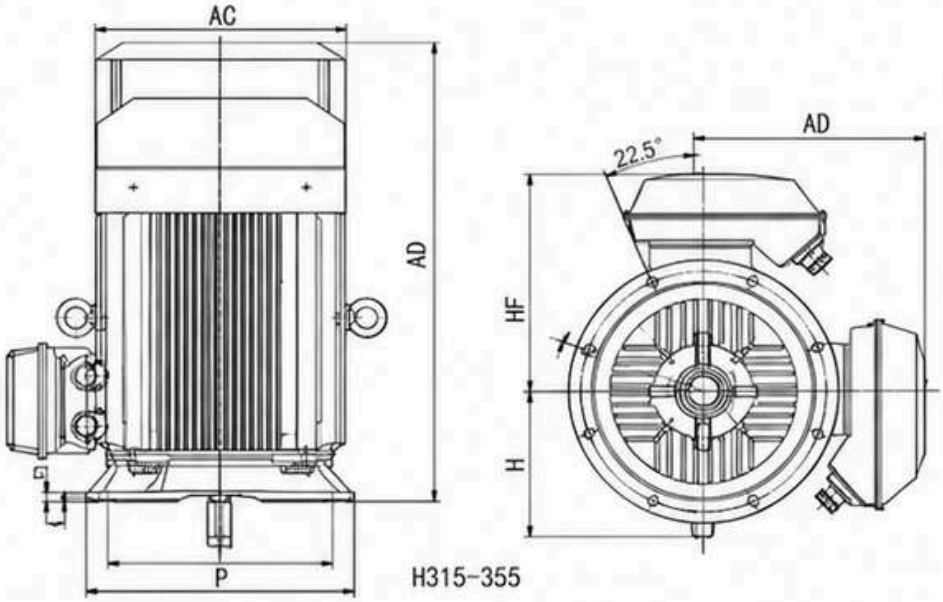


MECWIN®
EMPOWERING FUTURE

YE5 Motor Installation and Overall Dimensions V1 (H80~355)


Type	Pole	D	F	GD	G	E	H	K	M	N	P	S	AC	AD	HF	LA	T	L
80M	2,4,6	19	6	6	15.5	40	80	10	165	130	200	4-Φ12	175	150	-	12	3.5	320
90S	2,4,6	24	8	7	20	50	90	10	165	130	200	4-Φ12	205	155	-	12	3.5	350
90L	2,4,6	24	8	7	20	50	90	10	165	130	200	4-Φ12	205	155	-	12	3.5	380
100L	2,4,6	28	8	7	24	60	100	12	215	180	250	4-Φ14.5	215	170	145	13	4	440
112M	2,4,6,8	28	8	7	24	60	112	12	215	180	250	4-Φ14.5	255	193	155	14	4	470
132S	2,4,6,8	38	10	8	33	80	132	12	265	230	300	4-Φ14.5	310	240	200	14	4	550
132M	4,6,8	38	10	8	33	80	132	12	265	230	300	4-Φ14.5	310	240	200	14	4	550
160M	2,4,6,8	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	340	270	230	16	5	730
160L	2,4,6,8	42	12	8	37	110	160	14.5	300	250	350	4-Φ18.5	340	270	230	16	5	760
180M	2,4	48	14	9	42.5	110	180	14.5	300	250	350	4-Φ18.5	390	300	245	15	5	780
180L	4,6,8	48	14	9	42.5	110	180	14.5	300	250	350	4-Φ18.5	390	300	245	15	5	810
200L	2,4,6,8	55	16	10	49	110	200	18.5	350	300	400	8-Φ18.5	445	335	260	17	5	885
225M	2	55	16	10	49	110	225	18.5	400	350	450	8-Φ18.5	495	360	305	20	5	895
225S	4,8	60	18	11	53	140	225	18.5	400	350	450	8-Φ18.5	495	360	305	20	5	890
225M	4,6,8	60	18	11	53	140	225	18.5	400	350	450	8-Φ18.5	495	360	305	20	5	925
250M	2	60	18	11	53	140	250	24	500	450	550	8-Φ18.5	550	405	330	22	5	1020
250M	4,6,8	65	18	11	58	140	250	24	500	450	550	8-Φ18.5	550	405	330	22	5	1020
280S	2	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	630	540	380	22	5	1060
280S	4,6,8	75	20	12	67.5	140	280	24	500	450	550	8-Φ18.5	630	540	380	22	5	1060
280M	2	65	18	11	58	140	280	24	500	450	550	8-Φ18.5	630	540	380	22	5	1060
280M4	4,6,8	75	20	12	67.5	140	280	24	500	450	550	8-Φ18.5	630	540	380	22	5	1060
315S	2	65	18	11	58	140	315	28	600	550	660	8-Φ24	645	550	430	22	6	1420
315S	4,6,8	80	22	14	71	170	315	28	600	550	660	8-Φ24	645	550	430	22	6	1500
315M	2	65	18	11	58	140	315	28	600	550	660	8-Φ24	645	550	430	22	6	1520
315M	4,6,8	80	22	14	71	170	315	28	600	550	660	8-Φ24	645	550	430	22	6	1600
315L	2	65	18	11	58	140	315	28	600	550	660	8-Φ24	645	550	430	22	6	1420
315L	4,6,8	80	22	14	71	170	315	28	600	550	660	8-Φ24	645	550	430	22	6	1500
355M	2	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	740	665	490	25	6	1760
355M	4,6,8	95	25	14	86	170	355	28	740	680	800	8-Φ24	740	665	490	25	6	1800
355L	2	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	740	665	490	25	6	1830
355L	4,6,8	95	25	14	86	170	355	28	740	680	800	8-Φ24	740	665	490	25	6	1860
355I	2	75	20	12	67.5	140	355	28	740	680	800	8-Φ24	740	665	490	25	6	1830
355I	4,6	95	25	14	86	170	355	28	740	680	800	8-Φ24	740	665	490	25	6	1860

YE5 Motor Installation and Overall Dimensions B14 (H80~132)

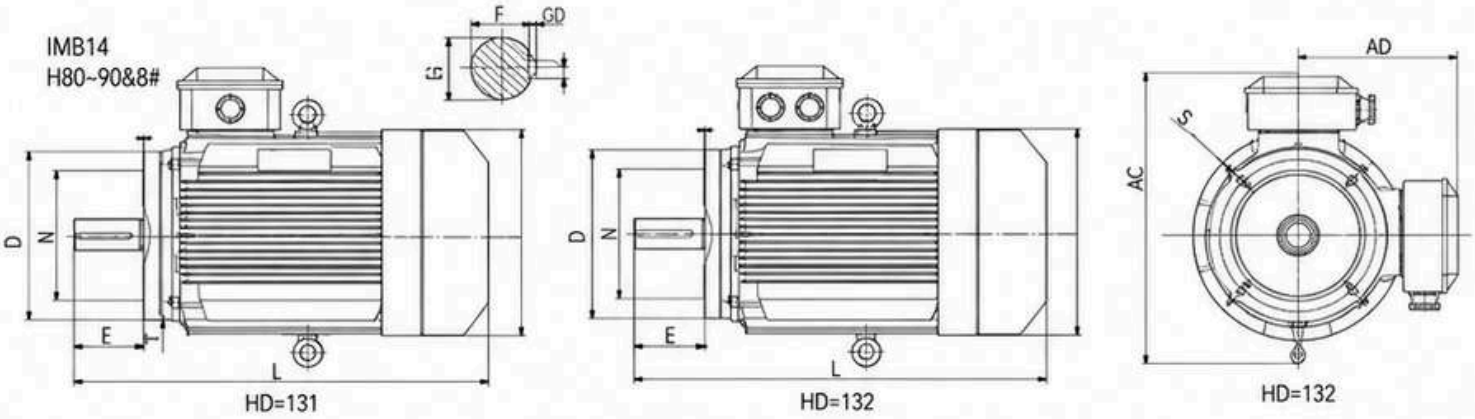

Type	Pole	D	F	GD	G	E	H	K	M	N	P	S	AC	AD	HF	LA	T	L
80M	2,4,6	19	6	6	15.5	40	80	100	80	120	4-M6	175	150	150	-	12	3.5	320
90S	2,4,6	24	8	7	20	50	90	115	95	140	4-M8	205	155	155	-	12	3.5	350
90L	2,4,6	24	8	7	20	50	90	115	95	140	4-M8	205	155	155	-	12	3.5	380
100L	2,4,6	28	8	7	24	60	100	130	110	160	4-M8	215	170	196	145	13	4	440
112M	2,4,6,8	28	8	7	24	60	112	130	110	160	4-M8	255	255	193	155	14	4	470
132S	2,4,6,8	38	10	8	33	80	132	165	130	200	4-M8	310	240	240	200	14	4	550
132M	4,6,8	38	10	8	33	80	132	165	130	200	4-M8	310	240	240	200	14	4	550

YE5 Motor Installation and Overall Dimensions B34 (H80~132)

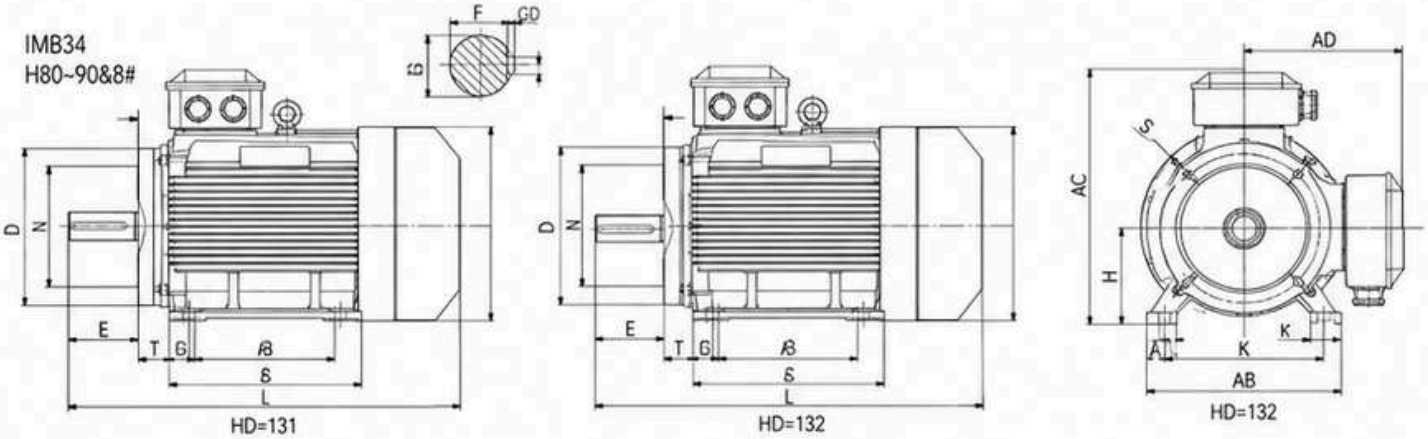

Type	Pole	A	B	B2	C	D	F	GD	G	E	H	K	M	N	P	S	AA	AB	AC	AD	BB	HA	HA	D	T	L
80M	2,4,6	125	100	15	50	19	6	6	15.5	40	80	10	100	80	120	4-M6	34	160	175	150	167	10	230	230	3.5	320
90S	2,4,6	140	100	20	56	24	8	7	20	50	90	10	115	95	140	4-M8	36	176	205	155	180	12	245	245	3.5	350
90L	2,4,6	140	125	20	56	24	8	7	20	50	90	10	115	95	140	4-M8	36	176	205	155	210	12	245	245	3.5	380
100L	2,4,6	160	140	18	63	28	8	7	24	60	100	12	130	110	160	4-M8	40	200	215	170	233	14	270	4	4	440
112M	2,4,6,8	190	140	20	70	28	8	7	24	60	112	12	130	110	160	4-M8	45	226	255	193	248	15	315	5	4	470
132S	2,4,6,8	216	140	23	89	38	10	8	33	80	132	12	165	130	200	4-M8	55	262	310	240	256	18	365	4	4	550
132M	4,6,8	216	178	23	89	38	10	8	33	80	132	12	165	130	200	4-M8	55	262	310	240	256	18	365	4	4	550

Motor Bearing Configuration

Base Number	Shaft Extension End		Non Axial extension End	
	2 Poles	4 Poles and Above	2 Poles	4 Poles and Above
80	6204-2Z/C3		6204-2Z/C3	
90	6205-2Z/C3		6205-2Z/C3	
100	6206-2Z/C3		6206-2Z/C3	
112	6206-2Z/C3		6206-2Z/C3	
132	6208-2Z/C3		6208-2Z/C3	
160	6309-2Z/C3		6309-2Z/C3	
180	6311-2Z/C3		6311-2Z/C3	
200	6312-2Z/C3		6312-2Z/C3	
225	6312/C3	6313/C3	6312/C3	
250		6314/C3		6313/C3
280	6314/C3	6317/C3		6314/C3
315	6317/C3	6319/C3	6317/C3	6319/C3
355	6319/C3	6322/C3	6319/C3	6322/C3

Motor Junction Box

Base Number	Boundary dimensions of junction box (Width × Length × High) mm	Wiring Bolt Specifications	Terminal box main outlet screw sleeve (Quantity Specification)	Main outlet screw sleeve (single) Applicable cable outer diameter (mm)	Auxiliary outlet hole (when required) (Quantity Specification)
80~100	116×124×57	M4	1-M20×1.5	6~12	1-M16×1.5
112~132	126×134×66	M5	2-M25×1.5	13~18	
160~180	180×240×90	M6	2-M40×1.5	22~30	
220~225	216×276×113	M8	2-M50×1.5	32~38	
250~280	240×300×133	M10	2-M63×1.5	37~44	
315	295×472×90	M12	2-M63×1.5	37~44	
355	350×540×200	M16	2-M63×1.5	37~44	

When the motor is equipped with a temperature measuring element, the temperature measuring element is connected to the junction box with an auxiliary outlet hole, and the lead wire connecting the temperature measuring passes through this hole.

Motor Vibration

Axis center height (mm)	80≤H≤132			132<H≤280			H>280		
Mounting type IMB	Displacement (μm)	Speed (mm/s)	Accelerated speed (m/s^2)	Displacement (μm)	Speed (mm/s)	Accelerated speed (m/s^2)	Displacement (μm)	Speed (mm/s)	Accelerated speed (m/s^2)
Free suspension	25	16	2.5	35	22	3.5	45	2.8	4.4
Rigid Mounting	21	13	2.0	29	1.8	2.8	37	2.3	3.6

Motor Noise (Sound Power Level Value Lwa at No Load)

Unit: dB

Center Height H	Poles				
	2P	4P	6P	8P	10P
80	62	56	54	52	–
90	67	59	57	56	–
100	74	64	61	59	–
112	77	65	65	61	–
132	79	71	69	64	–
160	81	73	73	68	–
180	83	76	73	70	–
200	84	76	73	73	–
225	86	78	74	73	–
250	89	79	76	75	–
280	91	80	78	76	–
315	92	88	83	82	82
355	100	95	85	90	90
3551, 3552, 3553	100	95	91	89	–
400	100	95	92	91	–
450	100	95	95	93	–

C-shaped Center Hole at the Extension End of the Motor Shaft

Center Height H	C-shaped Hole Specifications	Center Height H	C-shaped Hole Specifications
80	M6×24	160~180	M16×40
90	M8×24	200~315	M20×56
100~112	M10×28	355	M24×56
132	M12×30	-	-

Note: The motor shaft extension end is not equipped with a C-shaped center hole. If the customer needs it, follow the above specifications and indicate in the order that a C-shaped center hole is required.

Damp Proof Heating Strip Parameters


Base Number	80~90	100~112	132~160	180~200	225~280	315	355	400	450	500	560
Power (W)	20	30	40	50	60	80	100	110	130	160	190
Voltage (V)	220/230										

Note: The motor is not equipped with moisture-proof heating strips.
If requested by the customer, please indicate in the order.

Appendix

Installation Distance of Motor (Air Inlet Distance)

To ensure sufficient cooling of the motor, the minimum distance BL between the outer edge of the motor's hood and the air inlet (see table below) should be ensured.

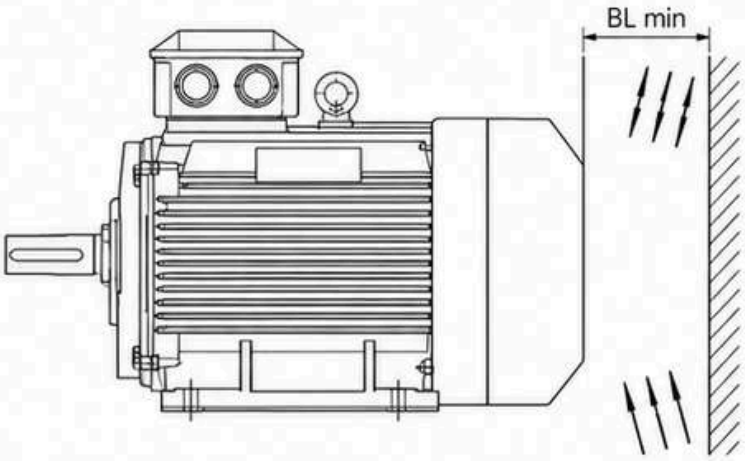

Frame	BL (mm)
80~100	15
112~132	30
160~180	40
200~280	50
315~355	65

When the motor operates at higher ambient temperatures or altitudes, the output power of the motor will correspondingly decrease. The conversion factor for the rated power of the motor is kHT. The output power of the motor = the rated power of the motor × kHT.


Power Conversion Coefficient kHT Corresponding to Different Altitudes and/or Ambient Temperatures

Altitude (m)	Environmental Temperature Corresponding to Altitude					
	<30°C	30~40°C	45°C	50°C	55°C	60°C
1000	1.07	1.00	0.96	0.92	0.87	0.82
1500	1.04	0.97	0.93	0.89	0.84	0.79
2000	1.00	0.94	0.90	0.86	0.82	0.77
2500	0.96	0.90	0.86	0.83	0.78	0.74
3000	0.92	0.86	0.82	0.79	0.75	0.70
3500	0.88	0.82	0.79	0.75	0.71	0.67
4000	0.82	0.77	0.71	0.71	0.67	0.63

When the standard motor 22 kW operates at an ambient temperature of 50°C and an altitude of 2500 m, its actual output power is 22 × 0.83 = 18.26 kW.

Appendix

Insulation Class

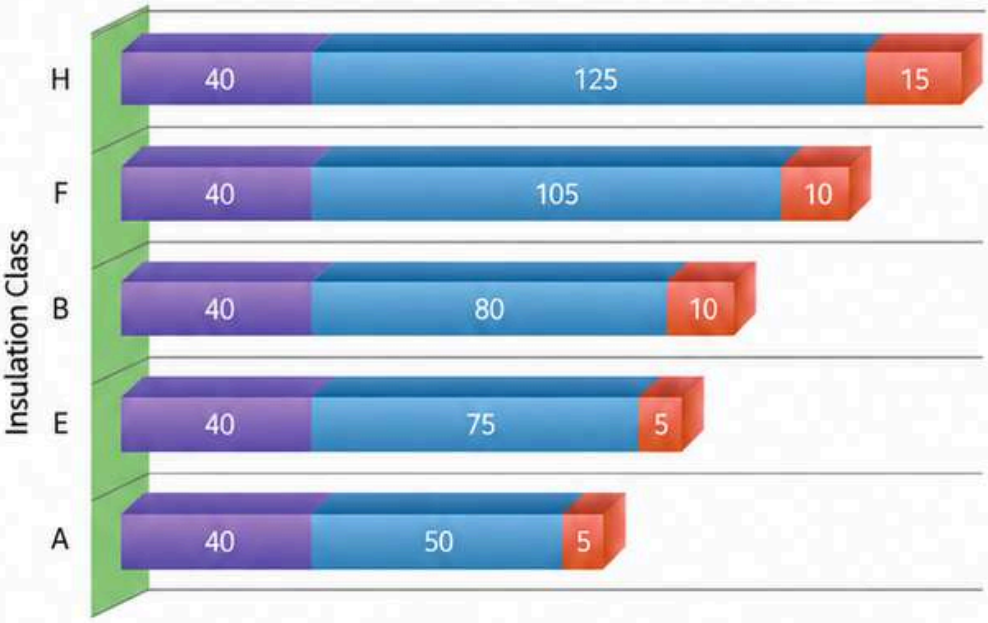

Ambient temperature (°C)	
Maximum temperature rise (°C)	
Temperature margin (°C)	

Ins. class	Maximum winding temperature
A	105°C
E	120°C
B	130°C
F	155°C
H	180°C

Color Selection

RAL 2000 Yellow orange

RAL 3000 Flame red

RAL 5007 Brilliant blue

RAL 7024 Graphite grey

RAL 5010 Gentain blue

RAL 7030 Stone grey

RAL 5012 Light blue

RAL 9011 Graphite black


Motor usage power convert, under different amb., different altitude

Amb (°C)	usage factor after conversion	altitude (m)	usage factor after conversion
30	1.06	1000	1.00
35	1.03	1500	0.98
40	1.00	2000	0.94
45	0.97	2500	0.91
50	0.93	3000	0.87
55	0.88	3500	0.82
60	0.82	4000	0.77

Eg: For rated power 22kw motor under amb 50°C, altitude 2500m , the actual motor power for using is: 22X0.93X0.91=18.6kW

Motor installation distance (Wind inlet distance)

To make sure the motor can be cooled completely ,the minimal BL distance between fan cover edge and wind inlet must be confirmed as follow data sheet .

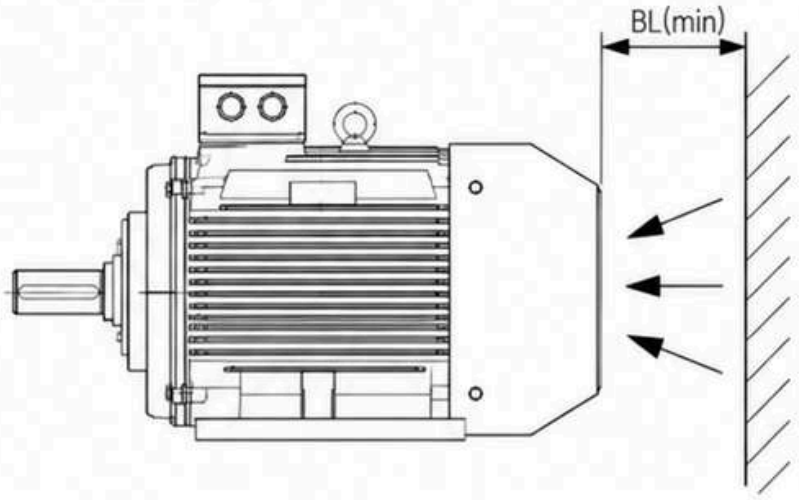

Frame	BL (mm)
80 ~ 100	15
112 ~ 132	30
160 ~ 180	40
200 ~ 280	50
315 ~ 355	65

MECWIN Global Customers



International Compliance Support

- Products can bedesignedandvalidatedforapplicable:
- IEC and EN standards
- CE conformity requirements
- UL and CSA requirements
- RoHS and REACH compliance
- ATEX requirements for hazardous-area applications
- MIL-STD environmental testing requirements
- Customer-specific testing and qualification standards

Certifications and third-party testing can be undertaken based on product application, destination country and customer requirements.
Partner with Mecwin

FromAgriculture toAviation, Mecwindeliversengineered motorsolutionsforglobalapplications.
Design in India. Manufacture in Bengaluru. Supply to the World.

www.mecwinindia.com

CONTACT US

Our Service & Support team are directly accessible in 18+ states in India.
MECWIN's trained service engineers can help with site survey, system sizing, installation, commissioning and on time service support.





Mecwin Technologies India Pvt.Ltd

Manufacturing Plant
Mecwin InfinityTechPark,#42/2, Opp.Machohalli Lake, K.G. Lakkenahalli Road, Machohalli Village, Dasanapura-2 Hobli, Bengaluru North Taluk, 560091, India

Overseas Office
12 AmberClose,RugbyCV225GE, United Kingdom.

Customer Care No : + 91 97412 29797

Email : marketing@mecwinindia.com

Scan to Reach Us