


TECHNICAL DATA - MAA / BAA



Motor type	Rated output	Rated speed	Efficiency			Power factor	Current	Starting current	Rated torque	Starting torque	Breakdown torque	Sound pressure level	Moment of Inertia	Weight
			η %			$\cos\varphi$	I_n	I_s/I_n	T_n	T_s/T_n	T_{max}/T_n	L_{pA}	J	
	kW	rpm	100%	75%	50%		A	p.u.	Nm	p.u.	p.u.	dB(A)	kgm ²	kg
8 POLES - 400 V - 50 Hz														
MAA 71 MB8	0,12	690	51,0	48,2	47,5	0,59	0,6	2,6	1,7	2,5	2,5	39	0,0006	6,8
MAA 80 MA8	0,18	680	51,0	48,3	47,5	0,61	0,8	2,8	2,5	1,5	1,7	41	0,0024	9,9
MAA 80 MB8	0,25	680	56,0	53,3	52,0	0,61	1,1	2,7	3,5	1,6	2,0	41	0,0027	10,9
MAA 90 S8	0,37	680	59,3	56,5	56,0	0,66	1,4	3,0	5,2	1,9	2,0	45	0,0037	13,4
MAA 90 L8	0,55	680	66,0	62,6	62,0	0,65	1,9	3,0	7,7	1,6	1,8	45	0,0050	17,2
MAA 100 LA8	0,75	710	66,0	65,1	64,0	0,67	2,4	3,5	10,1	1,7	2,1	47	0,0090	17,5
MAA 100 LB8	1,1	710	72,0	70,8	69,0	0,69	3,2	3,5	14,8	1,7	2,1	47	0,0120	19,7
MAA 112 M8	1,5	710	74,0	74,0	72,0	0,68	4,3	4,2	20,2	2,0	2,4	49	0,0170	25,6
MAA 132 SA8	2,2	720	75,0	75,5	72,5	0,71	6,0	5,5	29,2	2,0	2,0	51	0,0380	35,5
MAA 132 MA8	3	720	77,0	77,9	75,0	0,73	7,7	5,5	39,8	1,7	2,3	52	0,0460	45
MAA 160 MA8	4	730	80,0	79,1	77,5	0,73	9,9	6,0	52,4	1,9	2,1	56	0,080	60
MAA 160 MB8	5,5	720	83,5	82,6	81,0	0,74	13	6,0	73,0	1,9	2,1	56	0,092	72
MAA 160 L8	7,5	720	85,0	84,6	83,5	0,75	17	6,0	100	1,9	2,1	56	0,110	92
BAA 160 MB8	5,5	720	83,3	83,2	81,5	0,74	13	6,0	73	2,0	2,0	56	0,0906	124
BAA 160 L8	7,5	720	85,9	85,5	84,2	0,75	17	6,0	100	1,9	2,1	56	0,124	136
BAA 180 L8	11	715	87,8	87,9	86,4	0,73	25	6,0	147	1,9	2,0	66	0,261	174
BAA 200 L8	15	725	88,3	88,3	87,9	0,76	32	6,0	198	1,9	2,0	67	0,339	220
BAA 225 S8	18,5	730	90,2	90,2	89,2	0,76	39	6,0	242	1,9	2,0	65	0,49	285
BAA 225 M8	22	740	90,8	90,3	90,1	0,76	48	6,6	284	1,9	2,0	65	0,59	310
BAA 250 M8	30	740	91,2	90,5	90,0	0,76	65	6,6	387	1,9	2,0	63	1,02	395
BAA 280 S8	37	740	91,2	90,5	90,0	0,78	77	6,6	478	1,9	2,0	64	1,89	523
BAA 280 M8	45	740	92,0	92,0	91,2	0,78	93	6,6	581	1,9	2,0	64	2,26	575
BAA 315 MA8	55	740	93,1	93,1	91,5	0,79	112	6,6	710	1,8	2,0	70	3,89	860
BAA 315 MB8	75	740	93,7	93,7	92,0	0,79	152	6,6	968	1,8	2,0	70	5,3	1020
BAA 315 MC8	90	740	94,0	94,0	92,0	0,80	179	6,6	1162	1,8	2,0	70	6,3	1100
BAA 315 MD8	110	745	94,2	94,2	92,0	0,80	218	6,4	1410	1,8	2,0	70	7,4	1200
BAA 355 S8	132	740	94,6	94,8	93,4	0,82	246	5,03	1704	1,6	2,0	90	7,55	1556
BAA 355 M8	160	740	94,7	94,9	93,2	0,81	298	5,28	2066	1,6	2,0	90	11,73	1704
BAA 355 L8	200	740	94,8	94,9	93,3	0,82	370	5,42	2582	1,6	2,0	90	12,86	1989

Data and Technical Specification are subject to change in order to update or improve the products, without prior notice.



DIMENSIONS - MAA / BAA

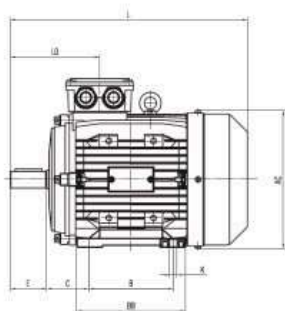



IM B3 (IM 1001)

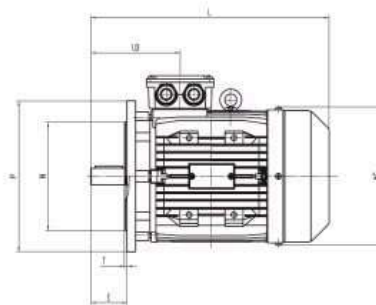



IM B5 (IM 3001) - V1 (IM 3011)

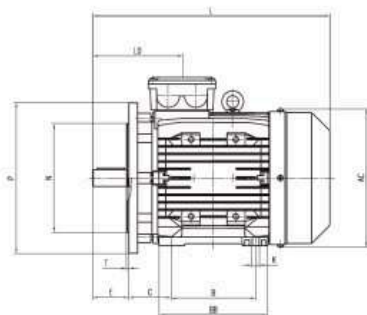


IM B35 (IM 2001)

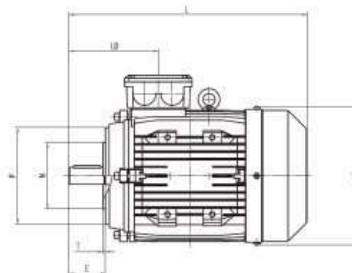

IM B14 (IM 3601)

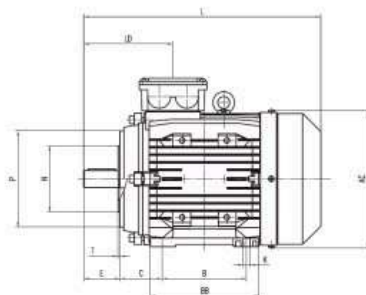

IM B34 (IM 2101)



MAA - ALUMINIUM

Frame Size	Pole	Feet											Flange					Flange					Shaft Extension					
		B3 - B35											B5 - V1					B14										
		A	AB	AC	B	BB	C	H	HA	HD	K	L	M	N	P	S	T	M	N	P	S	T	D	E	F	GA	DB	EG
63	2,8	100	120	122	80	100	40	63	7	173	7	215	115	95	140	9	3,0	75	60	90	M5	2,5	11	23	4	12,5	M4	10
71	2,8	112	132	137	90	110	45	71	7	188	7	254	130	110	160	9	3,5	85	70	105	M6	2,5	14	30	5	16	M5	12,5
80	2,8	125	160	158	100	125	50	80	8	217	9	290	165	130	200	11	3,5	100	80	120	M6	3	19	40	6	21,5	M6	19
90 S	2,8	140	175	177	100	155	56	90	10	235	9	310	165	130	200	11	3,5	115	95	140	M8	3	24	50	8	27	M8	19
90 L	2,8	140	175	177	125	155	56	90	10	235	9	365	165	130	200	11	3,5	115	95	140	M8	3	24	50	8	27	M8	19
100	2,8	160	196	197	140	180	63	100	12	252	11	386	215	180	250	14	4	130	110	160	M8	3,5	28	60	8	31	M10	22
112	2,8	190	220	197	140	180	70	112	12	292	11	395	215	180	250	14	4	130	110	160	M8	3,5	28	60	8	31	M10	22
132 S	2,8	216	252	253	140	226	89	132	15	325	11	436	265	230	300	14	4	165	130	200	M10	3,5	38	80	10	41	M12	28
132 M	2,8	216	252	253	178	226	89	132	15	325	11	500	265	230	300	14	4	165	130	200	M10	3,5	38	80	10	41	M12	28
160 M	2,8	254	290	314	210	296	108	160	20	390	14,5	640	300	250	350	18	5	-	-	-	-	-	42	110	12	45	M16	36
160 L	2,8	254	290	314	254	296	108	160	20	390	14,5	640	300	250	350	18	5	-	-	-	-	-	42	110	12	45	M16	36

All dimensions are expressed in mm.

Data and Technical Specification are subject to change in order to update or improve the products, without prior notice.

Marelli Motori