




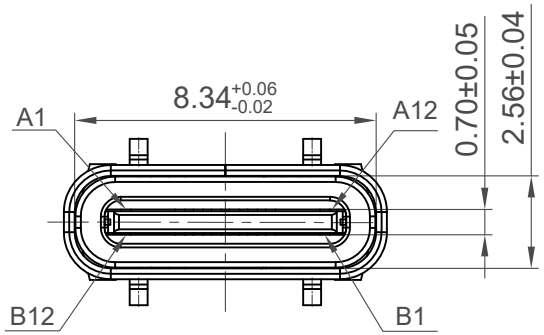




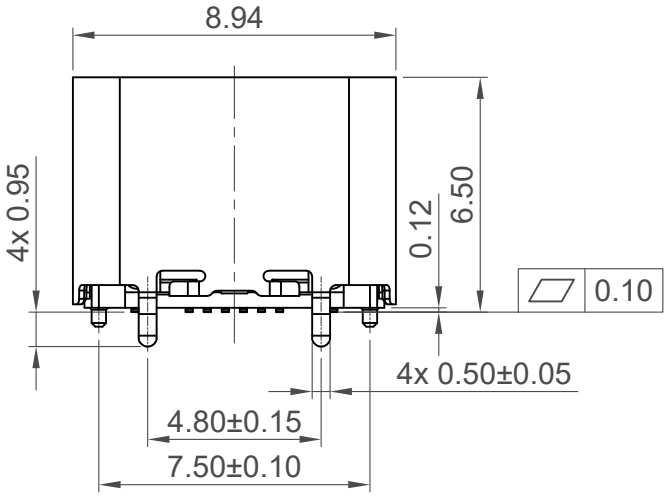

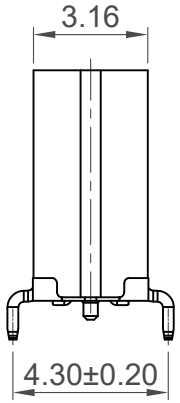

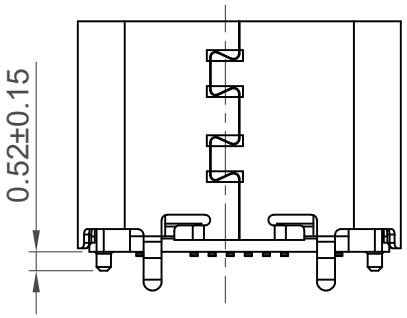

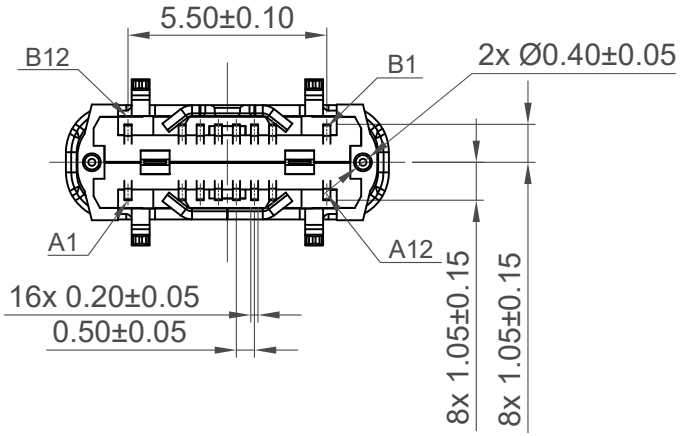

Specifications

Material
Insulator: LCP, UL 94V-0, Black
Contact: Copper Alloy (C1814), T=0.12mm
Mid Plate: Stainless Steel (SUS301), T=0.15mm
Shell: Stainless Steel (SUS304), T=0.30mm

Plating
Contact
Contact Area: 3u" Au over 50µ" min. Nickel
Solder Tails: Gold Flash over 50µ" min. Nickel
Shell: 30µ" min. Nickel
Mid Plate: Cleaning

Electrical
Current Rating: 5.00A collectively for V_{BUS} pins
6.25A collectively for GND pins
1.25A for B5 pin
0.25A per pin for all other pins
Voltage Rating: 20V DC
Contact Resistance: 40mΩ max initial.
50mΩ max after test
Dielectric Withstanding Voltage: 100V AC
Insulation Resistance 100MΩ min

Mechanical & Environmental
Operating Temperature: -25°C to +85°C
Mating Force: 5 to 20 N.
Unmated Force: 6 to 20 N after test
Durability: 10,000 cycles


Ordering Grid

USB4120 — 03 — C Request Samples and Quotation


Contact Plating
03 = 3u" Gold

Packing Options
C = Tape & Reel with Cap
(600 per reel)

Part Number		Product Description						
USB4120		USB 2.0 Type C Receptacle, 16contacts, Vertical, SMT, H=6.5mm						
Drawing Date								
28th September 2020								
By	CC	Tolerances (Except as Noted) Length	Angle	Units: Metric (mm)	RoHS COMPLIANT 2011/65/EU Deca-BDE	© This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	GCT www.gct.co	
Detail	Drawing Release	X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.10	-	3rd Angle Projection			Not to Scale	Drawn By CC
Revision	A3						Sheet No. 1/3	
Date	27/12/21							

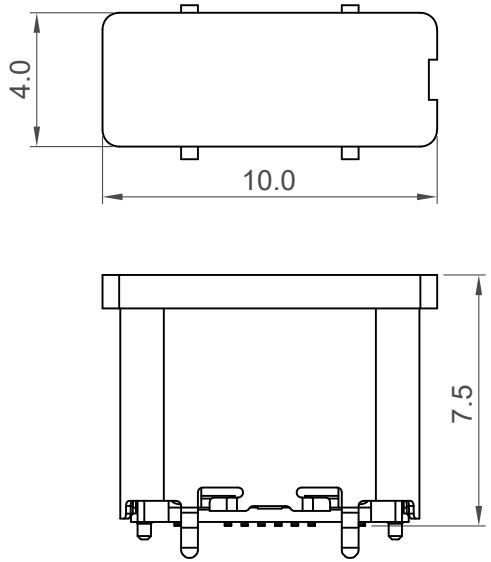


Cap Information

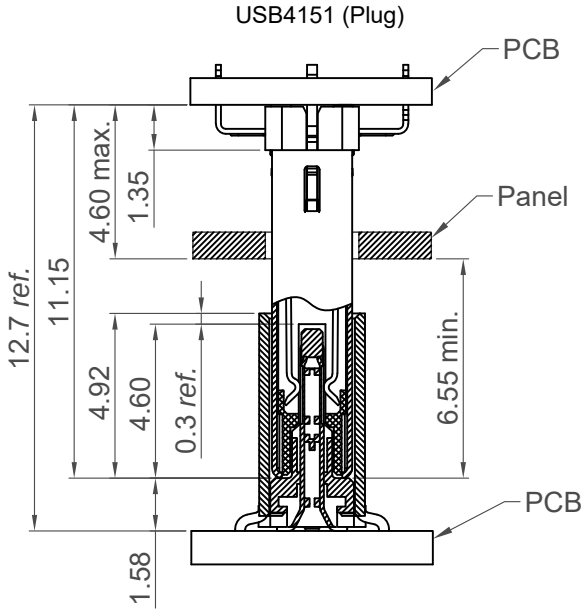

USB4120 (Receptacle)

Plug and Receptacle Mating View

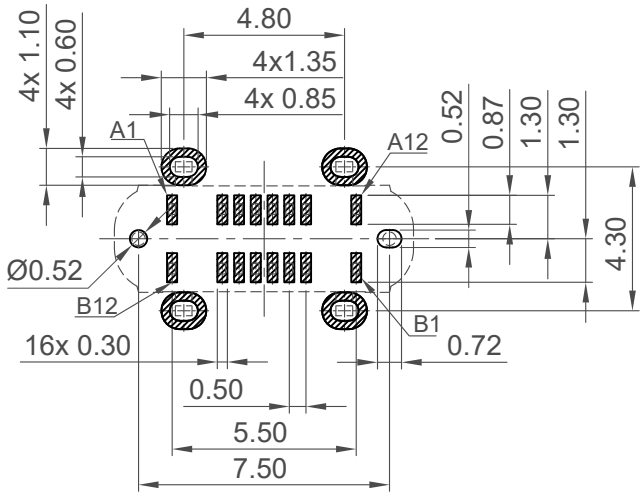

Recommended PCB Layout

Thickness 1.00±0.10mm


Tolerance: ±0.05mm


Solder Area Component Outline


Pin	Signal	Mating Sequence
A1	GND	First
A4	V_{BUS}	First
A5	CC1	Second
A6	Dp1	Second
A7	Dn1	Second
A8	SBU1	Second
A9	V_{BUS}	First
A12	GND	First
SHELL		GND


Pin	Signal	Mating Sequence
B12	GND	First
B9	V_{BUS}	First
B8	SBU2	Second
B7	Dn2	Second
B6	Dp2	Second
B5	CC2	Second
B4	V_{BUS}	First
B1	GND	First
SHELL		GND

Part Number: USB4120		Product Description: USB 2.0 Type C Receptacle, 16contacts, Vertical, SMT, H=6.5mm					
Drawing Date: 28th September 2020							
By	CC	Tolerances (Except as Noted) Length	Angle	Units: Metric (mm)	RoHS COMPLIANT 2011/65/EU Deca-BDE	This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	www.gct.co
Detail	Drawing Release	X.X ± 0.30	-	3rd Angle Projection			Not to Scale / Drawn By CC / Sheet No. 2/3
Revision	A3	X.XX ± 0.25					
Date	27/12/21	X.XXX ± 0.10					

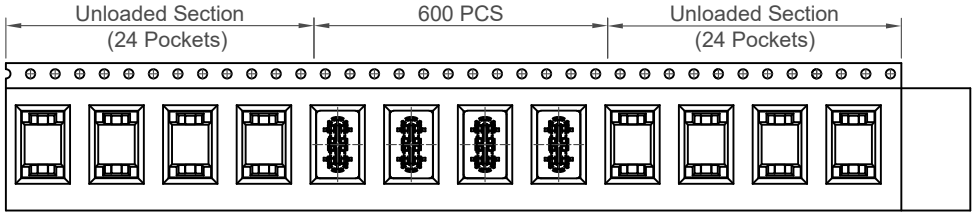

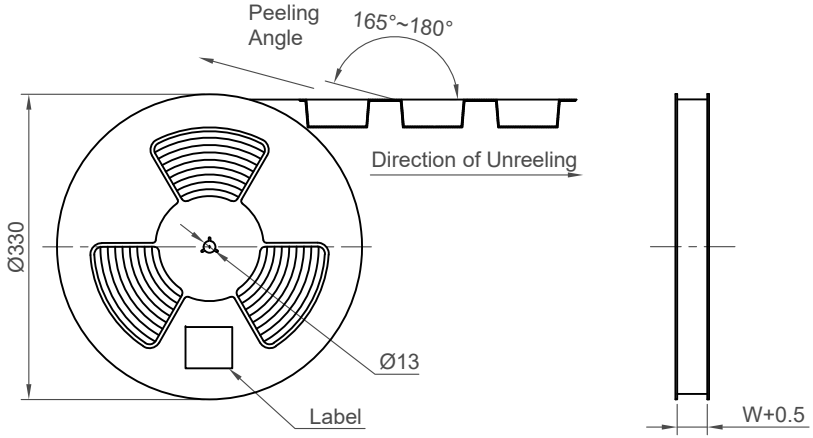

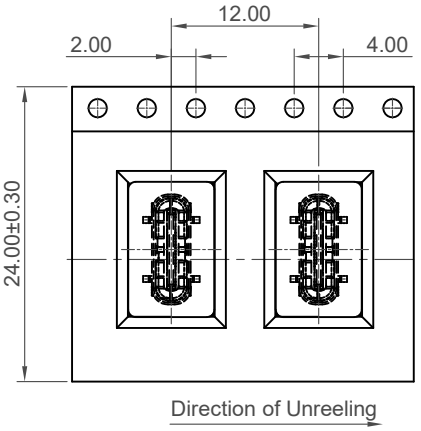

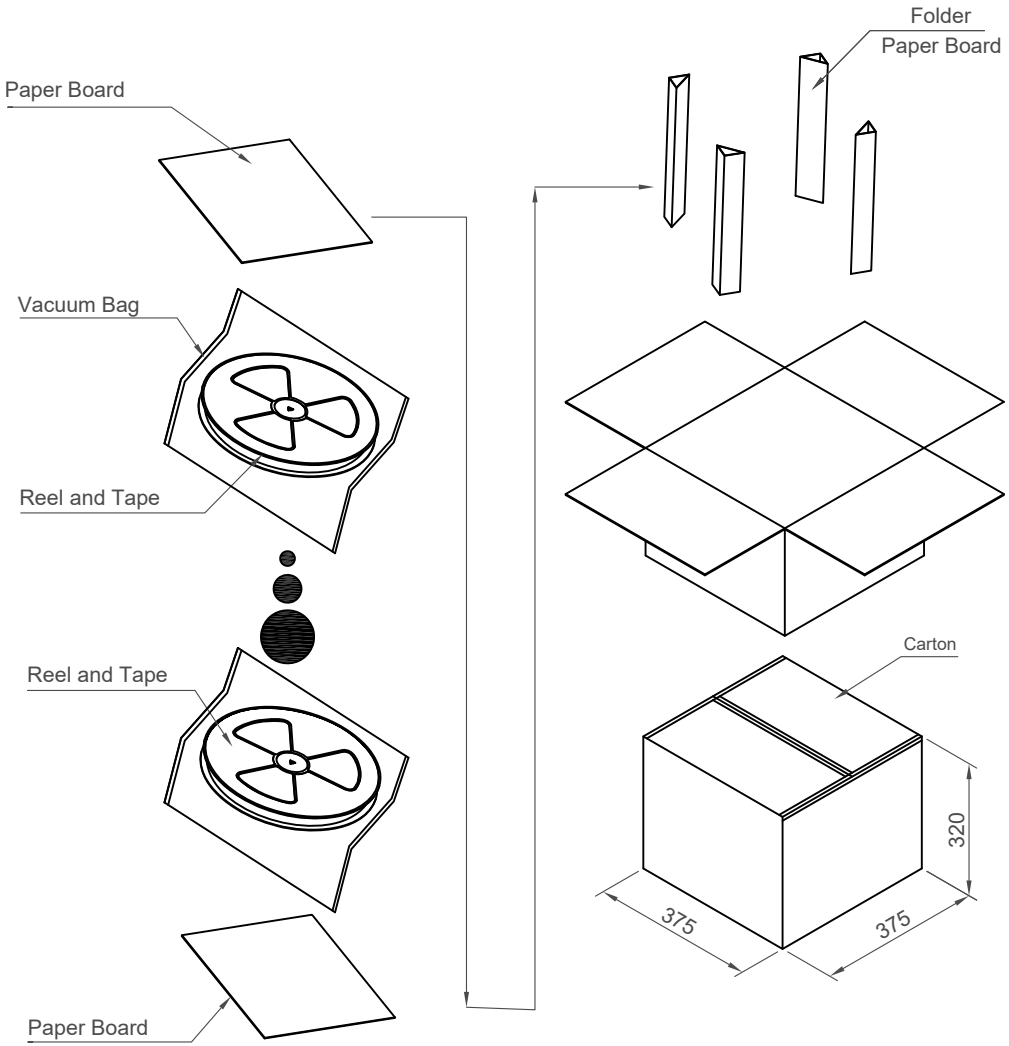

Pcs / Reel	Reels / Carton	Total Quantity
600	10	6,000 pcs

Part Number: USB4120		Product Description: USB 2.0 Type C Receptacle, 16contacts, Vertical, SMT, H=6.5mm					GCT www.gct.co
Drawing Date: 28th September 2020							
By: CC		Tolerances (Except as Noted) Length	Angle	Units: Metric (mm)	RoHS COMPLIANT 2011/65/EU Deca-BDE	© This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE	Not to Scale / Drawn By CC / Sheet No. 3/3
Detail: Drawing Release		X.X ± 0.30	-	3rd Angle Projection			
Revision: A3		X.XX ± 0.25					
Date: 27/12/21		X.XXX ± 0.10					