


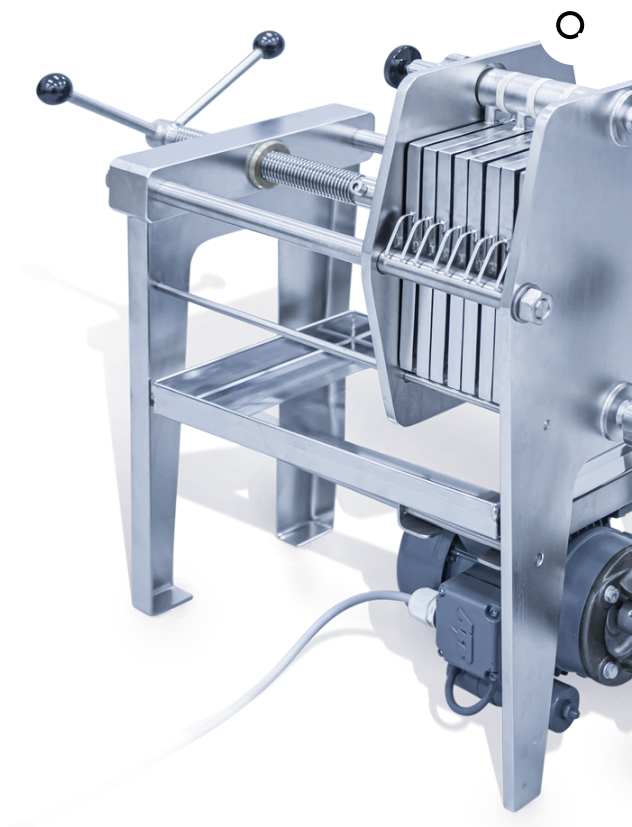

FT14 Plate and Frame Filter Press

A small plate pack mounted on a stainless steel framework, enabling demonstration of filter operation. This type of filter is widely used in the food, pharmaceutical, brewing and distilling industries.

The laboratory size unit is robust and versatile. A high degree of experimentation for scale-up to industrial process including several grades of filter media.

PRODUCT CODE: FT14

Categories: Armfield Educational Food Technology, Armfield Ingredients, Armfield Pharmaceuticals, FT Series - Educational Food Technology, FT14 Plate And Frame Filter Press, IFT Industrial Food Technology, IFT Series - Industrial Food Technology

Tags: Beer , Brewing , Centrifugal Pump , Clarifying , Distilling , Filter Cake , Filter Media , Food , FT14 , FT14 Plate And Frame Filter Press , Pharmaceutical , Polish , Slurry , Sterilisation , TDS , Wine

DESCRIPTION

The unit is mounted on a stainless steel, floor standing frame onto which the filter, feed pump and pipework are attached. A stainless steel drip tray is also included.

Four grades of filter media are supplied suitable for: pre-coat filter-aid, coarse clarifying, polishing and sterilisation. The small stainless steel plate pack allows ease of handling. Making teaching demonstrations more convenient.

The filter pack between the end castings is made up of one end and three intermediate thick turbid frames and one end and three intermediate filter plates. The filter will take a dressing of 7 x 200mm x 200mm filter sheets giving a nominal filtering surface area of 0.22m² and a nominal solids holding capacity of 1.5 litres.

Operation

The slurry to be filtered is connected by hose to the pump suction, and the pump is connected to a suitable electricity supply. A hose fitted to the filter outlet takes the clear filtrate to a suitable receiving vessel. The plate pack has been designed to allow washing of the filter cake when filtering is complete. A pressure gauge situated at the filter inlet is used to monitor the filtering process.

Feed/Circulating Pump

Centrifugal pump of all stainless steel construction with polished internals.

Maximum flow rate: 18.0 l/min

Maximum head: 2.0 bar

Motor: 0.25kW @ 2,800rpm

ADDITIONAL INFORMATION

Weight	120 kg
Dimensions	.73 × .3 × .57 m

TECHNICAL SPECIFICATIONS

Feed/Circulating Pump:	Centrifugal pump of stainless steel construction with polished internals
Maximum flow rate:	18.0 litres/min
Maximum head:	2.0 bar
Motor:	0.25kW 2800 rpm
Gasket material:	Silicone

FEATURES & BENEFITS

- Accurate for Education and research
- Versatile unit for uses in: Food / Pharmaceutical / Brewing / Distilling Industries
- Simple design enabling easy cleaning
- Four grades of filter media supplied: **Pre-coat filter aid / Coarse clarifying / Polish / Sterilisation**
- High degree of experimentation for scale-up to industrial processes

Operation

The slurry to be filtered is connected by hose to the pump suction, and the pump is connected to a suitable electricity supply.

A hose fitted to the filter outlet takes the clear filtrate to a suitable receiving vessel.

The plate pack has been designed to allow washing of the filter cake when filtering is complete. A pressure gauge situated at the filter inlet is used to monitor the filtering process.

Ordering Specification

- A fully self-contained plate and frame type filter press constructed entirely in stainless steel
- A centrifugal pump is mounted integrally in the framework and is connected to the filter inlet via a throttle valve and pressure gauge
- The filter pack is made up of four plates and four frames which will accept a dressing of seven filter sheets 200mm x 200mm
- The filter pack and sheets are compressed manually using a hardened steel screw thread
- Filter surface area is 0.22m² and solids holding capacity is 1.5 litres
- A back pressure valve is located at the filter outlet

Applications



- Wine
- Beer
- Low TDS slurry

Requirements

ELECTRICITY SUPPLY:

FT14-A: 220-240V/1ph/50Hz

FT14-B: 120V/1ph/60Hz

FT14-G: 220-240V/1ph/60Hz

Shipping Specifications

Packed and created shipping specifications Volume: 0.5m³

Gross Weight: 120Kg

Dimensions

OVERALL DIMENSIONS

Length: 0.73m

Width: 0.30m

Height: 0.57m

Order Codes

- FT14-A
- FT14-B
- FT14-G

YOU MAY ALSO LIKE...



**FT17 CROSS
FLOW
MEMBRANE
FILTRATION**

[Read more](#)



**FT140X –
MIXING
VESSELS**

[Read more](#)



**FT74XA
HTST/UHT
SYSTEM**

[Read more](#)



**FT18-MKII
MODULAR
CROSS FLOW
FILTRATION**

[Read more](#)



Armfield Limited. Unit 10 Headlands Business Park, Salisbury Road, Ringwood, Hampshire BH24 3PB.
England. Tel: +44(0) 1425 478781

