


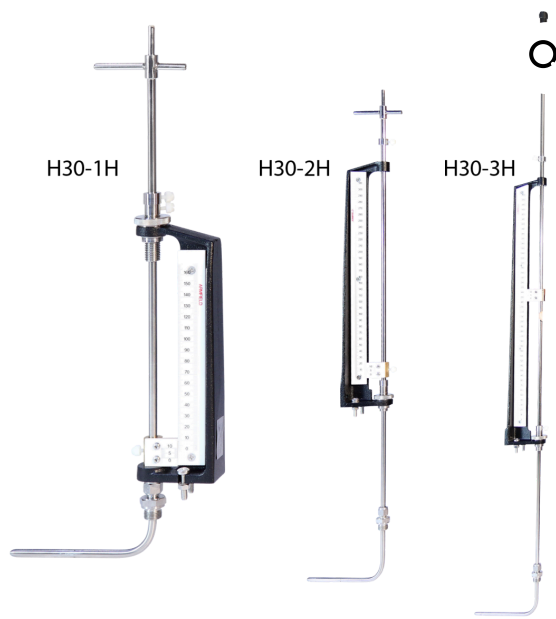

H30 Pitot Tubes

Pitot tubes for the measurement of water velocity in open channels and closed ducts. Tubes are stainless steel and mounted on a supporting body with scale.

PRODUCT CODE: H30-1H, H30-2H, H30-3H

Categories: Educational, H Series - Hydraulic Instruments, H30 Pitot Tubes

Tags: H Series , H30 , Hydraulic Measurement Instruments , Pitot Tube , Stainless Steel , Water Velocity

DESCRIPTION

Tubes are in stainless steel and mounted on a supporting body with scale. They are supplied with a watertight gland for installation below water level.

In order to measure velocity, the Pitot tubes must be connected to a manometer, such as the Armfield H12-8 or H12-9.

When used with the H12-9, the range is 0 – 5.2m/s. When used with the H12-8 the range is 0 – 19.8m/s

TECHNICAL SPECIFICATIONS

FEATURES & BENEFITS

Accessories

- **H1-10:** Adjustable Tripod stand
- **H12-8:** Portable pressure meters
- **H12-9:** Portable pressure meters

Ordering specification

- **H30-1H:**
 - 150mm Pitot tube
 - 150mm traverse Pitot tube supplied with connectors and
 - 10m tubing
- **H30-2H:**
 - 300mm Pitot tube
 - 300mm traverse Pitot tube supplied with connectors and
 - 10m tubing

- **H30-3H:**
 - 450mm Pitot tube
 - 450mm traverse Pitot tube supplied with connectors and
 - 10m tubing

Shipping Specifications

PACKED AND CRATED SHIPPING SPECIFICATIONS

Volume: 0.01m³

Gross Weight: 5Kg

Dimensions

See Ordering Specification

Order Codes

- H30-1H
- H30-2H
- H30-3H

YOU MAY ALSO LIKE...



**H12-9 –
PORTABLE
PRESSURE
METER**

[Read more](#)



**H12-8 –
PORTABLE
PRESSURE
METER**

[Read more](#)

Armfield Limited. Unit 10 Headlands Business Park, Salisbury Road, Ringwood, Hampshire BH24 3PB.
England. Tel: +44(0) 1425 478781

