


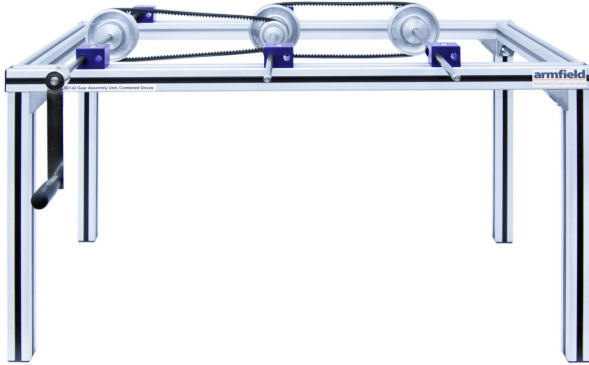

SD-1.62 – Gear Assembly Unit Combined Drives

Introduction to gear trains, transmissions, ratios and velocities and also spur gears, drive belts, pulleys, chains, tensioners, worm and wheel, bevel gears, rack and pinions, compound drives.

PRODUCT CODE: SD-1.62

Categories: Educational, SD-1.62-Gear Assembly Unit Combined Drives, SV - Theory Of Machines, SV Series - Statics & Vibrations

Tags: Bevel Gear , Chains , Compound Bevel Gear , Compound Worm , Cranked Handle , Drive Belts , Dual Spur Gear , Mechanical Action , Pulleys , Rack And Pinion , SD-1.62 , Spur Gear Train , Tensioners , Wheel Gear

DESCRIPTION

Based around a rigid, sturdy frame each drive arrangement can easily be interchanged and fixed into position. Bearing blocks ensure excellent and repeatable alignment of the drives as well as smooth running. The base frame allows for accurate meshing of the drives.

The drive arrangements available include dual belt drive, chain drive with tensioner and spur gear train, dual spur gear, compound bevel gear and spur gear, compound worm / wheel gear and bevel gear, rack and pinion with a spur gear drive.

Each of the drives is made from durable, long life materials, and conforms to industry standards giving the student a practical knowledge of the arrangement they may use in industry.

A cranked handle operates the drives giving more control and feel for each drive arrangement. The cranked handle is away from the main working area of the drives thus ensuring safety during drive rotation. The layout of the drives gives an excellent visual indication of motion, direction, velocity, and mechanical action.

TECHNICAL SPECIFICATIONS

2 'V' belt cogged (toothed) belt, section

4 'V' belt pulleys (approximately 4.5" diameter and 2.5" diameter)

Chain drive with tensioner and sprockets (toothed sprockets of 24 and 60 teeth)

4 spur gears: 2 x 28 teeth, 1 x 56 teeth, 1 x 70 teeth

Bevel gear pair: 90° between axes

Shaft blocks: Single height (6 off); double height (2 off)

4 shafts: 650mm long (3 off); 610mm long (1 off)

FEATURES & BENEFITS

- Floor or bench top apparatus
- Fully customer configurable using components supplied
- Manual driving of system
- Quick and easy setup of arrangements
- Belts, chains, sprockets, tensioner, bevel gear, spur gear,
- Worm/wheel and rack/pinion
- Smooth, quality frame
- Storage container for component parts

Experimental content

- Introduction to gear trains, transmissions, ratios and velocities
- Variety of drive arrangements
- Introduces spur gears, drive belts, pulleys, chains, tensioners, worm and wheel, bevel gears, rack and pinions, compound drives
- Drive construction
- Gearing up
- Gearing down
- The motion, direction and ratios of different arrangements

Related laws

- Automotive
- Assembly of different drive mechanisms, layout and meshing
- Industry standard drives

Requirements

Sturdy bench top

Shipping Specifications

PACKED AND CRATED SHIPPING SPECIFICATIONS

Volume: 0.53m³

Gross: weight 57kg

Dimensions

Length: 1.00m

Width: 0.50m

Height: 0.50m

Order Codes

SD-1.62 Gear Assembly Unit Combined Drives



YOU MAY ALSO LIKE...




**SD-1.51 –
WHEEL AND
DIFFERENTIAL
AXLE
APPARATUS**

[Read more](#)




**SD-1.56 –
EPICYCLIC GEAR
TRAIN**

[Read more](#)



**SD-1.61 –
GOVERNOR
APPARATUS**

[Read more](#)



**SD-1.60 –
STATIC &
DYNAMIC
BALANCING
APPARATUS**

[Read more](#)



**SD-1.53 – GEAR
TOOTH FORM
APPARATUS**

[Read more](#)

Armfield Limited. Unit 10 Headlands Business Park, Salisbury Road, Ringwood, Hampshire BH24 3PB.
England. Tel: +44(0) 1425 478781