EDS
Environmental Data Services

FLOWSENSE · FEATURES AND BENEFITS

From the reading in the chamber to the decision it pays for.

FlowSense takes readings from any logger fleet or SCADA system and carries them from the chamber to the capital plan. That covers the network running today, the infiltration and inflow (I/I) costing you money this year, and the calibrated evidence your capital programme is argued from. One record sits under all three, so nobody retypes a number between stages.

Monitor

Your fleet live, alarms on your phone, logger faults flagged before they happen, and blockage warning weeks ahead of a surcharge.

Analyse

Infiltration and inflow in kilolitres, dry weather flow profiled, hydraulics checked, and every channel's record scored before you rely on it.

Engineer

Calibrated rainfall response (RTK) models, a dynamic wave network model, the I/I heat map, and the cost per kilolitre of taking the water out.

Environmental Data Services
1300 721 683 · www.e-d-s.com.au

Built and supported in Australia

October 2026

WHY FLOWSENSE

Four purchases, four datasets, and an argument that never quite closes.

Doing this work properly usually means buying four things from four suppliers: a logger vendor's portal, a spreadsheet study, a modelling engagement and the effort of reporting. Each arrives in its own format, on its own timeline, with somebody retyping numbers in between. FlowSense does those four jobs on one record.

WHAT IT TAKES THE PLACE OF

- **The logger vendor's portal.** Live fleet status, alarms, battery and communications health, and the site detail your operators open every morning, for whatever instruments you own.
- **The annual I/I spreadsheet.** Infiltration and inflow measured storm by storm, in kilolitres, against a modelled dry weather baseline. It refreshes continuously.
- **A modelling consultancy engagement.** Calibration, validation, a dynamic wave network model and a costed capital plan, run in a workspace you keep.
- **The reporting effort.** Seven report templates written for seven readers, generated from the same record and carrying your logo.

WHAT THAT CHANGES

The number in the board paper and the reading in the chamber become the same number. You can walk from one to the other without leaving the browser.

A question asked in a meeting gets answered in the meeting. An overflow notified on Monday can be read against its rainfall, the sites upstream and the model already calibrated on that catchment. That takes minutes, not a scope of works.

And when the programme is funded, the evidence behind it is still in the system, still re-runnable, and still yours. Nobody has to rebuild it from exports when asked how a figure was reached.


1	5	16	90
Subscription, priced per site. No editions and no per user fees.	Ways your own SCADA connects, plus reviewed CSV import and loggers collected for you.	Project based engineering tools on a GIS canvas.	Day trial, on your own flow history, with no hardware to buy.

The point is not that one platform does more things. It is that every one of them reads the same validated record, in the same units, on the same timeline. That is why an answer from the reporting page and an answer from the model agree with each other. A folder of exports cannot do that, and neither can four separate tools.

HOW IT WORKS

Four sources. One validated record. Three ways to use it.

However a reading travels, the same rules apply once it arrives. So a figure stays comparable across several instrument brands, several SCADA systems and several years of history.

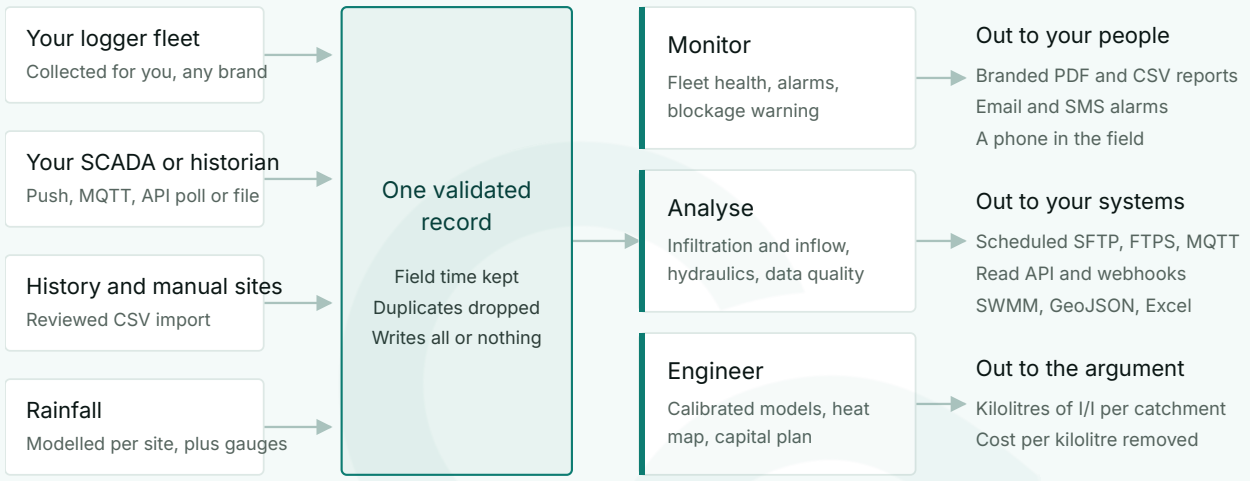

Schematic. Every source lands in the same record, under the same rules, before anything reads it.

THE RULE EVERY READING MEETS	WHY IT IS THERE
The field time is kept Never the time of collection	A reading logged at 03:00 stays at 03:00, even if it was collected at noon. Overnight analysis, storm lags and daily volumes then rest on when the water was actually there.
Duplicates are dropped On channel and timestamp	Any file, message or batch can safely be sent again. A failed transfer is fixed by resending it, not by arguing about what is already loaded.
Writes are all or nothing And every collection is logged	An interrupted import never leaves a half loaded day. That fault can take months to notice, and it invalidates everything reported in between.

NOTHING TO INSTALL

Cloud hosted and browser based, on desktop, tablet and phone. Your SCADA pushes to us or we read yours, so nothing goes onto a control network.

VENDOR INDEPENDENT

Bring the loggers you already own and keep buying whichever you prefer. Instruments from several manufacturers run side by side in one account.

YOURS TO LEAVE WITH

Every reading, report and model run exports in open formats, including EPA SWMM 5 input files and GeoJSON. Work started here stays portable.

MONITOR

The whole network on one screen, and the failing logger named before it goes quiet.

A monitoring programme fails quietly. A battery flattens, a modem stops answering, and nobody finds out until the quarter's report is already wrong. FlowSense monitors the fleet itself and puts what needs attention first.


CAPABILITY	WHAT IT GIVES YOU
Network Overview What needs attention, worst first, beside a map of where it is. Every site is judged against its own usual and refreshed every sixty seconds	Morning triage in one glance instead of ten portal logins. Point at a row and its site is ringed on the map. "Above usual" means above that site's own learned pattern for that hour, with the last day's rain shown beside it. Filter the map by what is wrong: alarms, communication failures, low battery, stale telemetry, anomalies, rainfall or hydraulic risk. Then click through to the site.
The site workspace Up to eleven tabs over one record, shown where the site's channels support them: overview, diagnostics, analysis, I/I, alarms, scattergraph, water quality, balance, insights, calibrations and field notes	Whatever the site measures, from flow to pump runs, pH, conductivity or gas, is shown the way it should be read. A pump appears as how long and how often it ran, never as an average. Every chart has zoom, pan, channel toggles, date presets and CSV export. The link remembers the window you are looking at, so you can send a colleague "this site, over this fortnight, on this tab".
Fleet Health Every logger on the account, worst first. Battery is judged for its chemistry, and a replace by date is projected from that site's own discharge trend	A dying logger becomes a planned visit on a scheduled run, not a hole in the record and an emergency truck. One screen answers "what needs a battery this month" for the whole fleet.
Alarms Threshold, no data and pump condition rules, for a whole site or one channel, each with its own recipients and cooldown, sent by email and SMS	The right person is told once, when the state changes, and the email links straight to the site. A condition that lasts a week does not send a message every cycle for a week. FlowSense also tells an alarm that is still breaching apart from one that has cleared and only waits to be acknowledged.
Offline detection per site Judged on when each site last delivered, against twice its own measured reporting interval, never sooner than a day and never later than a week	A meter that uploads twice a day is not reported late at hour three, and one that reports weekly is not written off on day two. A single fleet wide threshold gets both wrong, and an alerting system people learn to ignore is worse than none.

One detail catches people out. A threshold rule deliberately ignores stale data, so a dead logger frozen on a breaching value cannot hold an alarm open for a fortnight. The no data rule is what catches a dead logger.

BLOCKAGE WATCH · INCLUDED ON EVERY SITE

Weeks of warning, read from the pipe's own overnight behaviour.

A gravity sewer drains almost empty in the small hours. An obstruction shows up in that overnight trough long before it shows anywhere else, and long before anyone rings the council. This module reads it on every site you monitor, without being asked and without a separate subscription.

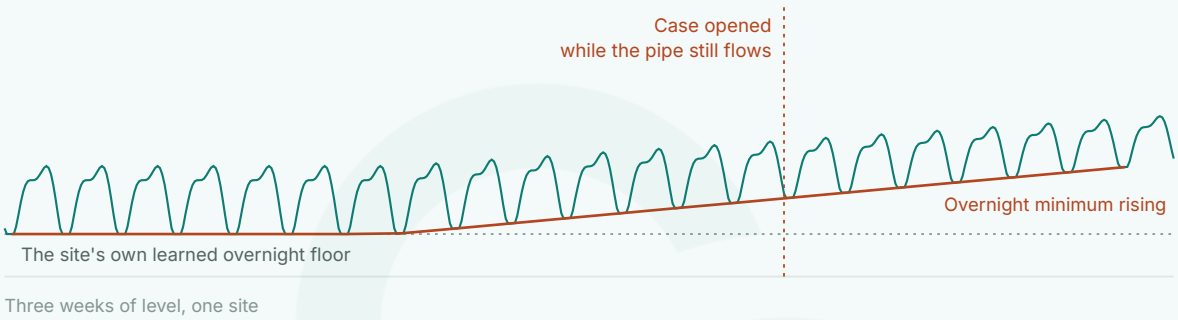


Schematic, not measured data. The daily shape is still there. What has changed is the floor underneath it and the height of the swing above it, which is the pipe filling rather than the catchment working harder.

CAPABILITY	WHAT IT GIVES YOU
Eight signatures, not one threshold Six read from level and two from velocity where measured. The strongest is conveyance at matched depth	A fall in velocity at the same depth measures the pipe, not what arrives through it. That is what separates a restriction worth a jetting crew from a catchment that simply got busier.
Rain excluded before anything is judged The analysis runs on dry days only	Rain produces every one of those signatures more strongly, so rain is excluded first. A site that rises only after rain scores zero and says so. A fortnight too wet to judge is reported as insufficient dry weather, never quietly as normal.
A mechanism and an action Silt or grease, sudden obstruction, downstream restriction, or increased load	Each verdict names what to do: desilt the reach, send CCTV, inspect below the meter, or do nothing, which saves the money. A suspect channel goes to data quality first. Flow alone is held at watch, because it cannot tell extra water from a restriction.
Cases that reach the people who dig Assign to your own team, or send a link to a contractor with no login	What they find comes back as a field note on the site, with their photographs on it, instead of as a phone call somebody retypes days later. The case closes on a recorded outcome.
Tested on your own network A one click backtest replays the detector against the overflows already in your register	It uses only the telemetry that existed before each event. The hit rate you are shown is therefore your own, not ours. You can run it on day one, on history you already hold.

ANALYSE

Infiltration and inflow, quantified rather than described.

"This catchment is wet" is not a business case. A volume in kilolitres, a peak, a lag and a percentage over dry weather flow is. FlowSense separates the storm response from the sanitary flow underneath it and reports what the difference is worth, per catchment, per storm.

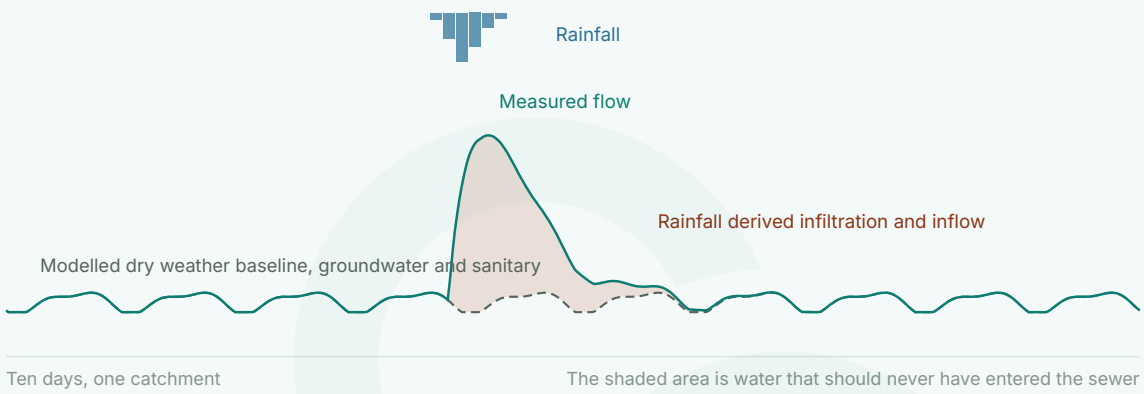

Schematic, not measured data. In the product these three traces carry real figures: peak inflow, volume in kilolitres, percentage over dry weather flow, and the lag between rain falling and the sewer responding.

CAPABILITY	WHAT IT GIVES YOU
A dry weather baseline that moves The daily sanitary pattern plus groundwater infiltration, built from qualifying dry days only and split by day type	Weekend sanitary flow cannot pass as inflow. The groundwater part is tracked day by day through the year, stepping over a storm's slow tail, instead of being held constant. A fixed baseline quietly charges that seasonal difference to storm response, which is how catchments get ranked wrongly.
Storm by storm event analysis Isolated storms detected, then measured individually	Peak, volume, lag and percentage uplift for each event, so you can see whether a catchment responds to every shower or only to the long soaking rain. The two mean very different repairs.
The three way split Sanitary flow, groundwater infiltration and rainfall derived inflow, summing exactly to the metered total	This is the number that ends the argument. It is a kilolitre figure you can apply a treatment cost to, and the capital plan later ranks its options against the same figure.
Catchment balance, not sampling Upstream flow reconciled with downstream, allowing for travel time	You get mean and peak balance, unaccounted volume and average error for each metered catchment. You can say how much flow is accounted for, not hope the meters agree.
Comparison across the network Sites compared on a shared window, trade waste discharge analysis, and wet weather uplift per catchment	Ranking is what turns analysis into a work programme: which catchment first, which one can wait a year, and which one is not a rainfall problem at all.

DATA QUALITY

Check the instrument before you trust the number.

Every figure on the pages either side of this one depends on a sound record. So FlowSense scores the record, names the weak channel, and shows its working when it repairs anything. An answer you cannot audit is not an answer.

CAPABILITY	WHAT IT GIVES YOU
Depth against velocity Every depth and velocity pair over the window, coloured by flow, with the correlation, ranges and sample count stated	The shape of the cloud is the diagnosis. Silt, surcharge, backwater and a failing meter each leave a different shape. A reviewer sees in a second what would otherwise take a site visit to argue about.
Completeness and gap events Coverage per channel, with the gaps listed rather than averaged away	You know how much of the period the record covers before you quote a figure from it. A report can state that coverage instead of implying a full month it never had. Every chart breaks at an outage rather than drawing a line across it.
Anomaly detection Flatlines, impossible values and drift, scored channel by channel, drift only on a week of readings or more	A meter that has quietly stopped moving is caught as a fault, not read as a calm fortnight. That failure silently corrupts a year of reporting. Drift is not judged on a single day, which would only compare night with day.
Defect detection with a method per defect Outliers, spikes, flatlines, negative values, implausible jumps and channels that disagree, each with a recommended repair	One smoother for everything deletes real storm peaks. Matching the method to the defect it found keeps the event you are about to be asked about, and tells you which method it used.
Conditioning for modelling Depth, velocity and flow prepared together where a survey or a model needs a continuous series	A model gets the continuous input it needs without anybody hand filling spreadsheet cells. The three channels stay consistent with each other while it happens.

Repairs are export only. A gap fill never overwrites the measured record, so the instrument's own reading is always there to go back to. A report can then say which of its numbers were measured and which were reconstructed. That distinction survives scrutiny from a regulator, an auditor or the consultant reviewing your submission.

NAMED METHODS, NOT HOUSE RECIPES

QARTOD flag vocabulary · IQR and MAD · Hampel · Theil-Sen · Nash-Sutcliffe · Kling-Gupta · Manning · Colebrook-White · ISO 8601 on every boundary

ENGINEER

Sixteen tools on a GIS canvas, and every number carrying the working that produced it.

This is the layer normally bought as a consultancy engagement and delivered as a PDF. Here it is a workspace you keep: project and scenario based, run against your own record, re-runnable next year when the network has changed and the question comes back.

I/I Heat Map
Severity painted onto the real network

RTK Calibration
SWMM compatible rainfall response per catchment

RTK Validation
Independent storms, per storm scorecard

Hydraulics
Dynamic wave model, pumps, gates, control rules

Scattergraph
Silt, surcharge, backwater, meter fault

Pump Station
Volumetric testing and performance decay

Overflow Forecast
Design or forecast storm to exceedance

Capital Plan
NPV, BCR, and cost per kilolitre of I/I removed

Compliance
Licence limits and an overflow register

Catchment Model
Multi site simulation with routing

Dry Weather Flow
Calibration and diurnal profiling

Events
Rainfall and response event detection

Data Scrubbing
Defect detection with a method per defect

QA and QC
Structured review and sign off

Compare
Scenario against scenario

Export
Excel, GeoJSON, CSV, or EPA SWMM 5

SCORED STORM BY STORM, TO A PUBLISHED STANDARD

One score for the whole series can look respectable while the model misses every storm peak, because dry stretches dominate it. So each storm is scored separately. The simulated peak must sit within 15 per cent below to 25 per cent above the observed peak. Event volume must sit within 10 per cent below to 20 per cent above. Peak timing is reported against a one hour tolerance.

HONEST ABOUT ITS OWN CEILING

Observed inflow is metered flow less a modelled baseline. It carries that baseline's noise, so no parameter set can beat it. The workspace shows the best score available on that record beside the score achieved. Judged against a perfect 1.0, an honest calibration looks like a failure, and people end up chasing it.

Where the evidence will not support a conclusion, the tool says so and stops. That is the behaviour you want from the tool a capital submission rests on.

ENGINEERING WORKSPACE

Severity painted onto the real network, and the price of taking the water out.

A heat map on its own is a commodity. This one has six defensible methods and attributes severity along the gravity network, by catchment and flow direction. Every estimate carries a confidence figure, and the work ends in a costed programme an authority can spend money against.

CAPABILITY	WHAT IT GIVES YOU
Six selectable methods Network attribution, rainfall derived I/I event analysis, hydraulic capacity, depth and velocity, mass balance, and the calibrated RTK rainfall response	The platform tells you which method your data supports and draws the map with it. A single hard wired method is only right on the networks it happens to suit.
Painted along the network Severity follows catchment and flow direction, not a circle drawn around a meter	A gauge reading badly points to the pipes that actually drain to it. The inspection list therefore follows how the sewer is plumbed, not how far apart things sit on a map.
A confidence figure on every estimate Kriging is the default way of estimating between gauges: a Gaussian process with leave one out validation and a 0 to 1 overlay	Pipes far from a gauge fade rather than pretending to a number. You can tell the hot spot that is evidence from the one that is interpolation before you send a CCTV truck to it.
An inspection priority list The pipes most likely to be sources, each with the confidence behind its score	The map becomes a work programme with an order to it. It exports as GeoJSON, CSV, an image or a formatted A4 assessment report, for the people who were not in the room.
Capital Plan Net present value, benefit cost ratio, and cost per kilolitre of infiltration removed	Options are ranked on the same basis your business case must use, from the same kilolitre figures the analysis produced. The submission and the evidence stop being two different documents.

Said plainly, because it matters. Flows in upstream pipes are a calibrated estimate derived from the downstream meter, not a measurement. The interface labels them that way wherever they appear. A map that does not say which of its numbers were measured is not one to defend in a hearing.

01

Measure

Storm response quantified at each gauge, from the record the platform already holds.

02

Attribute

Severity carried along the gravity network by catchment and flow direction.

03

Rank

Pipes ordered by how likely they are to be sources, each with its confidence.

04


Cost

The programme priced, and options ranked on cost per kilolitre removed.

PUMP STATION MANAGER

Station flow, and pump condition, from run times you already have.

Most pump stations will never get a flow meter, and they do not need one. The wet well fills at the rate sewage arrives and empties at the rate the pumps move it. So the run record is a flow record, and the same arithmetic shows the condition of the pumps.

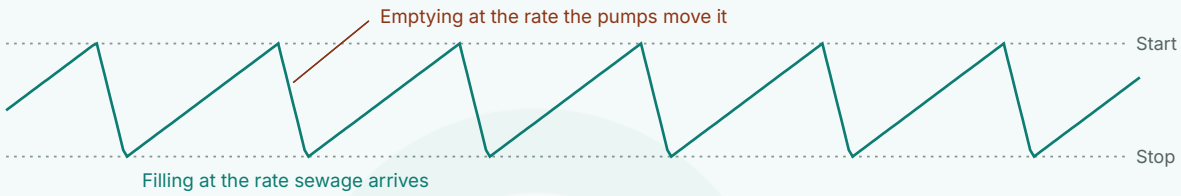

Five hours of wet well level, one station

Schematic, not measured data. Two slopes and a well volume are enough: one gives the inflow, the other gives what each pump is actually delivering today.

CAPABILITY	WHAT IT GIVES YOU
Station flow without a flow meter Arriving flow at every timestamp from the wet well level, plus volume pumped, starts and run hours per day and per week, with the well itself in kilolitres	Every station joins the flow picture using the level and run signals your SCADA already produces. Where power is metered, you also get kilowatt hours per megalitre. Pumped out balances what arrived, run by run, crew visits included, and over whole pump cycles. The well's own change is stated so the two volumes reconcile. No chamber work, no meter to buy, no confined space entry.
Pump delivery measured, not rated Delivered capacity from the station's own cycles, per pump and per day, read against the nameplate or the pump's own early record	Two pumps running together are never judged against their ratings added up, because pumps sharing a rising main cannot deliver that. Cycles the record cannot support are counted and set aside, not averaged in. A confident number is one that earned it.
Pump condition, with a remaining useful life Each pump's measured output is watched on dry days for slow decline, sudden drop and clearing. The life left is stated as a range, following ISO 13381-1	A wearing impeller or a rising main starting to block shows here weeks before the station struggles on a wet night. FlowSense ranks the likely causes rather than diagnosing one. Each finding raises one alarm, and logging a service restarts the reference. It reads hydraulic output, so bearings and seals remain the mechanic's call.

What it needs from you is small. A wet well level signal scanned at five minutes or better, pump run states as numbers, and the well dimensions. Most stations already produce the first two, which is why this is usually the cheapest flow data an authority can add.

IN THE FIELD

What the crew found, attached to the data it explains.

Telemetry says the flow changed. Only the person who lifted the lid knows why. FlowSense keeps both in the same place. Next year's engineer reading a strange fortnight finds the note, the photographs and the date of the visit, instead of ringing around to ask who remembers.

CAPABILITY	WHAT IT GIVES YOU
Field notes on every site Observation, maintenance, calibration and installation, dated and attributed	The record of somebody going and looking sits beside the telemetry it explains, on the site page and in reports, not in an inbox nobody else can search.
Photographs and video on the note Taken on the phone that is already in the field	The silt line, the ragging, the damaged benching: evidence a sentence cannot carry, stored against the site and the date rather than in somebody's camera roll.
Send a note to the people who need it Emailed to chosen recipients, with its photographs	A supervisor, a contractor or an asset engineer gets what was found without needing a login. The copy that was sent stays on the record.
Site surveys that become the paperwork The pre installation survey fills out the inspection and installation reports, including a drawn manhole diagram	The measurements are typed once, in the chamber, and the formatted report writes itself. Crew days spent on paperwork go back to being crew days on site.
Commissioning and calibration recorded Zero depth checks, reference device readings and meter comparisons kept against the site	The instrument's history stays with its readings. So "was this meter verified, and when?" still has an answer years later, which is exactly when it gets asked.
People without an account can still report A single use link opens one job, and nothing else	The jetting contractor or the depot crew reports what they found straight into the record. No licence to buy, no training, and the link shows them the job rather than your network.

All of it works on a phone at the manhole. The same account, the same sites, the same last reading, on whatever the crew already carries. There is no separate field app to licence, deploy or keep in step with the platform.

DELIVER

The report your board reads, generated from the record your operators use.

Reporting is where most monitoring programmes lose their week. FlowSense generates seven templates, each written for a different reader, from the same validated record, with your branding. The quarterly pack stops being a fortnight of copying charts into a document.

CAPABILITY	WHAT IT GIVES YOU
Seven templates, seven readers Flow totals, Executive summary, Flow analysis (rainfall derived I/I), Engineering diagnostic, Site investigation, Network performance and Pump station performance (PSM)	Operations, management, the I/I study, the technical team, the field pack, the asset planner and the pump station owner each get a document written for them, rather than one report everybody half reads.
Context, not just totals The period measured against five other windows, including the same weeks last year	"Up on last quarter" and "normal for a wet September" are different findings. The report tells them apart without anybody assembling last year's numbers by hand.
Built for the audience in front of you Pick the sites, a custom range, an optional comparison period and the sections to include, then schedule it by email daily, weekly or monthly	One template serves several readers. The pack that goes to a regulator need not carry the twelve pages that were only ever for the depot.
Your document, not ours Your logo and report title throughout, as a branded PDF with its charts, contents and bookmarks, or a CSV bundle	It goes to a council committee under your name. It reads as a document, not a screen dump, and every figure traces back to the site that produced it.
Scheduled feeds into your systems By SFTP, FTPS or MQTT, as CSV files or JSON messages, with channel selection per feed, a connection test, payload preview and run history	Your historian, BI tools or data pipeline get the data on a schedule, without anybody exporting anything. Each feed's bookmark moves on only after a fully successful send, so a failed delivery cannot silently skip a window.
A read API, webhooks and model exports Excel, GeoJSON, CSV, and EPA SWMM 5 input files	Your SCADA feeds FlowSense and FlowSense feeds your systems back. Very few products in this category accept the inbound half, and the work you start here stays portable.

Every number keeps its working. Volumes, scores and bands are explained where they appear, in plain language, including how a daily volume was computed and what a health score counts. A figure nobody can explain in a meeting gets argued with instead of acted on.

GETTING CONNECTED

Bring the fleet you own, the SCADA you run, and the history you already hold.

Nothing here asks you to replace instruments or to start the record again. A network assembled from three logger brands, two SCADA systems and a decade of exported spreadsheets lands in one account, and reads as one network.

ROUTE IN	WHAT IT MEANS FOR YOU
Collection operated by EDS Readings arrive on their own from your instrument fleet, on a schedule set per site	We run and monitor the collection as part of the subscription, across instruments from several manufacturers. Nobody at your end has to babysit it, and a new site type needs no platform change.
Your own SCADA, five ways Your SCADA can send readings to us, or we can collect them: five ways, including MQTT and a hosted SFTP folder. Your integrator picks the one that suits the site and its security posture	The five ways are HTTPS push, MQTT subscription, API poll (we read yours with an API key or OAuth2 client credentials), pickup from your SFTP or FTPS server, and a drop into an SFTP folder we host. Nothing is installed on a control network. The tokens that send data are write only, so a token that leaks cannot read a single stored value.
Reviewed CSV import Reviewed before it is loaded: a chart of old against new catches a file in the wrong time zone. Replace or merge, with a 30 day undo window	Last winter's flow survey is loaded and ranked the same afternoon, and a mistake is undone rather than lived with. Day one does not have to be the day your record begins.
Manual sites History that never had a logger, created by hand and placed on the map	A 2019 survey or a meter since removed is read by every heat map, model and volume total exactly as a live site is. Nothing polls it, so it never counts as an outage.
Rainfall, without a separate subscription Modelled rain at each site's own grid cell, from ECMWF IFS via Open-Meteo and filed in the hour it fell. Your own gauges, uploaded or on telemetry, take precedence	You can answer "did it rain there?" for any site on any date. The odds of rain ahead come from a 51 member ensemble. Gauge and modelled rain are tracked separately, so the two are never confused.
Commissioning done with you Connection request, tag mapping, units and a verified first reading	We set the connection up with your IT or SCADA people, using documents written for them. It is not called done until a reading has arrived and been checked.

Time is handled properly, which sounds dull until it is wrong. Every date and time on screen shows in the reader's own zone. Alarms and daily totals are worked out in the station's zone, and daylight saving is honoured on both sides. That is why a daily volume here matches the one your own spreadsheet produces.

ACCESS, ASSURANCE AND STANDARDS

Your team, your structure, and methods you can look up.

CAPABILITY	WHAT IT GIVES YOU
Access you control yourself Role based, with per user page access on top, down to individual sites and channels	A contractor sees three sites, an operator sees the network but not the modelling, and a planner sees everything. You decide, you change it in seconds, and no ticket or per user fee is involved.
Your own admin, and your own structure Create users, reset passwords, suspend accounts, and mirror your org with named sub teams that inherit access	You manage the people who join and leave your organisation, at your own pace. You can delegate admin sections one at a time, person by person, so a records officer can run users without running everything.
Assurance you can show an auditor Two factor sign-in, and a security log of sign-ins, exports and administrative actions kept for at least a year	You get a file on request showing who signed in, when, from where and what they exported. Access is scoped per account, passwords are hashed, traffic is TLS protected and stored third party credentials are encrypted.

BUILT TO THE PUBLISHED STANDARDS, AND TESTED AGAINST THEM

STANDARD	WHAT IT GOVERNS HERE
CIWEM UDG Code of Practice for the hydraulic modelling of sewer systems, 2017	The per storm acceptance bands every calibration and validation is scored against, and the dry weather flow pattern split by day type
WEF MOP FD-6 and **WPCF MOP No. 36**	Dry weather flow as sanitary diurnal plus groundwater infiltration, from qualifying dry days only
WSA 02 Sewerage Code of Australia	Self cleansing velocity, level of service checks, and Colebrook-White friction per pipe
AR&R 2019, Book 2, and **AS/NZS 3500.3**	Areal reduction factors, AR&R temporal patterns run exactly as supplied, the Rational Method for ungauged sub-catchments
QARTOD	The quality control tests and flag vocabulary that judge every sample
EPA SWMM, including EPA/600/R-15/162A	Dynamic wave routing, and the three component RTK method for rainfall derived infiltration and inflow
ISO 13381-1, and the **NSW Liquid Trade Waste Guidelines**, 2021	A pump's remaining useful life, stated with its uncertainty. On a trade waste account, the charging formulas

WHAT IT COSTS

One subscription. Every capability. Priced by the site.

Published here, because a price you can only learn through a sales cycle is itself a cost. There are no editions and no per user fees. Everything in this brochure is in the one subscription, and the only number that moves is how many sites you monitor.

FIRST 20 SITES	SITES 21 AND BEYOND
$30	$20
per site, per month	per site, per month

AUD excluding GST, billed annually on twelve month terms. Bands are cumulative: a fifty site network pays the first rate on twenty sites and the second on thirty. Growth never re-prices the sites you already have. A site is a monitored location with at least one active channel, and archived sites cost nothing.

WHAT THAT MEANS FOR A REAL NETWORK	SITES	PER MONTH	PER YEAR	BLENDED, PER SITE
Small shire	5	$150	$1,800	$30
Mid size council	50	$1,200	$14,400	$24
Bulk utility	300	$6,200	$74,400	$21

GETTING STARTED	WHAT IT COVERS	PRICE
Free trial	90 days, the whole platform, on your own uploaded flow history. Upload last winter's exports and see your infiltration ranking the same afternoon.	$0
Assisted onboarding	GIS network import, site and channel configuration, alarm setup, SCADA commissioning, and training.	$2,500 once waived at 50 sites and above
Guided calibration, optional	Calibration is included in the subscription and you can run it yourself. This is the optional service where EDS does the work with you, in the platform where you can re-run it.	$7,500 per catchment

The rate card applies for your current term and may change at renewal on 60 days notice. Cancel at renewal and your data exports with you in full. The only pass through charge is SMS alerting, at carrier cost. The bands are set against procurement reality: for most Queensland councils, a fifty site network sits under the $15,000 small contractual arrangement threshold.

SAID PLAINLY

Where the boundaries sit.

Stated here rather than discovered later, because an engineering buyer will ask and the answers are good ones.

Blockage Watch

A statistical early warning read from each sensor's own history. It says the pipe reaching that sensor is behaving differently for a reason rain does not explain. It does not locate the obstruction and cannot see one downstream of the meter. It needs two and a half months of history and enough dry days in the window. A pump station wet well is left to PSM.

GIS network

We integrate with your GIS. Connecting a council's own network layer is a scoped task at onboarding, not a switch, and the analysis still runs without one.

Network model

The dynamic wave solver is one dimensional: gravity network, pumps, gates and control rules. It does not do 2D overland flood mapping, water quality or sediment transport. A run exports as a SWMM input file, so the work stays portable where those layers are needed.

Model verification

The scorecard reports how the model performed against the storms in that window, to a published standard. It is not a promise about the next storm. A window with fewer than three assessable storms is reported as insufficient events, not passed.

TRUSTED BY WATER AUTHORITIES, UTILITIES AND CONTRACTORS ACROSS AUSTRALIA

Sydney Water · Hunter Water · Queensland Urban Utilities · Water Corporation · Yarra Valley Water · Veolia · Transurban · aurecon · Downer · GHD · Hach · SMEC · Stantec · ventia

See it running against a real network, and bring your hardest question about how a figure was calculated.

We will demonstrate FlowSense live, including the blockage backtest replayed on a real overflow register. We will also show the working behind every number.

Environmental Data Services

Australian owned and operated since 1991

Head office

13/20-22 Ellerslie Road
Meadowbrook QLD 4131

1300 721 683

eds@e-d-s.com.au
www.e-d-s.com.au
edsflowsense.au

Offices in Brisbane, Richmond NSW, Boronia VIC and Adelaide SA

Every drop, measured.

EDS FlowSense features and benefits, EDS-FS-FAB-01, revision 2.5 of 12 October 2026, superseding revision 2.4 of 11 October 2026. Capabilities described are those in the released platform at the date of issue, and were read from it. The diagrams are schematics drawn to explain a method, not measurements from any network. Prices are the rate card current at the date of issue. Logos are of organisations EDS has supplied, monitored or worked for since 1991; they are the trademarks of their owners and do not indicate use of FlowSense. Other third party names are the trademarks of their respective owners.