



FLOWSENSE · FEATURES AND BENEFITS

From the reading in the chamber to the decision it pays for.

FlowSense takes telemetry from any logger fleet or SCADA system and carries it the whole way: the network running today, the infiltration and inflow costing you money this year, and the calibrated evidence your capital programme is argued from. One record underneath all three, so nobody retypes a number between stages.

Monitor

The fleet live, alarms that reach a phone, logger health before it fails, and blockage warning weeks ahead of a surcharge.

Analyse

Infiltration and inflow in kilolitres, dry weather flow profiled, hydraulics read, and every channel's record scored before it is trusted.

Engineer

Calibrated RTK models, a dynamic wave network, the I/I heat map, and the cost per kilolitre of taking the water out.

Four purchases, four datasets, and an argument that never quite closes.

Doing this work properly today usually means buying four things from four suppliers: the logger vendor's portal, a spreadsheet study, a modelling engagement and whatever effort goes into the reporting. Each one arrives in its own format, on its own timeline, with somebody retyping numbers in between. FlowSense is those four jobs on one record.

WHAT IT TAKES THE PLACE OF

- The logger vendor's portal. Live fleet status, alarms, battery and comms health, and the site detail your operators open every morning, for whatever instruments you own.
- The annual I/I spreadsheet. Storm by storm infiltration and inflow, quantified in kilolitres against a modelled dry weather baseline, refreshed continuously.
- A modelling consultancy engagement. Calibration, validation, a dynamic wave network model and a costed capital plan, run in a workspace you keep.
- The reporting effort. Six report templates written for six readers, generated from the same record and carrying your logo.

WHAT THAT CHANGES

The number in the board paper and the reading in the chamber become the same number, and you can walk from one to the other without leaving the browser.

A question asked in a meeting gets answered in the meeting. An overflow notified on Monday can be read against the rainfall that caused it, the sites upstream of it and the model already calibrated on that catchment, in minutes rather than in a scope of works.

And when the programme is funded, the evidence behind it is still in the system, still re-runnable, and still yours.

1	4	16	90
Subscription, priced per site. No editions, modules or per user fees.	Ways data gets in, including your own SCADA and historical CSV.	Project based engineering tools on a GIS canvas.	Day trial, on your own flow history, with no hardware to buy.

FOR OPERATIONS

A ranked list every morning of what is failing, what is blocking and what needs a battery, with the alarm that reaches a phone and the case that reaches a crew.

FOR ENGINEERING AND PLANNING

Infiltration and inflow in kilolitres per catchment, calibrated models, and a programme ranked by cost per kilolitre removed. A study you re-run rather than re-commission.


FOR THE EXECUTIVE

One number per catchment, one page per reader, and the working behind both. Board papers and regulatory reporting generated from the record itself, with your logo on them.

The point is not that one platform does more things. It is that every one of them reads the same validated record, in the same units, on the same timeline. That is what makes an answer from the reporting page and an answer from the model agree with each other, and it is the thing a folder of exports has never been able to do.

Four ways in. One validated record. Three ways to use it.

However a reading travelled, the same rules apply to it once it arrives. That is what lets a figure stay comparable across a network assembled from several instrument brands, several SCADA systems and several years of history.

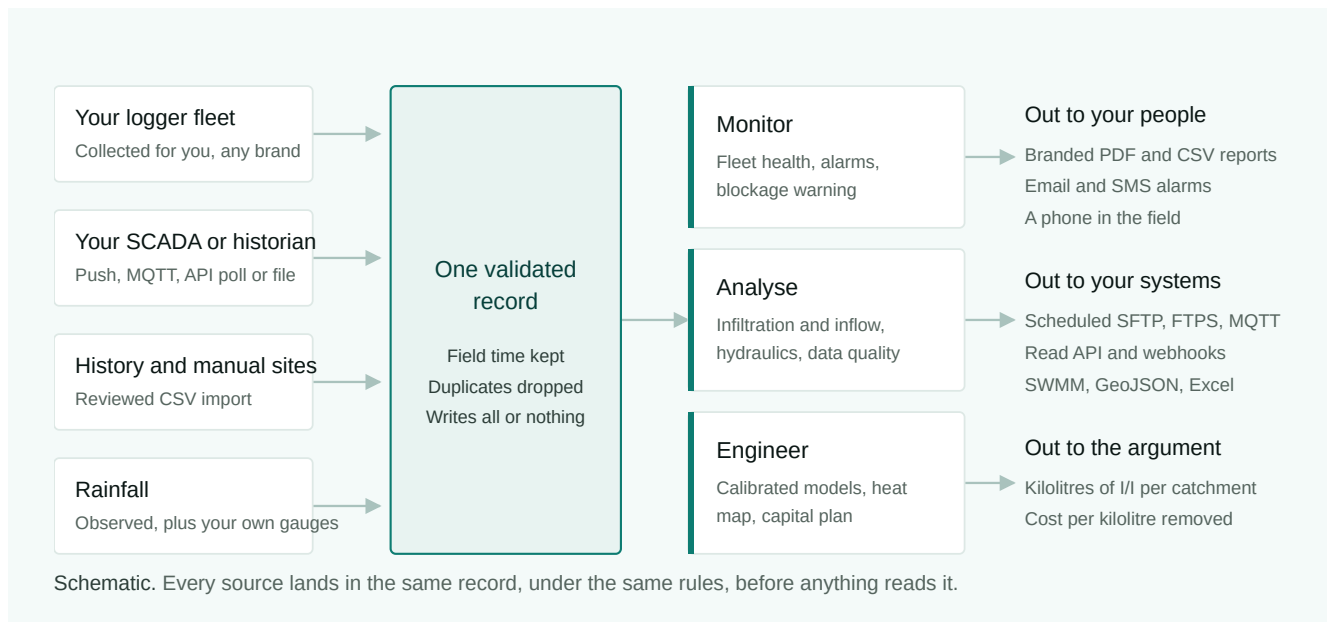

THE RULE EVERY READING MEETS

WHY IT IS THERE

The field time is kept

Never the time of collection

A reading logged at 03:00 stays at 03:00 even if it was collected at noon, so overnight analysis, storm lags and daily volumes rest on when the water was actually there.

Duplicates are dropped

On channel and timestamp

Any file, message or batch is safely re-sendable, so a failed transfer is fixed by sending it again rather than by an argument about what is already loaded.

Writes are all or nothing

And every collection is logged

An interrupted import leaves no half loaded day behind it, which is the fault that takes months to notice and invalidates everything reported in between.

Unknown tags wait for a person

Unmapped SCADA tags queue for review

Nothing a control system sends can create a channel by itself, so a renamed tag at your end cannot quietly become a second version of a site in ours.

NOTHING TO INSTALL

Cloud hosted and browser based, on desktop, tablet and phone. Your SCADA pushes out to us over HTTPS or MQTT, so no software goes onto a control

VENDOR INDEPENDENT

Bring the loggers you already own and keep buying whichever you prefer. Instruments from several manufacturers run side by side in one account.

YOURS TO LEAVE WITH

Every reading, report and model run exports in open formats, including EPA SWMM 5 input files and GeoJSON. Work started here stays portable.

The whole network on one screen, and the failing logger named before it goes quiet.

A monitoring programme fails quietly. A battery flattens, a modem stops answering, and nobody finds out until the quarter's report is already wrong. FlowSense treats the fleet itself as something to be monitored, and puts what needs attention first.

CAPABILITY

WHAT IT GIVES YOU

Network Overview

Every site, its alarms, battery and comms health and its rainfall, refreshed every sixty seconds

Morning triage in one glance, worst first, instead of ten portal logins.

Filter the map by what is actually wrong: alarms, comms failures, low battery, stale telemetry, anomalies, rainfall or hydraulic risk, then click straight through to the site.

The site workspace

Eleven tabs over one record: overview, diagnostics, analysis, I&I, alarms, depth against velocity, water quality, flow balance, insights, calibrations and field notes

Current state, full record and the analysis of that record in one place.

Zoom, pan, channel toggling, date presets and CSV export sit on every chart, and the window you are looking at travels in the link, so "this site, over this fortnight, on this tab" is something you can send to a colleague.

Fleet Health

Every logger on the account, worst first, with battery classified for its chemistry and a replace by date projected from that site's own discharge trend

A dying logger becomes a planned visit on a scheduled run rather than a hole in the record and an emergency truck. One screen answers "what needs a battery this month" for the whole fleet.

Alarms

Threshold and no data rules, site wide or channel specific, with per rule recipients and cooldowns, delivered by email and SMS

The right person is told, once, when the state changes, and the email links straight to the site. Alarms are edge triggered, so a condition that lasts a week does not send a message every cycle for a week.

Offline detection per site

Judged against each site's own upload cadence

A meter that uploads twice a day is not reported late at hour three, and one that uploads every fifteen minutes is late at hour two. A single fleet wide threshold gets both wrong, and an alerting system people learn to ignore is worse than none.

The same account on a phone


Responsive across desktop, tablet and mobile

The crew standing at the manhole sees what the office sees, including the last reading, the site's notes and its photographs, without an app to install or a second licence to buy.

One detail worth knowing, because it is the one that catches people out. A threshold rule deliberately ignores stale data, so a dead logger frozen on a breaching value cannot hold an alarm open for a fortnight. Catching the dead logger is the no data rule's job, on purpose.

Weeks of warning, read from the pipe's own overnight behaviour.

A gravity sewer drains almost empty in the small hours. An obstruction shows up in that overnight trough long before it shows up anywhere else, and long before anyone rings the council. This module reads it on every site you monitor, without being asked and without a separate subscription.

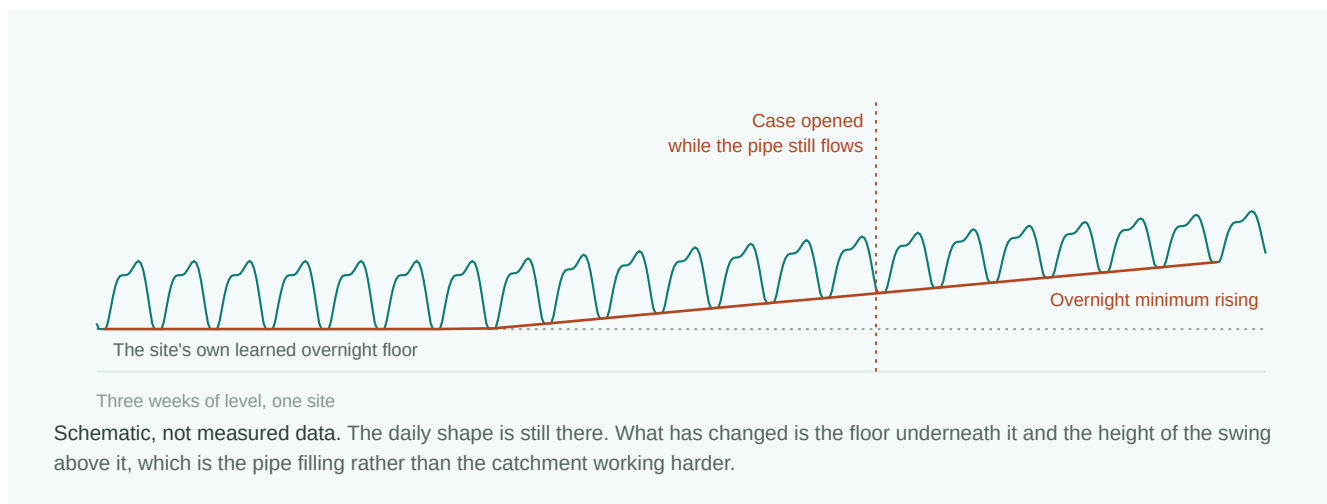

CAPABILITY

WHAT IT GIVES YOU

Eight signatures, not one threshold

Six read from level, two more where velocity is measured, the strongest being conveyance at matched depth

A fall in velocity at the same depth measures the pipe, not what arrives through it. That is what separates a restriction worth a jetting crew from a catchment that simply got busier.

Rain excluded before anything is judged

The analysis runs on dry days only

Rain produces every one of those signatures more strongly. A site that rises only after rain scores zero and says so, and a fortnight too wet to judge is reported as insufficient dry weather rather than quietly as normal.

A mechanism and an action

Silt or grease, sudden obstruction, downstream restriction, or increased load

Each verdict names what to do: desilt the reach, send CCTV, inspect below the meter, or do nothing at all. That last one is the verdict that saves the money, and a suspect channel is routed to data quality rather than to a crew.

Cases that reach the people who dig

Assign to your own team, or send a link to a contractor with no login

What they find comes back as a field note on the site, with their photographs on it, instead of as a phone call somebody retypes days later. The case closes on a recorded outcome.


Performance measured on your network

A one click backtest replays the detector against the overflows already in your register

It uses only the telemetry that existed before each event, so the hit rate you are shown is your own rather than ours. You can run it on day one, against history you already hold.

Infiltration and inflow, quantified rather than described.

"This catchment is wet" is not a business case. A volume in kilolitres, a peak, a lag and a percentage over dry weather flow is. FlowSense separates the storm response from the sanitary flow underneath it and reports what the difference is worth, per catchment, per storm.

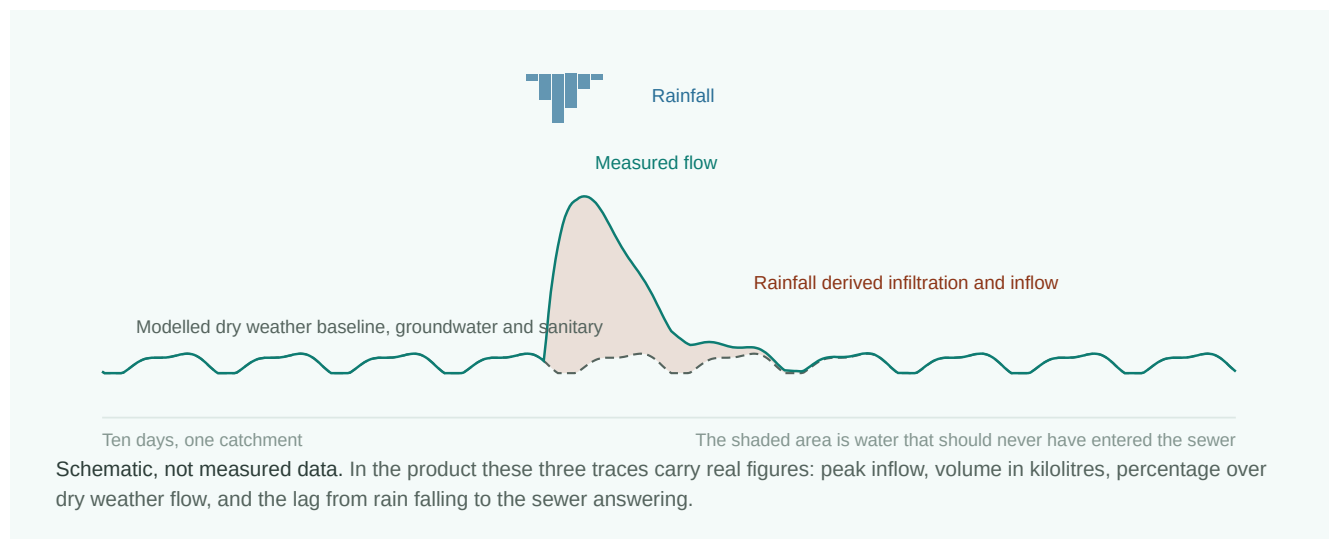

CAPABILITY

WHAT IT GIVES YOU

A dry weather baseline that moves

Sanitary diurnal plus groundwater infiltration, from qualifying dry days only, stratified by day type

Weekend sanitary flow cannot masquerade as inflow, and the groundwater component is tracked as it moves through the year rather than held constant. A fixed baseline quietly charges that seasonal difference to storm response, which is how catchments get ranked wrongly.

Storm by storm event analysis

Isolated storms detected, then measured individually

Peak, volume, lag and percentage uplift for each event, so you can see whether a catchment responds to every shower or only to the long soaking rain. The two mean very different repairs.

The three way split

Sanitary flow, groundwater infiltration and rainfall derived inflow, summing exactly to the metered total

This is the number that ends the argument: a kilolitre figure a treatment cost can be applied to, and the same figure the capital plan ranks its options against later.

Catchment closure, not sampling

Upstream against downstream reconciliation, aligned on travel time

Mean and peak balance, unaccounted volume and average error across a metered catchment, so you can say how much of the flow is accounted for rather than hoping the meters agree.

Comparison across the network

Multi site comparison on a shared window, trade waste discharge analysis, and wet weather uplift per catchment

Ranking is what turns analysis into a work programme: which catchment first, which one can wait a year, and which one is not a rainfall problem at all.

Check the instrument before you trust the number.

Every figure on the pages either side of this one rests on the record being sound. So the platform scores the record out loud, names the weak channel, and shows its working when it repairs anything. An answer you cannot audit is not an answer.

CAPABILITY

WHAT IT GIVES YOU

Depth against velocity

Every simultaneous pair over the window, coloured by flow, with the correlation, the ranges and the sample count stated

The shape of the cloud is the diagnosis. Silt, surcharge, backwater and a failing meter each leave a different one, so a reviewer can see in a second what would otherwise take a site visit to argue about.

Completeness and gap events

Coverage per channel, with the gaps listed rather than averaged away

You know how much of the period the record actually covers before you quote a figure from it, and a report can state that coverage rather than implying a full month it never had.

Anomaly detection

Flatlines, impossible values and drift, scored channel by channel

A meter that has quietly stopped moving is caught as a fault rather than read as a calm fortnight, which is the failure mode that silently corrupts a year of reporting.

Defect detection with a method per defect

Outliers, local spikes, flatlines, negatives, rate of change and cross channel residuals, each with a recommended repair

One universal smoother deletes real storm peaks. Matching the method to the defect it found keeps the event you are about to be asked about, and tells you which method it used.

Conditioning for modelling

Depth, velocity and flow conditioned together where a survey or a model needs a continuous series

A model gets the continuous input it requires without anybody hand filling cells in a spreadsheet, and the three channels stay consistent with each other while it happens.

Outage recovery

The windows a site went quiet are found and refilled from source where the source still holds them

A network or instrument outage stops being a permanent hole that only surfaces when a report is already wrong and already issued.

Repairs are export only. A gap fill never overwrites the measured record, so the reading the instrument produced is still there to go back to, and a report can say which of its numbers were measured and which were reconstructed. That distinction is what survives scrutiny from a regulator, an auditor or the consultant reviewing your submission.

NAMED METHODS, NOT HOUSE RECIPES

QARTOD flag vocabulary

IQR and MAD

Hampel

Theil-Sen

Nash-Sutcliffe

Kling-Gupta

Manning

Colebrook-White

ISO 8601 on every boundary

Sixteen tools on a GIS canvas, and every number carrying the working that produced it.

This is the layer normally bought as a consultancy engagement and delivered as a PDF. Here it is a workspace you keep: project and scenario based, run against your own record, re-runnable next year when the network has changed and the question comes back.

I/I Heat Map

Severity painted onto the real network

RTK Calibration

SWMM compatible unit hydrograph per catchment

RTK Validation

Independent storms, per storm scorecard

Hydraulics

Dynamic wave model, pumps, gates, control rules

Scattergraph

Silt, surcharge, backwater, meter fault

Pump Station

Volumetric testing and performance decay

Overflow Forecast

Design or forecast storm to exceedance

Capital Plan

NPV, BCR, and cost per kilolitre of I/I removed

Compliance

Licence limits and an overflow register

Catchment Model

Multi site simulation with routing

Dry Weather Flow

Calibration and diurnal profiling

Events

Rainfall and response event detection

Data Scrubbing

Defect detection with a method per defect

QA and QC

Structured review and sign off

Compare

Scenario against scenario

Export

Excel, GeoJSON, CSV, or EPA SWMM 5

SCORED STORM BY STORM, TO A PUBLISHED STANDARD

A single whole of series score can look respectable while the model misses every storm peak, because dry stretches dominate it. So each storm is scored separately: simulated peak within 15 per cent below to 25 per cent above observed, event volume within 10 per cent below to 20 per cent above, and peak timing reported against a one hour tolerance.

An event passes on peak and volume together, and three assessable storms is the minimum before a run may be called verified. A window with fewer is reported as insufficient events rather than quietly passed.

HONEST ABOUT ITS OWN CEILING

Observed inflow is metered flow less a modelled baseline, so it carries that baseline's noise and no parameter set can beat it. The workspace shows the best score available on that record beside the score achieved, because judging an honest calibration against a perfect 1.0 makes good work look like failure and sends people chasing it.

Where the evidence will not support a conclusion, the tool says so and stops. That is the behaviour you want from something a capital submission is going to rest on.

Severity painted onto the real network, and the price of taking the water out.

A heat map is commodity. Six defensible methods, attributed along the gravity network by catchment and flow direction, carrying a confidence figure and ending in a costed programme, is the thing an authority can actually spend money against.

CAPABILITY

WHAT IT GIVES YOU

Six selectable methods

Network attribution, RDII event analysis, hydraulic capacity, depth and velocity, mass balance, and the RTK unit hydrograph

The map is drawn by the method your data supports, and the platform tells you which applies. A single hard wired method is only right on the networks it happens to suit.

Painted along the network

Severity follows catchment and flow direction, not a circle drawn around a meter

A gauge reading badly implicates the pipes that actually drain to it, so the inspection list matches how the sewer is plumbed rather than how far things are apart on a map.

A confidence figure on every estimate

A Gaussian process engine with leave one out validation and a 0 to 1 overlay

Pipes far from a gauge fade rather than pretending to a number. You can tell the hot spot that is evidence from the one that is interpolation before you send a CCTV truck to it.

An inspection priority list

The pipes most likely to be sources, each with the confidence behind its score

The map becomes a work programme with an order to it, and exports as GeoJSON, CSV, an image or a formatted A4 assessment report for the people who were not in the room.

Capital Plan

Net present value, benefit cost ratio, and cost per kilolitre of infiltration removed

Options ranked on the same basis your business case has to be written on, from the same kilolitre figures the analysis produced. The submission and the evidence stop being two different documents.

Compliance and the overflow register

Licence limits tracked, events recorded

What you have to report is assembled as it happens rather than reconstructed at the end of the year from emails and somebody's notebook.

Said plainly, because it matters. Flows in upstream pipes are a calibrated estimate derived from the downstream meter, not a measurement, and the interface labels them that way everywhere they appear. A map that does not tell you which of its numbers were measured is not one you should defend in a hearing.

01

Measure

Storm response quantified at each gauge, from the record the platform already holds.

02

Attribute

Severity carried along the gravity network by catchment and flow direction.

03

Rank

Pipes ordered by how likely they are to be sources, each with its confidence.


04

Cost

The programme priced, and options ranked on cost per kilolitre removed.

Station flow, and pump condition, from run times you already have.

Most pump stations are never going to get a flow meter. They do not need one. The wet well fills at the rate sewage arrives and empties at the rate the pumps move it, so the run record is a flow record, and the same arithmetic gives you the condition of the pumps.

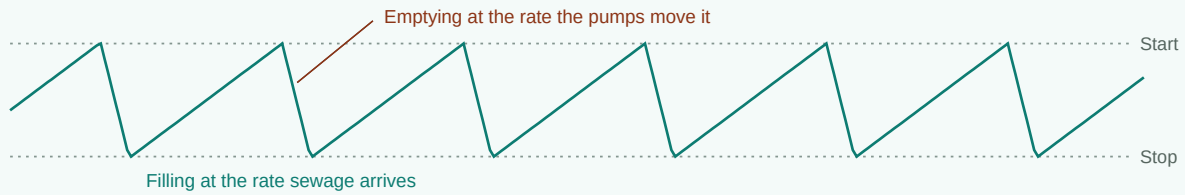

Five hours of wet well level, one station

Schematic, not measured data. Two slopes and a well volume are enough: one gives the inflow, the other gives what each pump is actually delivering today.

CAPABILITY

WHAT IT GIVES YOU

Station flow without a flow meter

Volume in and volume pumped, starts and run hours, per day and per week

Every station in the network joins the flow picture for the cost of the level and run signals your SCADA already produces. No chamber work, no meter to buy, no confined space entry.

Pump capacity measured, not rated

Delivered capacity from the station's own cycles over ninety days, against the nameplate, with the direction of travel

A pump losing capacity is an impeller wearing or a rising main starting to block, and it shows here weeks before the station struggles on a wet night. Two pumps running together are never judged against their ratings added up, because sharing a rising main they cannot deliver it.

Energy, with the arithmetic beside it

Kilowatt hours per megalitre, reported with the hours, the draw and the volume it came from

The figure to compare between stations and to watch over time. A station needing more energy for the same water is losing condition, and you can see which one and by how much.

Cycles the record cannot support are set aside

Counted and reported rather than averaged in

You are told how many cycles were excluded and why, so a confident number is a number that earned it rather than an average with rubbish hidden in it.

Storms read against the station

Rainfall hung over the station chart, and overflow events derived where a level band is configured

The wet weather story at a station is readable without exporting anything: what arrived, what was pumped, how long the well stayed high, and what it rained while that happened.

What it needs from you is small. A wet well level signal scanned at five minutes or better, pump run states as numbers, and the well dimensions. Most stations already produce the first two, which is why this is usually the cheapest flow data an authority can add.

What the crew found, attached to the data it explains.

Telemetry says the flow changed. Only the person who lifted the lid knows why. FlowSense keeps both in the same place, so next year's engineer reading a strange fortnight finds the note, the photographs and the date of the visit instead of ringing around to ask who remembers.

CAPABILITY

WHAT IT GIVES YOU

Field notes on every site

Observation, maintenance, calibration and installation, dated and attributed

The record of somebody going and looking sits beside the telemetry it explains, on the site page and in the reports, rather than in an inbox nobody else can search.

Photographs and video on the note

Taken on the phone that is already in the field

The silt line, the ragging, the damaged benching: evidence a sentence cannot carry, stored against the site and the date rather than in somebody's camera roll.

Send a note to the people who need it

Emailed to chosen recipients, with its photographs

A supervisor, a contractor or an asset engineer gets what was found without needing a login, and the copy that was sent stays on the record.

Site surveys that become the paperwork

The pre installation survey fills out the inspection and installation reports, including a drawn manhole diagram

The measurements are typed once, in the chamber, and the formatted report writes itself. Crew days spent producing artefacts turn back into crew days spent on sites.

Commissioning and calibration recorded

Zero depth checks, reference device readings and meter comparisons kept against the site

The instrument's history travels with its readings, so the question "was this meter verified, and when" has an answer years later, which is exactly when it gets asked.

People without an account can still report

A single use link opens one job, and nothing else

The jetting contractor or the depot crew reports what they found straight into the record. No licence to buy, no training, and the link shows them the job rather than your network.

All of it works on a phone at the manhole. The same account, the same sites, the same last reading, on whatever the crew already carries. There is no separate field app to licence, deploy or keep in step with the platform.

The report your board reads, generated from the record your operators use.

Reporting is where most monitoring programmes lose their week. Six templates, each written for a different reader, are generated from the same validated record and carry your branding, so the quarterly pack stops being a fortnight of copying charts into a document.

CAPABILITY

WHAT IT GIVES YOU

Six templates, six readers

Flow Totals, Executive Summary, Flow Analysis, Engineering Diagnostic, Site Investigation and Network Performance

Operations, management, the I/I study, the technical team, the field pack and the asset planner each get a document written for them, rather than one report everybody half reads.

Context, not just totals

The period measured against five other windows, including the same weeks last year

"Up on last quarter" and "normal for a wet September" are different findings, and the report distinguishes them without anybody assembling last year's numbers by hand.

Built for the audience in front of you

Multi site selection, custom range, optional comparison period, and section level include and exclude

One template serves several readers, and the pack that goes to a regulator need not carry the twelve pages that were only ever for the depot.

Your document, not ours

Your logo and report title throughout, as a branded PDF with contents and bookmarks, or a CSV bundle

It goes to a council committee under your name, reads as a document rather than a screen dump, and the figures in it can be traced back to the sites that produced them.

Scheduled feeds into your systems

SFTP, FTPS or MQTT, as CSV files or JSON messages, with per feed channel selection, test connection, payload preview and run history

Your historian, BI stack or ETL gets the data on a schedule without anybody exporting anything. The watermark advances only on a fully successful send, so a failed delivery cannot silently skip a window.

A read API, webhooks and model exports

Excel, GeoJSON, CSV, and EPA SWMM 5 input files

Your SCADA feeds FlowSense and FlowSense feeds your systems back. Very few products in this category accept the inbound half, and the work you start here stays portable.

Every number keeps its working. Volumes, scores and bands are explained where they appear, in plain language, including how a daily volume was computed and what a health score counts. A figure nobody can explain in a meeting is a figure that gets argued with instead of acted on.

Bring the fleet you own, the SCADA you run, and the history you already hold.

Nothing here asks you to replace instruments or to start the record again. A network assembled from three logger brands, two SCADA systems and a decade of exported spreadsheets lands in one account, and reads as one network.

ROUTE IN

WHAT IT MEANS FOR YOU

Collection operated by EDS

Readings arrive on their own from your instrument fleet, on a schedule set per site

We run and monitor the collection chain as part of the subscription, across instruments from several manufacturers. Nobody at your end babysits a poller, and a new site type is onboarded without a platform change.

Your own SCADA, four ways

HTTPS push to our endpoint, MQTT subscription, API poll where we read yours, or file pickup from your SFTP or FTPS server

Your integrator picks whichever suits the site and the security posture. Nothing is installed on a control network, and ingest tokens are write only: a token that leaks cannot read a single stored value.

Reviewed CSV import

Staged, reviewed before commit, replace or merge, with the date format and time zone chosen at upload and a 30 day undo window

Last winter's flow survey is loaded and ranked the same afternoon, and a mistake is undone rather than lived with. Day one does not have to be the day your record begins.

Manual sites

History that never had a logger, created by hand and placed on the map

A 2019 survey or a meter since removed is read by every heat map, model and volume total exactly as a live site is. Nothing polls it, so it never counts as an outage.

Rainfall, without a separate subscription

Observed rainfall topped up for every geocoded site, with your own and Bureau gauge data uploadable alongside it

"Did it rain there" is answerable for any site on any date, and sources are tracked separately so ground truth and modelled rain never get confused with each other.

Commissioning done with you

Connection request, tag mapping, units and a verified first reading

The connection is stood up with your IT or SCADA people, against documents written for them, and it is not called done until a reading has arrived and been checked.

Time is handled properly, which sounds dull until it is wrong. Every date and time on the screen is shown in the reader's own zone, while alarms and daily totals are worked out in the station's, and daylight saving is honoured on both sides. That is why a daily volume here matches the one your own spreadsheet produces.

Your team, your structure, and methods you can look up.

CAPABILITY

WHAT IT GIVES YOU

Access you control yourself

Role based, with per user page access on top, down to individual sites and channels

A contractor sees three sites, an operator sees the network but not the modelling, and a planner sees everything. Decided by you, changed in seconds, with no ticket raised and no per user fee behind it.

Your own admin, and your own structure

Create users, reset passwords, suspend accounts, and mirror your org with named sub teams that inherit access

The people who join and leave your organisation are managed by you at your pace. Individual admin sections can be delegated one at a time, per person, so a records officer can run users without running everything.

Assurance you can show an auditor

Two factor authentication, a full audit log of administrative actions, and usage analytics

Who signed in, from where, what they viewed and what they exported. Access is scoped per account, credentials are hashed, traffic is TLS protected and stored third party credentials are encrypted at rest.

Methods you can look up

A "how this is calculated" note on the figures that matter

The engineer reviewing your submission can read what a number counts and which standard it follows, in the product, without a support call or a scope of works.

BUILT TO THE PUBLISHED STANDARDS, AND TESTED AGAINST THEM ON EVERY RELEASE

STANDARD	WHAT IT GOVERNS HERE
CIWEM UDG Code of Practice for the hydraulic modelling of sewer systems, 2017	The per storm acceptance bands every calibration and validation is scored against, and dry weather flow as a diurnal stratified by day type
WEF MOP FD-6 and WPCF MOP No. 36	Dry weather flow as sanitary diurnal plus groundwater infiltration, from qualifying dry days only
WSA 02 Sewerage Code of Australia	Self cleansing velocity, level of service checks, and Colebrook-White friction per pipe
AR&R 2019, Book 2, and AS/NZS 3500.3	Areal reduction factors, design rainfall temporal patterns, the Rational Method for ungauged sub-catchments
QARTOD	The quality control test battery and flag vocabulary every sample is judged by
EPA SWMM, including EPA/600/R-15/162A	Dynamic wave routing, and the three component RTK method for rainfall derived infiltration and inflow

FlowSense is built to the standards listed and tested against them on every release. EDS does not describe the software as certified, accredited or endorsed by the bodies that publish them. In the product this lives on a page generated from the running software, where each standard lists the calculations that cite it.

One subscription. Every capability. Priced by the site.

Published here, because a price you can only discover through a sales cycle is itself a cost.

No editions, no modules, no per user fees: everything in this brochure is in the one subscription, and the only number that moves is how many sites you monitor.

FIRST 20 SITES \$30 per site, per month	SITES 21 AND BEYOND \$20 per site, per month
---	--

AUD excluding GST, billed annually on twelve month terms. Bands are cumulative, so a fifty site network pays the first rate on twenty sites and the second on thirty, and growth never re-prices the sites you already have. A site is a monitored location with at least one active channel, and archived sites cost nothing.

WHAT THAT MEANS FOR A REAL NETWORK	SITES	PER MONTH	PER YEAR	BLENDED, PER SITE
Small shire	5	\$150	\$1,800	\$30
Regional council	20	\$600	\$7,200	\$30
Mid size council	50	\$1,200	\$14,400	\$24
Large regional network	90	\$2,000	\$24,000	\$22
Bulk utility	300	\$6,200	\$74,400	\$21

GETTING STARTED	WHAT IT COVERS	PRICE
Free trial	90 days, the whole platform, on your own uploaded flow history. Upload last winter's exports and see your infiltration ranking the same afternoon.	\$0
Assisted onboarding	GIS network import, site and channel configuration, alarm setup, SCADA commissioning, and training.	\$2,500 once waived at 50 sites and above
Guided calibration, optional	Calibration is included in the subscription and you can run it yourself. This is the optional service where EDS does the work with you, in the platform where you can re-run it.	\$7,500 per catchment

Cancel at renewal and your data exports with you in full. The only pass through charge is SMS alerting at carrier cost, and these are founding rates, locked for as long as the subscription stays active. The bands are set against procurement reality: for most Queensland councils a fifty site network sits under the \$15,000 small contractual arrangement threshold.

Where the boundaries sit.

Stated here rather than discovered later, because an engineering buyer will ask and the answers are good ones.

Blockage Watch	A statistical early warning read from each sensor's own history. It says the pipe reaching that sensor is behaving differently for a reason rain does not explain. It does not locate the obstruction, it cannot see one downstream of the meter, and it needs roughly two months of history plus enough dry days in the window.
Upstream flow allocation	Flows in upstream pipes are a calibrated estimate derived from the downstream meter, not a measurement, and the interface labels them that way.
GIS network	We integrate with your GIS. Connecting a council's own network layer is a scoped task at onboarding, not a switch, and the analysis still runs without one.
Network model	The dynamic wave solver is one dimensional: gravity network, pumps, gates and control rules. It does not do 2D overland flood mapping, water quality or sediment transport. A run exports as a SWMM input file, so the work stays portable where those layers are needed.
Model verification	The scorecard reports how the model performed against the storms in that window, to a published standard. It is not a promise about the next storm, and a window with fewer than three assessable storms is reported as insufficient events rather than passed.
Overflow forecast	As good as the rainfall forecast fed into it. It is a risk ranking tool, not a guarantee.

See it running against a real network, and bring your hardest question about how a figure was calculated.

We will demonstrate FlowSense live, including the blockage backtest replayed against a real overflow register, and we will show you the working behind every number on the screen. If you would rather test it on your own data first, send us the history you already hold and we will stand up a 90 day trial on it.

Environmental Data Services
1300 721 683

Online
www.e-d-s.com.au

Built and supported in Australia
September 2026