



Discover the AquaSamp Mini

OPTIMISE YOUR WASTEWATER MONITORING:
SAVE TIME, GAIN EASE AND PRECISION

Say goodbye to tedious manual sampling

The AquaSamp Mini opens the
door to a world where bulky
sampling rods are a thing
of the past.



Qualified spot sampling with ease


Imagine you could effortlessly and precisely collect samples from a depth of up to 6 metres. Our low-maintenance peristaltic pump combined with the stainless steel suction nozzle makes it possible – simply, effectively, precisely.



Non-stop monitoring, around the clock

The AquaSamp Mini transforms your spot sampling monitoring into a continuously monitoring system. Depending on your requirements, switch between spot sampling or automatic, time-controlled sampling.

The easy-to-change, integrated LFP battery allows you to take up to 144 individual samples, e.g. every 10 minutes, day and night.

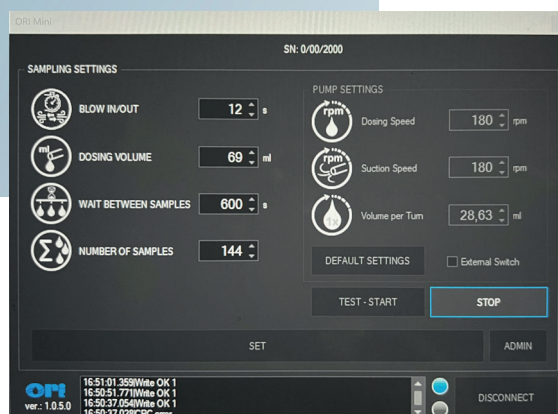

Maximum safety, even in high-risk environments

With the optional ATEX-certified version, we offer you a safe solution for use in potentially explosive areas.



Portability that inspires

No more transporting cumbersome equipment. The AquaSamp Mini is a lightweight (only 4.1 kg incl. battery) that promises effortless transport and easy handling without compromising on performance.



AquaSamp Mini

Convincing ease of use

Our specially developed Windows app makes programming the AquaSamp Mini intuitive and simple. Simple start via PC or start button



High flexibility?

The AquaSamp Mini integrates into the Enviro Guardian monitoring system. For event-controlled laboratory sampling and as a feed pump for the SensorSafe Conduit system.




Invest cheaply, benefit in the long term.

Why spend more when the best solution is so affordable? The AquaSamp Mini is the investment that pays for itself after a short time.

With the AquaSamp Mini, you can rely on a safe and cost-effective solution for your wastewater monitoring. Take the step into a future where technology not only takes work off your hands, but also redefines the accuracy and reliability of your water sampling.

Technical data

ATEX Motor	Non Ex with Li Ion battery (Art.–Nr. : 8092365–ne)			
	II 3G		Ex db [ib] IIB T4 Gb with Accubox 2 (Art.–Nr. :8092365–2)	
Norm	EN IEC 60079–0:2018			
Degree of protection	IP 65			
Electrical data	Battery non Ex Li Ionen, 14,8 V DC / 3.4 Ah / 50.32Wh non Ex Sicherung 3A			
	Battery Zone 2 Li Ionen, 12 V DC / 3,7			
Dimension (Ø x H) in mm / weight in kg	with 15l HDPE–bottle (ØXH) 270 x 700			
	5,3kg with Li Ion battery Ex Version Zone 2			
	4,1 kg with Li Ion battery non EX			
Sampling principle	Peristaltic pump			
Sample container	15l HDPE composite container, 2l borosilicate glass bottle (others on request)			
Wetted material	Suction hose	PVC	Pump hose	Silicon (various materials on request)
	Hose coupling	PA		
	Suction piece	V2A (1.4305/AISI303) optional V4A (1.4571/ASIS 316 Ti)		
	Bottle	HDPE or borosilicate glass		
Suction hose	Ø (di)	9 mm (special versions are available on request)		
	Length	20 m (special versions are available on request)		
Suction height	Max. 6 m			
Dosing volume	Up to 15000 ml, depending on the duration of the relevant signal			
Temperature	Operation temperature 0°C – +40°C			
	Max. ambient temperature –20°C – +50°C			

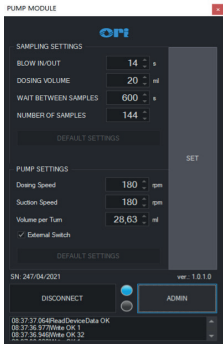

Sample container made of borosilicate glass

Book your service with us

Trainings / Exhibitions



Learn more about our products

- Free real-time video consultation by our product managers
- Individual presentation and live explanation directly on the device
- Simply select your desired date and time – you will then receive a confirmation e-mail with a link for the live consultation with Teams or Teamviewer



Do you want to read further expert knowledge on a quarterly basis

Subscribe to our newsletter



ORI Abwassertechnik GmbH & Co.
Bollacken 2, 32479 Hille
Germany

Tel.: +49(0) 57 03 / 51 01 0
Fax: +49(0) 57 03 / 51 01 51
E-Mail: info@origmbh.de

www.origmbh.de



www.origmbh.de

Our distributors worldwide



Your Contact: Environmental Data Services
1300 721 683
www.e-d-s.com.au