

Gyroscopic forces and parasitic friction --- Solution

Y23 (2023) — English translation

- A1** Let us consider a ring charged uniformly around its perimeter with a charge Q and rotating around its axis with an angular velocity Ω . Find the equivalent current i in the ring. **0.30**

First solution: During the rotation time $T = 2\pi/\Omega$, each elementary charge passes through a point in the ring, from where:

$$i = \frac{Q}{T}$$

Second solution: The result can also be obtained using the expression:

$$i = \lambda v$$

где $v = \Omega R$ - speed of ring elements. Both expressions lead to the answer:

Answer:

$$i = \frac{\Omega Q}{2\pi}$$

- A2** Determine the magnetic moment of the ball $\vec{m}$. Express your answer in terms of $\vec{\omega}$, q and r . **1.00**

First solution: The magnetic moment of the system is determined by the relation:

$$\vec{m} = \int \frac{[\vec{r} \times \vec{v}] dq}{2}$$

где dq - элементарный заряд, а $\vec{r}$ и $\vec{v}$ - его радиус-вектор и скорость соответственно. Заметим, что момент импульса механической системы определяется соотношением:

$$\vec{L} = \int [\vec{r} \times \vec{v}] dM$$

где dM - элементарная масса, а $\vec{r}$ и $\vec{v}$ - её радиус-вектор и скорость соответственно. Если распределения заряда и массы подобны, то мы приходим к следующему соотношению:

$$\vec{m} = \frac{\vec{L}q}{2M} = \frac{Iq\vec{\omega}}{2M}$$

где $I = 2Mr^2/5$ - moment of inertia of a homogeneous ball relative to the diameter.

$$\vec{m} = \int \frac{[\vec{r} \times \vec{v}] dq}{2}$$

where dq is the elementary charge, and $\vec{r}$ and $\vec{v}$ are its radius vector and speed, respectively.

Note that the angular momentum of a mechanical system is determined by the relation:

$$\vec{L} = \int [\vec{r} \times \vec{v}] dM$$

where dM is the elementary mass, and $\vec{r}$ and $\vec{v}$ are its radius vector and speed, respectively.

If the charge and mass distributions are similar, then we arrive at the following relationship:

$$\vec{m} = \frac{\vec{L}q}{2M} = \frac{Iq\vec{\omega}}{2M}$$

where $I = 2Mr^2/5$ is the moment of inertia of a homogeneous ball relative to the diameter.

Second solution: consider a disk with radius R and thickness h with charge density ρ and rotating with angular velocity $\vec{\omega}$ around its rotation axis. Select a ring with radius r and thickness dr . Then for the magnetic moment of the ring we obtain:

$$d\vec{m}_d = \vec{n}S \cdot \frac{\omega dQ}{2\pi}$$

где $S = \pi r^2$ - площадь кольца. Преобразуем:

$$d\vec{m}_d = \vec{\omega} \cdot \frac{2\pi r^3 dr h \rho}{2} \Rightarrow \vec{m}_d = \frac{\pi R^4 h \rho \vec{\omega}}{2}$$

Перейдём к шару. Будем характеризовать h и R углом θ с осью симметрии шара. Тогда:

$$R = r \sin \theta \quad h = -r \cos \theta$$

Тогда для элемента магнитного момента шара имеем:

$$d\vec{m} = \frac{\pi r^5 \rho \vec{\omega}}{4} \sin^5 \theta d\theta \Rightarrow \vec{m} = \frac{\pi r^5 \rho \vec{\omega}}{4} \int_0^\pi \sin^5 \theta d\theta = \frac{\pi r^5 \rho \vec{\omega}}{4} \int_{-1}^1 (1 - 2t^2 + t^4) dt = \frac{4\pi r^5 \rho \vec{\omega}}{15}$$

Для ответа на вопрос осталось подставить $\rho = 3q/4\pi r^3$.

$$d\vec{m}_d = \vec{n}S \cdot \frac{\omega dQ}{2\pi}$$

where $S = \pi r^2$ is the area of the ring. Let's convert:

$$d\vec{m}_d = \vec{\omega} \cdot \frac{2\pi r^3 dr h \rho}{2} \Rightarrow \vec{m}_d = \frac{\pi R^4 h \rho \vec{\omega}}{2}$$

Let's move on to the ball. We will characterize h and R by the angle θ with the symmetry axis of the ball. Then:

$$R = r \sin \theta \quad h = -r \cos \theta$$

Then for the element of the magnetic moment of the ball we have:

$$d\vec{m} = \frac{\pi r^5 \rho \vec{\omega}}{4} \sin^5 \theta d\theta \Rightarrow \vec{m} = \frac{\pi r^5 \rho \vec{\omega}}{4} \int_0^\pi \sin^5 \theta d\theta = \frac{\pi r^5 \rho \vec{\omega}}{4} \int_{-1}^1 (1 - 2t^2 + t^4) dt = \frac{4\pi r^5 \rho \vec{\omega}}{15}$$

To answer the question, all that remains is to substitute $\rho = 3q/4\pi r^3$.

Third solution: consider a thin-walled spherical shell with radius R and thickness dR , rotating with angular velocity $\vec{\omega}$. Let us select a ring limited by the angles θ and $\theta + d\theta$ of the spherical coordinate system. The magnetic moment of the selected ring is equal to:

$$d\vec{m}_{\text{сф}} = \frac{dQ\vec{\omega}}{2\pi} \cdot \pi R^2 \sin^2 \theta = \vec{\omega} \cdot \frac{2\pi \rho R^2 dR \sin \theta d\theta}{2\pi} \cdot \pi R^2 \sin^2 \theta = \pi \rho R^4 dR \vec{\omega} \cdot \sin^3 \theta d\theta$$

Проинтегрируем полученное выражение:

$$\vec{m}_{\text{сф}} = \pi \rho R^4 dR \vec{\omega} \int_0^\pi \sin^3 \theta d\theta = \pi \rho R^4 dR \vec{\omega} \int_{-1}^1 (1 - t^2) dt = \frac{4\pi \rho R^4 dR \vec{\omega}}{3}$$

Магнитный момент шара получается интегрированием магнитного момента по сферам:

$$\vec{m} = \frac{4\pi \rho \vec{\omega}}{3} \int_0^r R^4 dR = \frac{4\pi \rho r^5 \vec{\omega}}{15}$$

Для ответа на вопрос осталось подставить $\rho = 3q/4\pi r^3$. Finally:

$$d\vec{m}_{\text{сф}} = \frac{dQ\vec{\omega}}{2\pi} \cdot \pi R^2 \sin^2 \theta = \vec{\omega} \cdot \frac{2\pi \rho R^2 dR \sin \theta d\theta}{2\pi} \cdot \pi R^2 \sin^2 \theta = \pi \rho R^4 dR \vec{\omega} \cdot \sin^3 \theta d\theta$$

Let's integrate the resulting expression:

$$\vec{m}_{\text{сф}} = \pi \rho R^4 dR \vec{\omega} \int_0^\pi \sin^3 \theta d\theta = \pi \rho R^4 dR \vec{\omega} \int_{-1}^1 (1 - t^2) dt = \frac{4\pi \rho R^4 dR \vec{\omega}}{3}$$

The magnetic moment of a ball is obtained by integrating the magnetic moment over the spheres:

$$\vec{m} = \frac{4\pi \rho \vec{\omega}}{3} \int_0^r R^4 dR = \frac{4\pi \rho r^5 \vec{\omega}}{15}$$

To answer the question, all that remains is to substitute $\rho = 3q/4\pi r^3$.

Finally:

Answer:

$$\vec{m} = \frac{qr^2 \vec{\omega}}{5}$$

A3 Find the moment of forces $\vec{M}$ acting on the ball relative to its center. Express your answer in terms of $\vec{\omega}$, $\vec{B}$, q and r .

0.20

The moment of forces $\vec{M}$ acting on a coil with current in a uniform magnetic field is equal to:

$$\vec{M} = [\vec{m} \times \vec{B}]$$

from where:

Answer:

$$\vec{M} = \frac{qr^2 [\vec{\omega} \times \vec{B}]}{5}$$

B1 Write down the condition for the ball not to slip on the plane in terms of $\vec{v}_C$, $\vec{\omega}$ and $\vec{r}$. Using the resulting expression, express the angular velocity components ω_x and ω_y in terms of v_{Cx} , v_{Cy} and r . Differentiating the no-slip condition with respect to time, express $\vec{a}_C$ in terms of $\dot{\vec{\omega}}$ and $\vec{r}$.

0.50

If a rigid body rotates with angular velocity $\vec{\omega}$, and the speed of point A is equal to $\vec{v}_A$, then the speed of point B is given by the expression:

$$\vec{v}_B = \vec{v}_A + [\vec{\omega} \times \overrightarrow{AB}]$$

From here we obtain the condition of no slipping:

Let's project the resulting equation onto the x and y axes:

$$v_{Cx} - \omega_y r = 0 \quad v_{Cy} + \omega_x r = 0$$

From here:

The vector $\vec{r}$ remains constant as the ball moves along the plane. Then differentiating, we get:

Answer:

$$\vec{v}_C + [\vec{\omega} \times \vec{r}] = 0$$

B2 Using the equation for the dynamics of rotational motion about the center of mass, express the angular acceleration of the ball $\dot{\vec{\omega}}$ in terms of q , m , r , $\vec{\omega}$, $\vec{r}$, $\vec{B}$ and $\vec{F}$.

0.20

Let us write down the equation for the dynamics of rotational motion relative to the center of mass:

$$\frac{d\vec{L}_C}{dt} = \vec{M}_C$$

Для момента сил относительно центра масс имеем:

$$\vec{M}_C = [\vec{r} \times \vec{F}] + \frac{qR^2 [\vec{\omega} \times \vec{B}]}{5}$$

а для производной момента импульса по времени имеем:

$$\frac{d\vec{L}_C}{dt} = I\dot{\vec{\omega}}$$

from:

Answer:

$$\dot{\vec{\omega}} = \frac{5[\vec{r} \times \vec{F}]}{2mr^2} + \frac{q[\vec{\omega} \times \vec{B}]}{2m}$$

B3 Express the friction force $\vec{F}$ in terms of $m, q, \vec{B}, \vec{\omega}, \vec{r}$ and $\vec{a}_C$. Note: Use the double cross product property: **0.20**

$$[\vec{a} \times [\vec{b} \times \vec{c}]] = \vec{b}(\vec{a} \cdot \vec{c}) - \vec{c}(\vec{a} \cdot \vec{b})$$

Note: Take advantage of the double cross product property:

$$[\vec{a} \times [\vec{b} \times \vec{c}]] = \vec{b}(\vec{a} \cdot \vec{c}) - \vec{c}(\vec{a} \cdot \vec{b})$$

Consider the vector product with $\vec{r}$ terms in the equation obtained in step B3: from:

Answer:

$$\vec{F} = -\frac{2m\vec{a}_C}{5} - \frac{q\vec{B}(\vec{r} \cdot \vec{\omega})}{5}$$

B4 Find the angular velocity component of the ball ω_z at the point with coordinate x_C of its center. Express your answer in terms of q, m, B, r and x_C . **0.80**

Since the vectors $\vec{r}$ and $\vec{e}_z$ are collinear, the equation for the dynamics of rotational motion in projection onto the z axis is written as follows:

$$I\dot{\omega}_z = \frac{qr^2 [\vec{\omega} \times \vec{B}]_z}{5} = -\frac{qr^2 B\omega_y}{5} \Rightarrow \dot{\omega}_z = -\frac{qB\omega_y}{2m}$$

С другой стороны, $\omega_y r = v_x$, откуда:

$$\dot{\omega}_z = -\frac{qBv_x}{2mr}$$

and finally:

Answer:

$$\omega_z = -\frac{qBx_C}{2mr}$$

B5 Prove that the trajectory of the center of the ball is rectilinear.

0.40

Let us write the theorem on the motion of the center of mass:

$$m\vec{a}_C = m\vec{g} + \vec{N} + \vec{F} + q[\vec{v}_C \times \vec{B}]$$

Подставляя выражение для $\vec{F}$, полученное в пункте B3, получим:

$$m\vec{a}_C = m\vec{g} + \vec{N} + q[\vec{v}_C \times \vec{B}] - \frac{2m\vec{a}_C}{5} - \frac{q\vec{B}(\vec{r} \cdot \vec{\omega})}{5}$$

откуда:

$$\vec{a}_C = \frac{5\vec{g}}{7} + \frac{5\vec{N}}{7m} + \frac{5q[\vec{v}_C \times \vec{B}]}{7m} - \frac{q\vec{B}(\vec{r} \cdot \vec{\omega})}{7m}$$

Обратим внимание, что все силы лежат в плоскости xz , which means that the motion is one-dimensional, since initially the ball was motionless

B6 Find the projection of the acceleration of the center a_{Cx} of the ball onto the axis x depending on the position of its center x_C .

0.50

Projecting the acceleration of the ball center onto the x axis:

$$a_{Cx} = \frac{5g \sin \alpha}{7} + \frac{qBr\omega_z}{7m}$$

Подставляя выражение для ω_z , we obtain:

Answer:

$$a_{Cx} = \frac{5g \sin \alpha}{7} - \frac{q^2 B^2 x}{14m^2}$$

B7 Determine the dependence of the coordinate x_C of the center of the ball on time t .
Express your answer in terms of g, α, q, m, B and t .

0.70

Introducing the variable $x' = x - 10g \sin \alpha \left(\frac{m}{qB} \right)^2$, we get:

$$\ddot{x}' = - \left(\frac{qB}{m} \right)^2 \frac{x'}{14}$$

Это уравнение гармонических колебаний с циклической частотой $\omega_0 = qB/m\sqrt{14}$. Тогда общее решение для $x(t)$:

$$x(t) = 10g \sin \alpha \left(\frac{m}{qB} \right)^2 + A \cos(\omega_0 t + \varphi_0)$$

Учтём начальные условия:

$$\begin{cases} x(0) = 0 \\ \dot{x}(0) = 0 \end{cases} \Rightarrow \begin{cases} \varphi_0 = \pi \\ A = 10g \sin \alpha \left(\frac{m}{qB} \right)^2 \end{cases}$$

Для $x(t)$ we have:

Answer:

$$x(t) = 10g \sin \alpha \left(\frac{m}{qB} \right)^2 \left(1 - \cos \left(\frac{qBt}{m\sqrt{14}} \right) \right)$$

B8 Describe the evolution of the angular velocity of the ball $\vec{\omega}$. As an answer, indicate the
hodograph of the angular velocity vector (in the coordinate system xyz), that is, a curve
describing the position of the end of the vector with its fixed beginning. Indicate all
characteristic values in the figure. Express them using m, g, q, B, α and r .

0.50

The angular velocity vector of the ball always lies in the yz plane. For ω_z we have:

$$\omega_z(t) = -\frac{qBx(t)}{2mr} = -\frac{5mg \sin \alpha}{qBr} \left(1 - \cos \left(\frac{qBt}{m\sqrt{14}} \right) \right)$$

Для ω_y имеем:


$$\omega_y(t) = \frac{v_{Cx}(t)}{r} = \frac{5mg \sin \alpha}{qBr} \sqrt{\frac{2}{7}} \sin \left(\frac{qBt}{m\sqrt{14}} \right)$$

Отсюда:

$$\sin^2 \left(\frac{qBt}{m\sqrt{14}} \right) + \cos^2 \left(\frac{qBt}{m\sqrt{14}} \right) = \left(\frac{\omega_y}{\frac{5mg \sin \alpha}{qBr} \sqrt{\frac{2}{7}}} \right)^2 + \left(1 + \frac{\omega_z}{\frac{5mg \sin \alpha}{qBr}} \right)^2 = 1$$

Из полученных соотношений видно, что годограф вектора угловой скорости является эллипсом с полуосями ω_{0z} и ω_{0y} , равными:

$$\omega_{0z} = \frac{5mg \sin \alpha}{qBr} \quad \omega_{0y} = \frac{5mg \sin \alpha}{qBr} \sqrt{\frac{2}{7}}$$

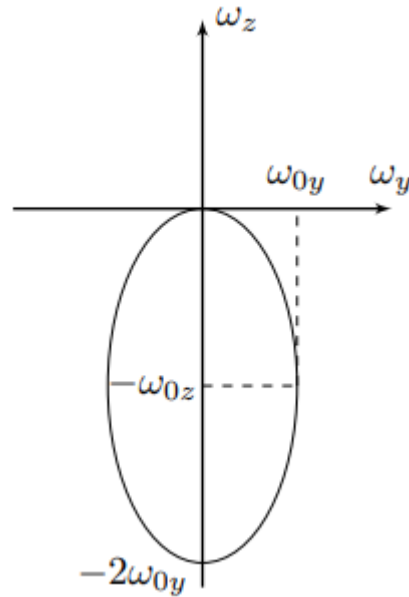

B9 Find the maximum speed v_{max} among all the elements of the ball at the moment when the center speed reaches its maximum. Express your answer in terms of m, g, q, B and α . **0.60**

Let ω be the magnitude of the angular velocity forming an angle φ with the plane. The maximum speed is the point whose distance to the instantaneous axis of rotation of the ball is maximum. Further, it makes sense to consider only the section lying in the yz plane. The figure shows that the maximum speed of the ball element is achieved at a perpendicular to the instantaneous axis of rotation passing through the center and is equal to:

$$v_{max} = \omega r(1 + \cos \varphi)$$

For the angular velocity components we have:

$$\omega_y = \omega \cos \varphi \quad \omega_z = -\omega \sin \varphi$$

Из уравнения эллипса получим:

$$\frac{\omega^2 \cos^2 \varphi}{\omega_{0y}^2} + \frac{(\omega_{0z} - \omega \sin \varphi)^2}{\omega_{0z}^2} = 1 \Rightarrow \omega = \frac{2\omega_{0z} \sin \varphi}{\sin^2 \varphi + \frac{\omega_{0z}^2 \cos^2 \varphi}{\omega_{0y}^2}}$$

Отсюда для максимальной скорости имеем:

$$v_{max} = \frac{2\omega_{0z}r \sin \varphi(1 + \cos \varphi)}{\sin^2 \varphi + \frac{\omega_{0z}^2 \cos^2 \varphi}{\omega_{0y}^2}} = \frac{2\omega_{0z}r \tan \varphi(1 + \sqrt{1 + \tan^2 \varphi})}{\tan^2 \varphi + \frac{\omega_{0z}^2}{\omega_{0y}^2}}$$


В рассматриваемый момент $\tan \varphi = \omega_{0z}/\omega_{0y}$, поэтому:

$$v_{max} = \omega_{0y}r \left(1 + \sqrt{1 + \frac{\omega_{0z}^2}{\omega_{0y}^2}} \right)$$

Подставляя ω_{0y} и ω_{0z} , we find:

Answer:

$$v_{max} = \frac{5mg \sin \alpha(3 + \sqrt{2})}{qB\sqrt{7}}$$

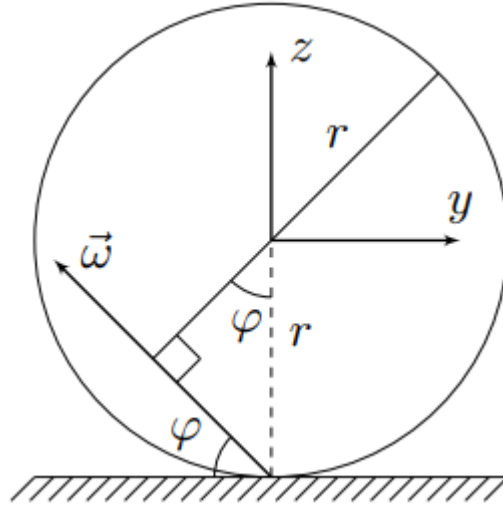

B10 At what minimum friction coefficient μ_{min} of a ball on a plane is motion possible without slipping? Express your answer in terms of g , α , q , m and B .

0.60

We have shown that the motion is one-dimensional, which means that the Lorentz force is zero at any moment. Then the normal reaction force of the plane N at any moment is equal to

$$N = mg \cos \alpha$$

Определим силу трения F_x из теоремы о движении центра масс:

$$F_x = ma_{Cx} - mg \sin \alpha = mg \sin \alpha \left(\frac{5}{7} \cos \left(\frac{qBt}{m\sqrt{14}} \right) - 1 \right) \geq -\frac{12mg \sin \alpha}{7}$$

откуда сила трения F_x всегда находится в следующем диапазоне:

$$-\frac{2mg \sin \alpha}{7} \geq F_x \geq -\frac{12mg \sin \alpha}{7}$$

Минимально возможный коэффициент трения определяется выражением:

$$\mu_{min} = \frac{|F_x|_{max}}{N}$$

from:

Answer:

$$\mu_{min} = \frac{12 \tan \alpha}{7}$$

C1 Determine the distance $S_{i,i+1}$ between the positions of the center of the ball at the moments of the i th and $(i + 1)$ th stops. Express your answer using i, g, k, α, q, m and B . **0.80**

Since during rolling there is only a redistribution of the normal reaction force, the equation of the dynamics of rotational motion relative to the center of mass remains true, and the theorem on the movement of the center of mass must be changed:

The phase diagram of each half of the oscillations is an ellipse, shifted from position x_0 by the amount $\pm \Delta x$, where:

$$x_0 = 10g \sin \alpha \left(\frac{m}{qB} \right)^2$$

$$\Delta x = 10g \sin \alpha \left(\frac{m}{qB} \right)^2 \frac{k}{r \tan \alpha}$$

From the phase diagram it is clear that if a_i is the amplitude of half of the oscillation with number i , then the amplitude of half of oscillation a_{i+1} with number $i + 1$ is determined by the expression:

$$a_{i+1} = a_i - 2\Delta x$$

Учитывая выражение для a_1 :

$$a_1 = x_0 - \Delta x$$

имеем:

$$a_{i+1} = x_0 - (1 + 2i)\Delta x$$


Тогда для $S_{i,i+1}$ имеем:

$$S_{i,i+1} = 2a_{i+1}$$

or:

Answer:

$$S_{i,i+1} = 2 \cdot 10g \sin \alpha \left(\frac{m}{qB} \right)^2 \left(1 - \frac{k(1+2i)}{r \tan \alpha} \right)$$

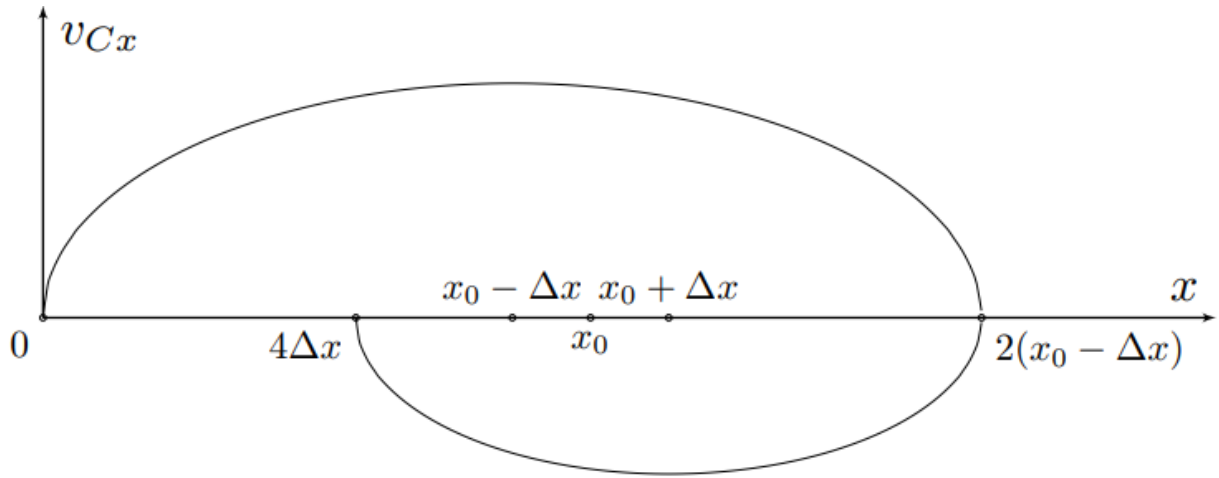

C2 Determine the range of possible positions x_{Ck} of the last stop of the ball's center. Express your answer in terms of g, k, α, q, m and B .

0.20

Rolling stops if at the stopping point

$$|F_{\text{кач}}| \leq kmg \cos \alpha / r$$

Этому соответствуют следующие координаты x :

Answer:

$$x \in \left[10g \sin \alpha \left(\frac{m}{qB} \right)^2 \left(1 - \frac{k}{r \tan \alpha} \right); 10g \sin \alpha \left(\frac{m}{qB} \right)^2 \left(1 + \frac{k}{r \tan \alpha} \right) \right]$$

C3 Find the time τ of the ball's movement. Express your answer in terms of g, k, α, q, m and B .

0.50

Oscillations occur until the next stopping point is in the range $x_{\text{ост}} \in [-\Delta x; \Delta x]$, which leads to the expression for the number of N oscillations:

$$N = \left[\frac{a_1}{2\Delta x} \right] + 1$$

Поскольку $\tan \alpha \gg k/r$, с хорошей точностью верно:

$$N = \frac{r \tan \alpha}{2k}$$

Для времени движение имеем:

$$t = \frac{\pi N}{\omega_0}$$

or:

Answer:

$$t = \frac{\pi m r \tan \alpha}{k q B} \sqrt{\frac{7}{2}}$$

C4 What amount of heat Q was released during the movement of the ball? Express your answer in terms of g, k, α, q, m and B . **1.00**

First solution: Let's use the law of conservation of energy:

$$Q = -\Delta W_p - E_k$$

где ΔW_p - изменение потенциальной энергии системы, а E_k - её кинетическая энергия. Для ΔW_p имеем:

$$\Delta W_p = -mg \sin \alpha x_0 = -10mg^2 \sin^2 \alpha \left(\frac{m}{qB} \right)^2$$

Для нахождения кинетической энергии определим конечную угловую скорость вращения шара:

$$E_k = \frac{I\omega_z^2}{2} = \frac{Iq^2 B^2 x_0^2}{8m^2 r^2} = \frac{q^2 B^2}{20m} \cdot 100g^2 \sin^2 \alpha \left(\frac{m}{qB} \right)^4 = 5mg^2 \sin^2 \alpha \left(\frac{m}{qB} \right)^2$$

$$Q = -\Delta W_p - E_k$$

where ΔW_p is the change in the potential energy of the system, and E_k is its kinetic energy.

For ΔW_p we have:

$$\Delta W_p = -mg \sin \alpha x_0 = -10mg^2 \sin^2 \alpha \left(\frac{m}{qB} \right)^2$$

To find the kinetic energy, we determine the final angular velocity of the ball's rotation:

$$E_k = \frac{I\omega_z^2}{2} = \frac{Iq^2 B^2 x_0^2}{8m^2 r^2} = \frac{q^2 B^2}{20m} \cdot 100g^2 \sin^2 \alpha \left(\frac{m}{qB} \right)^4 = 5mg^2 \sin^2 \alpha \left(\frac{m}{qB} \right)^2$$

First solution: explicitly calculate the work done by the rolling friction force. For it we have:

$$A_i = -\frac{kN}{r} \cdot 2A_i = -\frac{2kmg \cos \alpha}{r} \cdot a_i$$

После подстановки a_i получим выражение для работы:

$$A = -\frac{20mg^2 \sin \alpha \cos \alpha k}{r} \left(\frac{m}{qB} \right)^2 \sum_{i=1}^N \left(1 + \frac{k}{r \tan \alpha} - \frac{2ik}{r \tan \alpha} \right)$$

Суммируя, получим:

$$A = -\frac{20mg^2 \sin \alpha \cos \alpha k}{r} \left(\frac{m}{qB} \right)^2 \left(\left(1 + \frac{k}{r \tan \alpha} \right) N - \frac{N(N+1)k}{r \tan \alpha} \right)$$

Подставляя N и учитывая малость, получим:

$$A = -\frac{20mg^2 \sin \alpha \cos \alpha k}{r} \left(\frac{m}{qB} \right)^2 \left(\frac{r \tan \alpha}{2k} - \frac{r \tan \alpha}{4k} \right) = -5mg^2 \sin^2 \alpha \left(\frac{m}{qB} \right)^2$$

Количество теплоты $Q = -A$, from which:

$$A_i = -\frac{kN}{r} \cdot 2A_i = -\frac{2kmg \cos \alpha}{r} \cdot a_i$$

After substituting a_i we get the expression for work:

$$A = -\frac{20mg^2 \sin \alpha \cos \alpha k}{r} \left(\frac{m}{qB} \right)^2 \sum_{i=1}^N \left(1 + \frac{k}{r \tan \alpha} - \frac{2ik}{r \tan \alpha} \right)$$

Summing up, we get:

$$A = -\frac{20mg^2 \sin \alpha \cos \alpha k}{r} \left(\frac{m}{qB} \right)^2 \left(\left(1 + \frac{k}{r \tan \alpha} \right) N - \frac{N(N+1)k}{r \tan \alpha} \right)$$

Substituting N and taking into account the smallness, we get:

$$A = -\frac{20mg^2 \sin \alpha \cos \alpha k}{r} \left(\frac{m}{qB} \right)^2 \left(\frac{r \tan \alpha}{2k} - \frac{r \tan \alpha}{4k} \right) = -5mg^2 \sin^2 \alpha \left(\frac{m}{qB} \right)^2$$

The amount of heat $Q = -A$, from where:

Answer:

$$Q = 5mg^2 \sin^2 \alpha \left(\frac{m}{qB} \right)^2$$

D1 Determine the modulus of the torque of the rotational friction force M' . Express your answer in terms of μ , m , g , α and r_0 . 0.40

The reaction force N is uniformly distributed over the area of a circle with radius r_0 , therefore:

$$\frac{dN}{dS} = \frac{mg \cos \alpha}{\pi r_0^2}$$

Тогда для момента силы трения имеем:

$$dM' = \frac{\mu dN}{dS} \cdot 2\pi r dr \cdot r \Rightarrow M' = \frac{\mu dN}{dS} \cdot \frac{2\pi r_0^3}{3}$$

from:

Answer:

$$M' = \frac{2\mu mgr_0 \cos \alpha}{3}$$

D2 At what point in time t_1 will the ball start spinning? Express your answer in terms of μ , 0.50 r_0 , m , q , B , r and α .

Since the arising torque of spinning friction is directed along the z axis, the expression for the friction force $\vec{F}$, and, as a consequence, the theorem on the movement of the center of mass remains true:

$$a_{Cx} = \frac{5g \sin \alpha}{7} + \frac{qBr\omega_z}{7m}$$

В уравнение динамики вращательного движения необходимо внести изменения:

$$I\dot{\omega}_z = M_{\text{тр}} - \frac{qr^2B\omega_y}{5}$$

где $M_{\text{тр}}$ - возникающий момент силы трения вращения. До тех пор, пока скорость центра шара не достигает значения

$$v_0 = \frac{2M'mr}{IqB} = \frac{10\mu mgr_0 \cos \alpha}{3qBr}$$

шар движется равноускоренно и не вертится. Тогда выражение для времени t_1 следующее:

$$t_1 = \frac{7v_0}{5g \sin \alpha}$$

or:

Answer:

$$t_1 = \frac{14\mu mr_0}{3qBr \tan \alpha}$$

D3 Construct a high-quality graph $\omega_z(t)$. On the graph, indicate all the characteristic values, features and asymptotes. Express the characteristic values in terms of m , g , α , q , **1.50**

B and r.

To analyze the subsequent movement, we differentiate the expression for acceleration a_{Cx} :

$$\dot{a}_{Cx} = \ddot{v}_{Cx} = \frac{qBr\dot{\omega}_z}{7m} = \frac{qBr}{7m} \left(\frac{M'}{I} - \frac{qBv_x}{2mr} \right)$$

Вводя величину $v_1 = v_{Cx} - v_0$, получим:

$$\ddot{v}_1 = - \left(\frac{qB}{m} \right)^2 \frac{v_1}{14} \Rightarrow v_1(t_1) = A \sin(\omega_0 \tau + \varphi_0)$$

где время $\tau = t - t_1$ - время, прошедшее от момента начала верчения. Воспользуемся начальными условиями:

$$\begin{cases} v_1(0) = A \sin \varphi_0 = 0 \\ \dot{v}_1(0) = \omega_0 A \cos \varphi_0 = \frac{5g \sin \alpha}{7} \Rightarrow v_{Cx}(\tau) = v_0 + \frac{5g \sin \alpha \sin \omega_0 \tau}{7\omega_0} \end{cases}$$


Подставляя в уравнение динамики вращательного движения относительно оси z:

$$\dot{\omega}_z = -\frac{qB}{2mr} \cdot \frac{5g \sin \alpha \sin \omega_0 \tau}{7\omega_0} \Rightarrow \omega_z(\tau) = -\frac{qB}{2mr} \cdot \frac{5g \sin \alpha (1 - \cos \omega_0 \tau)}{7\omega_0^2}$$

В исходных терминах:

$$\omega_z(\tau) = -\frac{5mg \sin \alpha}{qBr} \left(1 - \cos \left(\frac{qB\tau}{m\sqrt{14}} \right) \right)$$

From the resulting expression it is clear that at the moment the spinning stops, the ball repeats it again according to the same law, since both the speed of the center and the angular speed of the spinning change with the same period. This can be interpreted as continuous spinning. Then the graph looks like the one shown in the figure below:

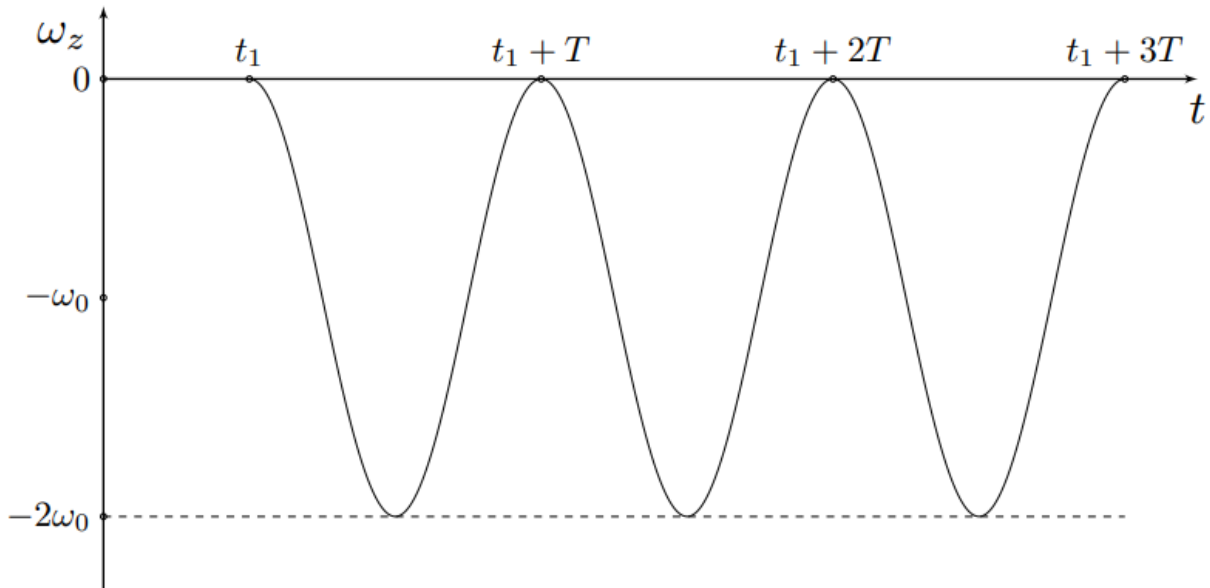

Construct a high-quality graph $x_C(t)$. On the graph, indicate all the characteristic values, features and asymptotes. Characteristic values can be expressed through the variables you enter.

We have already mentioned that before the start of slipping, during time t_1 the ball moves uniformly accelerated and manages to cover the distance:

$$x_1 = \frac{7v_0^2}{10g \sin \alpha} = \frac{70\mu^2 m^2 g r_0^2 \cos^2 \alpha}{9q^2 B^2 r^2 \sin \alpha}$$

Определим зависимость $x(\tau)$:

$$x(\tau) = x_1 + \int_0^\tau \left(v_0 + \frac{5g \sin \alpha \sin \omega_0 \tau}{7\omega_0} \right) d\tau = x_1 + v_0 \tau + \frac{5g \sin \alpha (1 - \cos \omega_0 \tau)}{7\omega_0^2}$$

Let's depict this on the graph:

