

root / SNCNA / FUNDAMENTAL

A horizontal toolbar containing ten icons: a blank document, a folder, a sheet of paper, a pencil, a four-way arrow, a trash can, a download arrow, an upload arrow, a document with a checkmark, and a circular refresh icon.



 Move to
  Rename
  Clone
 

20 Aug 2026 15:56

27 Jul 2026 08:40

16 Jun 2026 03:29

13 May 2026 16:30


16 Dec 2025 14:11

04 Sep 2025 09:17

04 Sep 2025 09:17

04 Sep 2025 09:07

Meganadhan M A

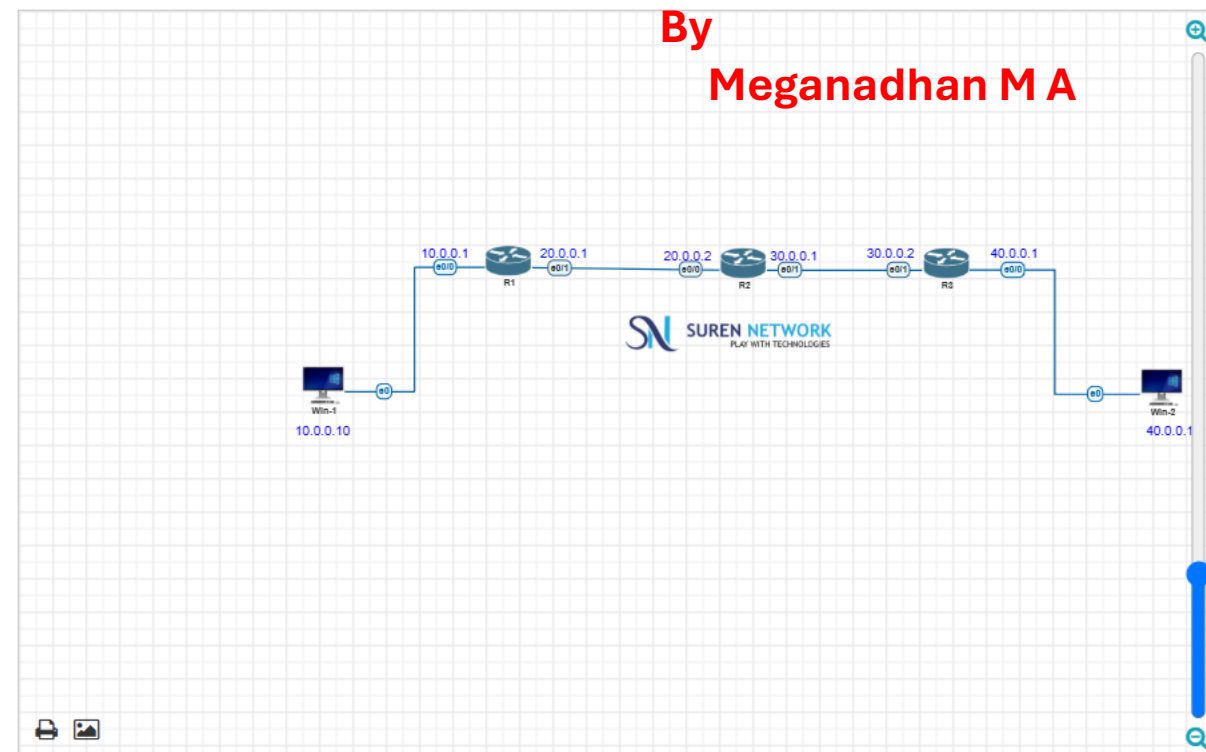

Open Edit Delete

- Lab Name : 6-STATIC ROUTE

labs.surennetwork.com/legacy/topology

linkedinWebmail - MainNetworking Acade...Online typing WPM...NCCR Biometric Att...HP Product Warrant...Fujitsu Technical Su...D-LINKHP » Device Status

Notifications

Win-110.0.0.10

10.0.0.1e0/0

R1

20.0.0.1e0/1

20.0.0.2e0/0

R2

30.0.0.1e0/1

30.0.0.2e0/1

R3

40.0.0.1e0/0

Win-240.0.0.10

SN SUREN NETWORK

PLAY WITH TECHNOLOGIES

Lab No: 6

Lab Name: Static Route Configuration

By

Meganadhan M A

Static Route

TERMINAL (5)

Physical01 : 00 : 00START

News for youMarkets reverse...

Search

06:11 pm03-09-2026


```
R1(config)#
```

Static route added to the Router ONE (R1)

Router 2 Configuration setup procedures.

```
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR
```

Gateway of last resort is not set

```
S 10.0.0.0/8 [1/0] via 20.0.0.1
S 40.0.0.0/8 [1/0] via 30.0.0.2
```

Static route added to the Router TWO (R2)

```
R2(config)#do sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR
```


Gateway of last resort is not set

```
S 10.0.0.0/8 [1/0] via 20.0.0.1
S 20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 20.0.0.0/8 is directly connected, Ethernet0/0
L 20.0.0.2/32 is directly connected, Ethernet0/0
C 30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 30.0.0.0/8 is directly connected, Ethernet0/1
L 30.0.0.1/32 is directly connected, Ethernet0/1
S 40.0.0.0/8 [1/0] via 30.0.0.2
```

Router 2 is configured and has added a route to the remaining router for the reachability

```
R2(config)#do sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
Ethernet0/0    20.0.0.2        YES manual  up          up
Ethernet0/1    30.0.0.1        YES manual  up          up
Ethernet0/2    unassigned      YES TFTP   down        down
Ethernet0/3    unassigned      YES TFTP   down        down
R2(config)#
```


R3 (config)#

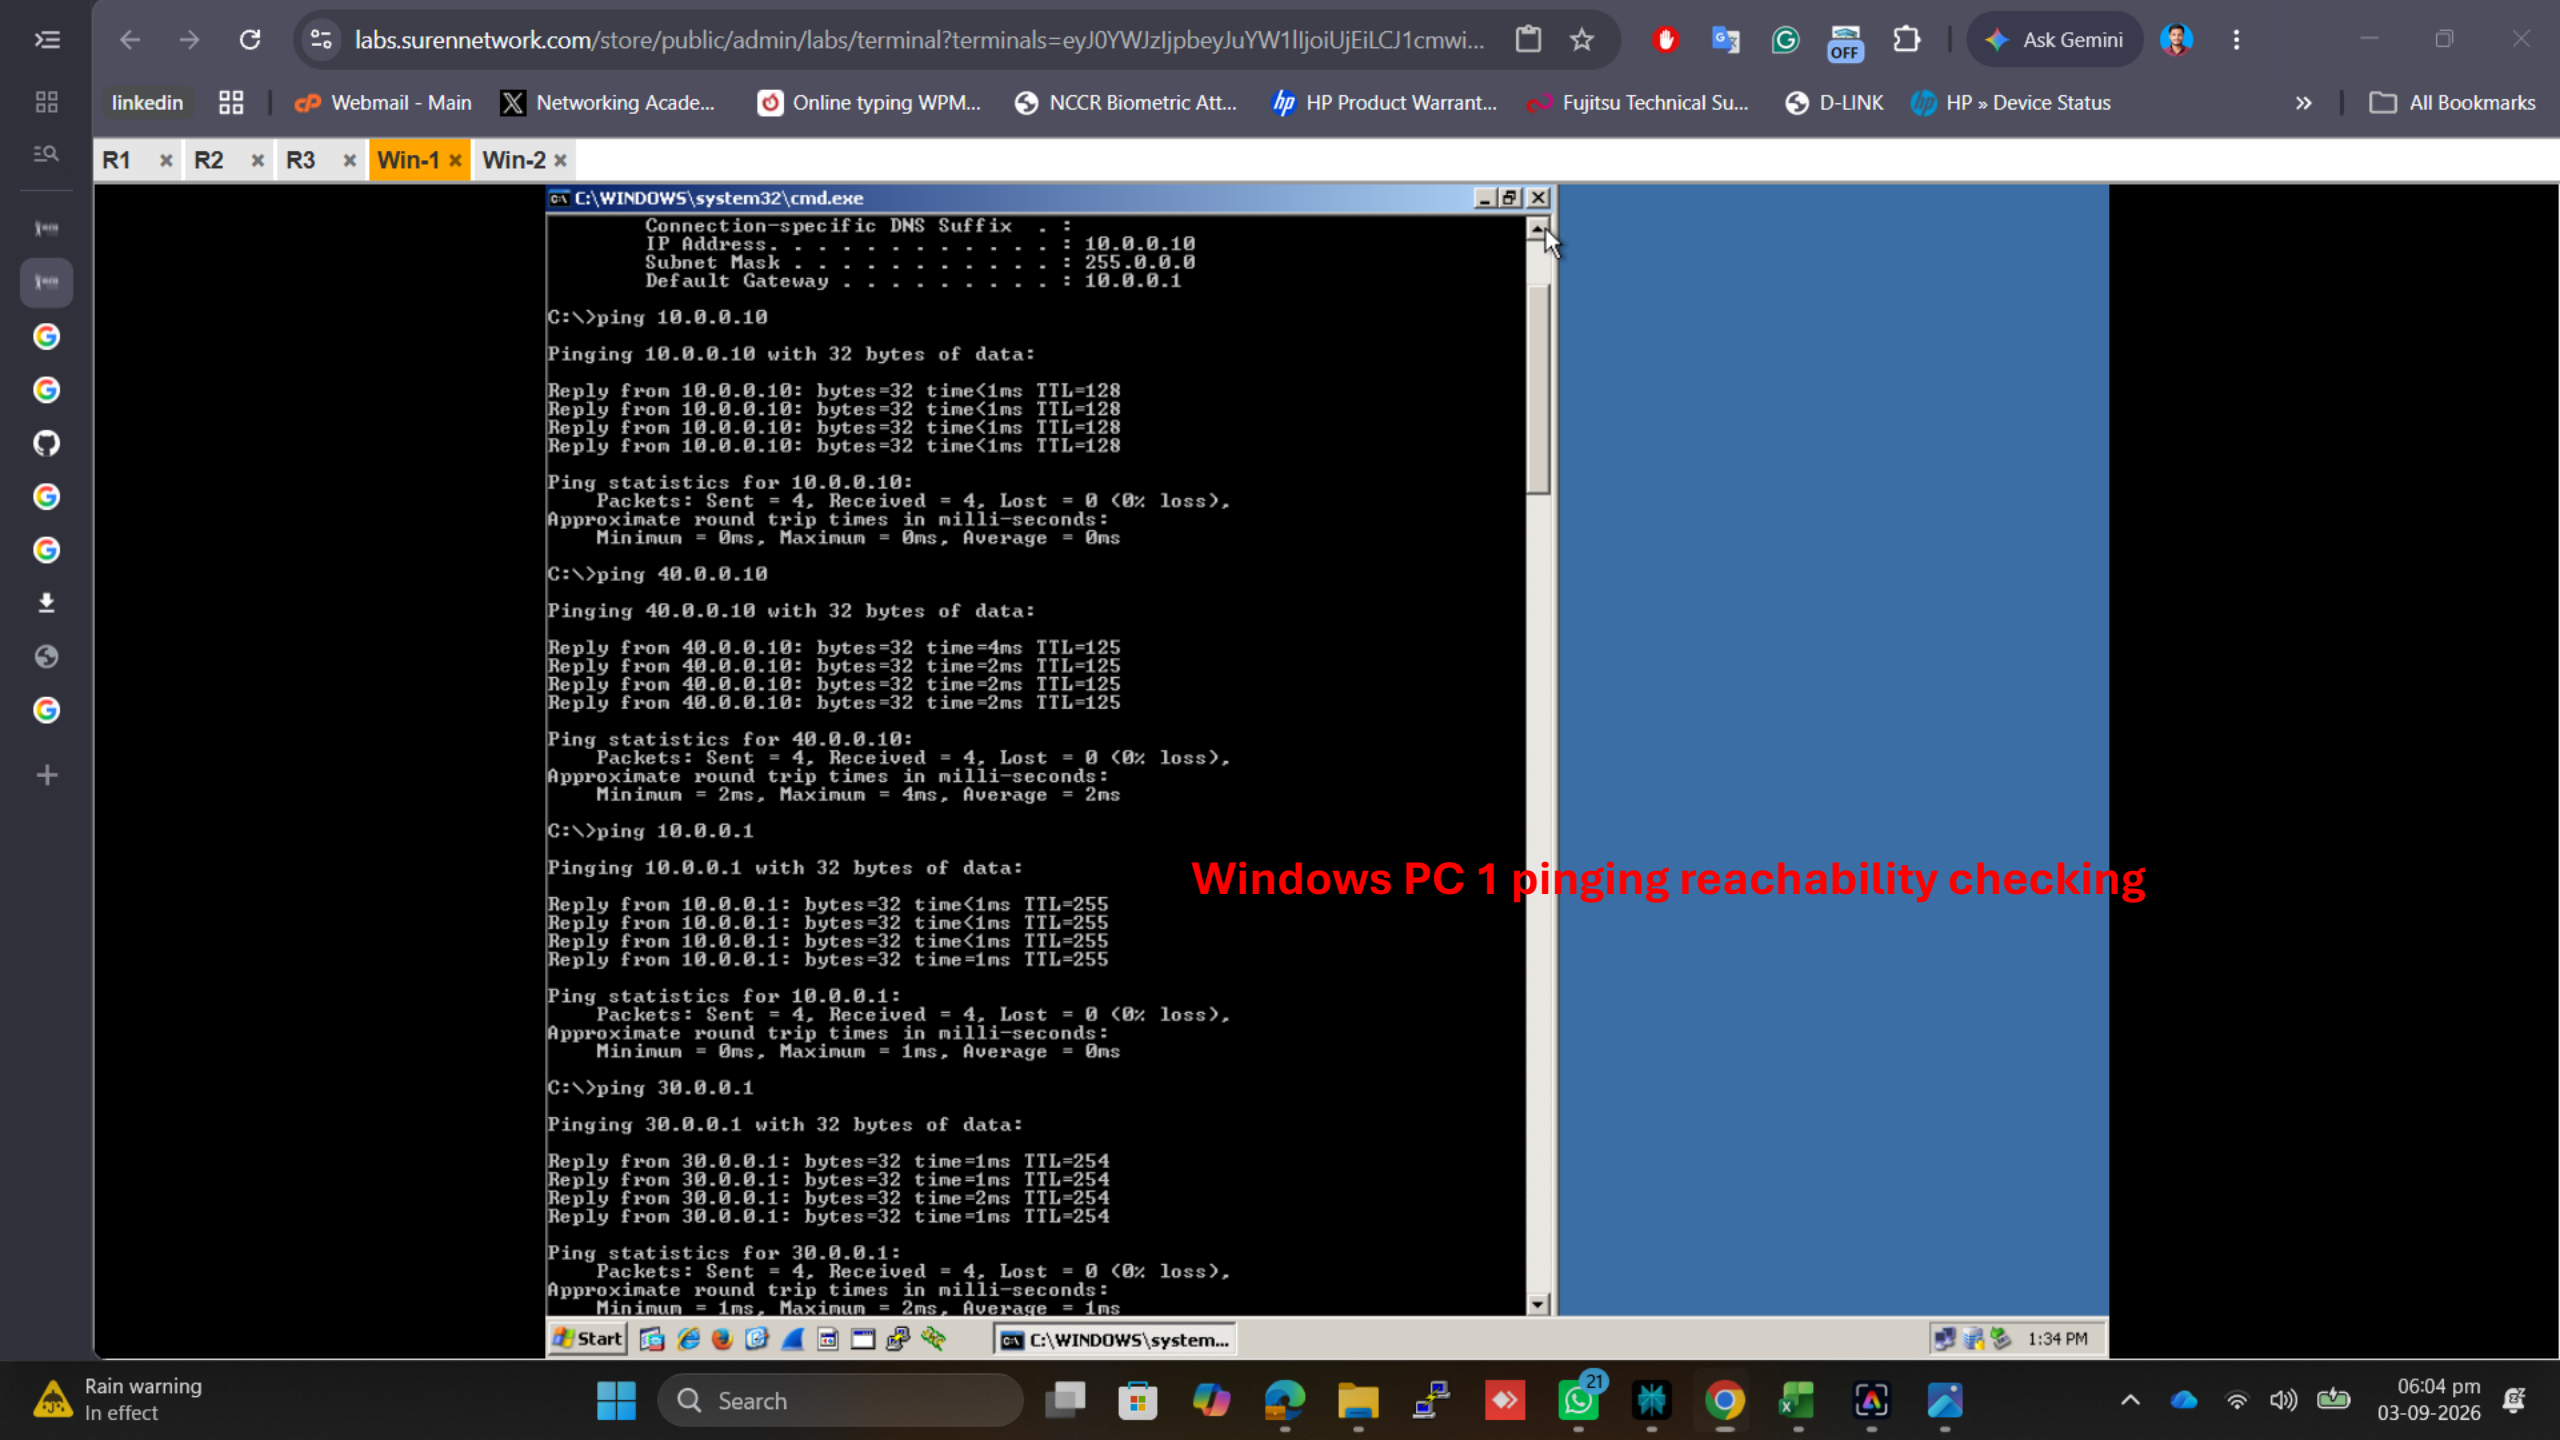

```

10.0.0.1 - PuTTY
User Access Verification

Username: Admin
Password:
R1>en
Password:
R1#sh ip route static
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S      30.0.0.0/8 [1/0] via 20.0.0.2
S      40.0.0.0/8 [1/0] via 20.0.0.2
R1#

```

labs.surennetwork.com/store/public/admin/labs/terminal?terminals=eyJ0YWJzljpbeyJuYW11ljoUjEiLCJ1cmwi...

linked in Webmail - Main Networking Acade... Online typing WPM... NCCR Biometric Att... HP Product Warrant... Fujitsu Technical Su... D-LINK HP » Device Status All Bookmarks

R1 x R2 x R3 x Win-1 x Win-2 x

30.0.0.1 - PuTTY

User Access Verification

Password:

Password:

Password:

R2>en

Password:

R2#sh ip int br

Interface	IP-Address	OK?	Method	Status	Prot
oc01					
Ethernet0/0	20.0.0.2	YES	manual	up	up
Ethernet0/1	30.0.0.1	YES	manual	up	up
Ethernet0/2	unassigned	YES	TFTP	down	down
Ethernet0/3	unassigned	YES	TFTP	down	down

R2#sh ip route static

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from Pfr

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 20.0.0.1

S 40.0.0.0/8 [1/0] via 30.0.0.2

R2#

Windows PC 1: PuTTY Connection checking R2

Start

C:\WINDOWS\system32...

10.0.0.1 - PuTTY

30.0.0.1 - PuTTY

1:38 PM

JPY/INR +1.53%

Search

06:08 pm 03-09-2026

Windows PC 1: PuTTY Connection checking R3

The screenshot shows a Windows XP desktop with two PuTTY terminal windows open. The top window, titled '30.0.0.1 - PuTTY', displays the configuration for R3. The bottom window, titled '40.0.0.1 - PuTTY', displays the configuration for R1. The text 'Windows PC 1: PuTTY Connection checking R3' is overlaid in red.

Top Window (30.0.0.1 - PuTTY):

```

Et 40.0.0.1 - PuTTY
Et
Et User Access Verification
Et Password:
Et R3>en
Et Password:
R2 R3#sh ip route static
Co Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
My D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
Re N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
Ga E1 - OSPF external type 1, E2 - OSPF external type 2
B S i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
E S ia - IS-IS inter area, * - candidate default, U - per-user static route
R2 o - ODR, P - periodic downloaded static route, H - NHRP, I - LISP
R3 a - application route
# + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 10.0.0.0/8 [1/0] via 30.0.0.1
S 20.0.0.0/8 [1/0] via 30.0.0.1
R3#
  
```

Bottom Window (40.0.0.1 - PuTTY):

```

Cisc ASDM-1...
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 30.0.0.0/8 [1/0] via 20.0.0.2
S 40.0.0.0/8 [1/0] via 20.0.0.2
R1#
  
```

Windows PC 1: PuTTY Connection checking R3

```

a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    30.0.0.0/8 [1/0] via 20.0.0.2
S    40.0.0.0/8 [1/0] via 20.0.0.2
R1#

```

labs.surennetwork.com/store/public/admin/labs/terminal?terminals=eyJ0YWJzljpbeyJuYW1lIjoiUjEiLCJ1cmwi...

linkedinWebmail - MainNetworking Acade...Online typing WPM...NCCR Biometric Att...HP Product Warrant...Fujitsu Technical Su...D-LINKHP » Device StatusAll Bookmarks

R1 x R2 x R3 x Win-1 x Win-2 x

My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

Cisco ASDM-I...

Old Java ASDM

PuTTY

Tftpd32

C:\WINDOWS\system32\cmd.exe

Windows IP Configuration

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . :
IP Address. : 40.0.0.10
Subnet Mask : 255.0.0.0
Default Gateway : 40.0.0.1

C:\>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=3ms TTL=125
Reply from 10.0.0.10: bytes=32 time=2ms TTL=125
Reply from 10.0.0.10: bytes=32 time=2ms TTL=125
Reply from 10.0.0.10: bytes=32 time=2ms TTL=125

Ping statistics for 10.0.0.10:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\>

10.0.0.1 - PuTTY

User Access Verification

Username: Admin

Password:

R1>en

Password:

R1#sh ip route static

Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 30.0.0.0/8 [1/0] via 20.0.0.2

S 40.0.0.0/8 [1/0] via 20.0.0.2

R1#

Windows PC 2: PuTTY Connection checking

Start

C:\WINDOWS\system32... 10.0.0.1 - PuTTY 1:40 PM

News for you

Markets reverse...

Search

06:10 pm 03-09-2026