


Title: CISCO Packet Tracer Lab 2

Name: Meganadhan M A

Date of Class: 17/08/2026

Date of HW: 18&19 – August 2026

-
- Search in Ur PC or press windows button then type cisco packet tracers

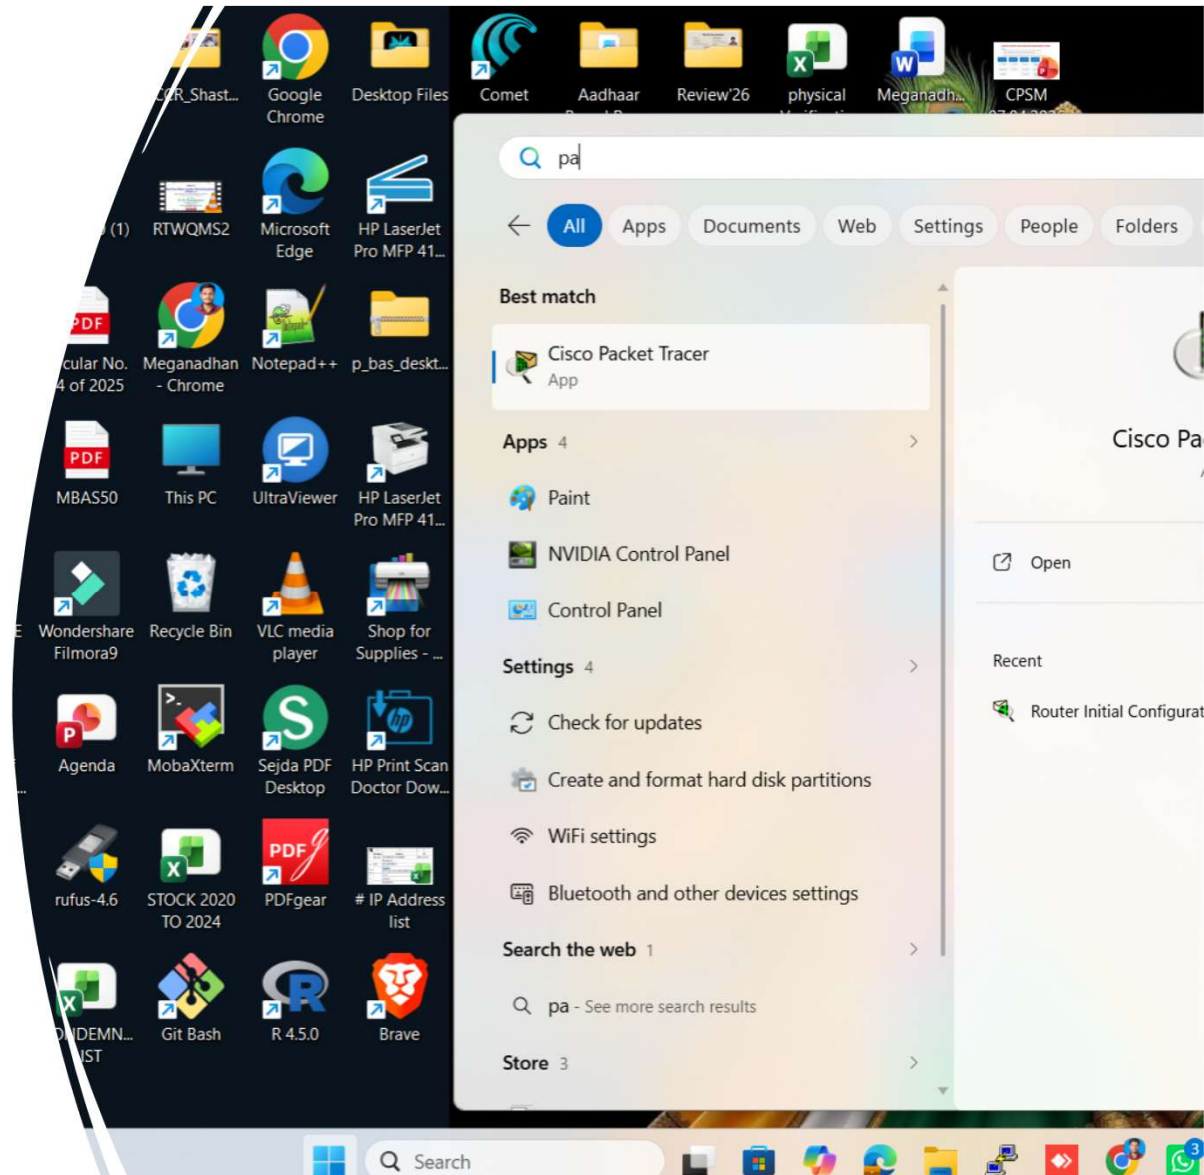

HP Wondersha... NCCR_Shast... Google Chrome Desktop Files Comet Aadhaar Based Reg... Review'26 physical Verificati... Meganadha... CPSM 07.04.2026

Arun G MBAS50 (1) RTWQMS2 Microsoft Edge HP LaserJet Pro MFP 41... New Microsof... transaction STOCK 2020 TO 2024 (1) Asset Register_final Assessment IT Infra_SB

Biometric Purchas... circular No. 14 of 2025 Meganadhan - Chrome Notepad++ p_bas_desk... K

Property TAX-Chennai MBAS50 This PC UltraViewer HP LaserJet Pro MFP 41...

PURCHASE ORDER Wondershare Filmora9 Recycle Bin VLC media player Shop for Supplies - ...

NCCR -of Profoma In... Agenda MobaXterm Sejda PDF Desktop HP Print Scan Doctor Dow...


Scope of works_CAM... rufus-4.6 STOCK 2020 TO 2024 PDFgear # IP Address list MBAS50 (2) DSC_0008ba Router Back Mailds Adobe Acrobat Cisco Packet Tracer


Realtime Digital C... CONDEMN... LIST Git Bash R 4.5.0 Brave DSC_0001 Review PPTs April'26 HP LaserJet Pro M404-... Chithra EMI Adobe Expre...





Kalpasar_PS...

UPS Batteries List

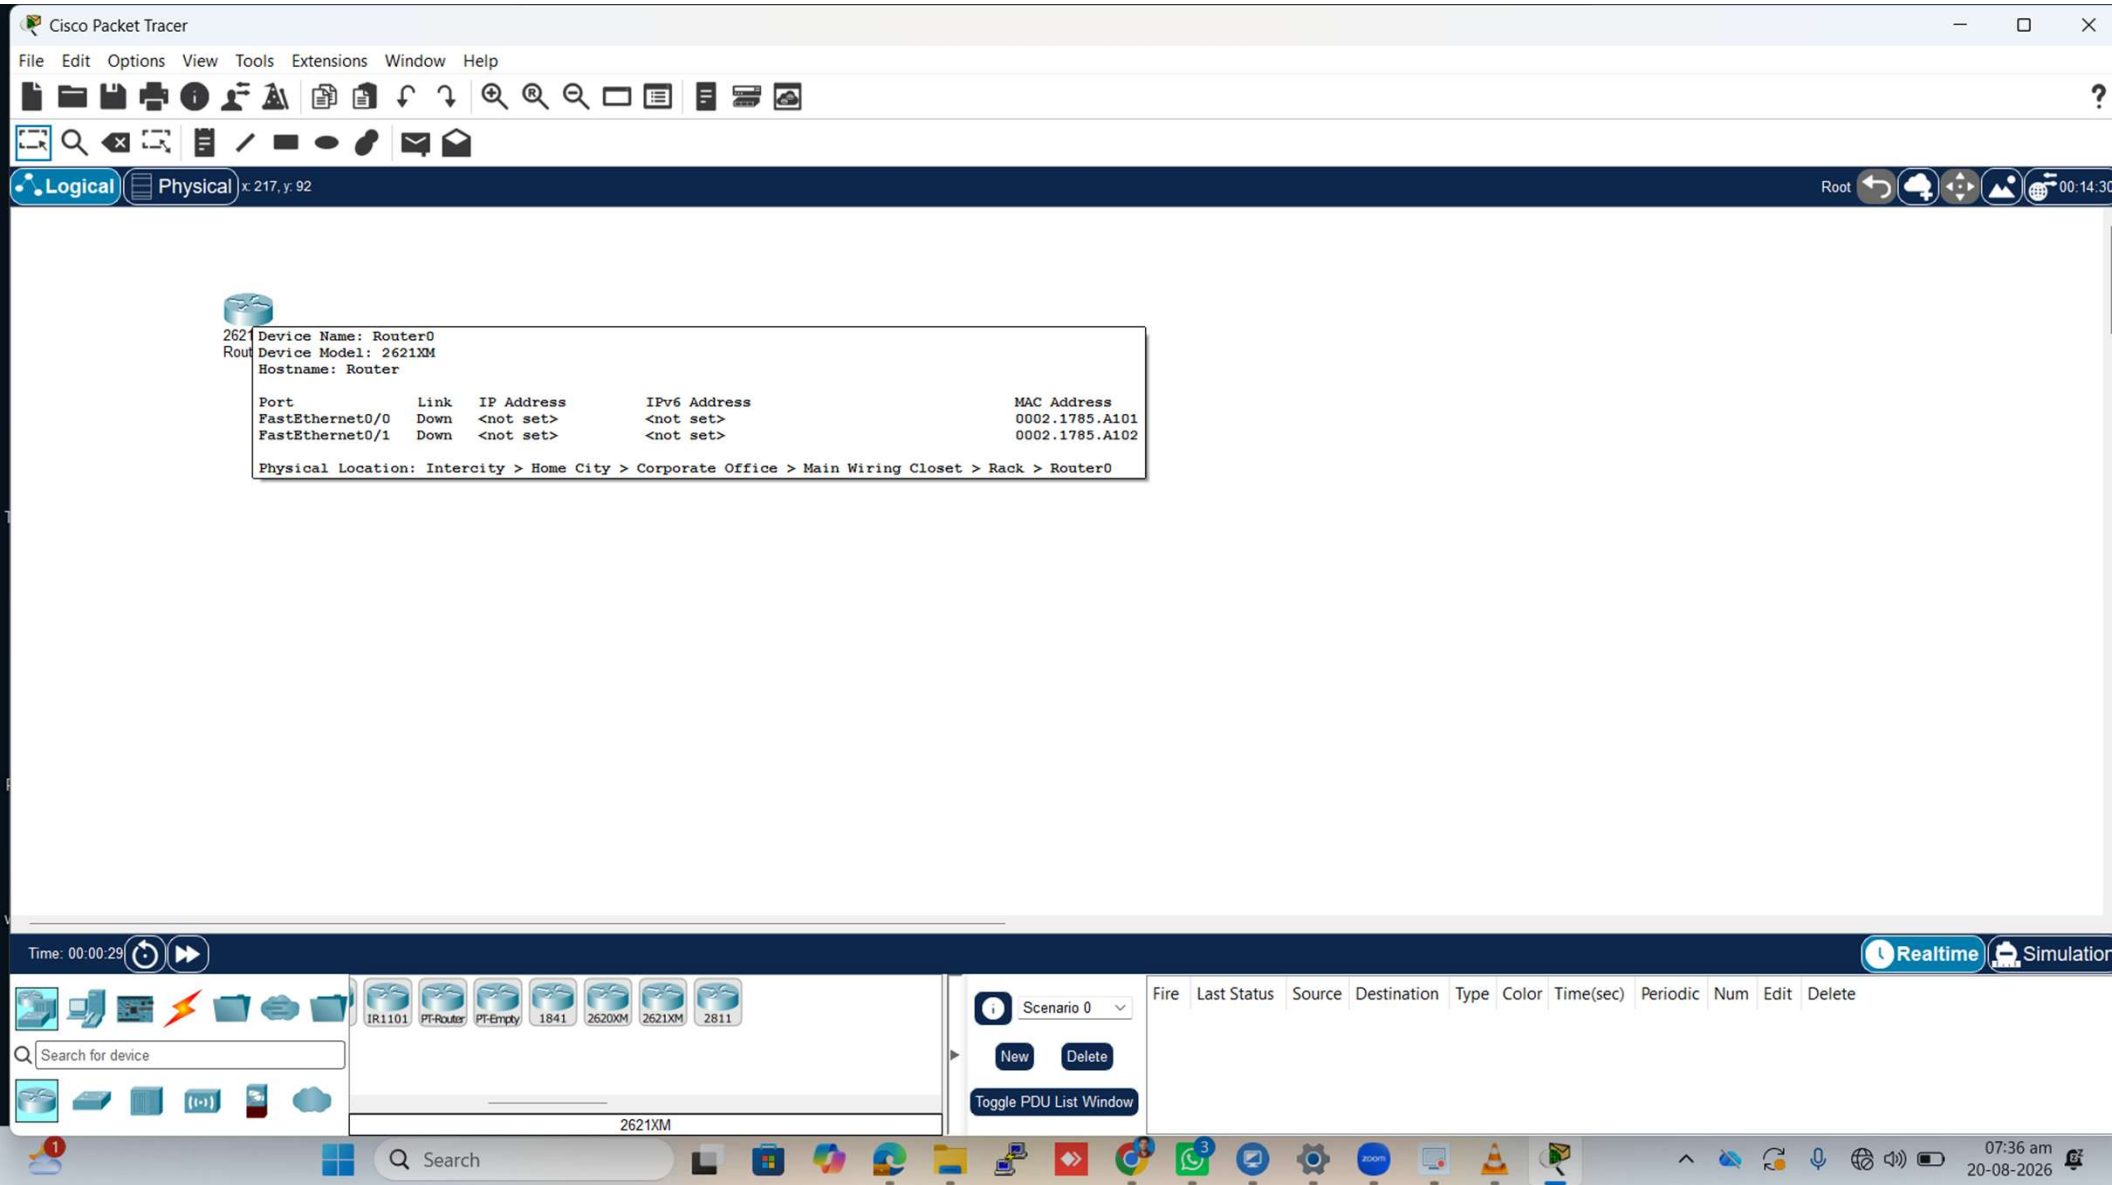

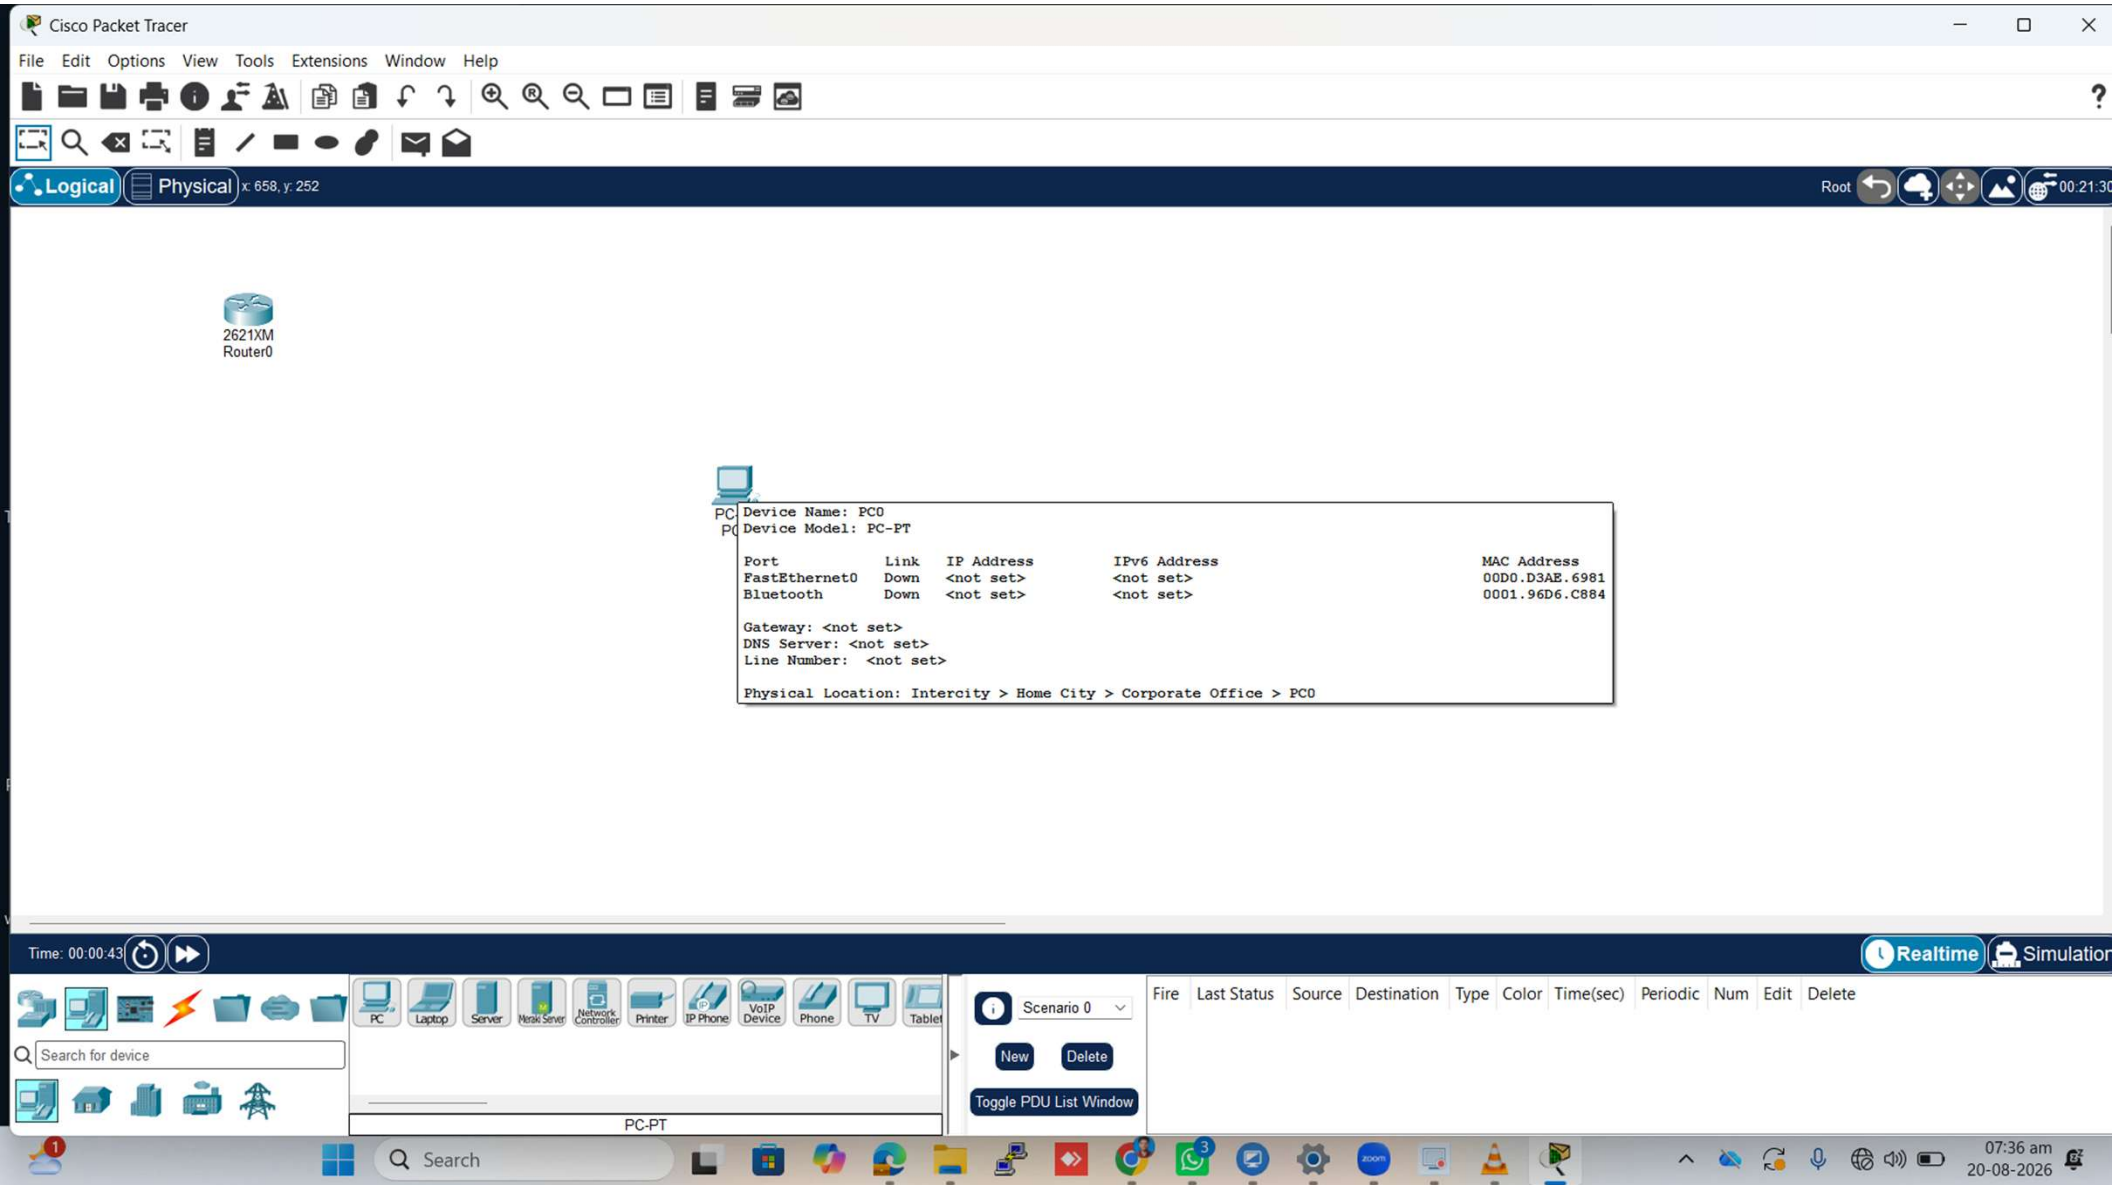

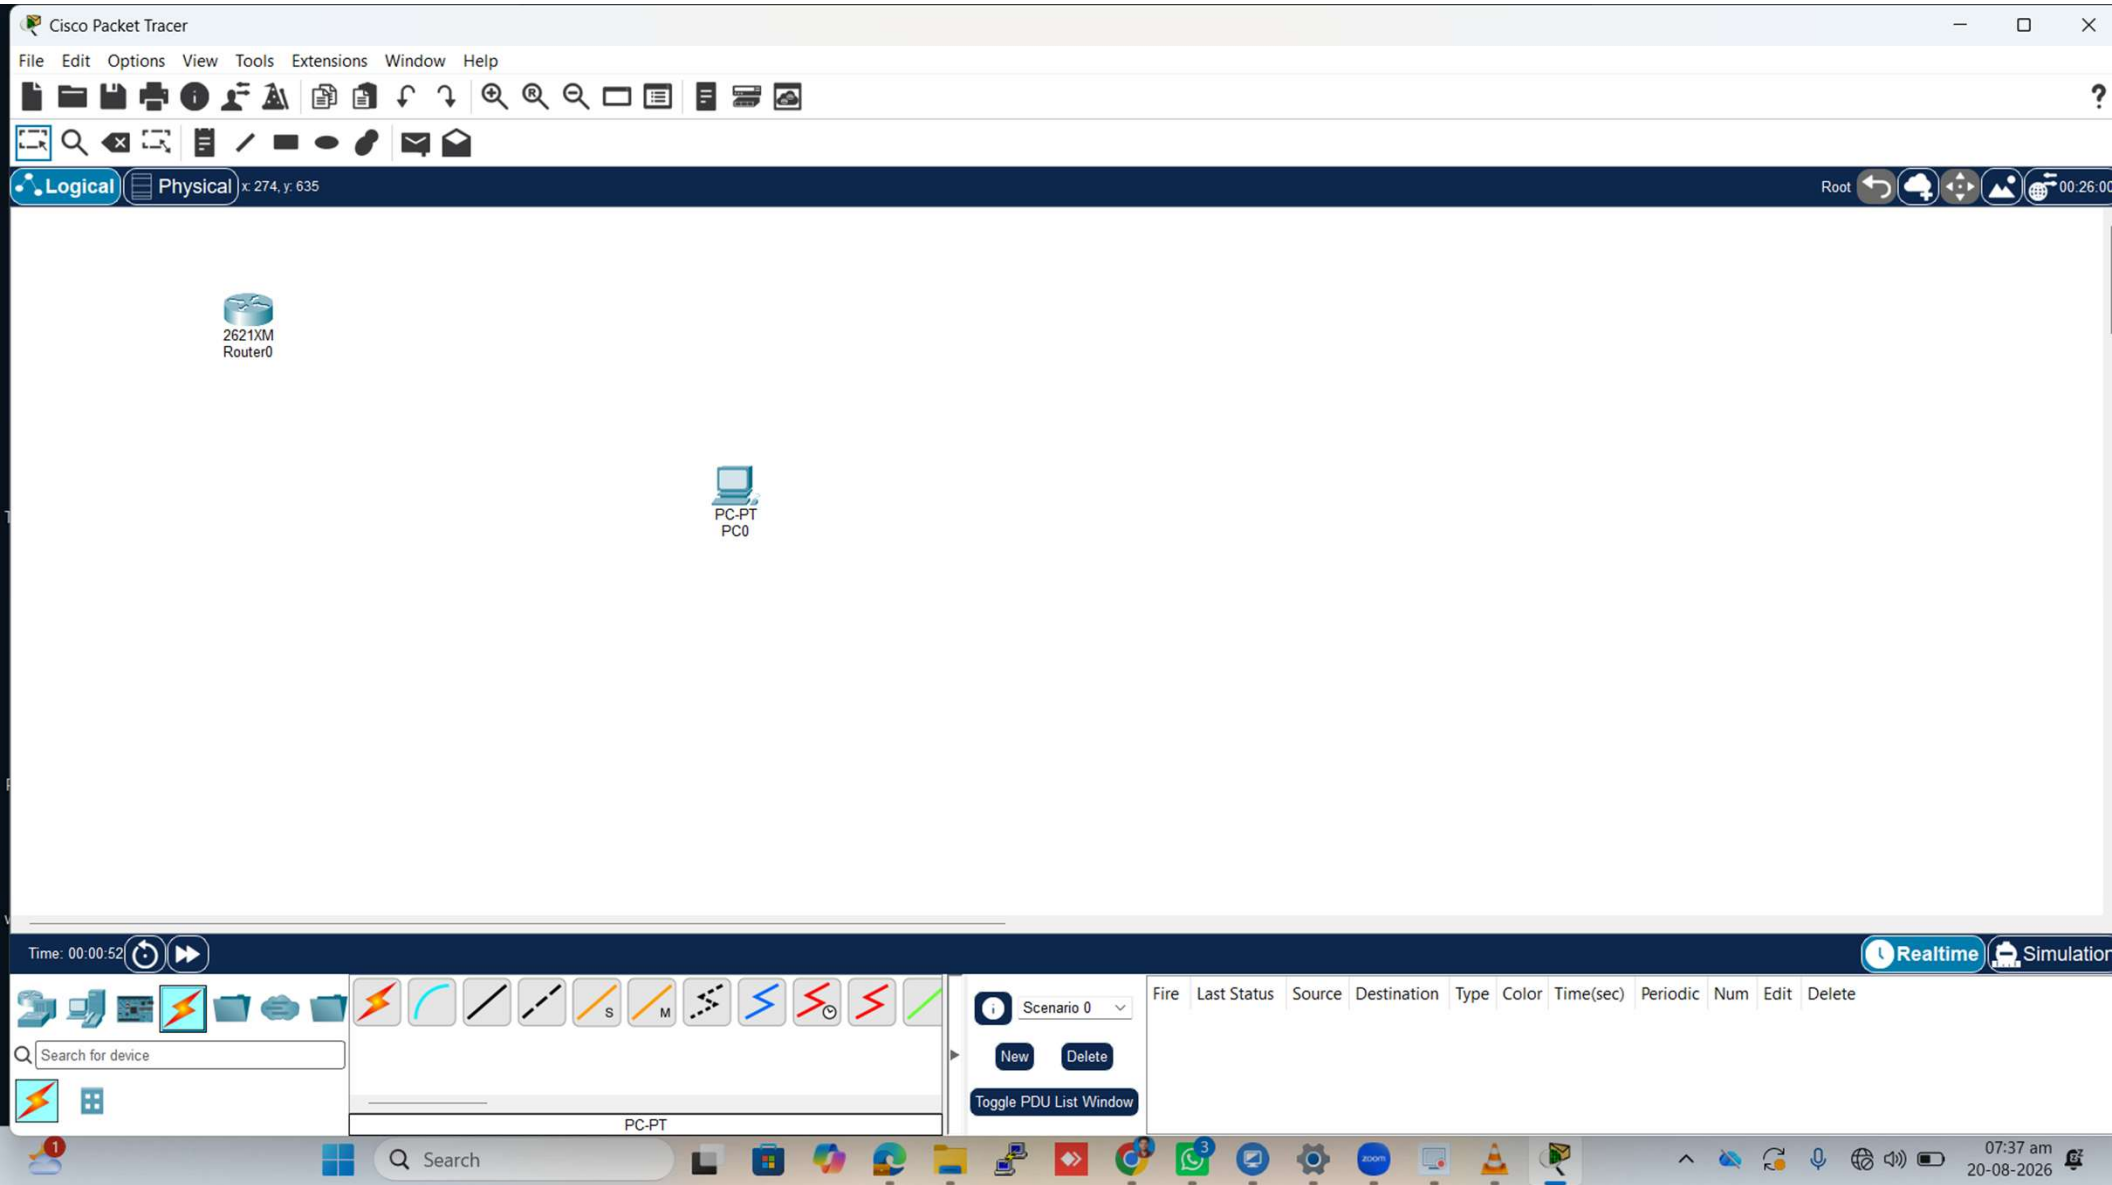

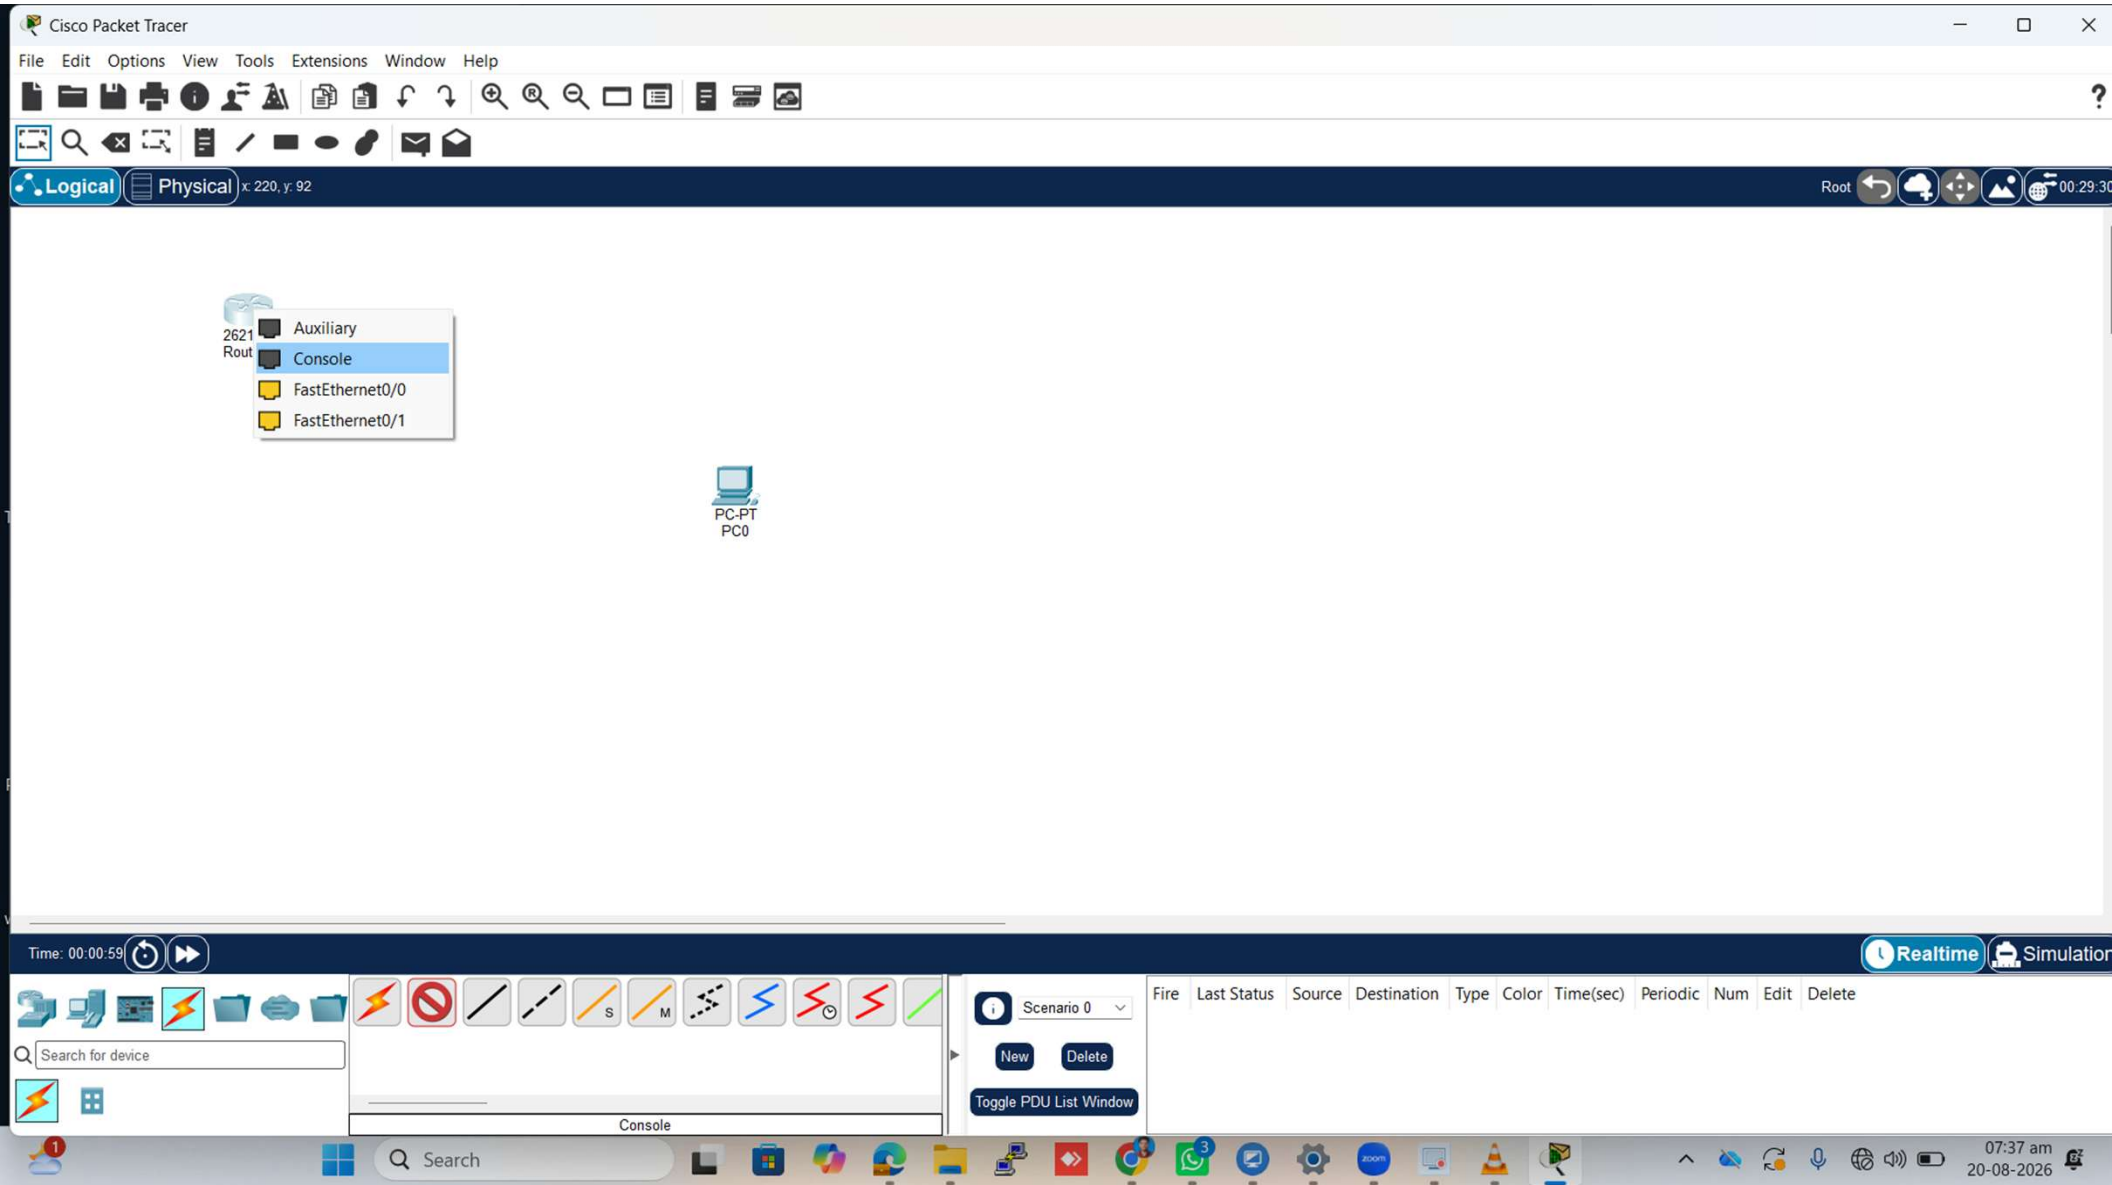

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

?

Logical Physical x 663, y: 257

Root

00:34:00

Time: 00:01:08

Realtime Simulation

Search for device

Scenario 0


New Delete


Toggle PDU List Window


Fire Last Status Source Destination Type Color Time(sec) Periodic Num Edit Delete

Console

07:37 am 20-08-2026

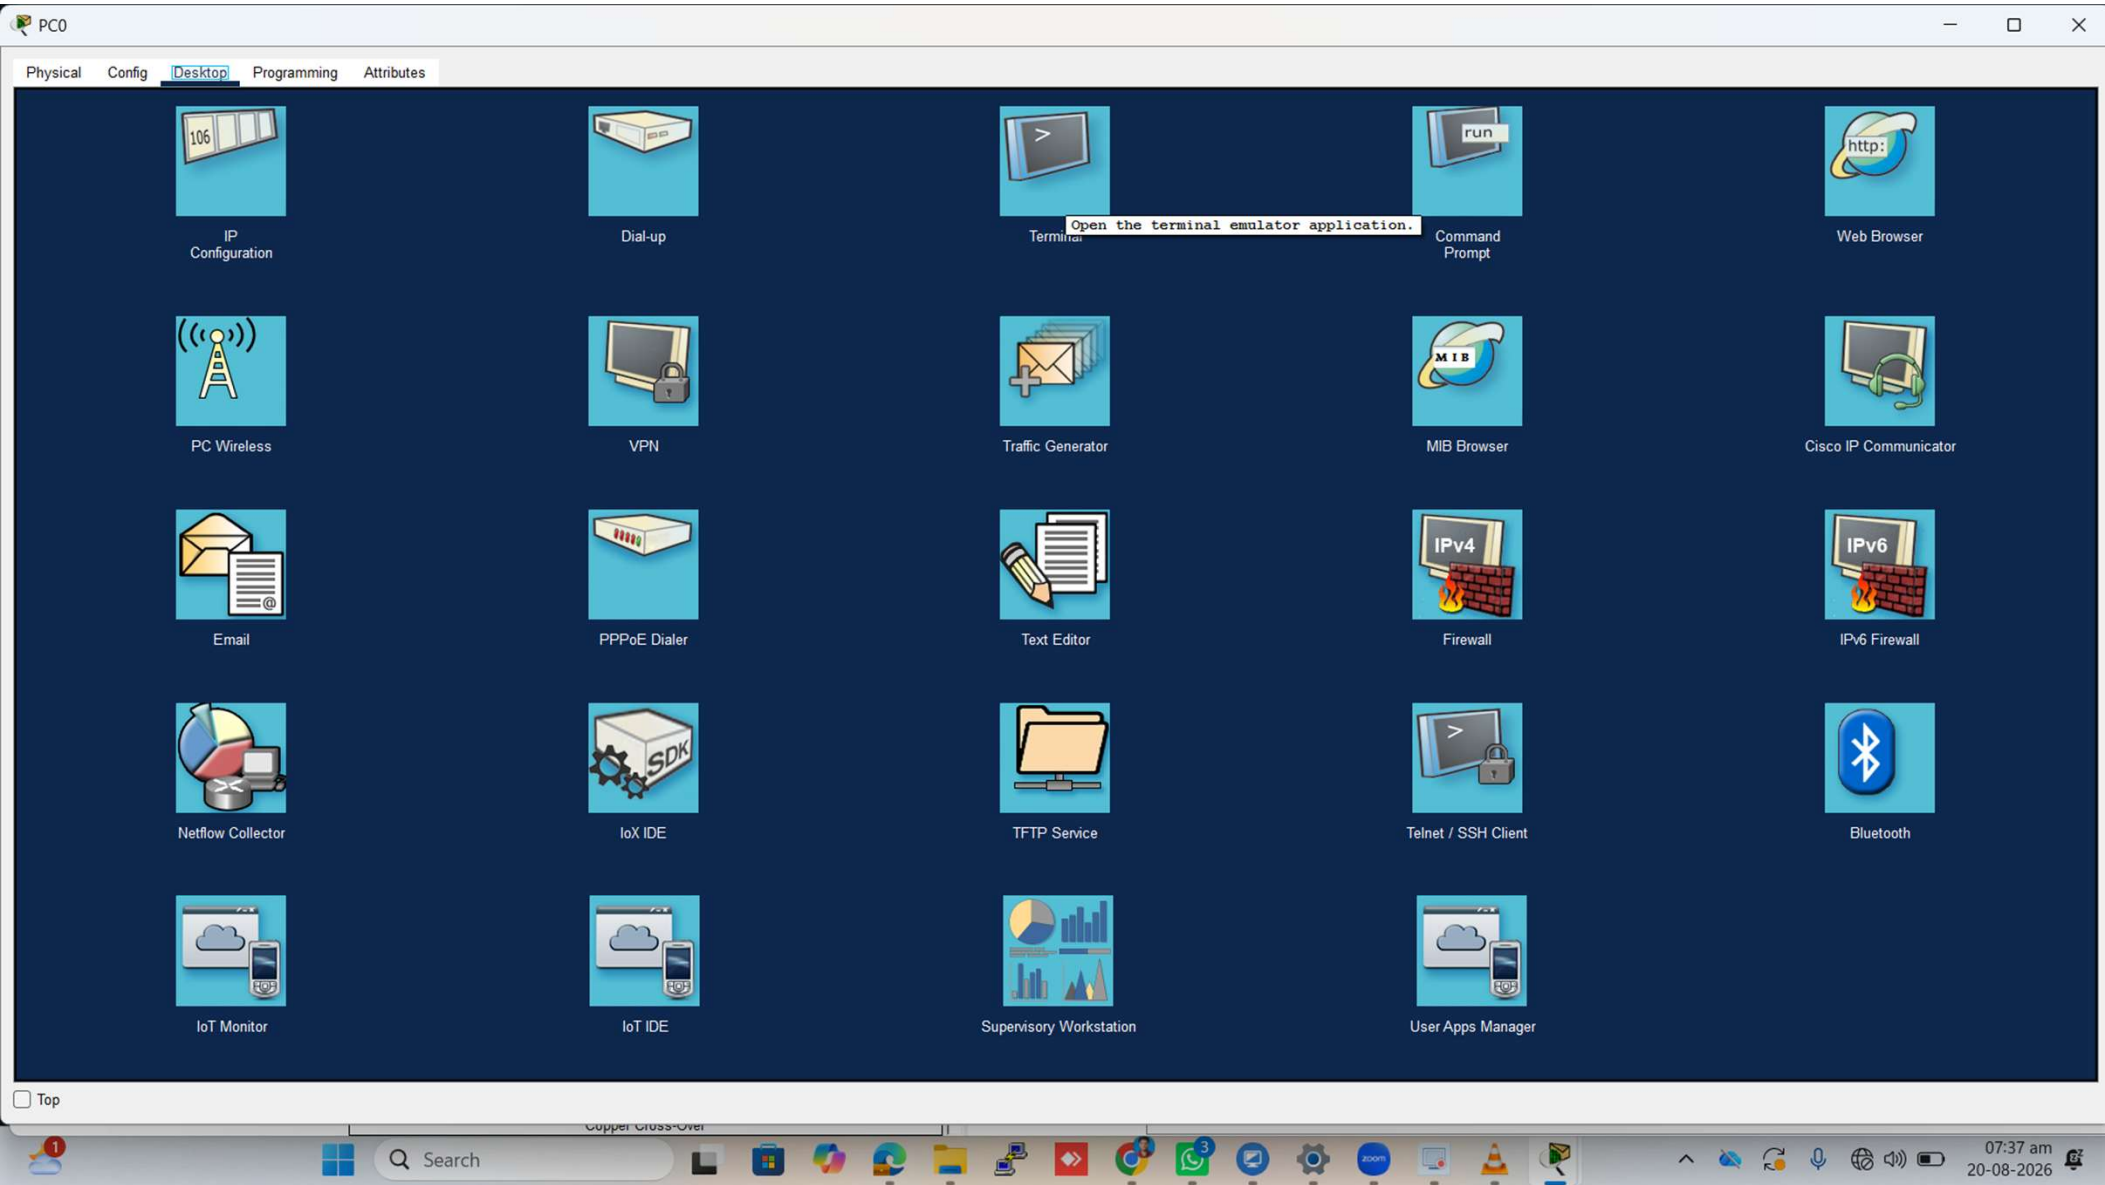

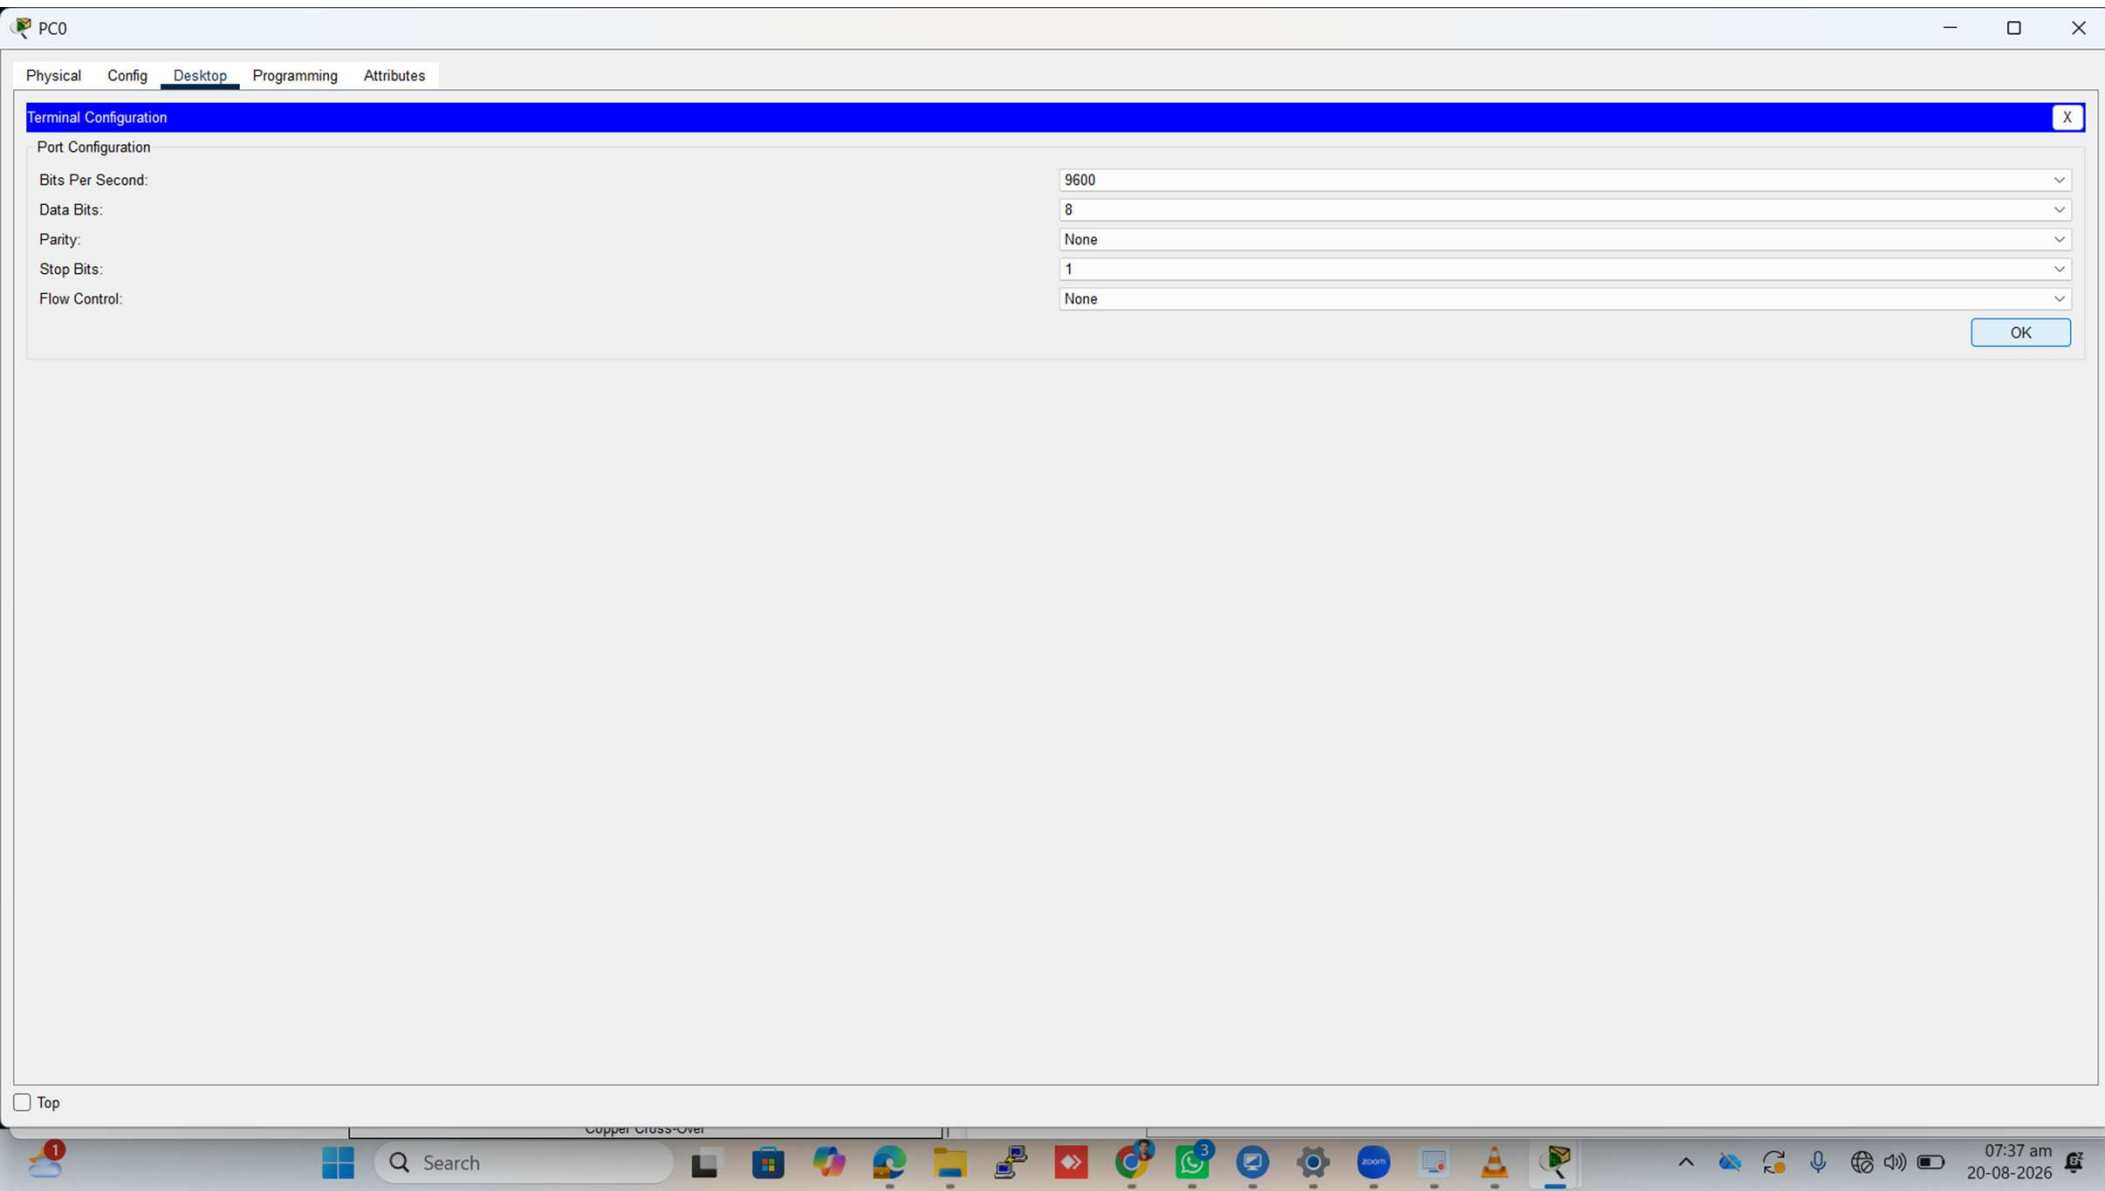

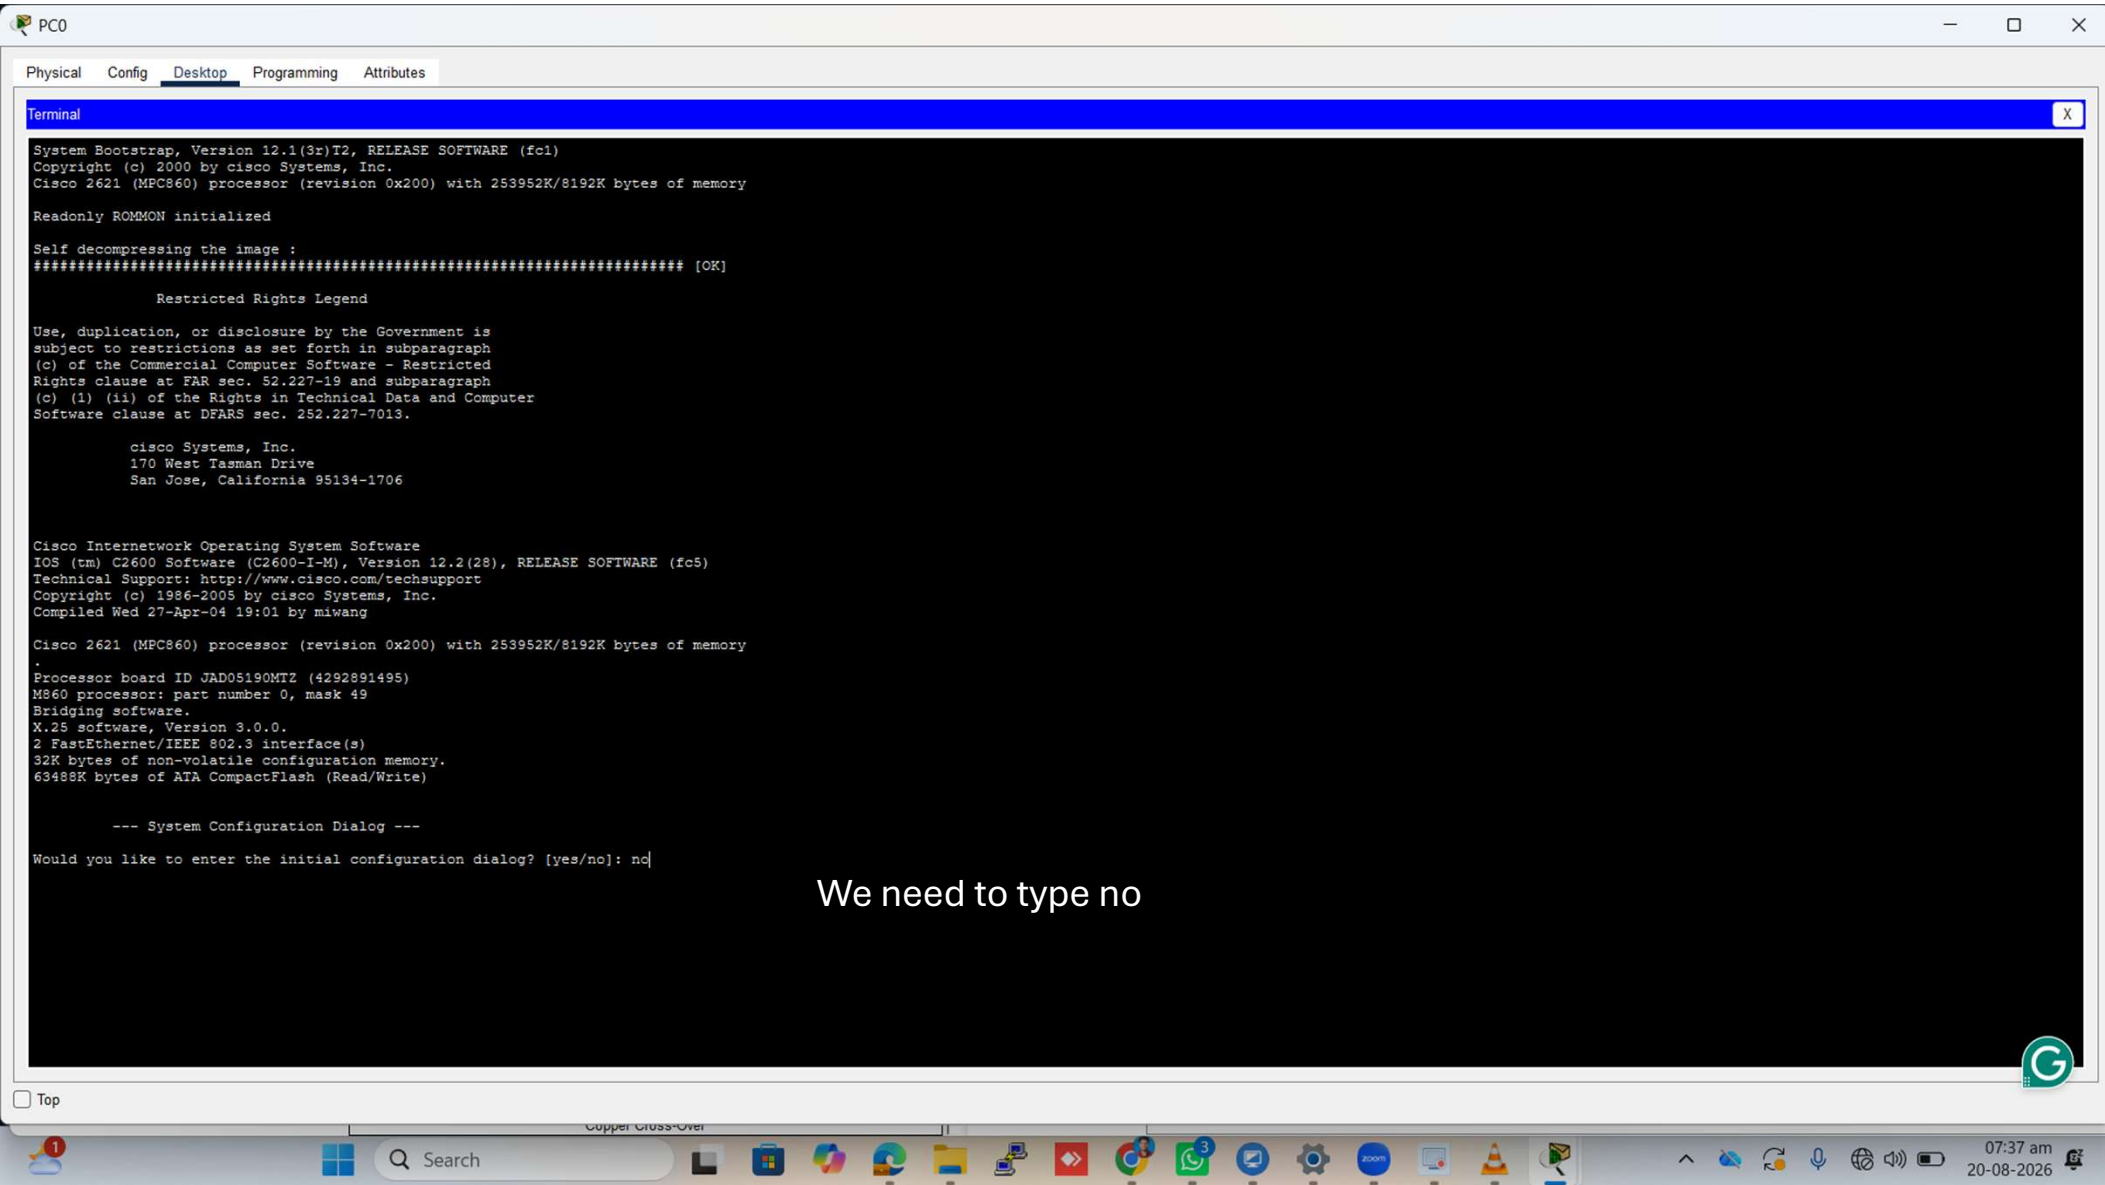

PC0

Physical Config Desktop Programming Attributes

Terminal

```
Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-I-M), Version 12.2(28), RELEASE SOFTWARE (fc5)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2005 by Cisco Systems, Inc.
Compiled Wed 27-Apr-04 19:01 by miwang

Cisco 2621 (MPC860) processor (revision 0x200) with 253952K/8192K bytes of memory
.
Processor board ID JAD05190MTZ (4292891495)
M860 processor: part number 0, mask 49
Bridging software.
X.25 software, Version 3.0.0.
2 FastEthernet/IEEE 802.3 interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router#sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#do sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router(config)#
```

CISCO Internetwork Operating System Software

Top

Copper Cross-Over

07:39 am 20-08-2026

PC0

Physical Config Desktop Programming Attributes

Terminal

```
Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-I-M), Version 12.2(28), RELEASE SOFTWARE (fc5)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2005 by Cisco Systems, Inc.
Compiled Wed 27-Apr-04 19:01 by miwang

Cisco 2621 (MPC860) processor (revision 0x200) with 253952K/8192K bytes of memory
.
Processor board ID JAD05190MTZ (4292891495)
M860 processor: part number 0, mask 49
Bridging software.
X.25 software, Version 3.0.0.
2 FastEthernet/IEEE 802.3 interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router#sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#do sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router(config)#
```

Top

Copper Cross-Over

07:39 am 20-08-2026

PC0

Physical Config Desktop Programming Attributes

Terminal

```
Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-I-M), Version 12.2(28), RELEASE SOFTWARE (fc5)
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2005 by Cisco Systems, Inc.
Compiled Wed 27-Apr-04 19:01 by miwang

Cisco 2621 (MPC860) processor (revision 0x200) with 253952K/8192K bytes of memory
.
Processor board ID JAD05190MTZ (4292891495)
M860 processor: part number 0, mask 49
Bridging software.
X.25 software, Version 3.0.0.
2 FastEthernet/IEEE 802.3 interface(s)
32K bytes of non-volatile configuration memory.
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset    administratively down down
FastEthernet0/1 unassigned      YES unset    administratively down down
Router#sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset    administratively down down
FastEthernet0/1 unassigned      YES unset    administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#do sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset    administratively down down
FastEthernet0/1 unassigned      YES unset    administratively down down
Router(config)#int fastethernet 0/0
Router(config-if)#ip address 100.0.0.1 255.0.0.0
Router(config-if)#no shutdown
```

Top

Copper Cross-Over

07:40 am 20-08-2026

PC0

Physical Config Desktop Programming Attributes

Terminal

```
63488K bytes of ATA CompactFlash (Read/Write)

--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip interface brief
Interface      IP-Address      OK? Method Status        Protocol
FastEthernet0/0 unassigned      YES unset  administratively down down
FastEthernet0/1 unassigned      YES unset  administratively down down
Router#sh ip int br
Interface      IP-Address      OK? Method Status        Protocol
FastEthernet0/0 unassigned      YES unset  administratively down down
FastEthernet0/1 unassigned      YES unset  administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#do sh ip int br
Interface      IP-Address      OK? Method Status        Protocol
FastEthernet0/0 unassigned      YES unset  administratively down down
FastEthernet0/1 unassigned      YES unset  administratively down down
Router(config)#int fastethernet 0/0
Router(config-if)#ip address 100.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-UPDOWN: Interface FastEthernet0/0, changed state to down


Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console


Router#sh ip int br
Interface      IP-Address      OK? Method Status        Protocol
FastEthernet0/0 100.0.0.1       YES manual down          down
FastEthernet0/1 unassigned      YES unset  administratively down down
Router#
```


Top

Copper Cross-Over

07:41 am 20-08-2026

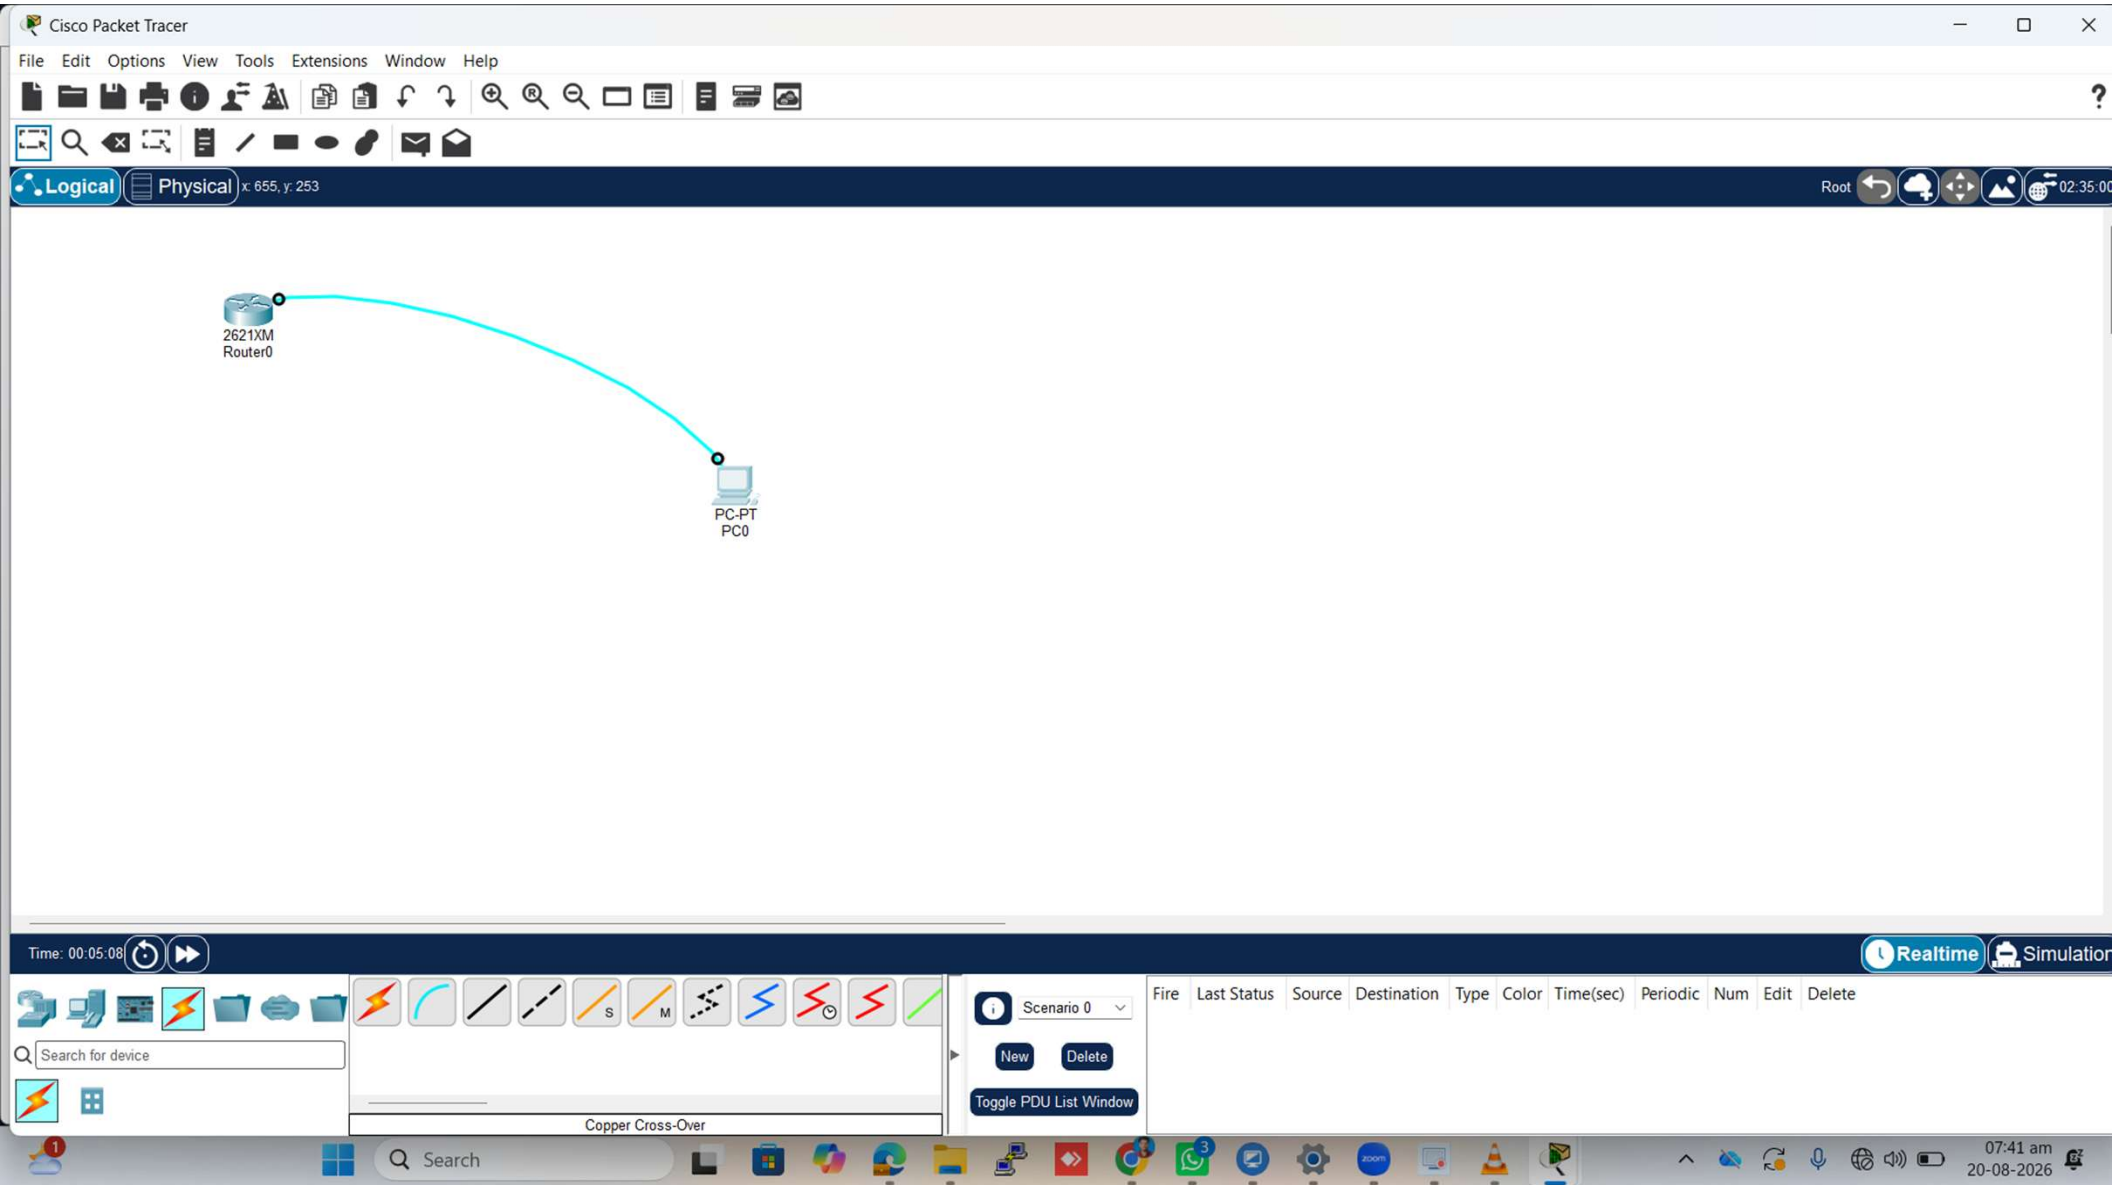

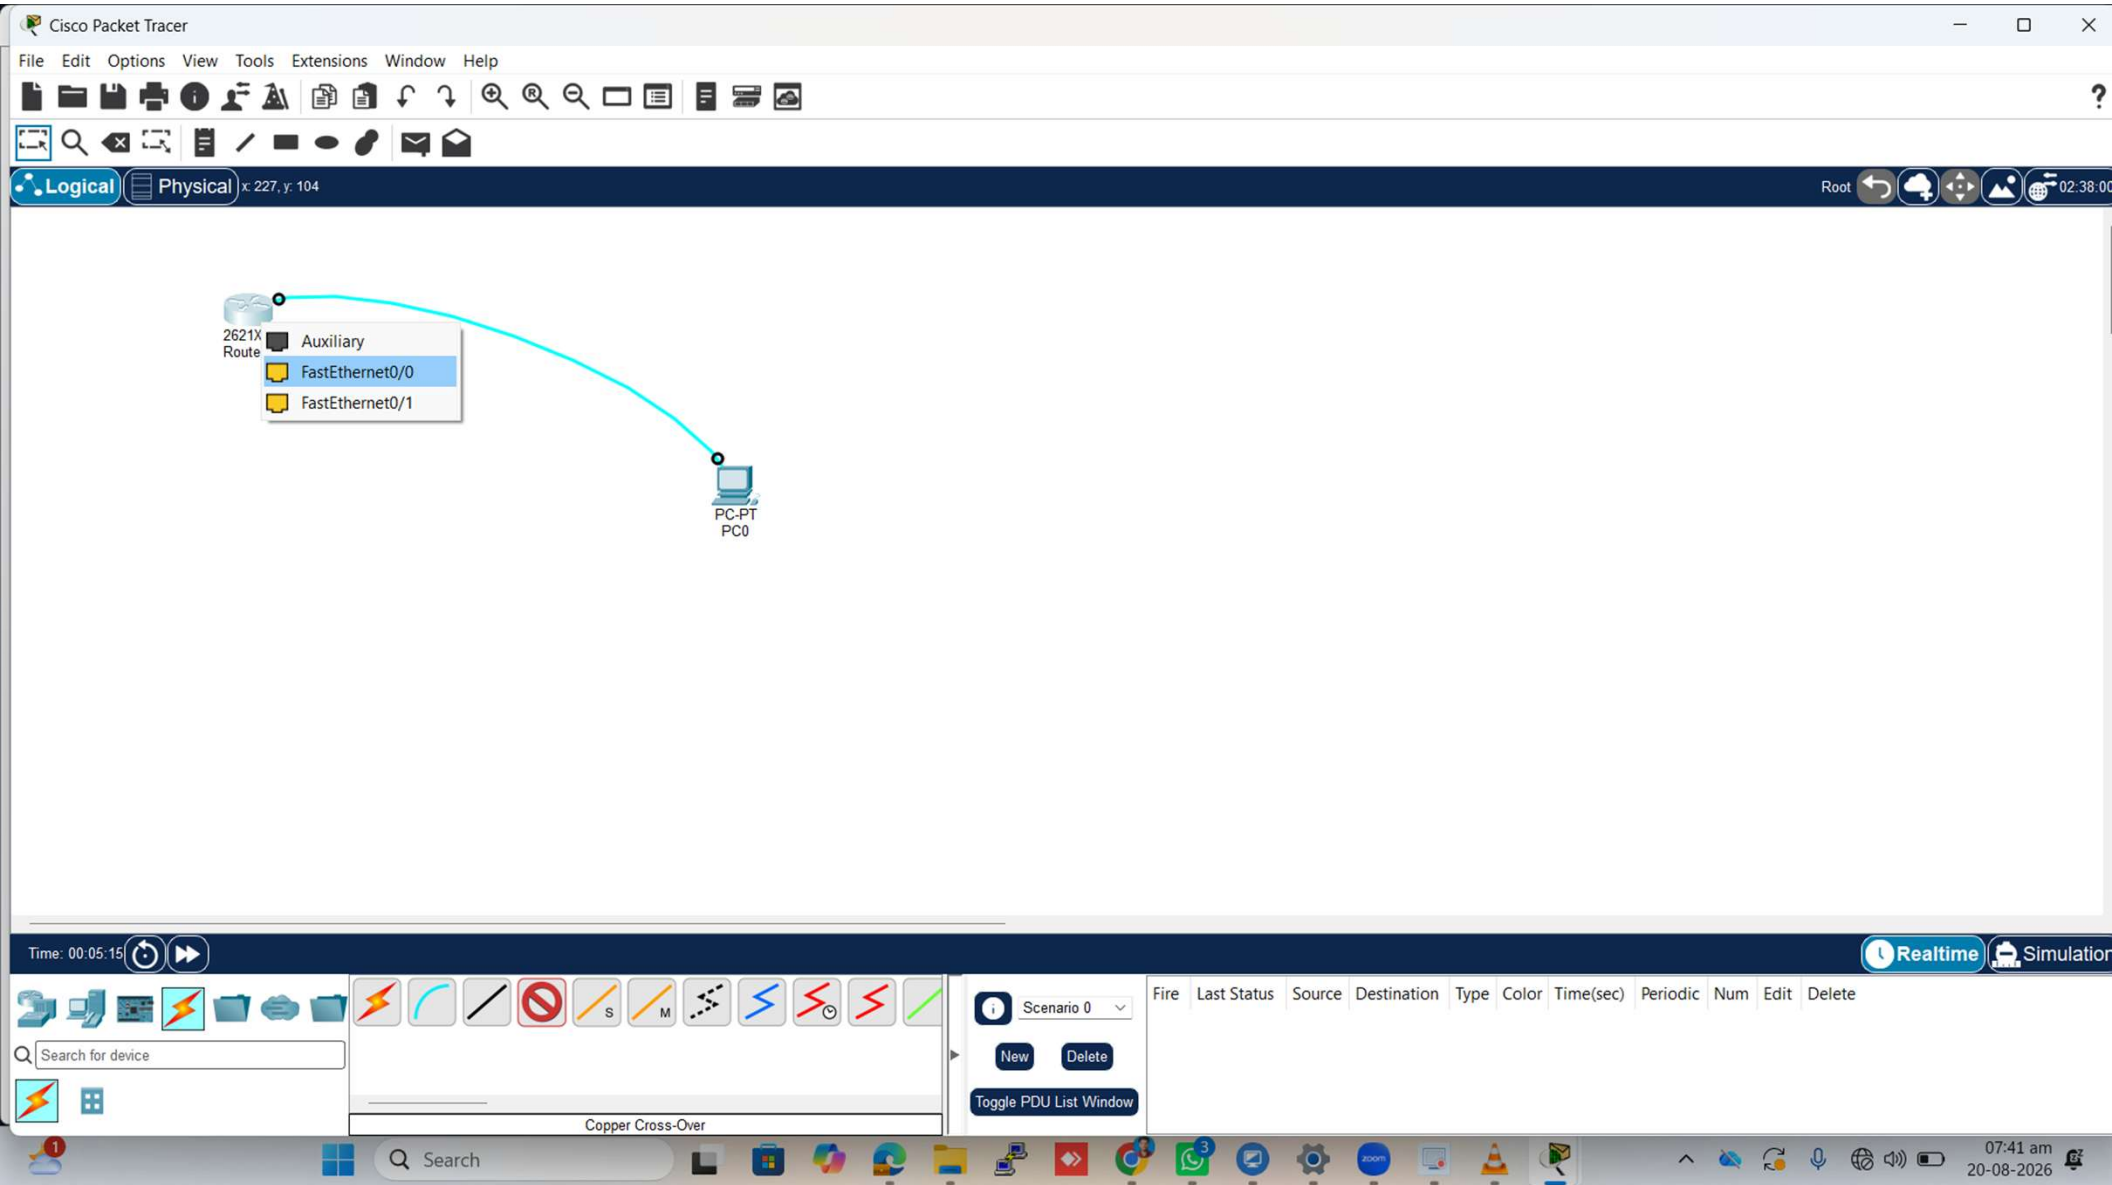

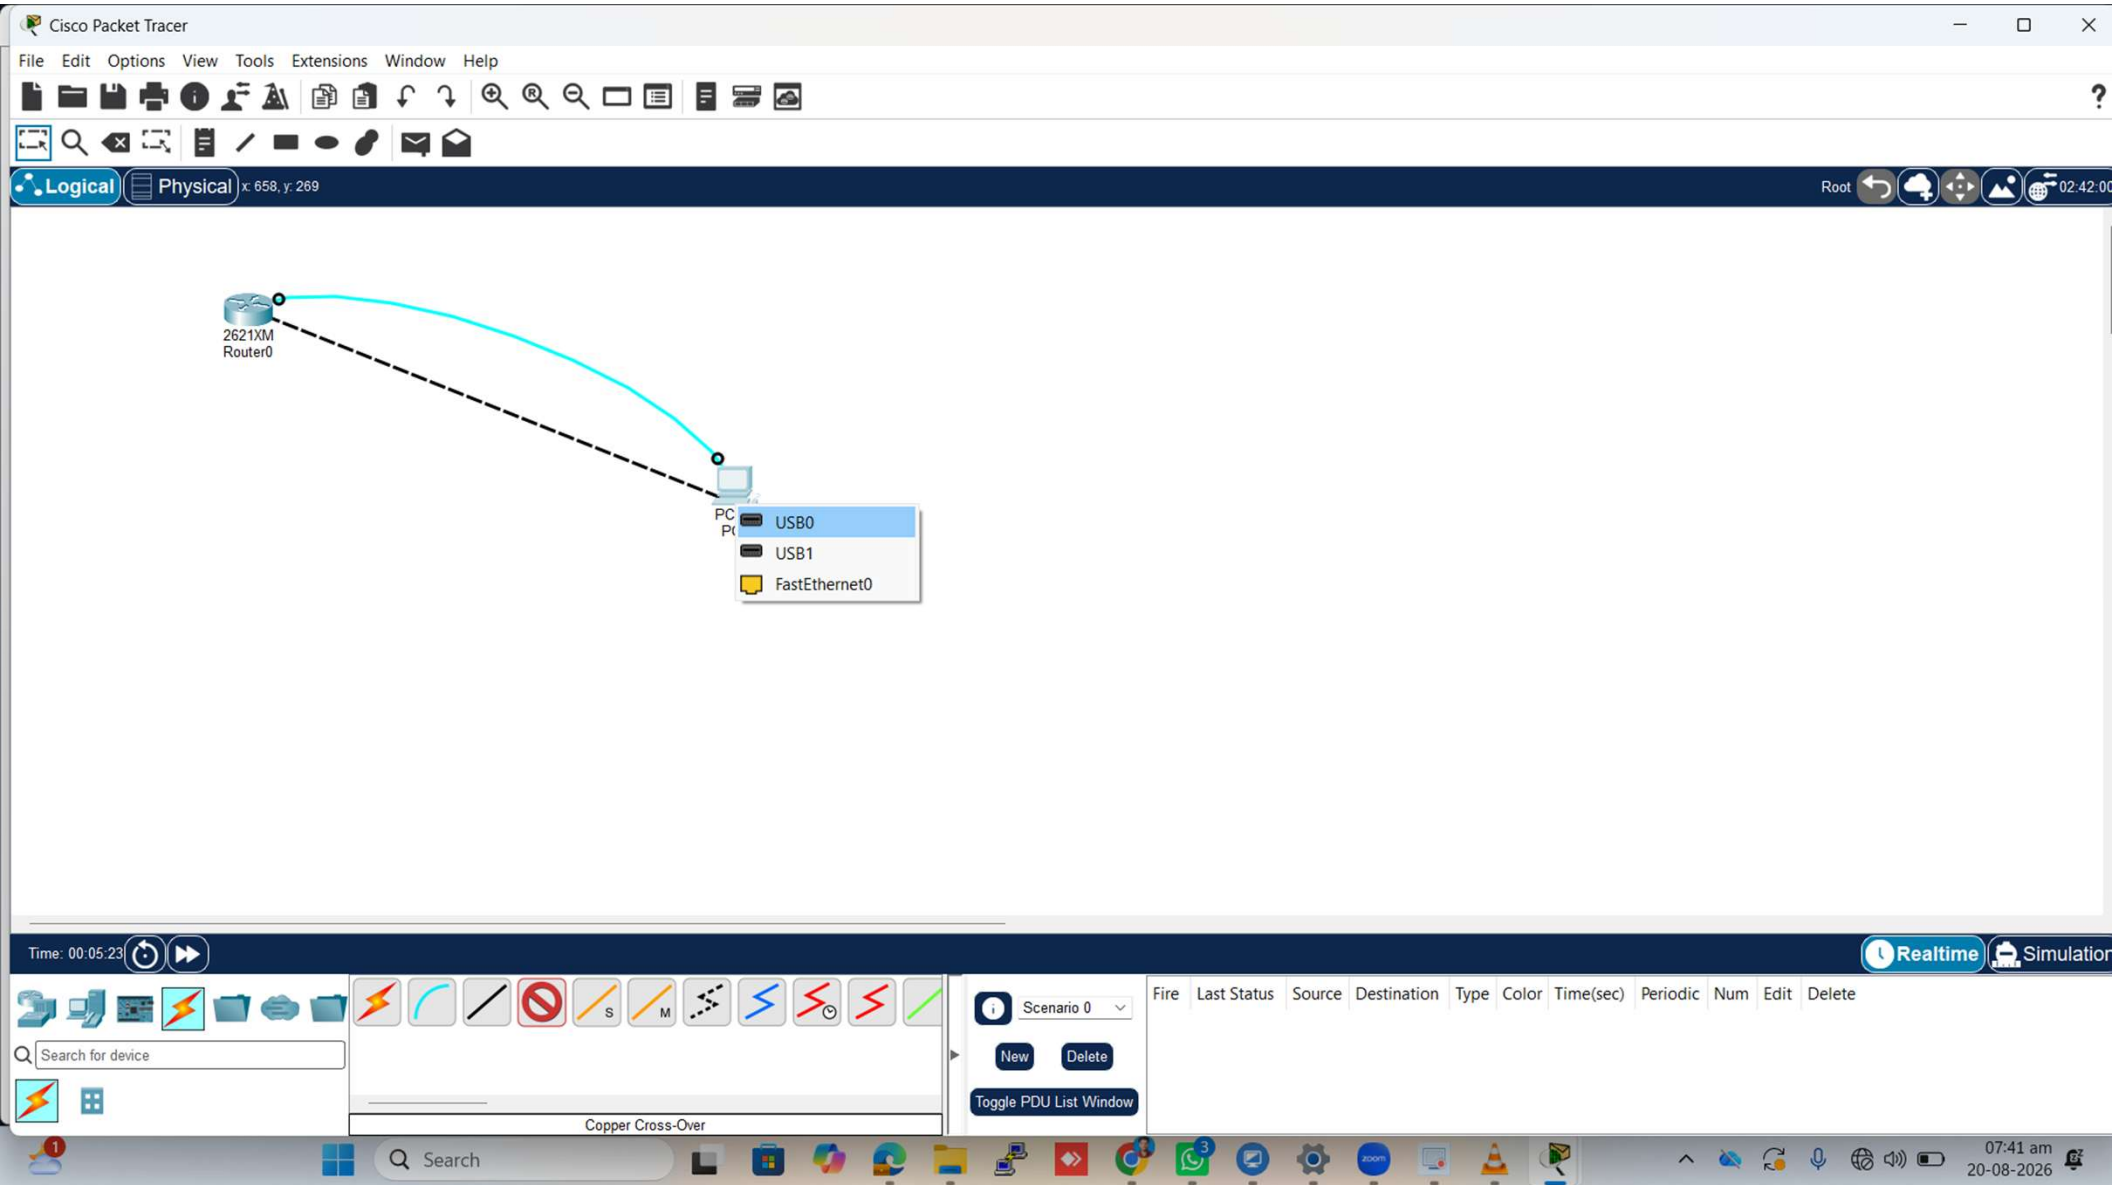

PC0

Physical Config Desktop Programming Attributes

Terminal

```
--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router#sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#do sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router(config)#int fastethernet 0/0
Router(config-if)#ip address 100.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-UPDOWN: Interface FastEthernet0/0, changed state to down

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 100.0.0.1       YES manual down        down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
```

Top

Copper Cross-Over

07:41 am
20-08-2026

PC0

Physical Config Desktop Programming Attributes

Terminal

```
--- System Configuration Dialog ---

Would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router#sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#do sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 unassigned      YES unset   administratively down down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router(config)#int fastethernet 0/0
Router(config-if)#ip address 100.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-UPDOWN: Interface FastEthernet0/0, changed state to down

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 100.0.0.1       YES manual down        down
FastEthernet0/1 unassigned      YES unset   administratively down down
Router#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
```

Top

Copper Cross-Over

07:41 am 20-08-2026

Terminal

```
FastEthernet0/1    unassigned    YES unset    administratively down down
Router#sh ip int br
Interface          IP-Address      OK? Method Status        Protocol
FastEthernet0/0    unassigned      YES unset    administratively down down
FastEthernet0/1    unassigned      YES unset    administratively down down
Router#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#do sh ip int br
Interface          IP-Address      OK? Method Status        Protocol
FastEthernet0/0    unassigned      YES unset    administratively down down
FastEthernet0/1    unassigned      YES unset    administratively down down
Router(config)#int fastethernet 0/0
Router(config-if)#ip address 100.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-3-UPDOWN: Interface FastEthernet0/0, changed state to down

Router(config-if)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#sh ip int br
Interface          IP-Address      OK? Method Status        Protocol
FastEthernet0/0    100.0.0.1       YES manual  up            up
FastEthernet0/1    unassigned      YES unset    administratively down down
Router#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Router#user CloudMKV pass Mkv@10
^
% Invalid input detected at '^' marker.

Router#username CloudMKV password Mkv@10
^
% Invalid input detected at '^' marker.

Router#sh ip int br
Interface          IP-Address      OK? Method Status        Protocol
FastEthernet0/0    100.0.0.1       YES manual  up            up
FastEthernet0/1    unassigned      YES unset    administratively down down
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#user CloudMKV pass Mkv@10
Router(config)#line con 0
Router(config-line)#pass Vedaant
Router(config-line)#login local
Router(config-line)#exit
Router(config)#
```



PC0

Physical Config Desktop Programming Attributes

Terminal

```
Router#  
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up  
Router#user CloudMKV pass Mkv@10  
^  
% Invalid input detected at '^' marker.  
Router#username CloudMKV password Mkv@10  
^  
% Invalid input detected at '^' marker.  
Router#sh ip int br  
Interface      IP-Address      OK? Method Status      Protocol  
FastEthernet0/0 100.0.0.1       YES manual up          up  
FastEthernet0/1 unassigned      YES unset  administratively down down  
Router#conf t  
Enter configuration commands, one per line. End with CNTL/Z.  
Router(config)#user CloudMKV pass Mkv@10  
Router(config)#line con 0  
Router(config-line)#pass Vedaant  
Router(config-line)#login local  
Router(config-line)#exit  
Router(config)#exit  
Router#  
%SYS-5-CONFIG_I: Configured from console by console  
Router#exit  
  
Router con0 is now available  
  
Press RETURN to get started.
```

Top

Copper Cross-Over

07:45 am 20-08-2026

PC0

Physical Config Desktop Programming Attributes

Terminal

```
User Access Verification
Username: CLOUDMKV
Password:

Router>en
Router#sh ip int br
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 100.0.0.1       YES manual up          up
FastEthernet0/1 unassigned      YES unset  administratively down down
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#line console 0
Router(config-line)#pass Vedaant
Router(config-line)#login
Router(config-line)#exit
Router(config)#exit
Router#
%SYS-5-CONFIG_I: Configured from console by console

Router#exit

Router con0 is now available

Press RETURN to get started.


User Access Verification
Password:


Router>
```


Top

Copper Cross-Over

07:46 am 20-08-2026

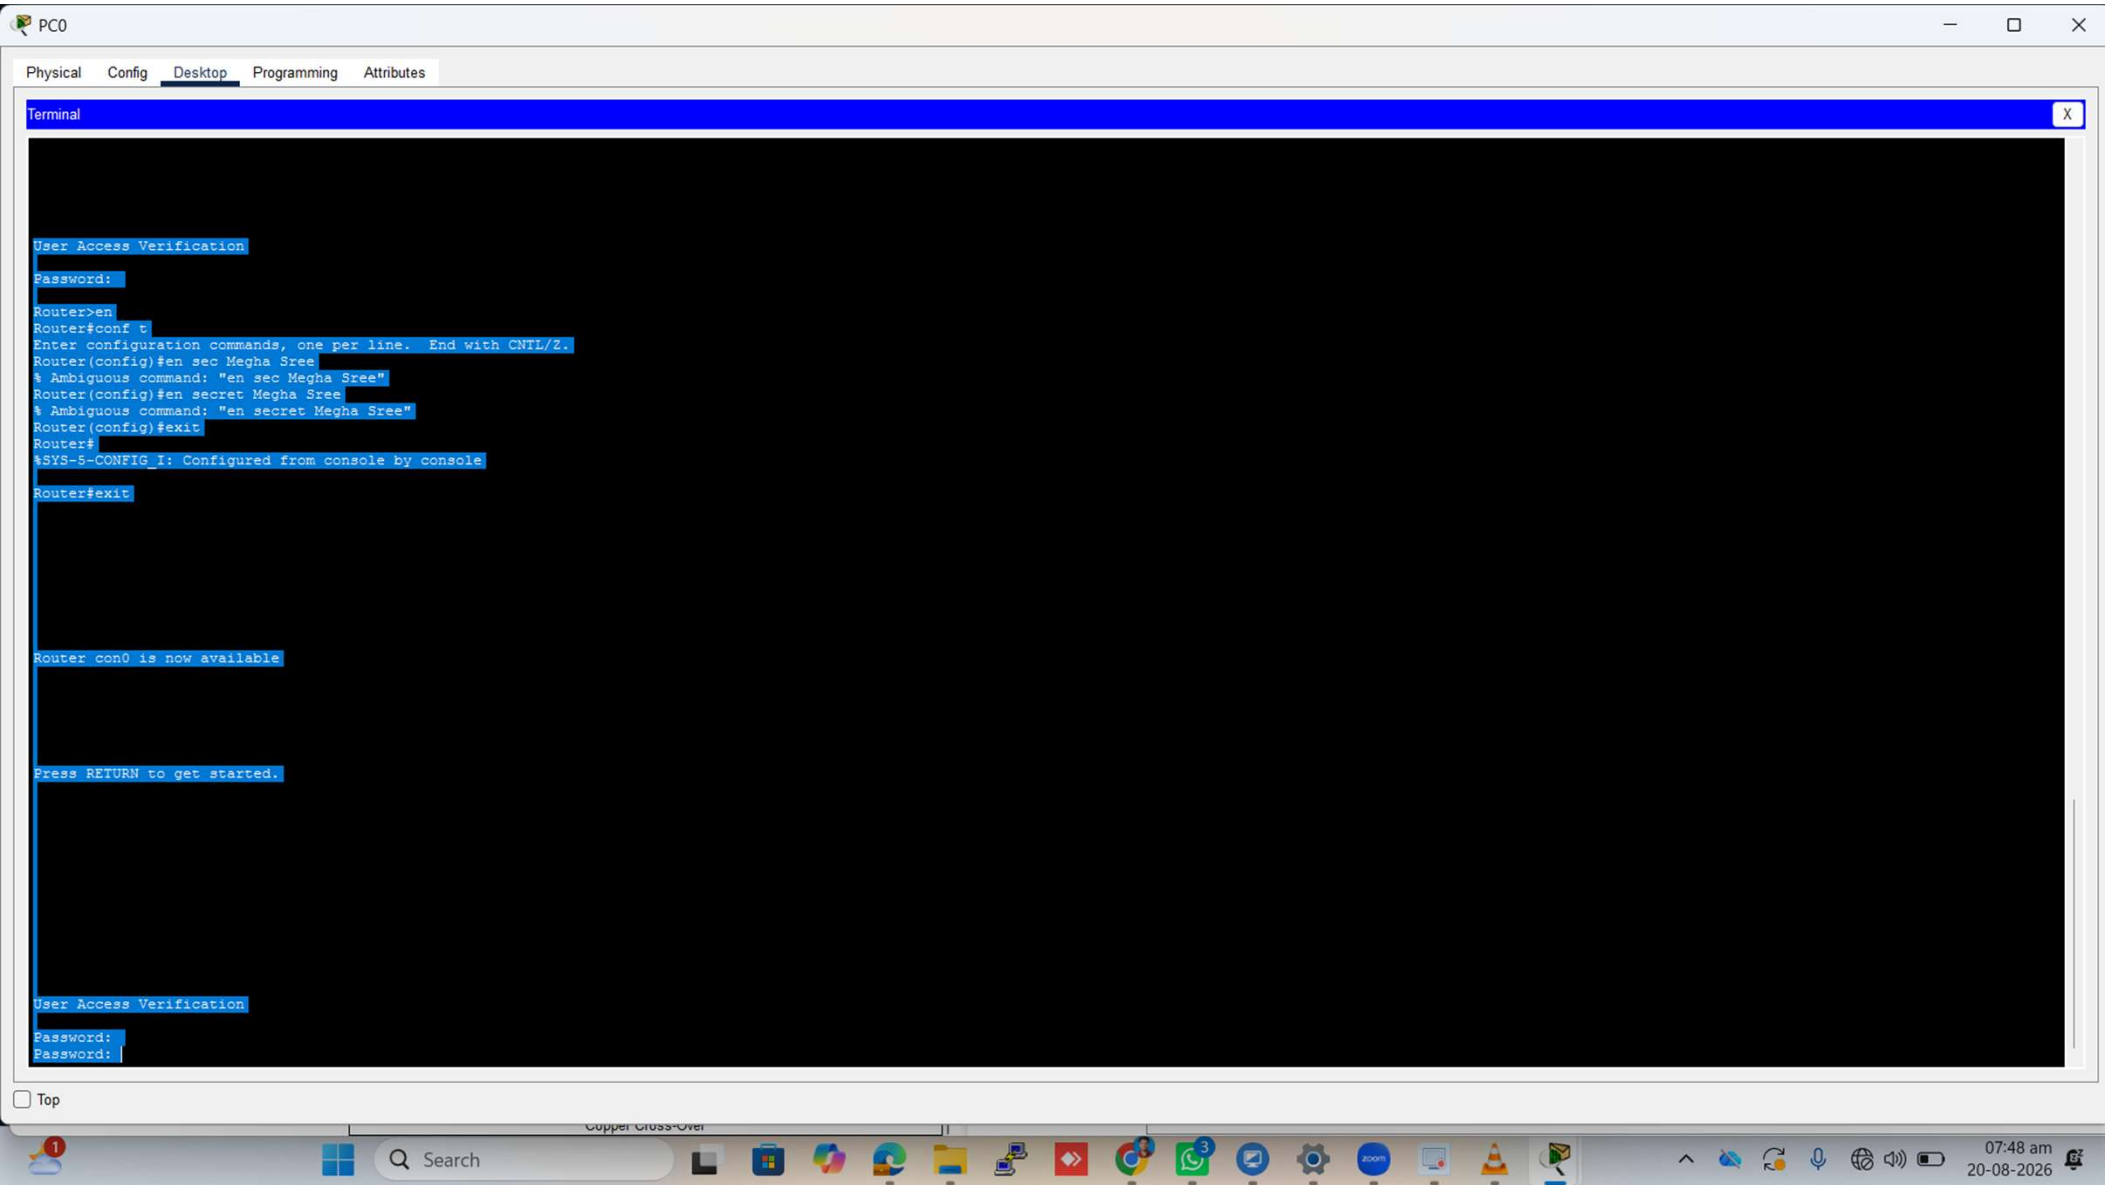

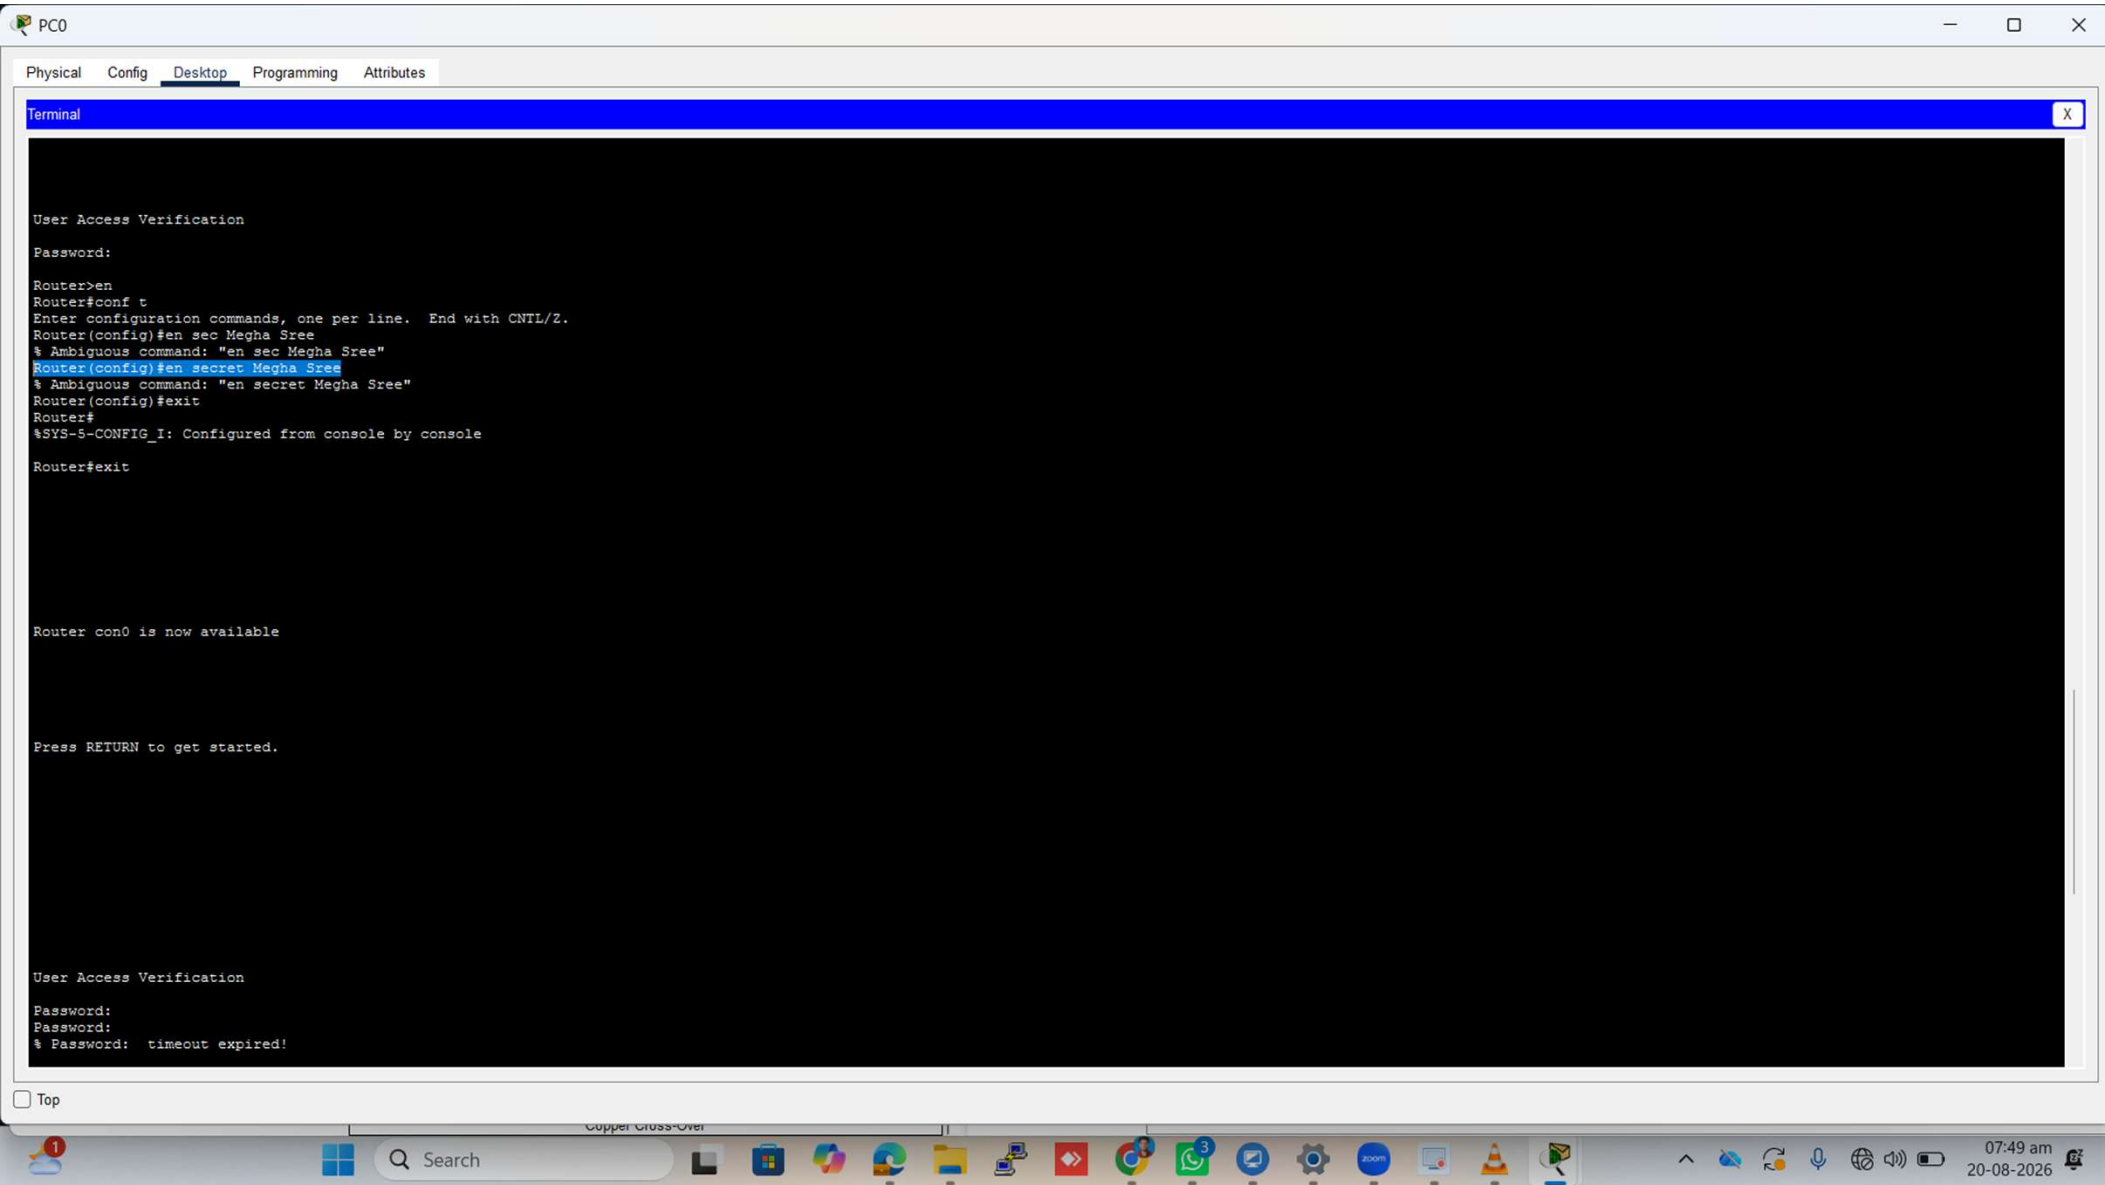

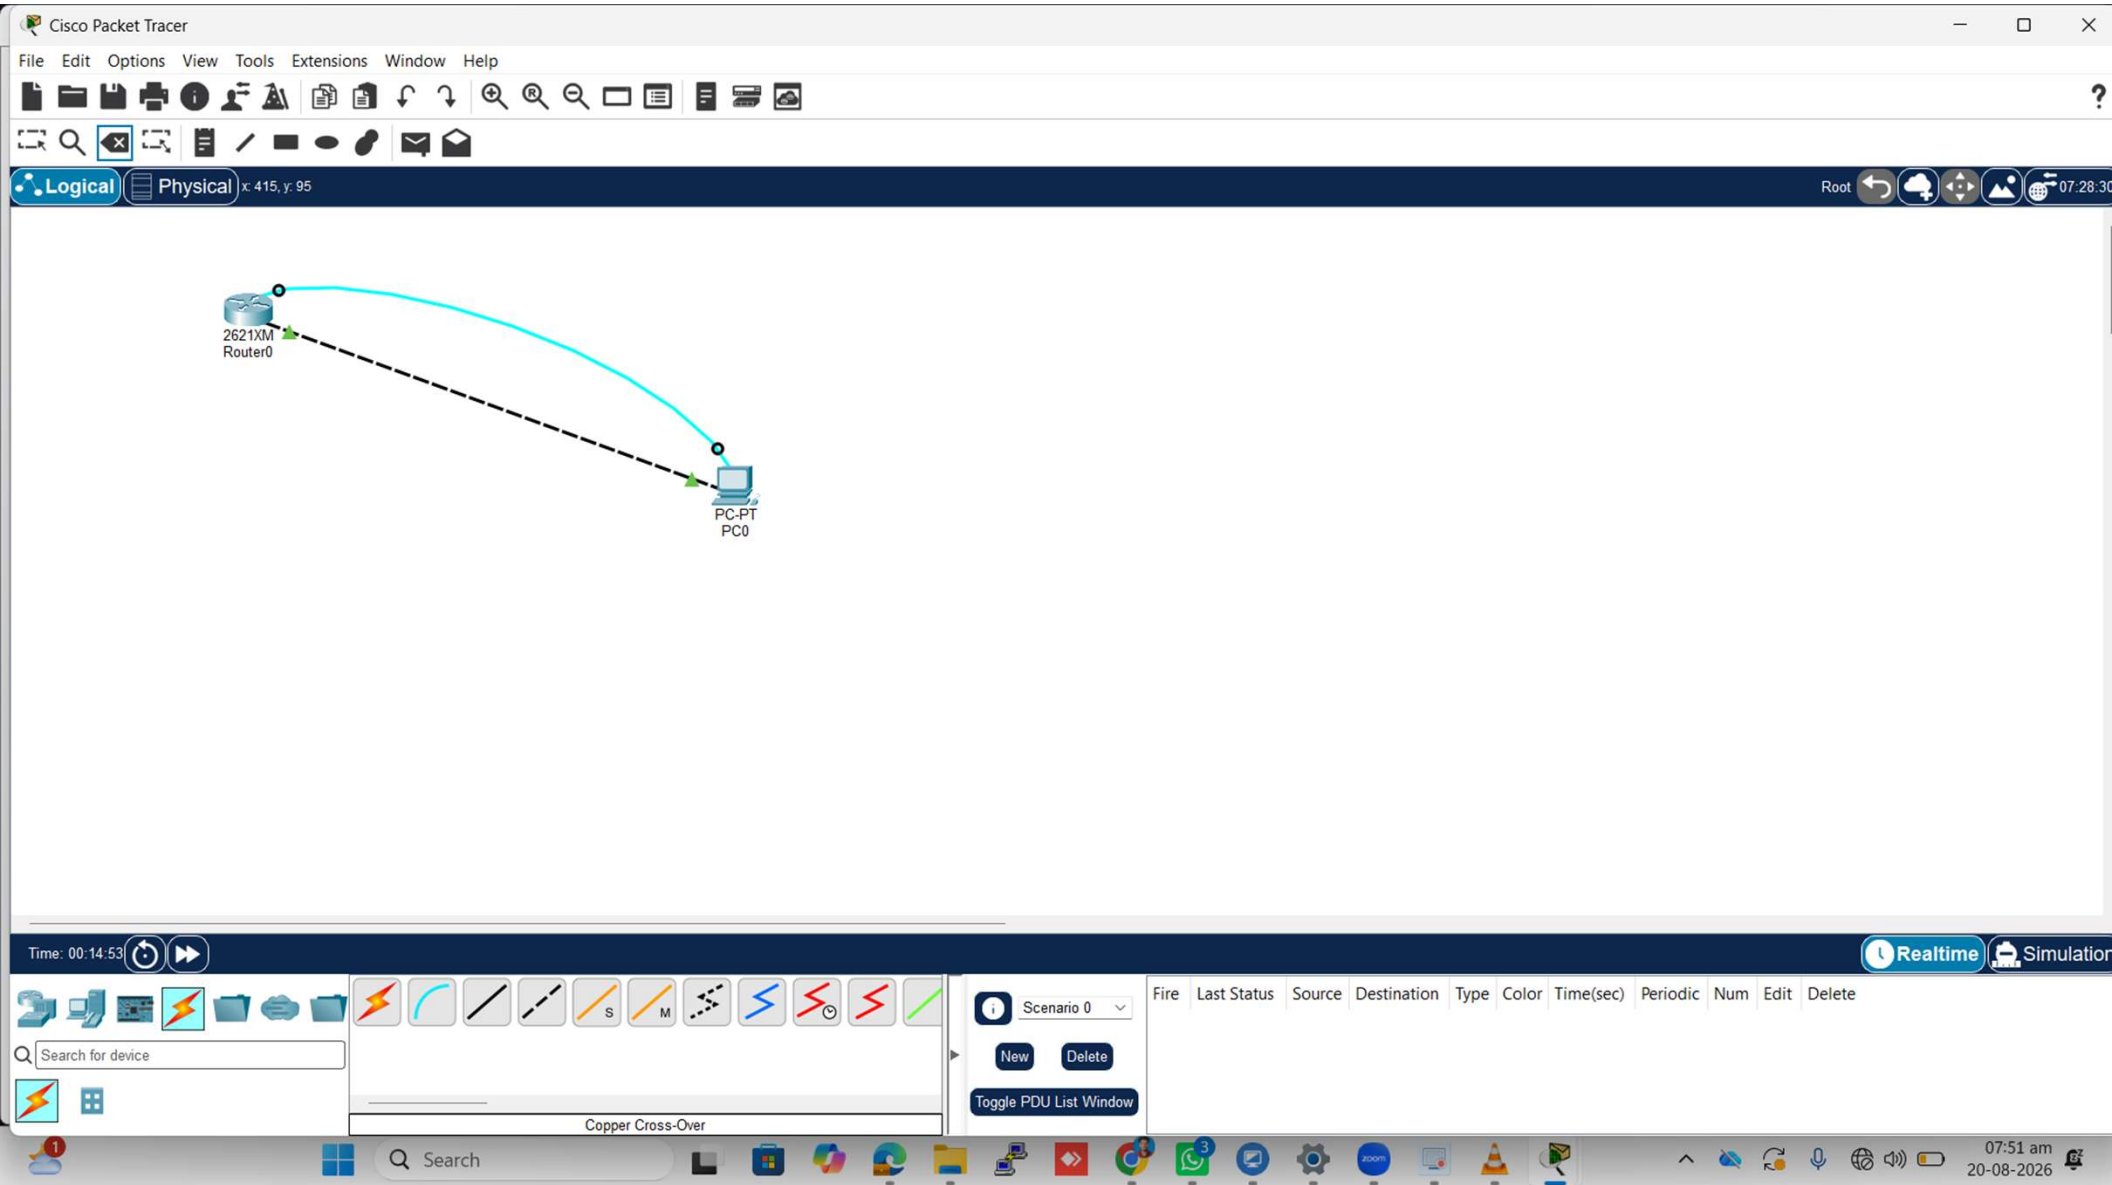

Cisco Packet Tracer

FileEditOptionsViewToolsExtensionsWindowHelp

Logical Physical x 436, y: 103

Root

07:31:00

2621XM
Router0

PC-PT
PC0

Time: 00:14:57

Realtime

Search for device


Scenario 0


NewDelete

Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
------	-------------	--------	-------------	------	-------	-----------	----------	-----	------	--------

07:51 am
20-08-2026

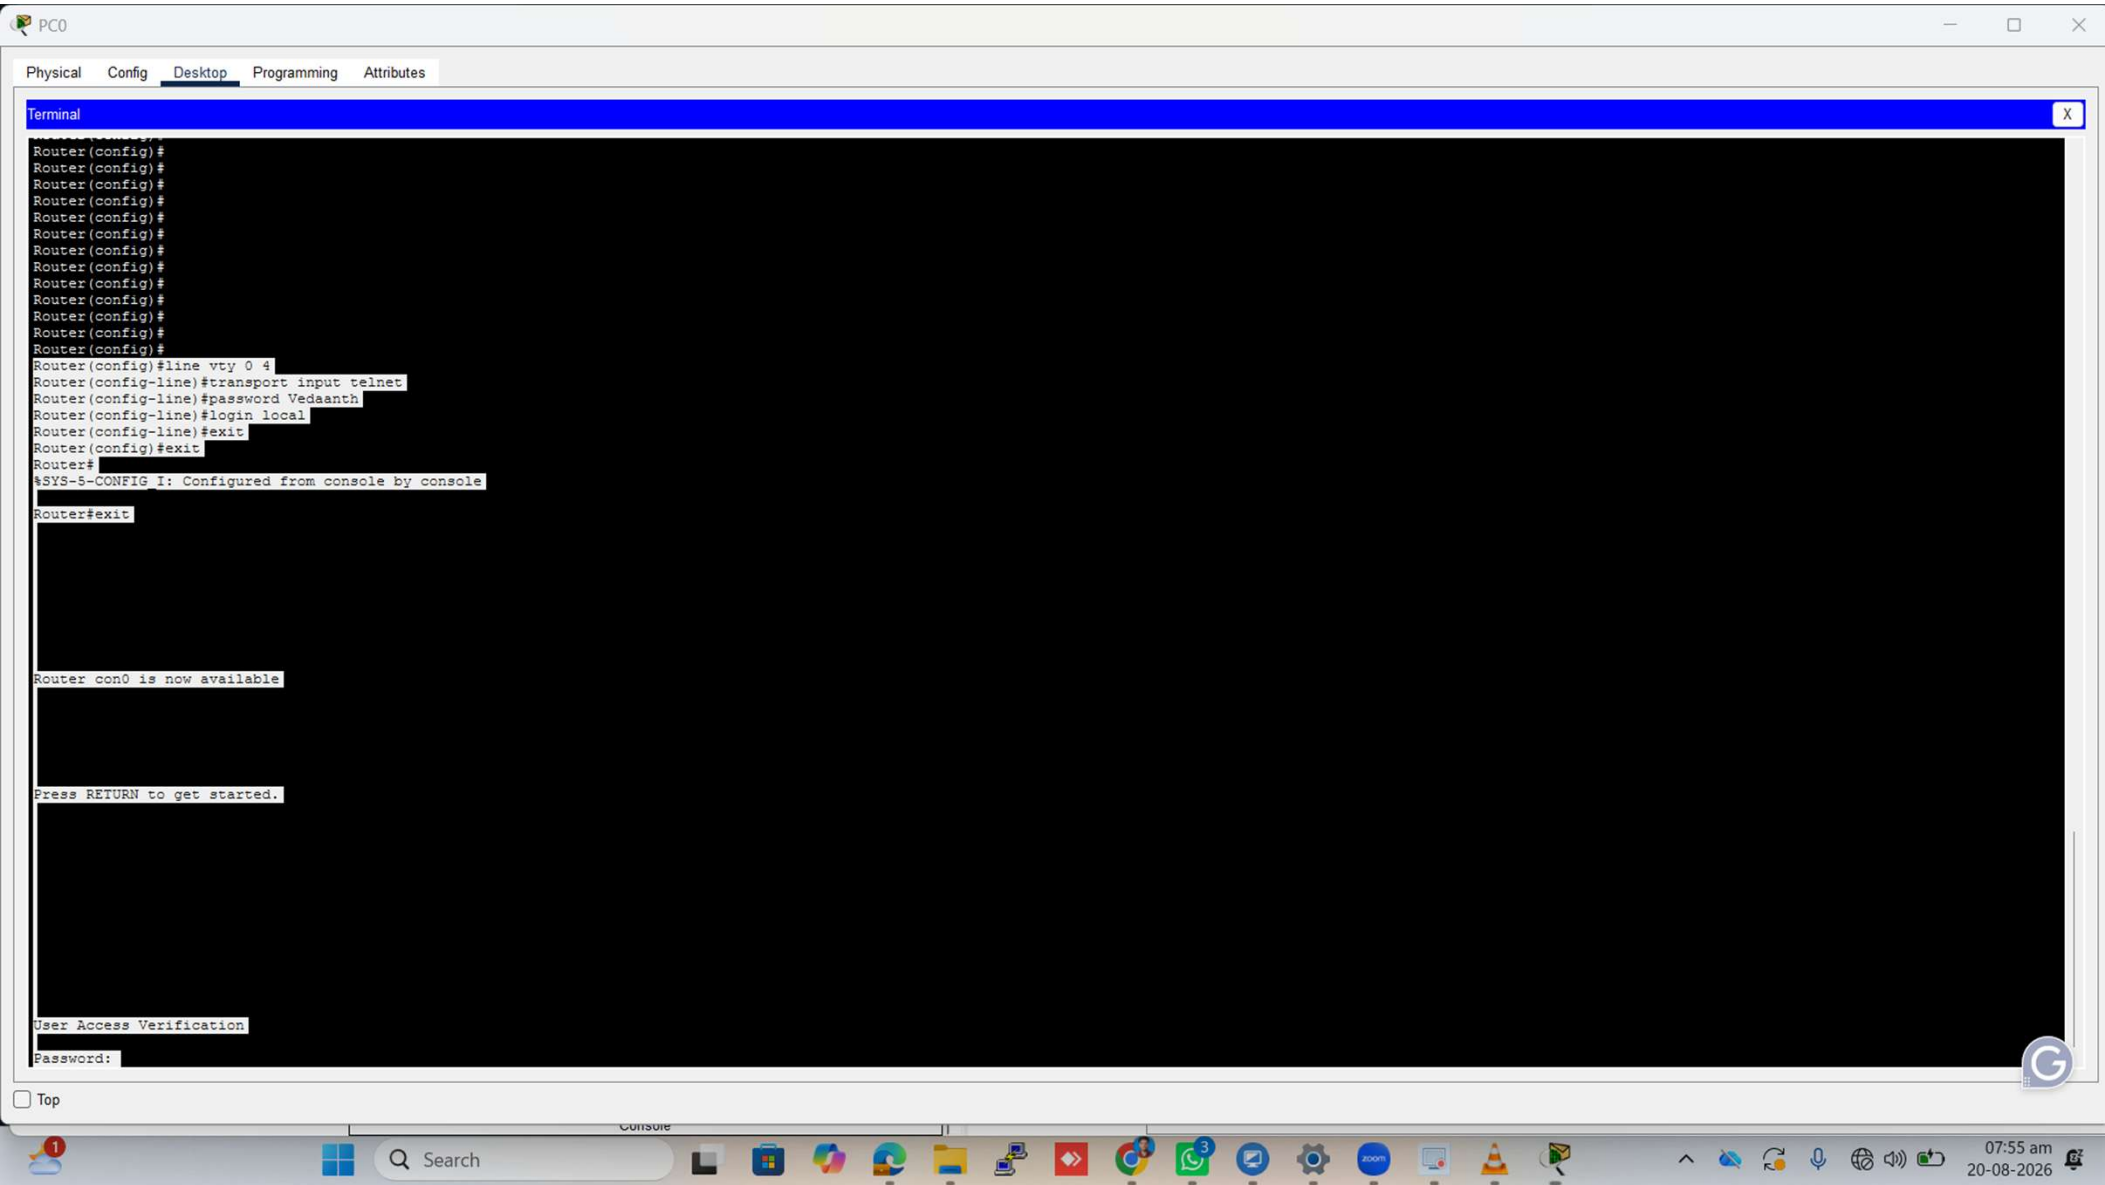

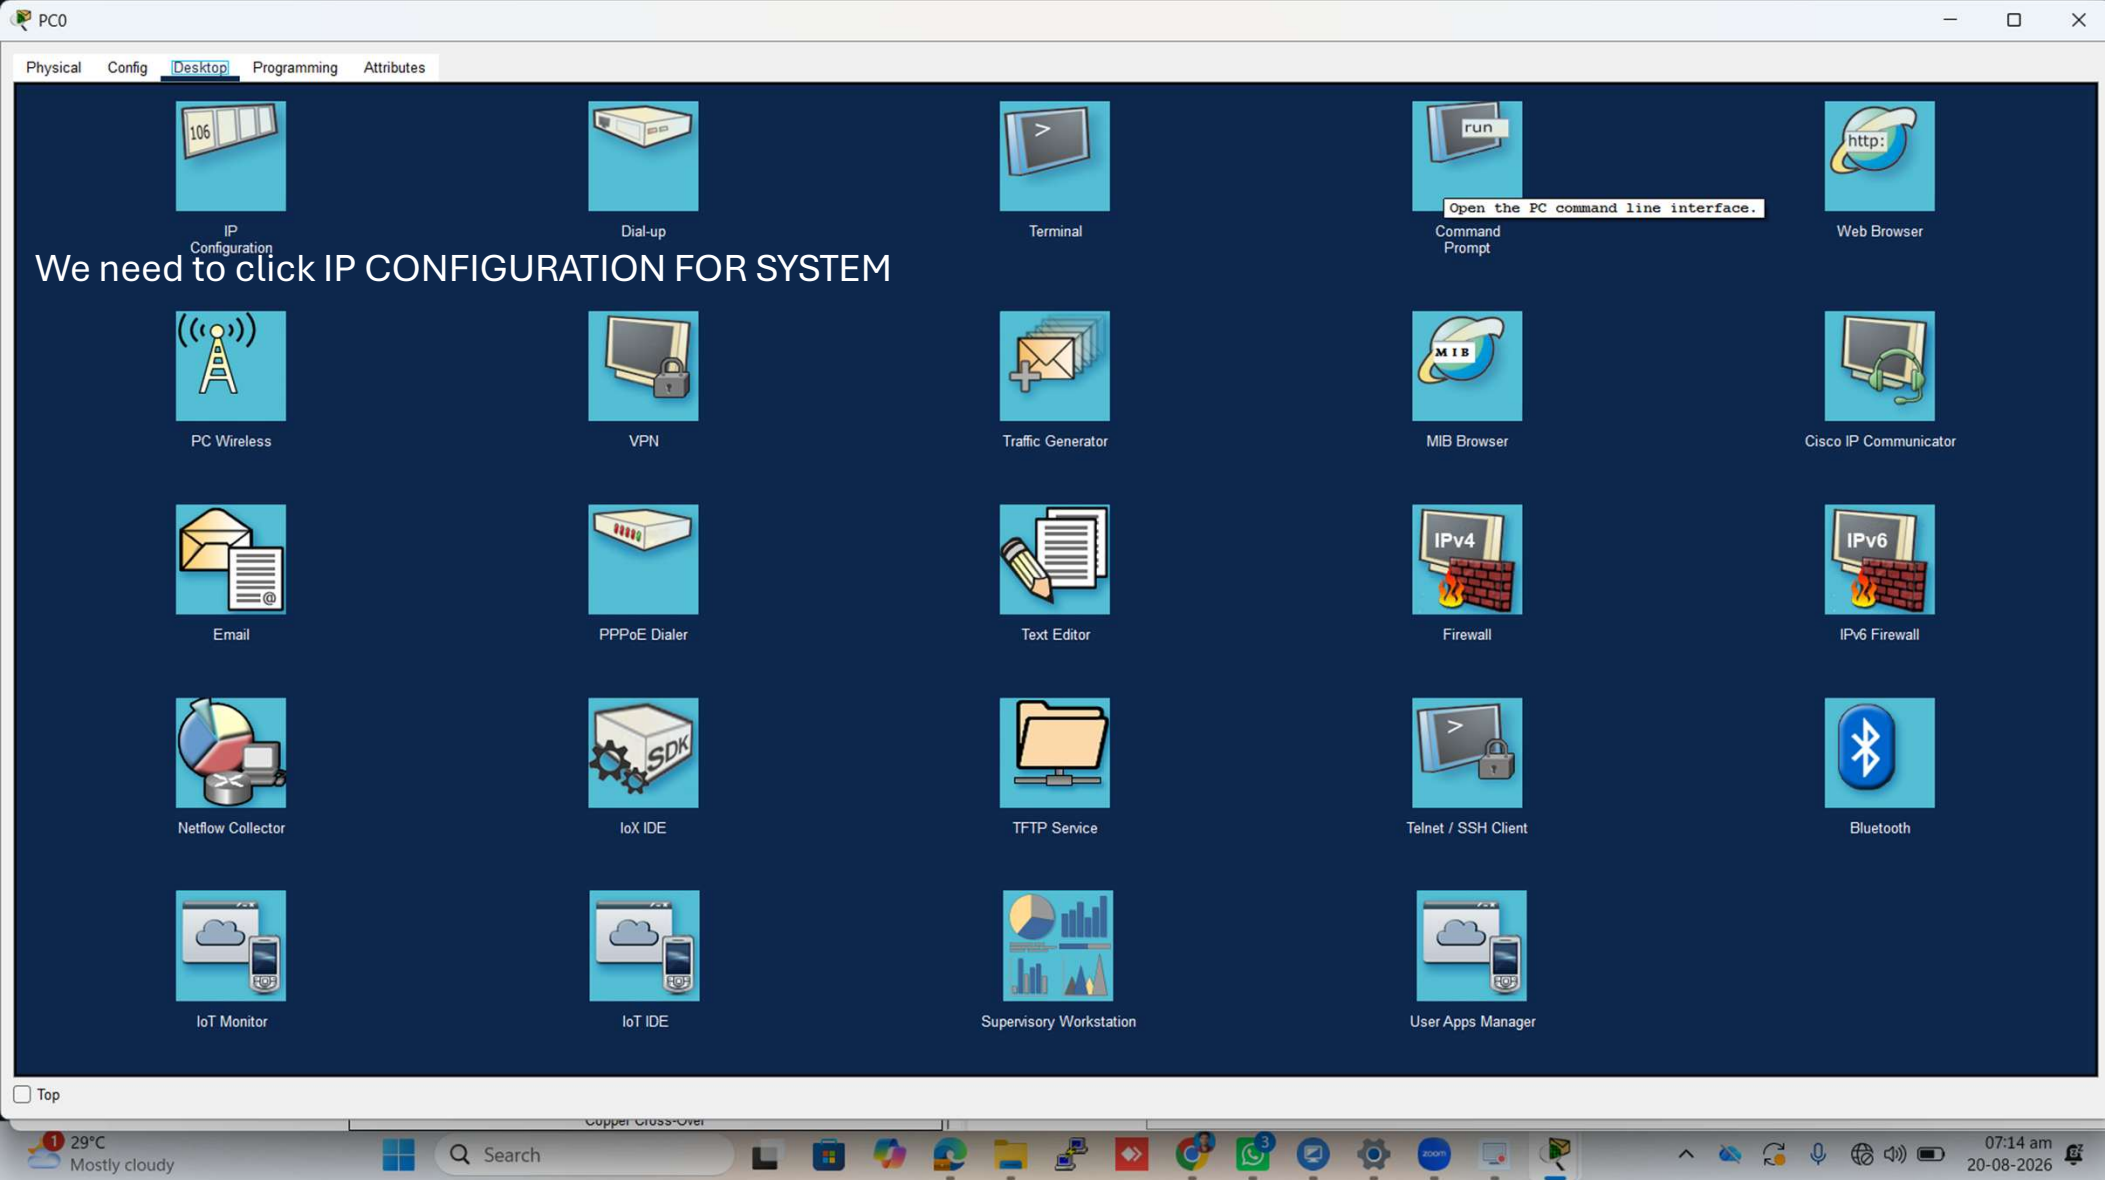

PC0

Physical Config Desktop Programming Attributes

IP Configuration

Interface FastEthernet0

IP Configuration

☐ DHCP ☒ Static

IPv4 Address 100.0.0.100

Subnet Mask 255.0.0.0

Default Gateway 0.0.0.0

DNS Server 0.0.0.0

IPv6 Configuration

☐ Automatic ☒ Static

IPv6 Address /

Link Local Address FE80::250:FFF:FEDA:DA82

Default Gateway

DNS Server

802.1X

☐ Use 802.1X Security

Authentication MD5

Username

Password


To assign the IP address to the PC


Top


29°C Mostly cloudy


Search

07:13 am 20-08-2026

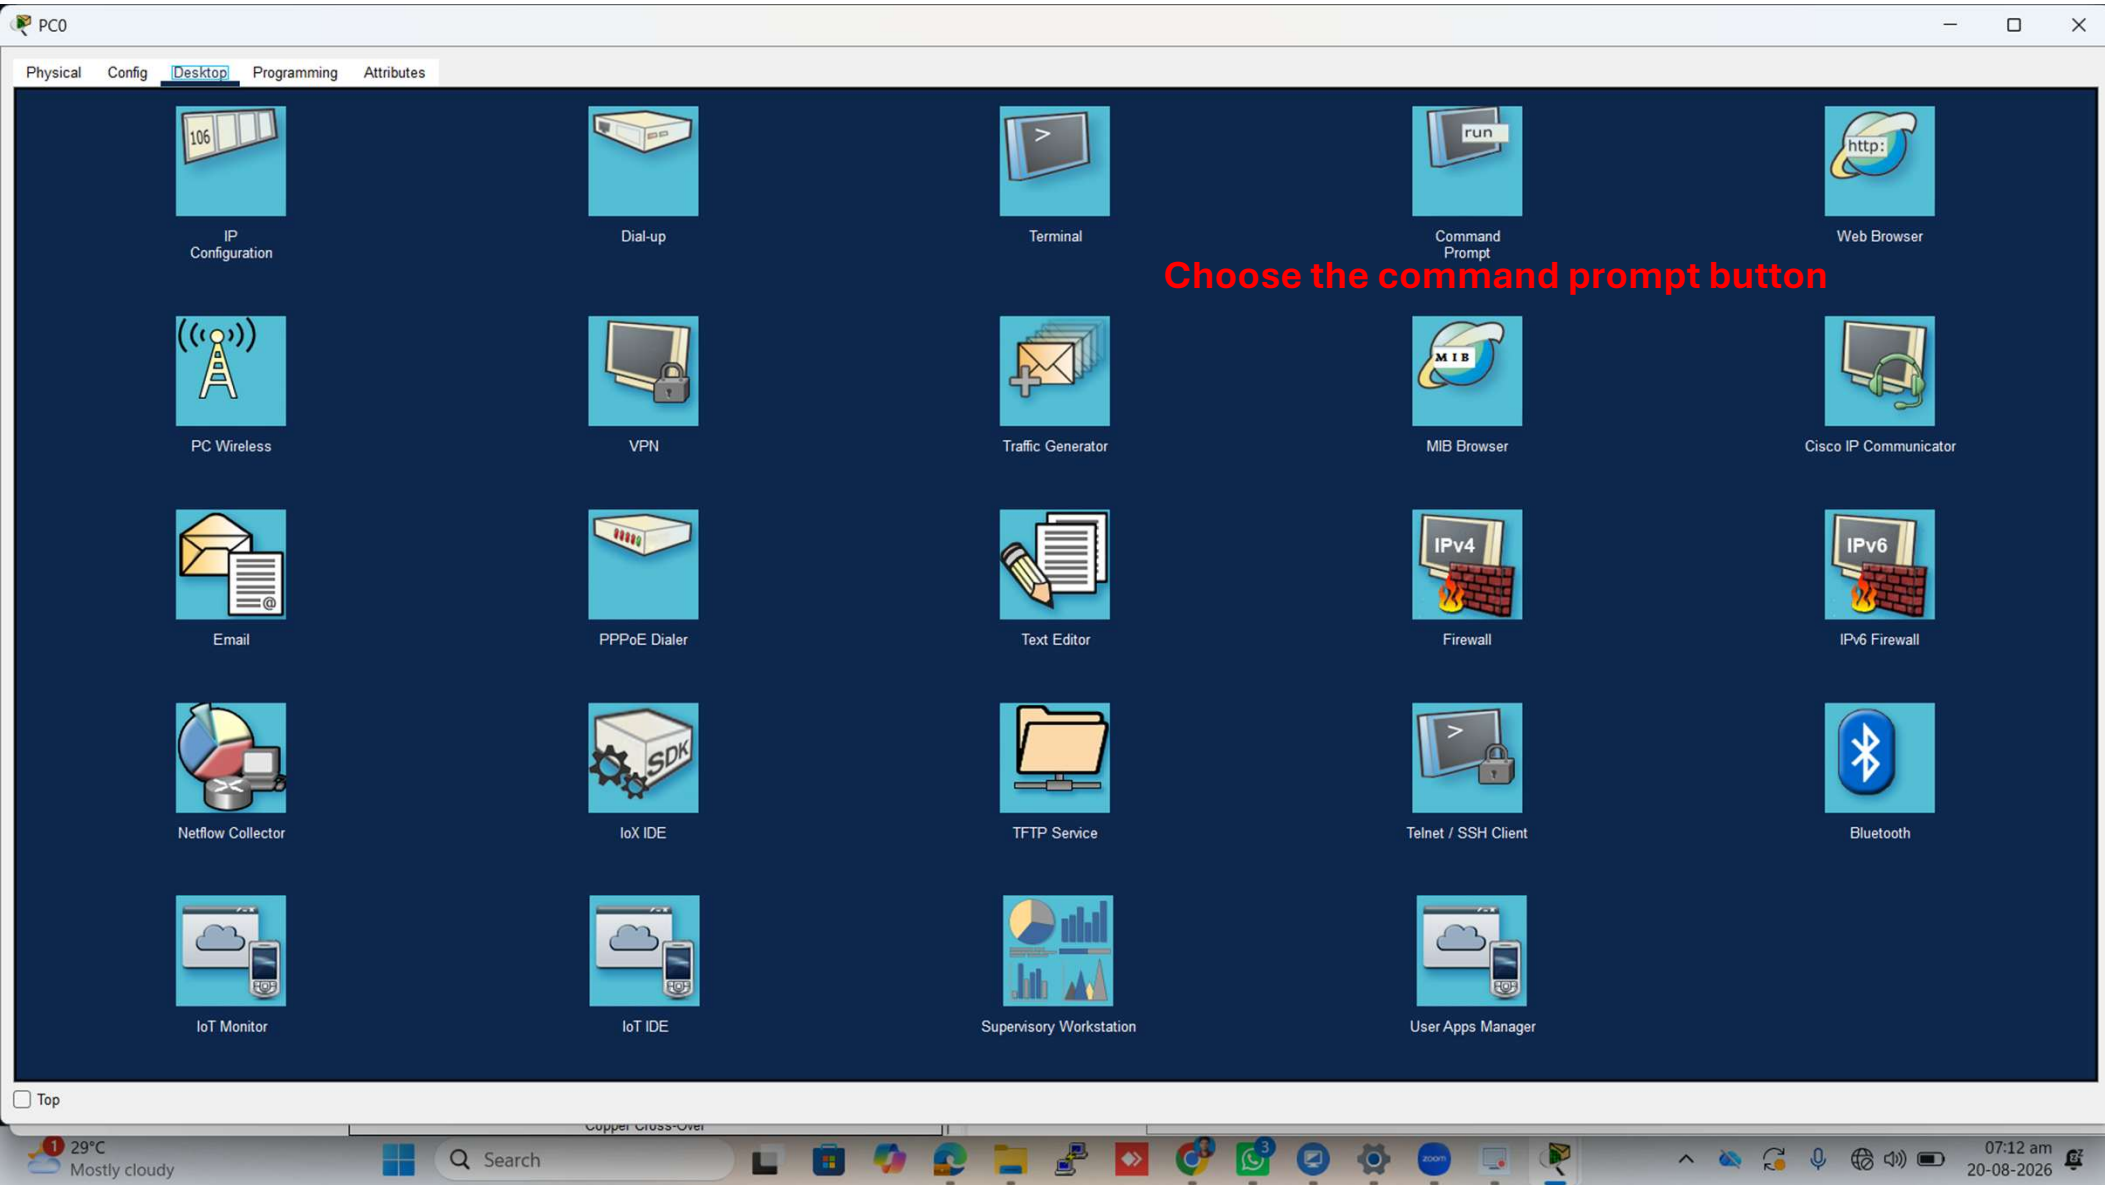

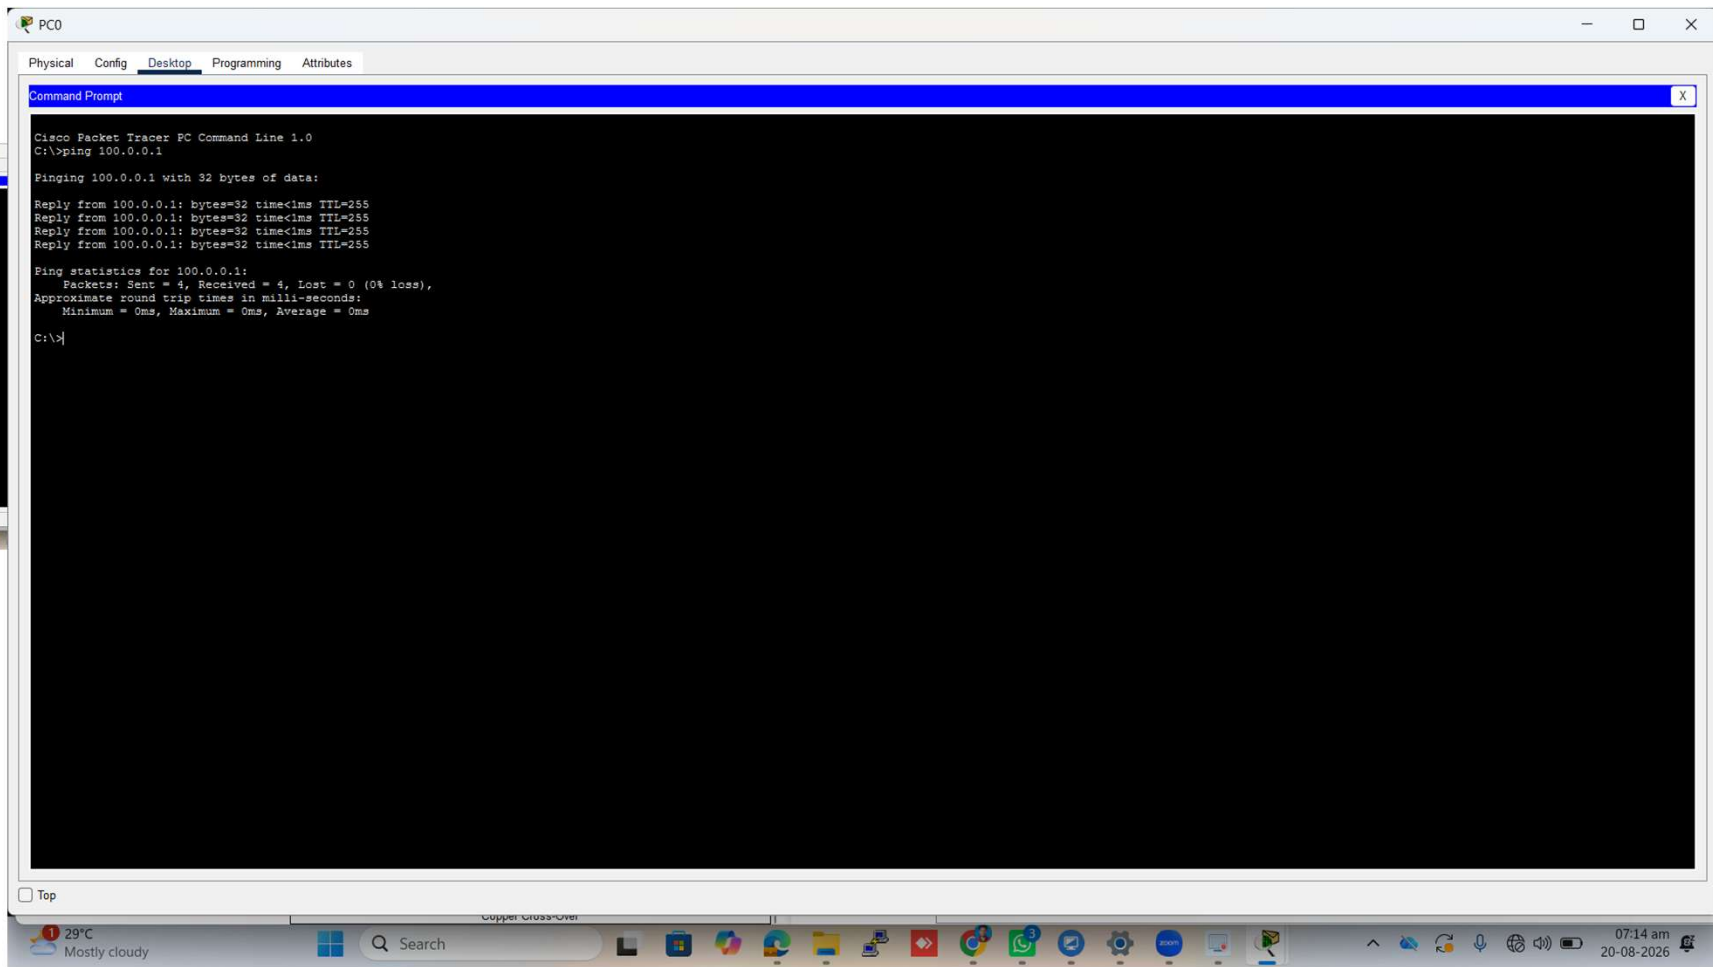

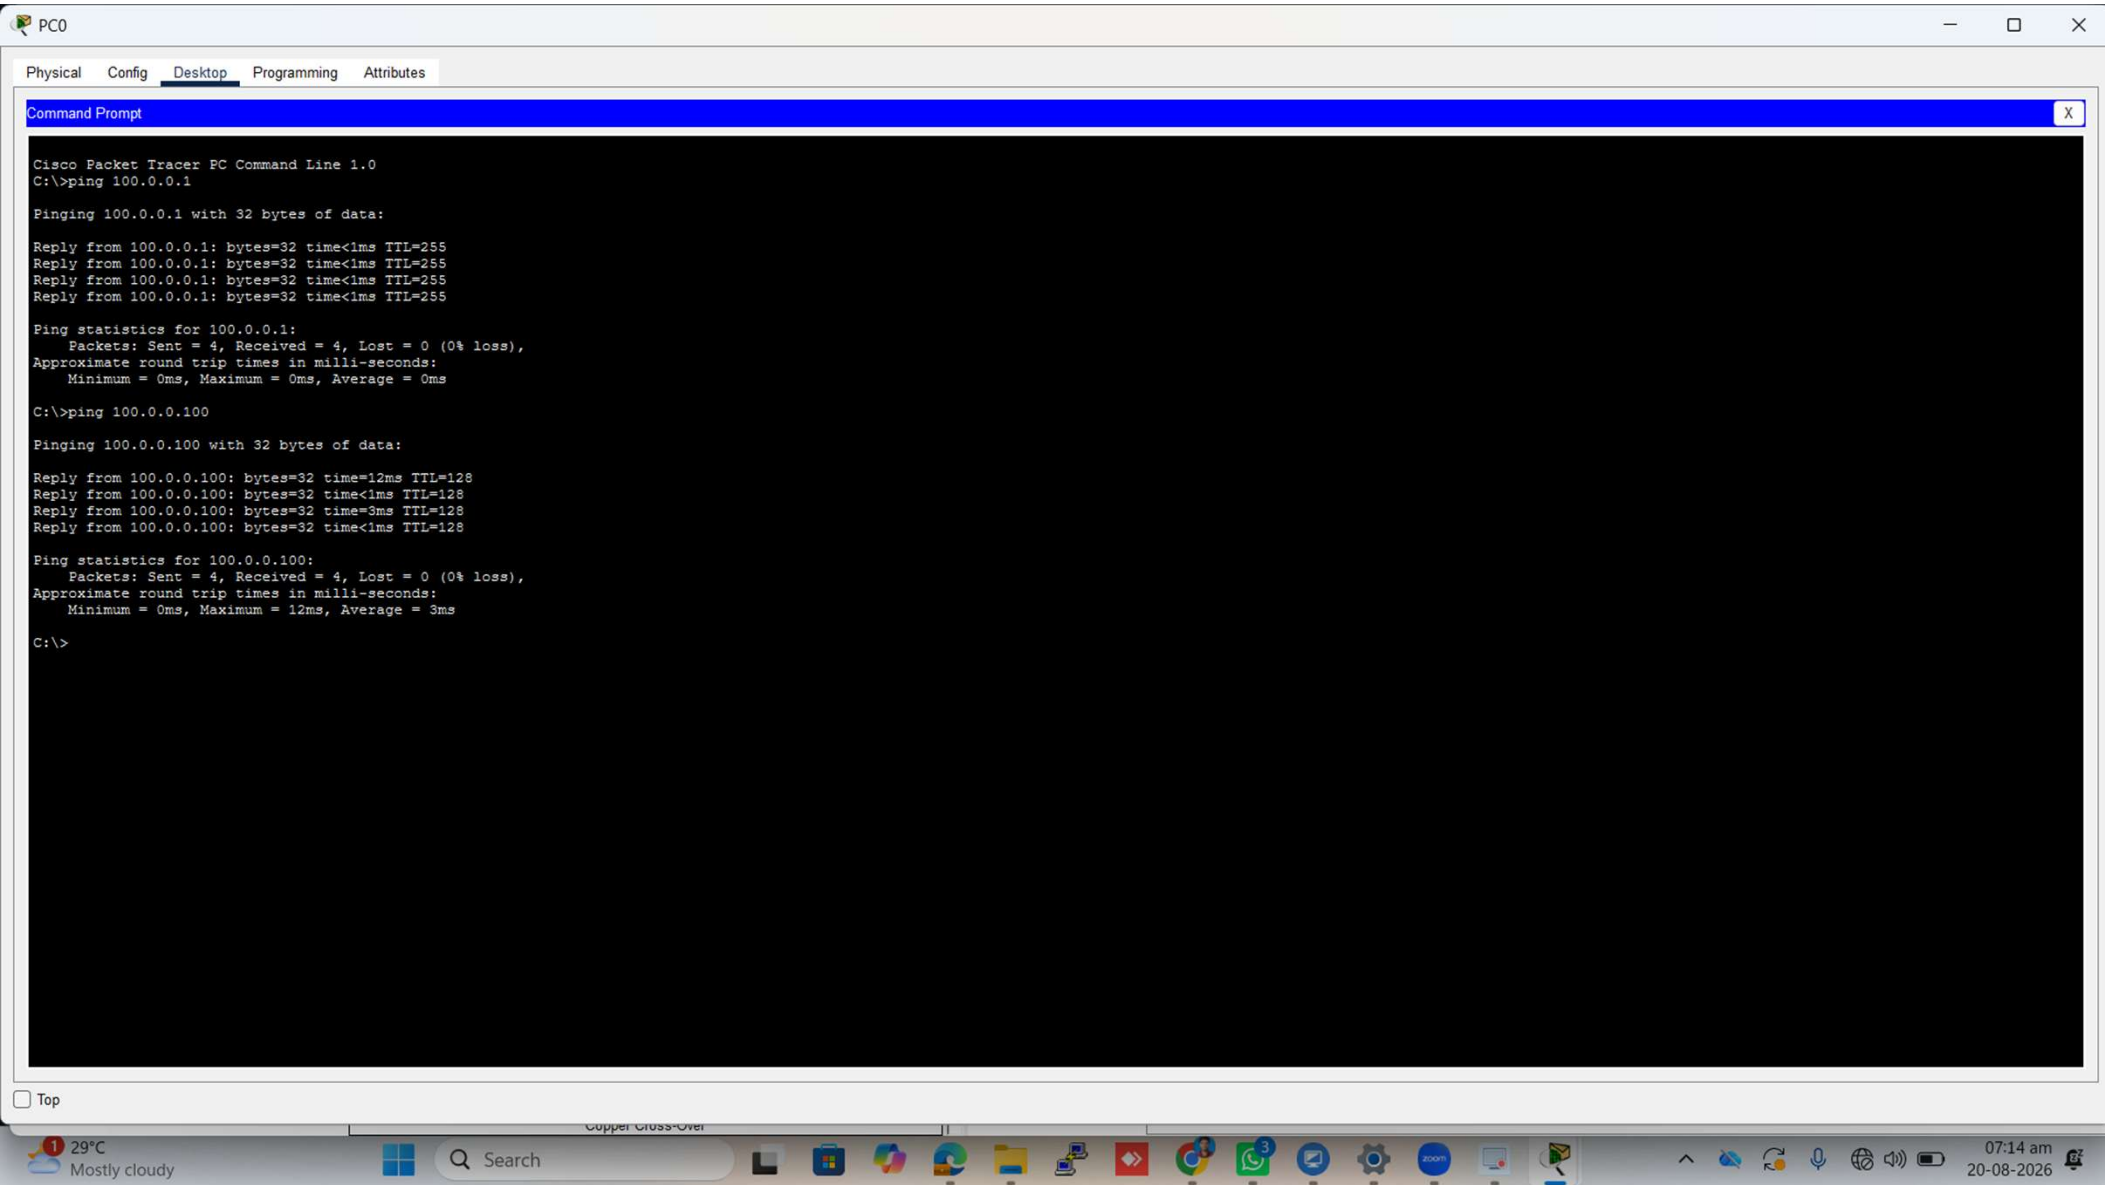

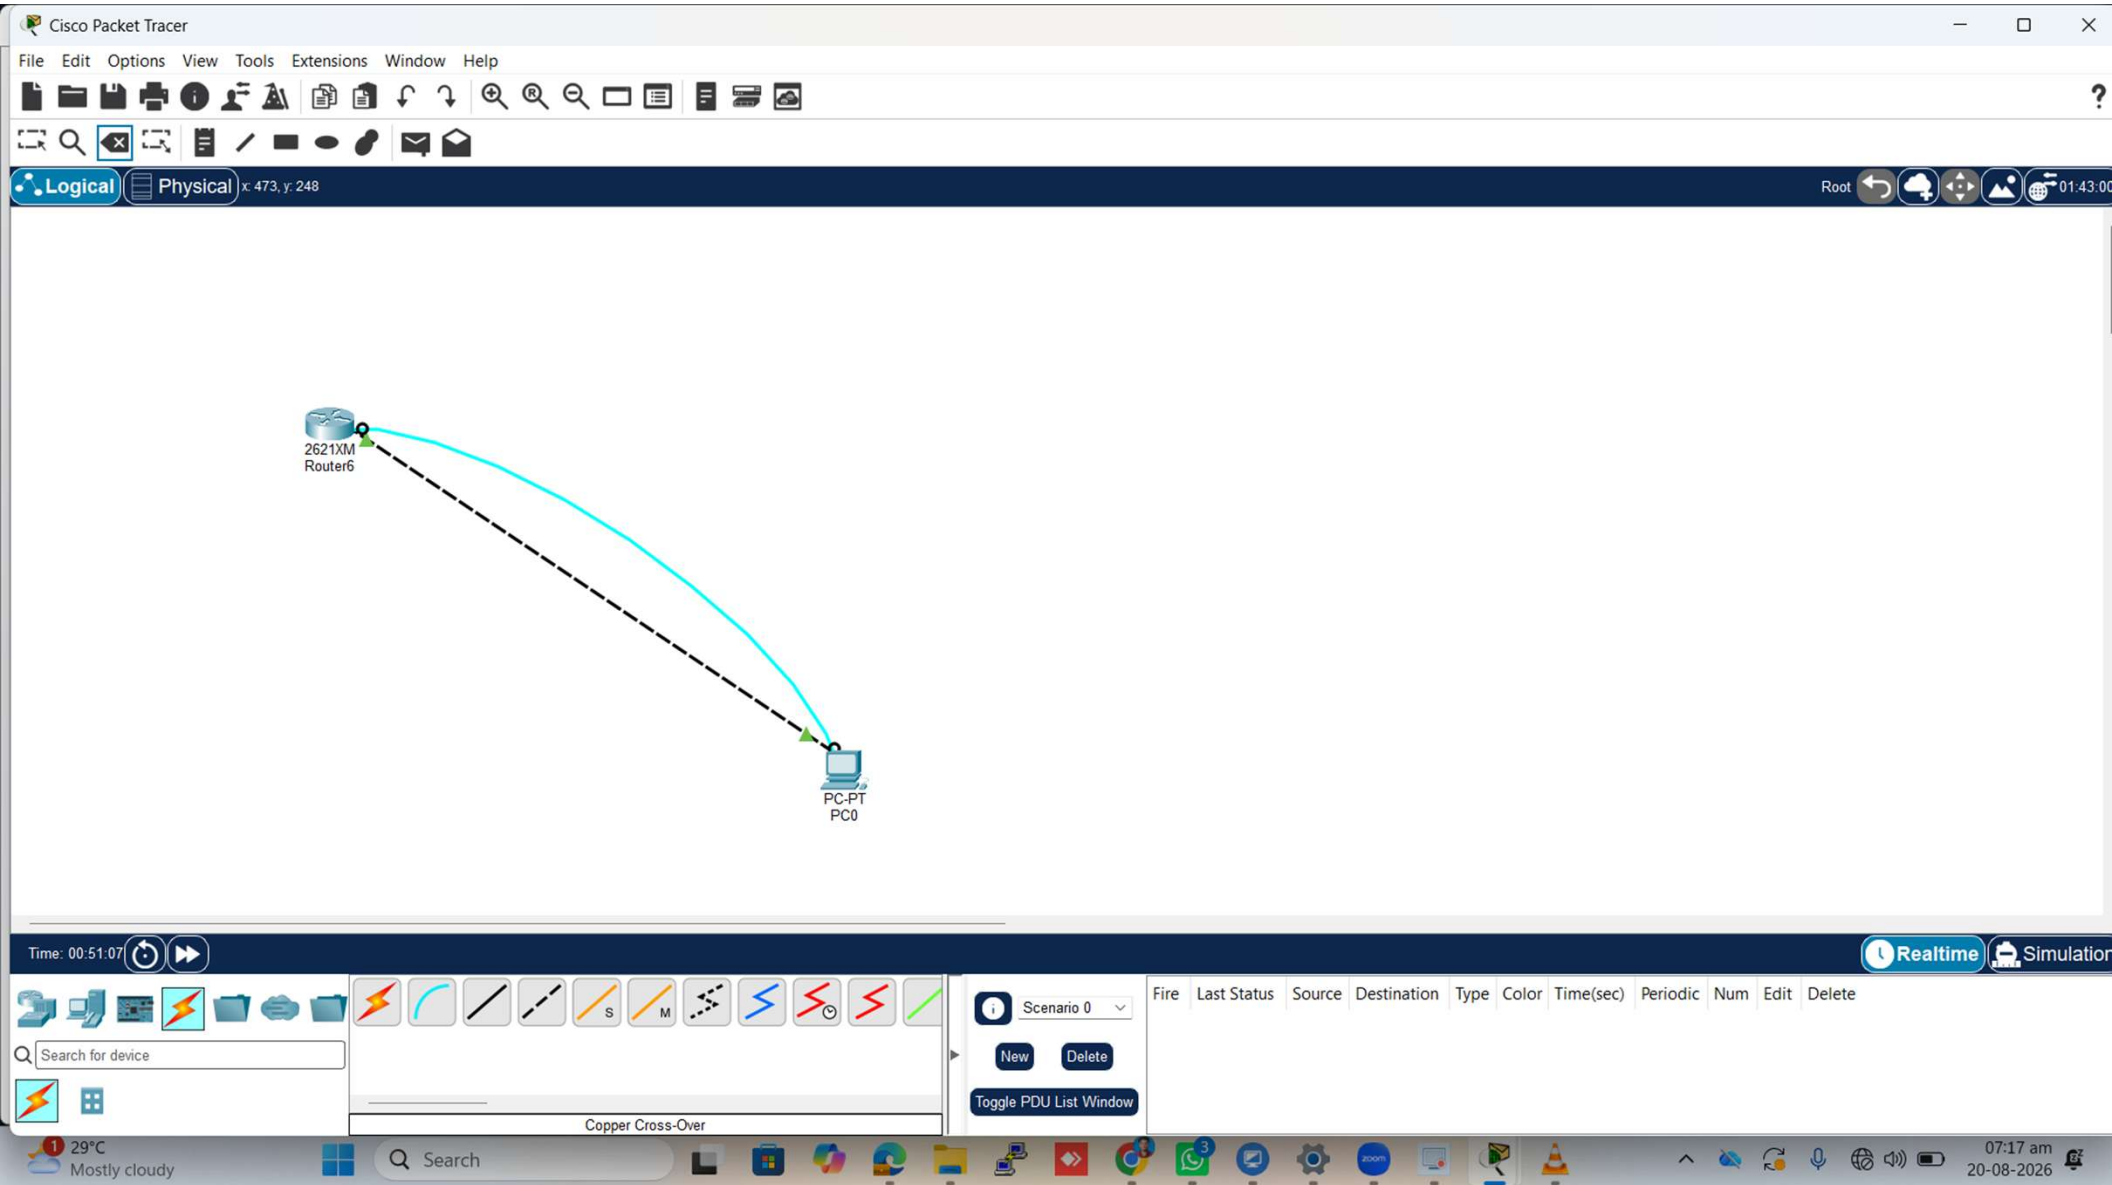

Cisco Packet Tracer

FileEditOptionsViewToolsExtensionsWindowHelp

LogicalPhysical

x 483, y: 253

Root

01:45:00

Time: 00:51:10

RealtimeSimulation

Search for device

Scenario 0

NewDelete

Toggle PDU List Window

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
------	-------------	--------	-------------	------	-------	-----------	----------	-----	------	--------

29°C Mostly cloudy

Search

07:17 am 20-08-2026

Cisco Packet Tracer

File Edit Options View Tools Extensions Window Help

?

Logical Physical x 1035, y: 214

Root

03:08:00

2621XM
Router6

Router at Thrid Floor

PC-PT
PC0

Time: 00:53:56

Realtime Simulation

Search for device

Copper Cross-Over

Scenario 0

New Delete


Toggle PDU List Window


Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
------	-------------	--------	-------------	------	-------	-----------	----------	-----	------	--------


29°C
Mostly cloudy

Search

07:20 am
20-08-2026

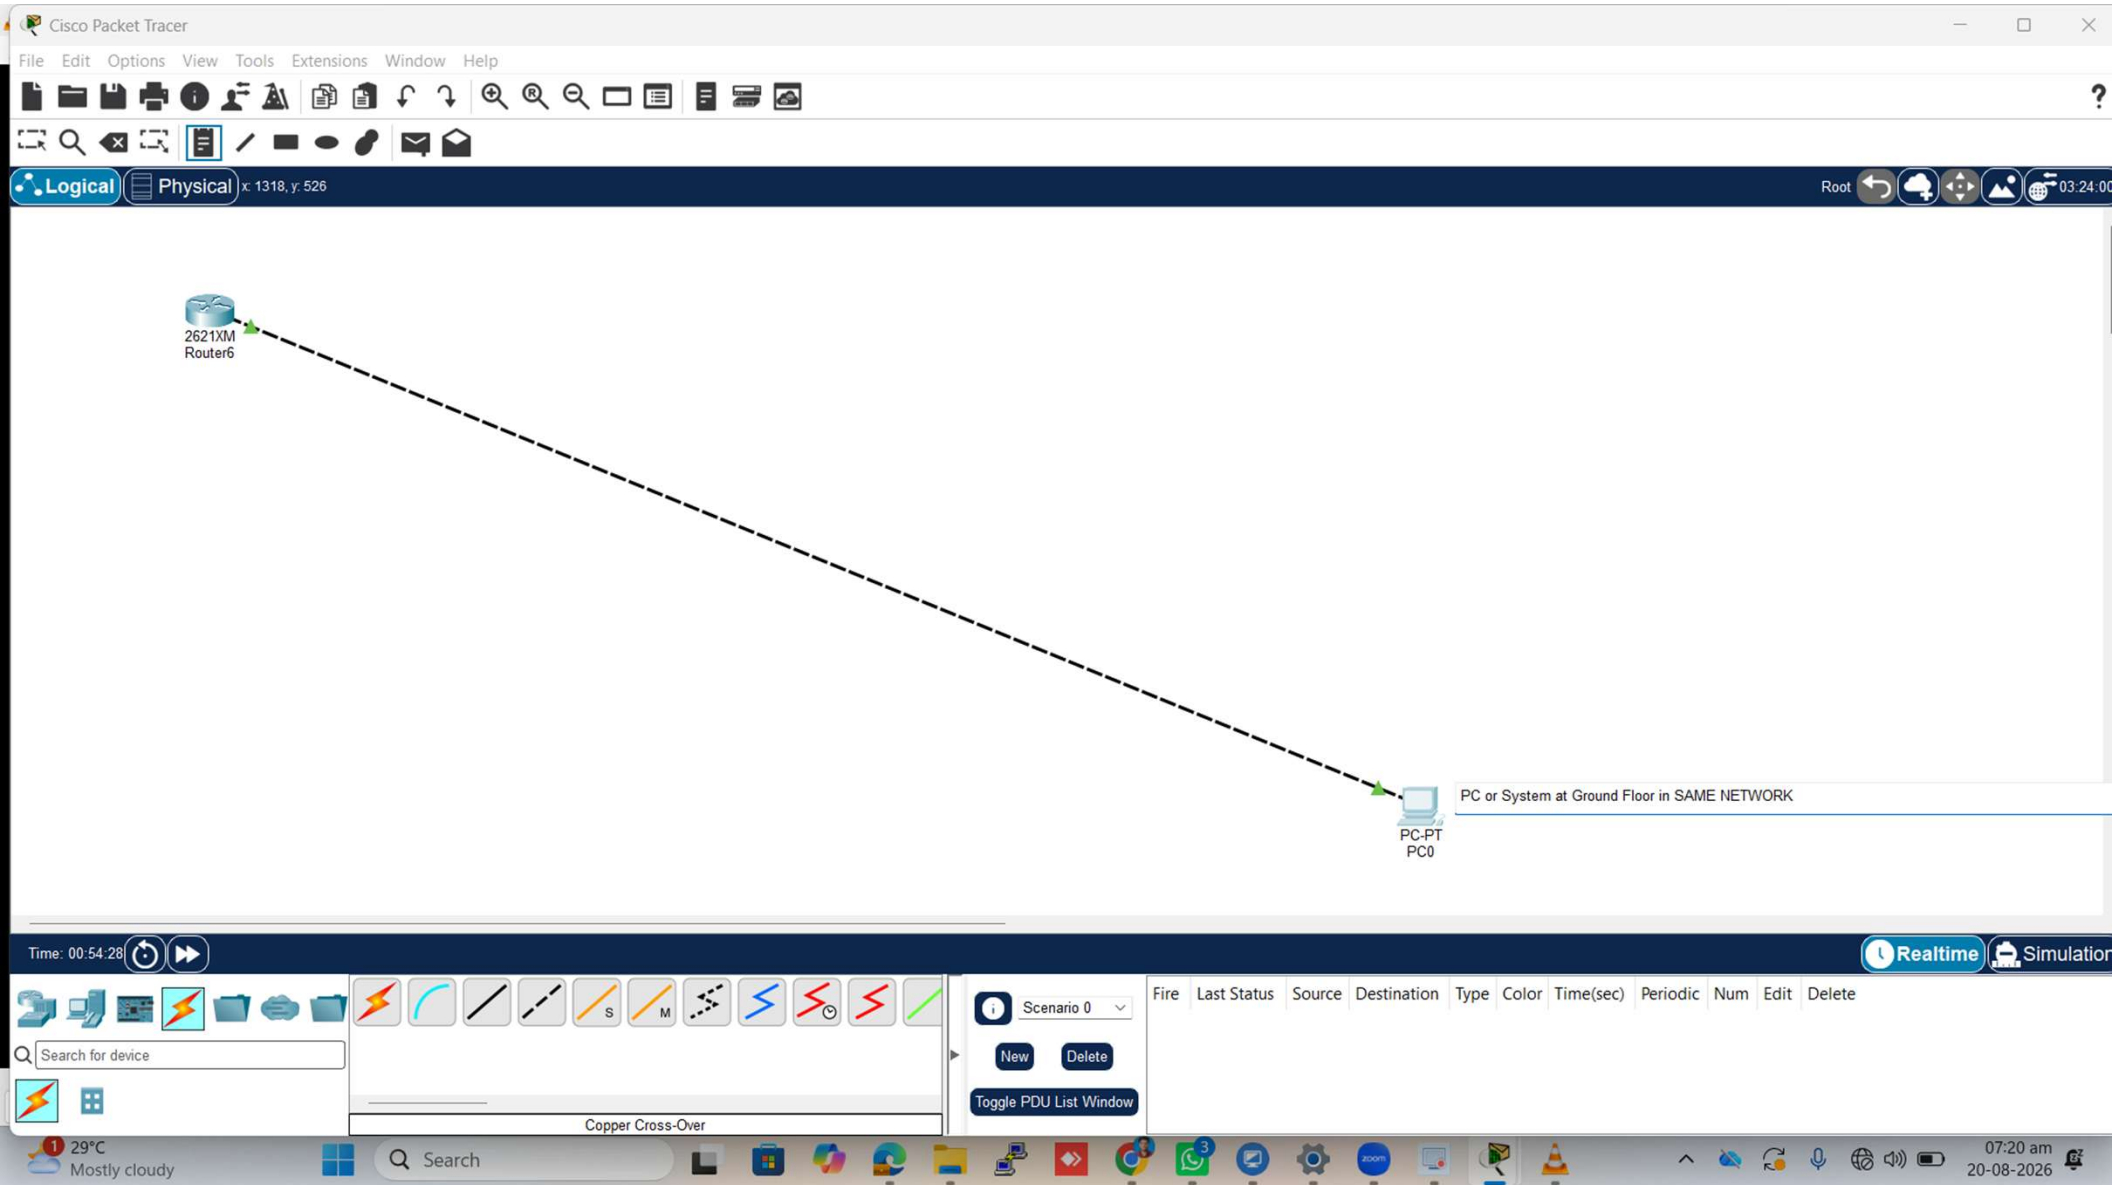

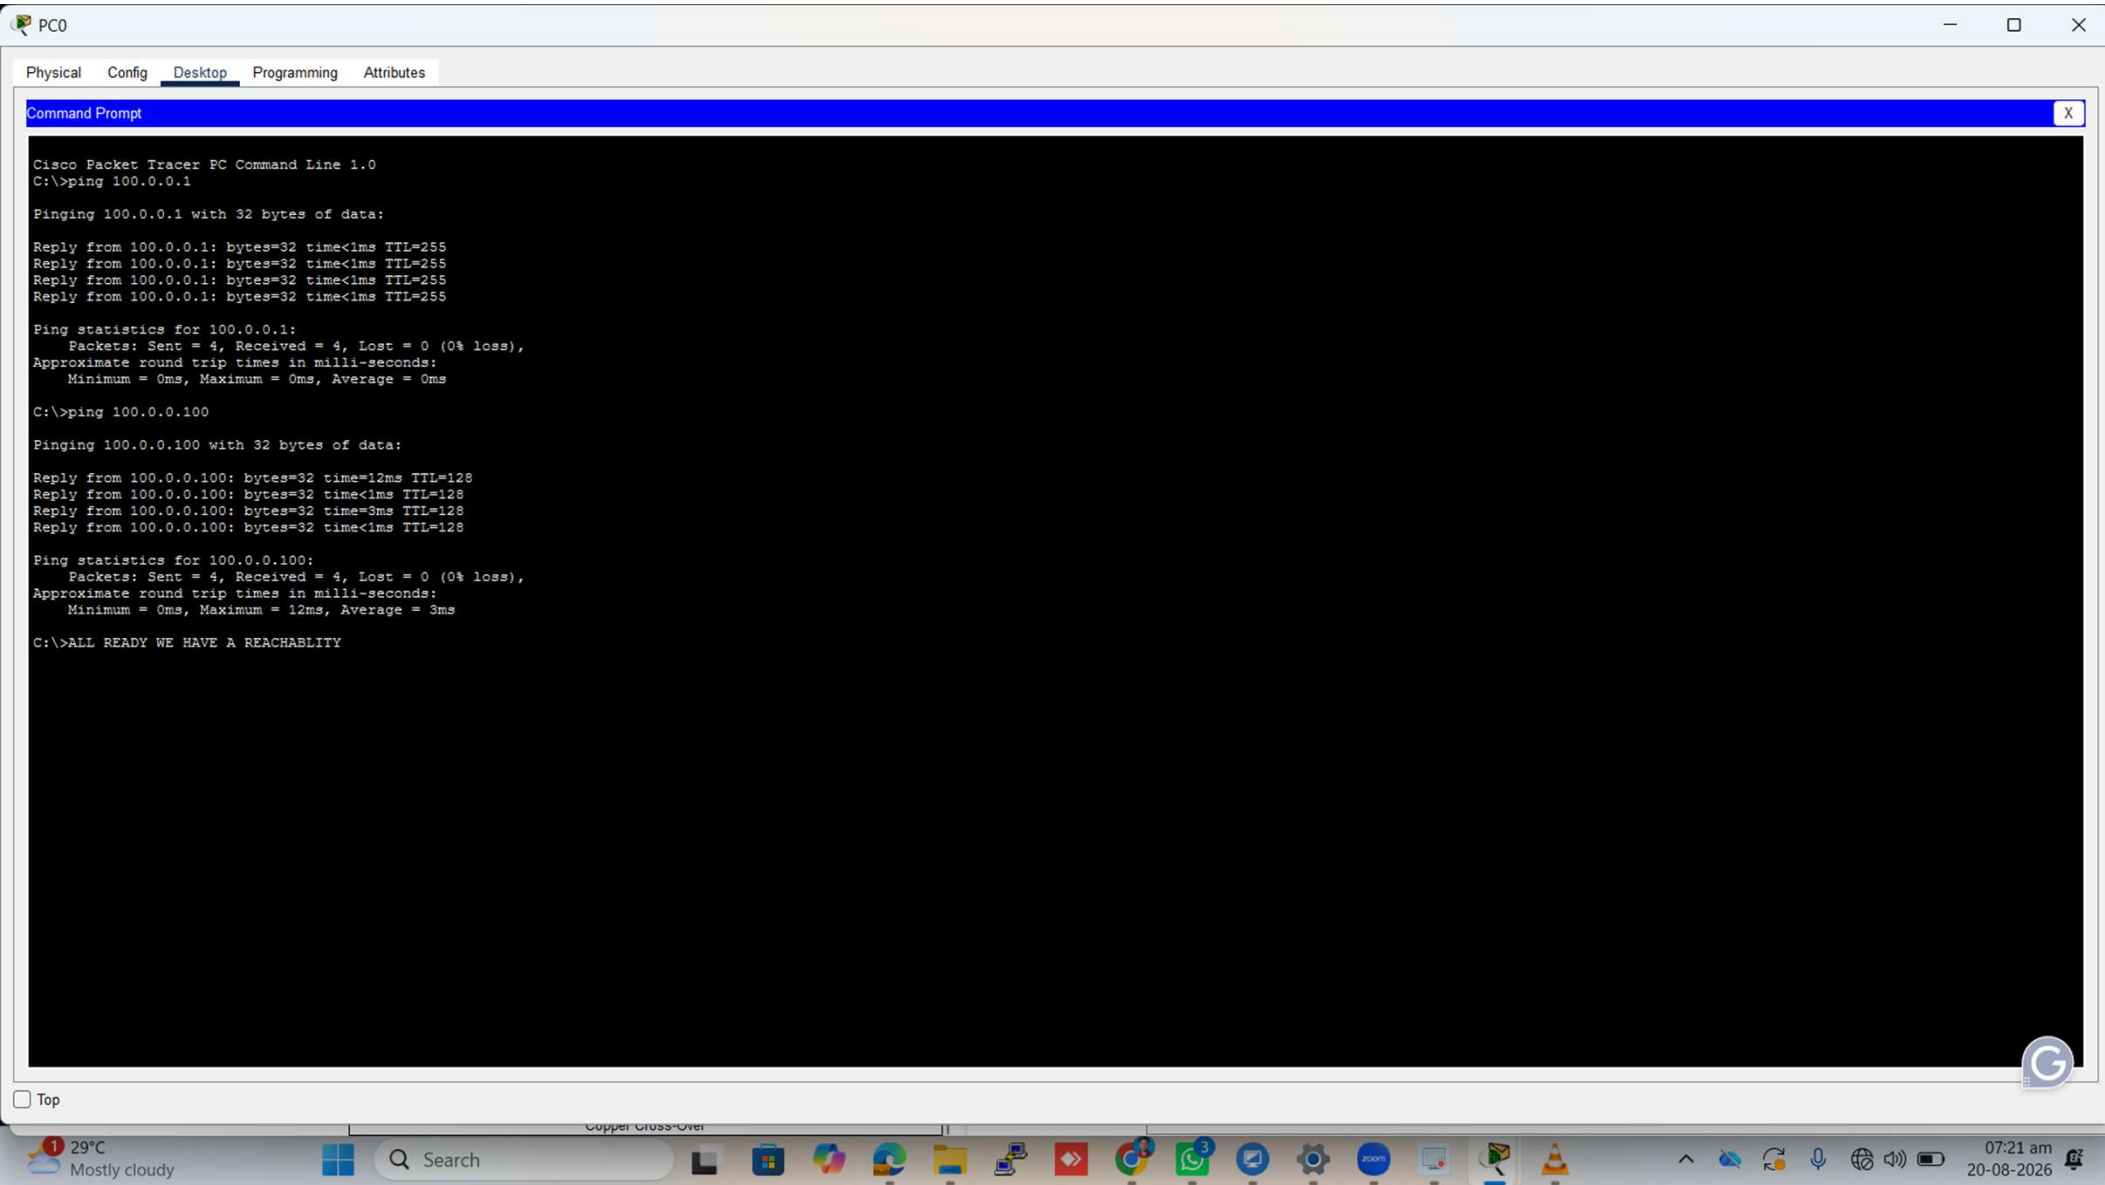

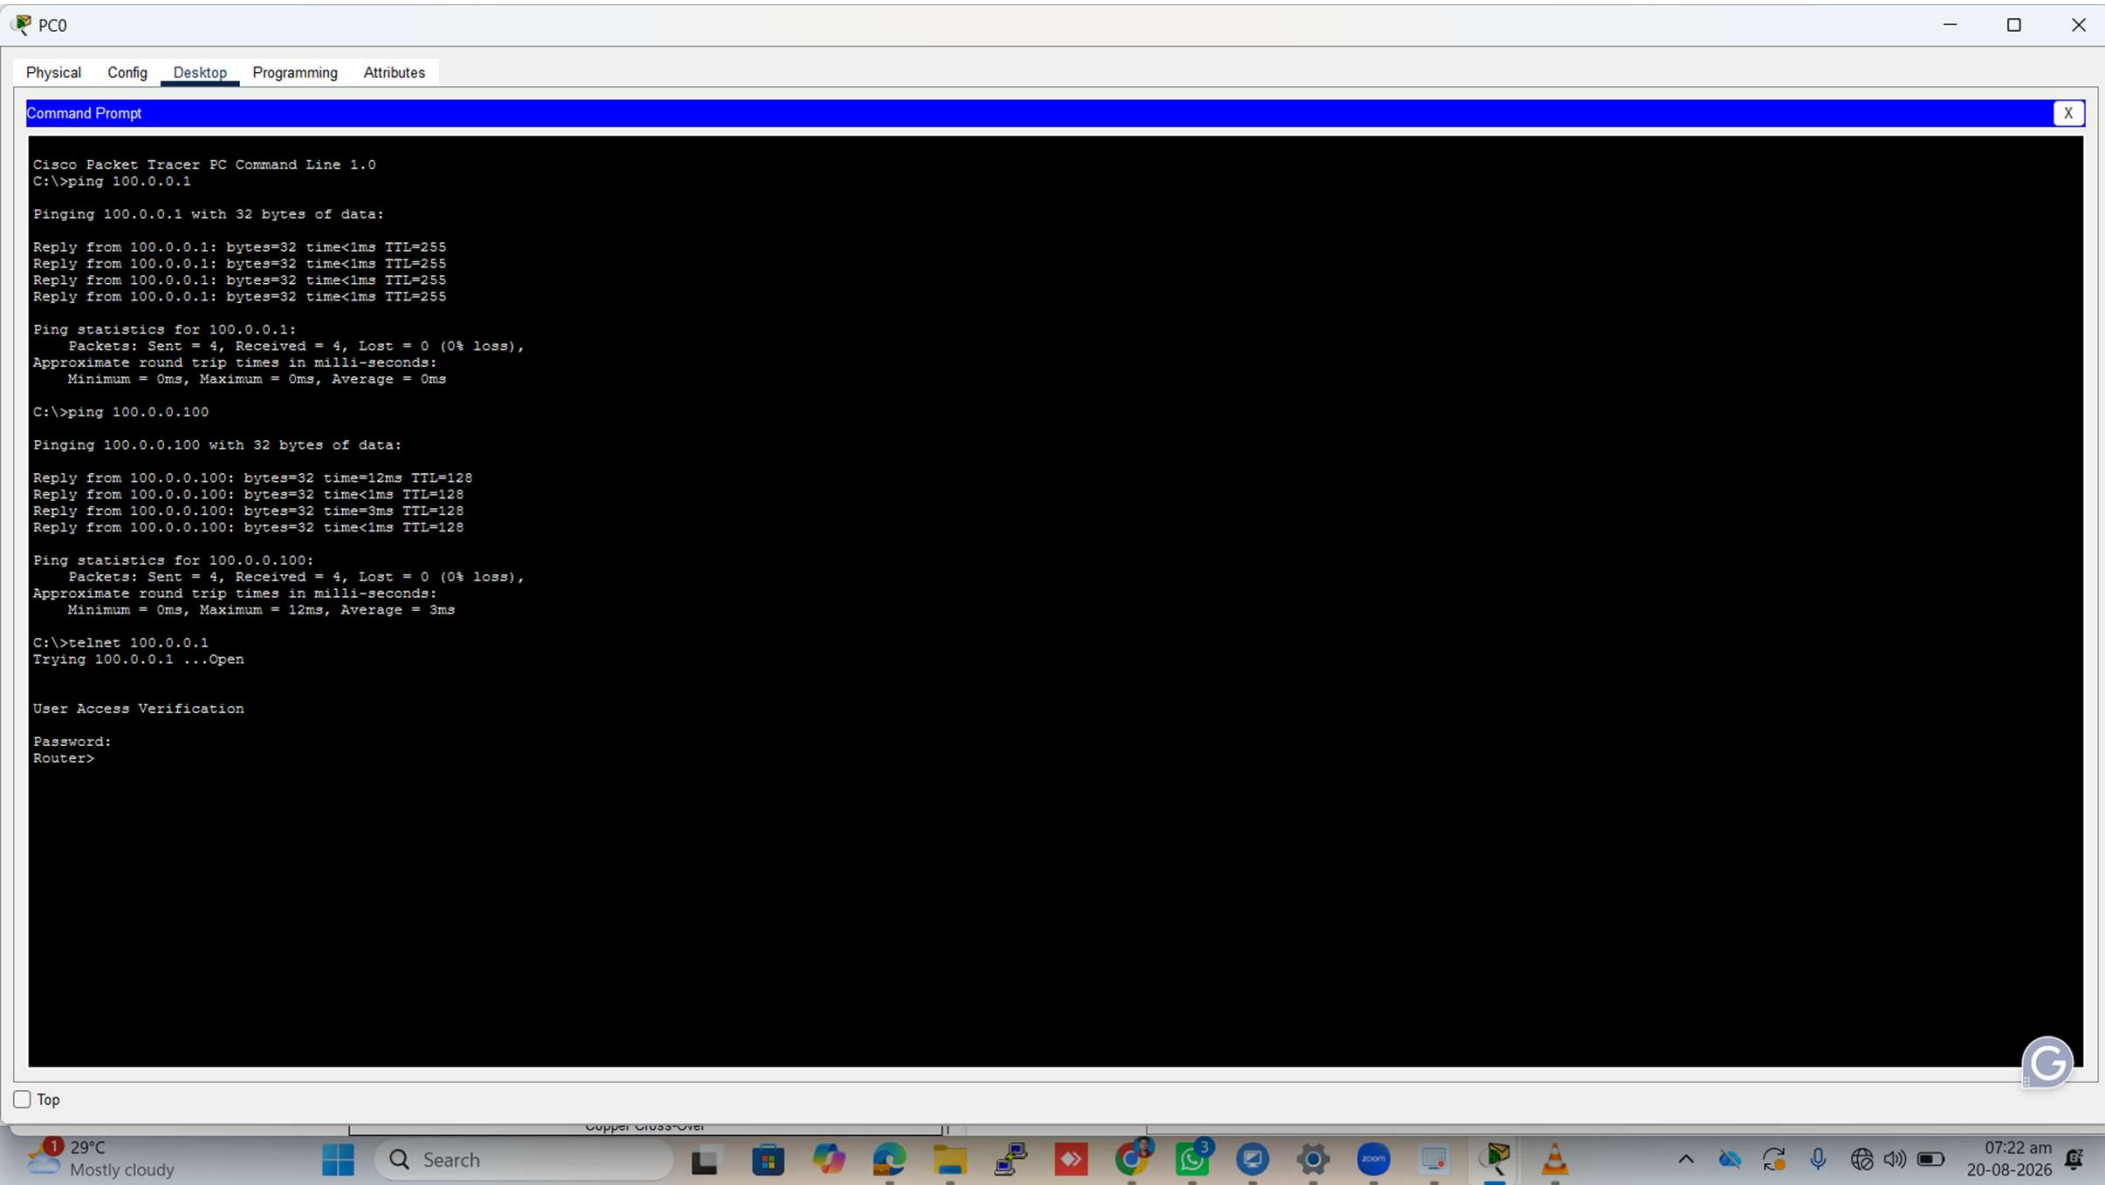

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 100.0.0.1

Pinging 100.0.0.1 with 32 bytes of data:

Reply from 100.0.0.1: bytes=32 time<1ms TTL=255
Reply from 100.0.0.1: bytes=32 time<1ms TTL=255
Reply from 100.0.0.1: bytes=32 time<1ms TTL=255
Reply from 100.0.0.1: bytes=32 time<1ms TTL=255

Ping statistics for 100.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 100.0.0.100

Pinging 100.0.0.100 with 32 bytes of data:

Reply from 100.0.0.100: bytes=32 time=12ms TTL=128
Reply from 100.0.0.100: bytes=32 time<1ms TTL=128
Reply from 100.0.0.100: bytes=32 time=3ms TTL=128
Reply from 100.0.0.100: bytes=32 time<1ms TTL=128

Ping statistics for 100.0.0.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 3ms

C:\>telnet 100.0.0.1
Trying 100.0.0.1 ...Open

User Access Verification

Password:
Router>en
Password:
Password:
Password:
% Bad secrets

Router>en
Password:
Password:
Password:
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#line vty 0 ?
<1-15> Last Line number
<cr>
Router(config)#line vty 0 15(no of user/ports)
```

Top

Copper Cross-Over

29°C Mostly cloudy

Search

07:24 am 20-08-2026

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Pinging 100.0.0.1 with 32 bytes of data:
Reply from 100.0.0.1: bytes=32 time<1ms TTL=255
Reply from 100.0.0.1: bytes=32 time<1ms TTL=255
Reply from 100.0.0.1: bytes=32 time<1ms TTL=255
Reply from 100.0.0.1: bytes=32 time<1ms TTL=255

Ping statistics for 100.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 100.0.0.100

Pinging 100.0.0.100 with 32 bytes of data:
Reply from 100.0.0.100: bytes=32 time=12ms TTL=128
Reply from 100.0.0.100: bytes=32 time<1ms TTL=128
Reply from 100.0.0.100: bytes=32 time=3ms TTL=128
Reply from 100.0.0.100: bytes=32 time<1ms TTL=128

Ping statistics for 100.0.0.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 12ms, Average = 3ms

C:\>telnet 100.0.0.1
Trying 100.0.0.1 ...Open

User Access Verification

Password:
Router>en
Password:
Password:
Password:
Password:
% Bad secrets

Router>en
Password:
Password:
Password:
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#line vty 0 ?
    <1-15> Last Line number
    <cr>
Router(config)#line vty 0 15
Router(config-line)#password Vedaanth
^
% Invalid input detected at '^' marker.

Router(config-line)#login local
Router(config-line)#exit
Router(config)#exit
Router#
```


Top

Copper Cross-Over

29°C Mostly cloudy

Search

07:25 am 20-08-2026

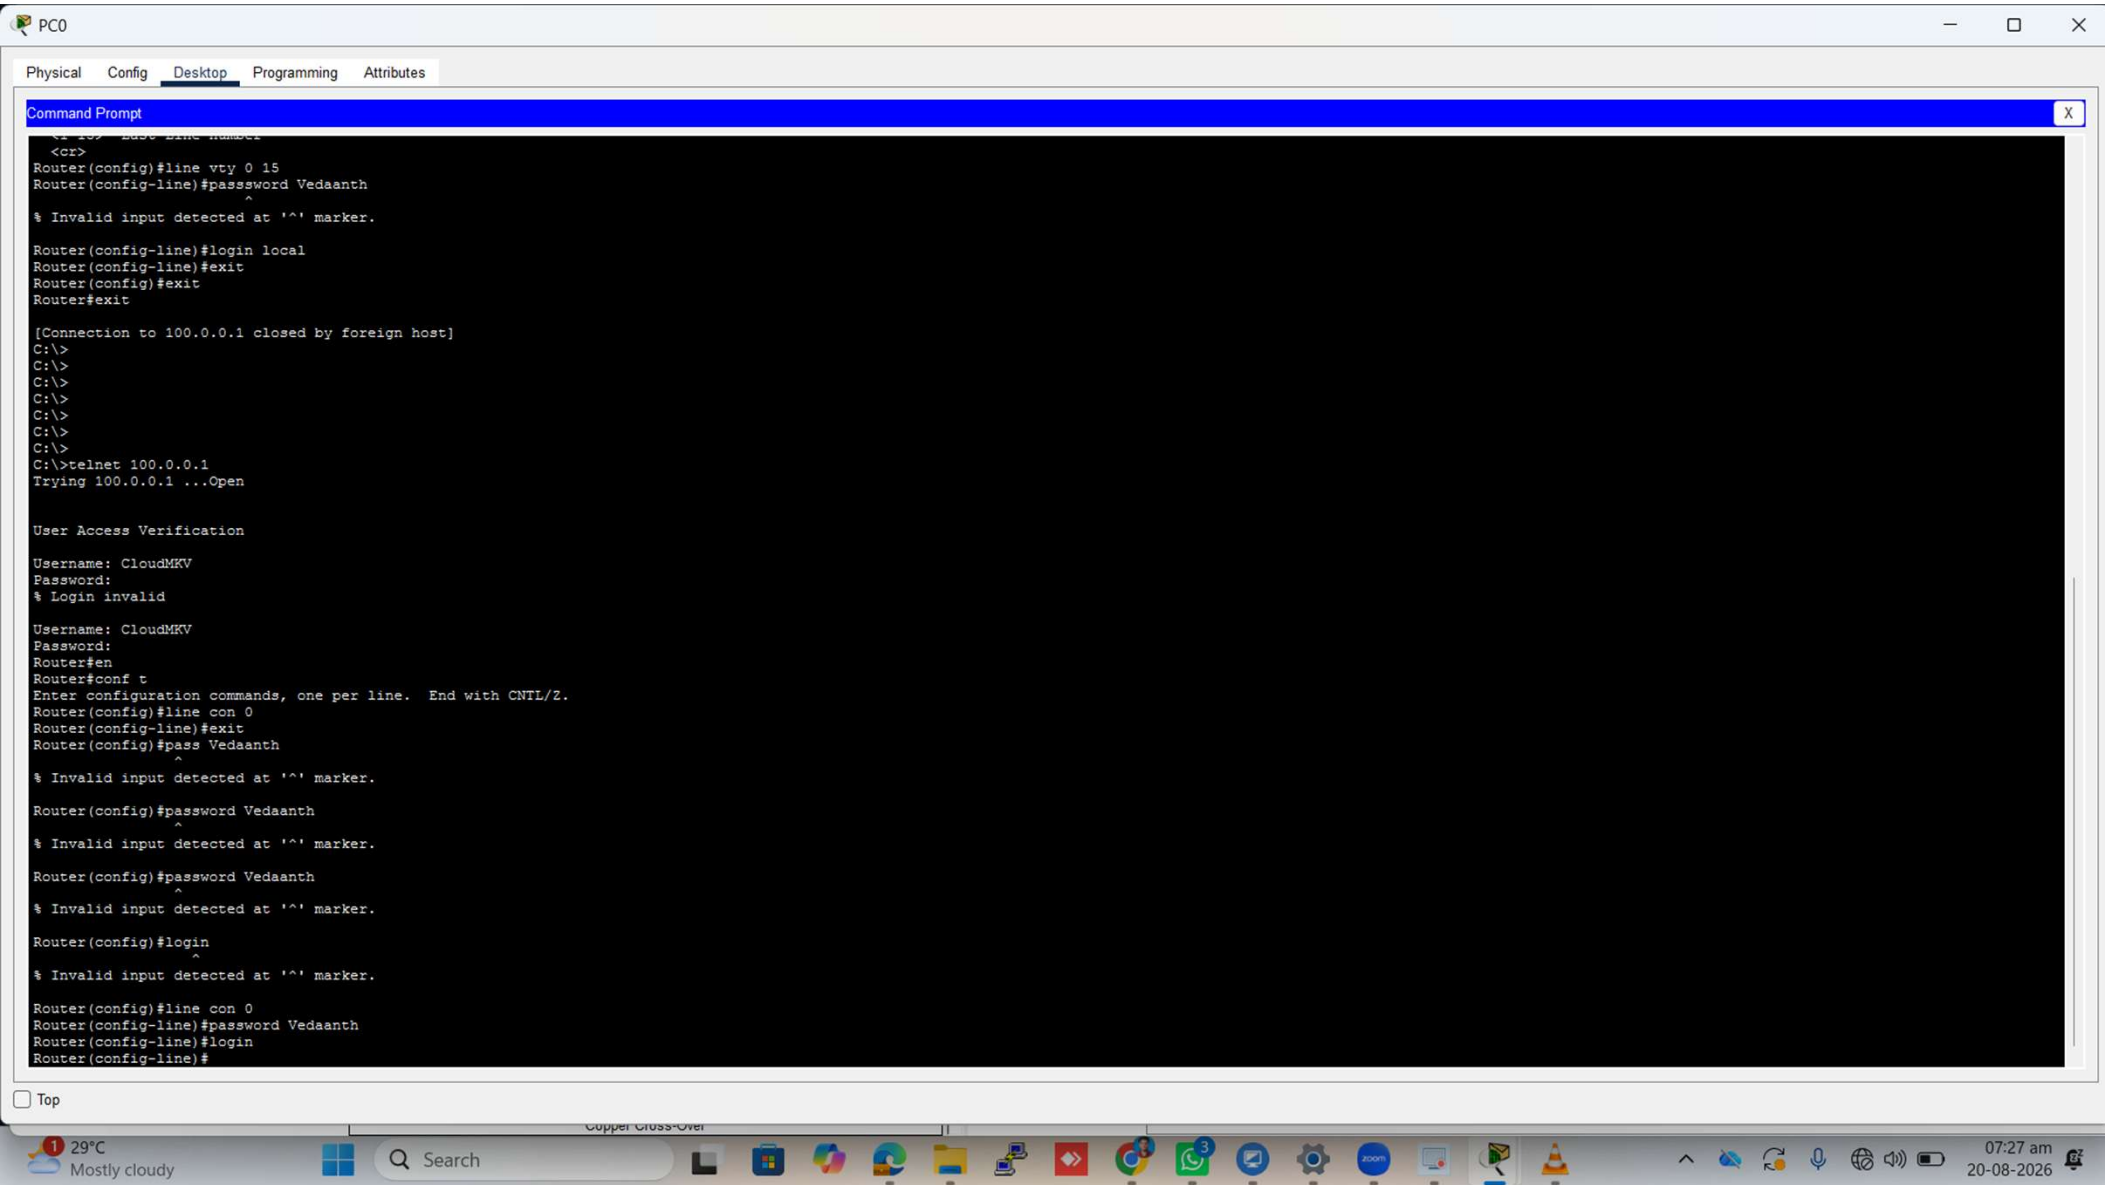



PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Pinging 100.0.0.100 with 32 bytes of data:

Reply from 100.0.0.100: bytes=32 time=5ms TTL=128
Reply from 100.0.0.100: bytes=32 time=6ms TTL=128
Reply from 100.0.0.100: bytes=32 time=4ms TTL=128
Reply from 100.0.0.100: bytes=32 time<1ms TTL=128

Ping statistics for 100.0.0.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 6ms, Average = 3ms

C:\>telnet 100.0.0.1
Trying 100.0.0.1 ...Open


User Access Verification

Username: CloudMKV
Password:
Router#en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#line con 0
Router(config-line)#password Vedaanth
Router(config-line)#login
Router(config-line)#exit
Router(config)#exit
Router#exit

[Connection to 100.0.0.1 closed by foreign host]
C:\>telnet 100.0.0.1
Trying 100.0.0.1 ...Open

User Access Verification

Username: CloudMKV
Password:
Router#sh ip int br
Interface      IP-Address      OK? Method Status          Protocol
FastEthernet0/0 100.0.0.1       YES manual up              up
FastEthernet0/1 unassigned      YES unset  administratively down down
Router#enable sec Megha Sree
^
```



Physical Config Desktop Programming Attributes

Command Prompt

X

```
Pinging 100.0.0.100 with 32 bytes of data:
Reply from 100.0.0.100: bytes=32 time=5ms TTL=128
Reply from 100.0.0.100: bytes=32 time=6ms TTL=128
Reply from 100.0.0.100: bytes=32 time=4ms TTL=128
Reply from 100.0.0.100: bytes=32 time<1ms TTL=128

Ping statistics for 100.0.0.100:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 6ms, Average = 3ms

C:\>telnet 100.0.0.1
Trying 100.0.0.1 ...Open

User Access Verification

Username: CloudMKV
Password:
Router#en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#line con 0
Router(config-line)#password Vedaanth
Router(config-line)#login
Router(config-line)#exit
Router(config)#exit
Router#exit

[Connection to 100.0.0.1 closed by foreign host]
C:\>telnet 100.0.0.1
Trying 100.0.0.1 ...Open

User Access Verification

Username: CloudMKV
Password:
Router#sh ip int br
Interface      IP-Address      OK? Method Status          Protocol
FastEthernet0/0  100.0.0.1       YES manual up              up
FastEthernet0/1  unassigned      YES unset  administratively down down
```