




!!!!!! Neenga kudutha fees !!!!!
10,000 RS

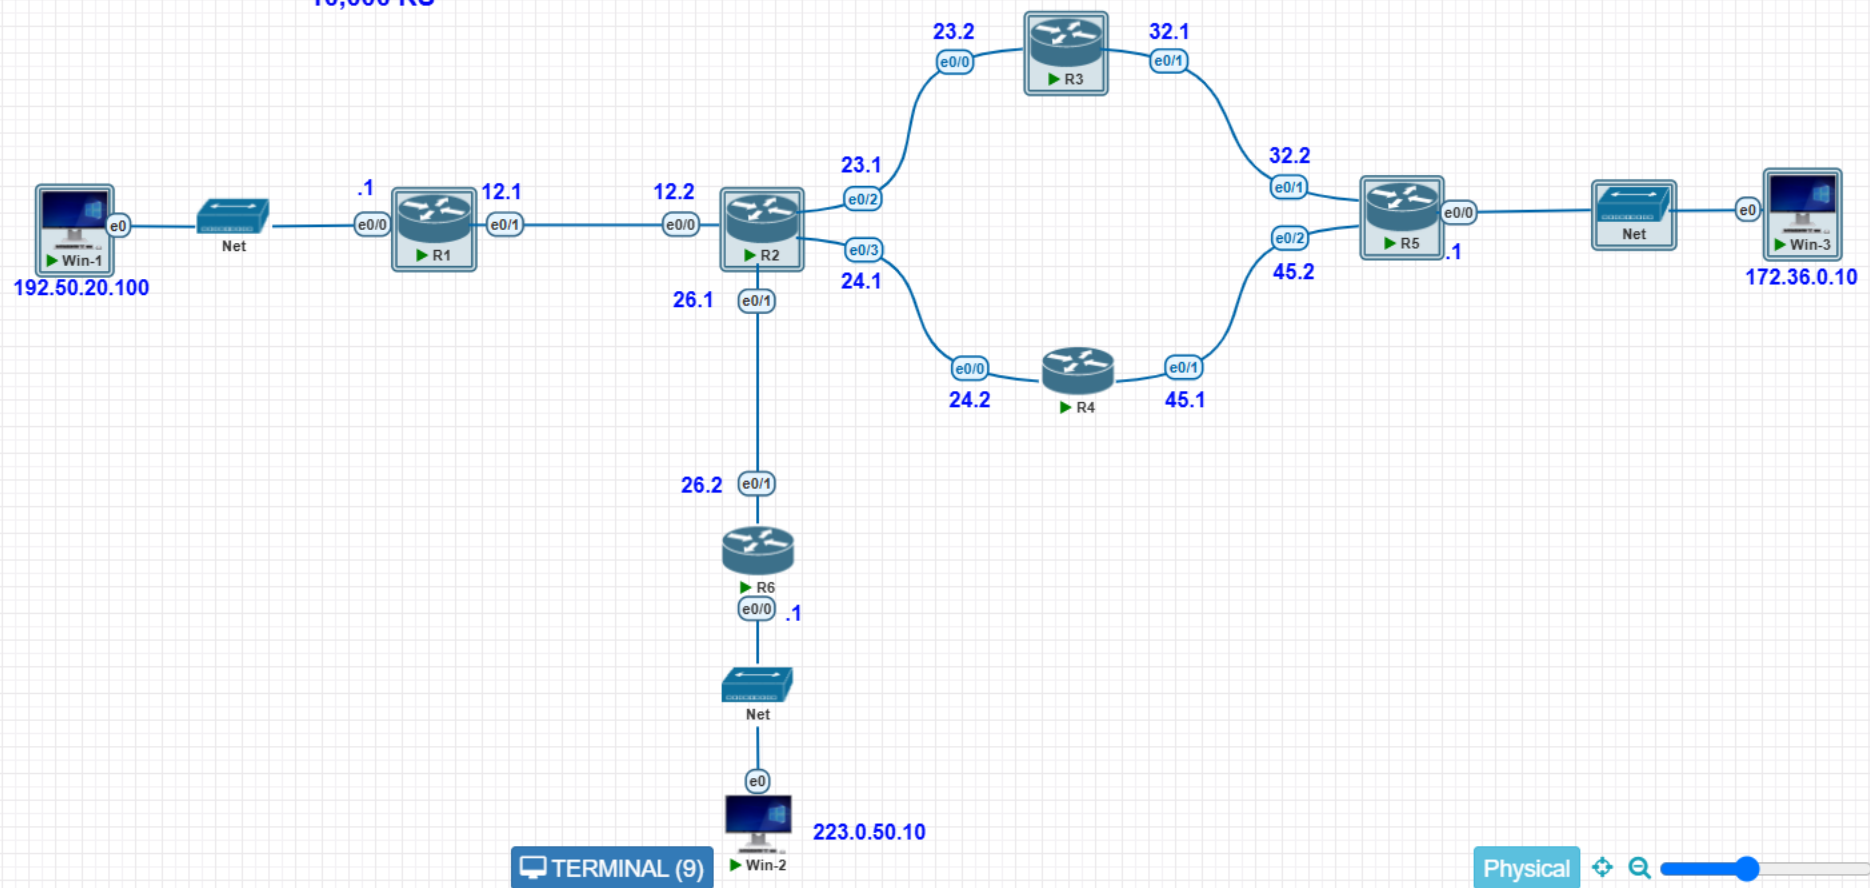

TERMINAL (9)

Physical 01 : 00 : 00 START

```

Ethernet0/2                unassigned        YES TFTP        down            down
Ethernet0/3                unassigned        YES TFTP        down            down
R1(config)#ip route 23.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 24.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 26.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 223.0.50.0 255.255.255.0 12.0.0.2
R1(config)#ip route 32.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 45.0.0.0 255.0.0.0 12.0.0.2
R1(config)#ip route 172.36.0.0 255.255.0.0 12.0.0.2
R1(config)#do sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

    12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       12.0.0.0/8 is directly connected, Ethernet0/1
L       12.0.0.1/32 is directly connected, Ethernet0/1
S       23.0.0.0/8 [1/0] via 12.0.0.2
S       24.0.0.0/8 [1/0] via 12.0.0.2
S       26.0.0.0/8 [1/0] via 12.0.0.2
S       32.0.0.0/8 [1/0] via 12.0.0.2
S       45.0.0.0/8 [1/0] via 12.0.0.2
S       172.36.0.0/16 [1/0] via 12.0.0.2
    192.50.20.0/24 is variably subnetted, 2 subnets, 2 masks
C       192.50.20.0/24 is directly connected, Ethernet0/0
L       192.50.20.1/32 is directly connected, Ethernet0/0
S       223.0.50.0/24 [1/0] via 12.0.0.2
R1(config)#

```

```
R2#config t
Enter configuration commands, one per line. End with CNTL/Z.
R2(config)#ip route 192.50.20.0 255.255.255.0 12.0.0.1
R2(config)#ip route 223.0.50.0 255.255.255.0 26.0.0.2
R2(config)#ip route 32.0.0.0 255.0.0.0 23.0.0.2
R2(config)#ip route 172.36.0.0 255.255.0.0 23.0.0.2
R2(config)#do sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

12.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    12.0.0.0/8 is directly connected, Ethernet0/0
L    12.0.0.2/32 is directly connected, Ethernet0/0
23.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    23.0.0.0/8 is directly connected, Ethernet0/2
L    23.0.0.1/32 is directly connected, Ethernet0/2
24.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    24.0.0.0/8 is directly connected, Ethernet0/3
L    24.0.0.1/32 is directly connected, Ethernet0/3
26.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C    26.0.0.0/8 is directly connected, Ethernet0/1
L    26.0.0.1/32 is directly connected, Ethernet0/1
S    32.0.0.0/8 [1/0] via 23.0.0.2
S    172.36.0.0/16 [1/0] via 23.0.0.2
S    192.50.20.0/24 [1/0] via 12.0.0.1
S    223.0.50.0/24 [1/0] via 26.0.0.2
R2(config)#
```

```
R3(config)#do sh ip route
```

```
R3(config)#
```

R1 x R2 x R3 x R5 x R6 x Win-1 x Win-2 x Win-3 x R4 x

```
R4#
R4#sh ip int br
Interface                IP-Address      OK? Method Status      Protocol
Ethernet0/0              24.0.0.2        YES manual  up          up
Ethernet0/1              45.0.0.1        YES manual  up          up
Ethernet0/2              unassigned      YES TFTP    down        down
Ethernet0/3              unassigned      YES TFTP    down        down
R4#
```

labs.surrennetwork.com/store/public/admin/labs/terminal?terminals=eyJ0YWJzljpbeyJuY...

linked in Webmail - Main Networking Acade... Online typing WPM... NCCR Biometric Att... HP Product Warrant... Fujitsu Technical Su... D-LINK HP » Device Status All Bookmarks

R1 x R2 x R3 x R5 x R6 x Win-1 x Win-2 x Win-3 x R4 x

Ethernet0/1 32.0.0.2 YES manual up up
Ethernet0/2 45.0.0.2 YES manual up up
Ethernet0/3 unassigned YES TFTP down down
R5(config)#ip route 192.50.20.0 255.255.255.0 32.0.0.1
R5(config)#ip route 12.0.0.0 255.0.0.0 32.0.0.1
R5(config)#ip route 23.0.0.0 255.0.0.0 32.0.0.1
R5(config)#ip route 26.0.0.0 255.0.0.0 32.0.0.1
R5(config)#ip route 223.0.50.0 255.255.255.0 32.0.0.1
R5(config)#do sh ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S 12.0.0.0/8 [1/0] via 32.0.0.1
S 23.0.0.0/8 [1/0] via 32.0.0.1
S 26.0.0.0/8 [1/0] via 32.0.0.1
32.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 32.0.0.0/8 is directly connected, Ethernet0/1
L 32.0.0.2/32 is directly connected, Ethernet0/1
45.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C 45.0.0.0/8 is directly connected, Ethernet0/2
L 45.0.0.2/32 is directly connected, Ethernet0/2
172.36.0.0/16 is variably subnetted, 2 subnets, 2 masks
C 172.36.0.0/16 is directly connected, Ethernet0/0
L 172.36.0.1/32 is directly connected, Ethernet0/0
S 192.50.20.0/24 [1/0] via 32.0.0.1
S 223.0.50.0/24 [1/0] via 32.0.0.1
R5(config)#

06:53 pm 26-08-2026

```
R6(config)#do sh ip route
```

```
L 223.0.50.1/32 is directly connected, Ethernet0/0
```

```
R6(config)#
```


labs.surennetwork.com/store/public/admin/labs/terminal?terminals=eyJ0YWJzljpbeyJuY...

Ask Gemini

New Chrome available

linkedin

Webmail - Main

Networking Acade...

Online typing WPM...

NCCR Biometric Att...

HP Product Warrant...

Fujitsu Technical Su...

D-LINK

HP » Device Status

All Bookmarks

R1

R2

R3

R5

R6

Win-1

Win-2

Win-3

R4

C:\WINDOWS\system32\cmd.exe

Ping statistics for 223.0.50.10:
Packets: Sent = 3, Received = 0, Lost = 3 (100% loss),
Control-C
^C
C:\>ping 172.36.0.10

Pinging 172.36.0.10 with 32 bytes of data:

Reply from 172.36.0.10: bytes=32 time=2ms TTL=124
Reply from 172.36.0.10: bytes=32 time=3ms TTL=124
Reply from 172.36.0.10: bytes=32 time=3ms TTL=124
Reply from 172.36.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 172.36.0.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\>ping 223.0.50.10

Pinging 223.0.50.10 with 32 bytes of data:

Reply from 223.0.50.10: bytes=32 time=4ms TTL=125
Reply from 223.0.50.10: bytes=32 time=2ms TTL=125
Reply from 223.0.50.10: bytes=32 time=2ms TTL=125
Reply from 223.0.50.10: bytes=32 time=1ms TTL=125

Ping statistics for 223.0.50.10:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 1ms, Maximum = 4ms, Average = 2ms

C:\>ping 192.50.20.100

Pinging 192.50.20.100 with 32 bytes of data:

Reply from 192.50.20.100: bytes=32 time<1ms TTL=128
Reply from 192.50.20.100: bytes=32 time<1ms TTL=128
Reply from 192.50.20.100: bytes=32 time<1ms TTL=128
Reply from 192.50.20.100: bytes=32 time<1ms TTL=128

Ping statistics for 192.50.20.100:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>_

Go

Start

C:\WINDOWS\system...

Network Connections

2:23 PM

06:53 pm

26-08-2026

