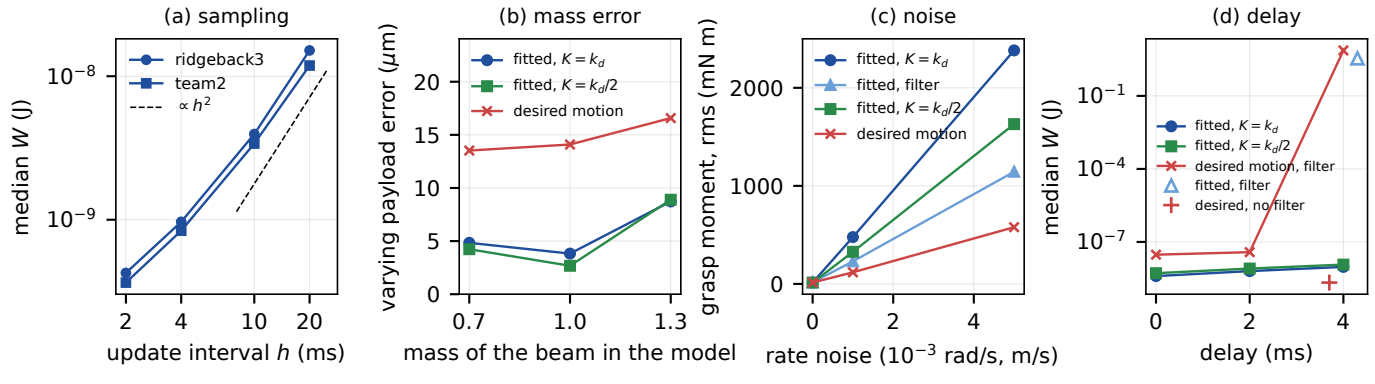
(a) sampling
median W (J)
10^{-8}
10^{-9}
ridgeback3
team2
$\propto h^2$
2
4
10
20
update interval h (ms)
(b) mass error
varying payload error (μm)
fitted, $K = k_d$
fitted, $K = k_d/2$
desired motion
0
5
10
15
20
0.7
1.0
1.3
mass of the beam in the model
(c) noise
grasp moment, rms (mN m)
fitted, $K = k_d$
fitted, filter
fitted, $K = k_d/2$
desired motion
0
1000
2000
0
2
4
rate noise (10^{-3} rad/s, m/s)
(d) delay
median W (J)
10^{-1}
10^{-4}
10^{-7}
fitted, $K = k_d$
fitted, $K = k_d/2$
desired motion, filter
fitted, filter
desired, no filter
0
2
4
delay (ms)