

CAN–485 Diagnostic Gateway

ISOLATED USB–C TO RS–485 / CAN 2.0B FIELDBUS INTERFACE


A. USB + POWER

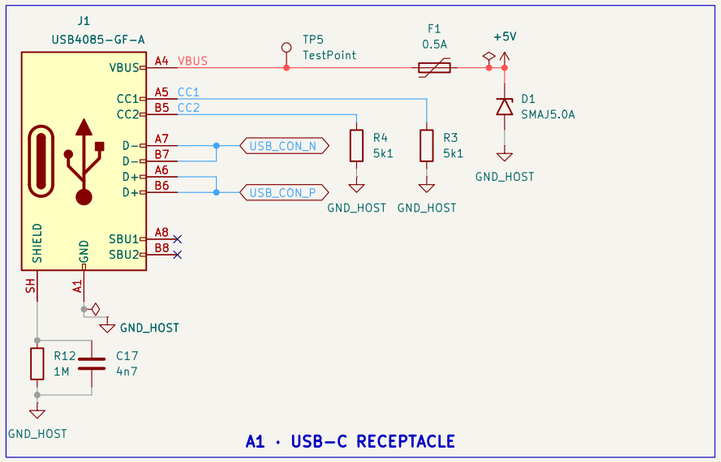

A1 · USB–C RECEPTACLE

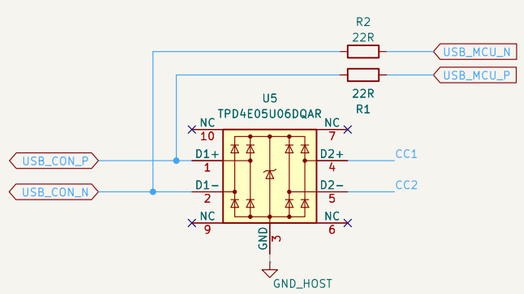


A2 · USB ESD + SERIES RESISTORS

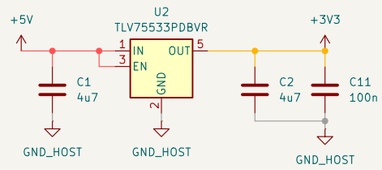

A3 · 3.3 V REGULATOR


B. MCU + CLOCK

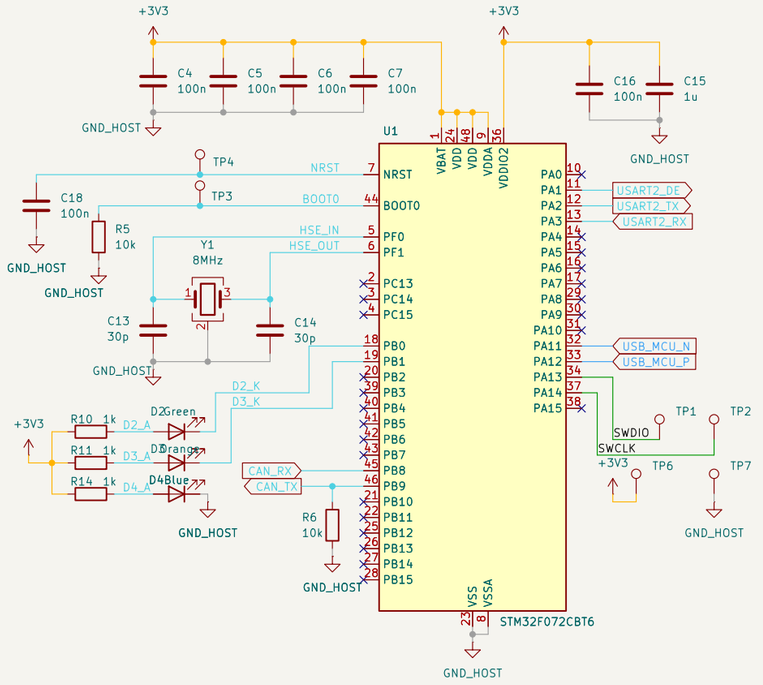


MCU + DECOUPLING · 8 MHz CLOCK

BOOT / RESET · STATUS LEDS · SWD TEST POINTS


C. FIELD I/O

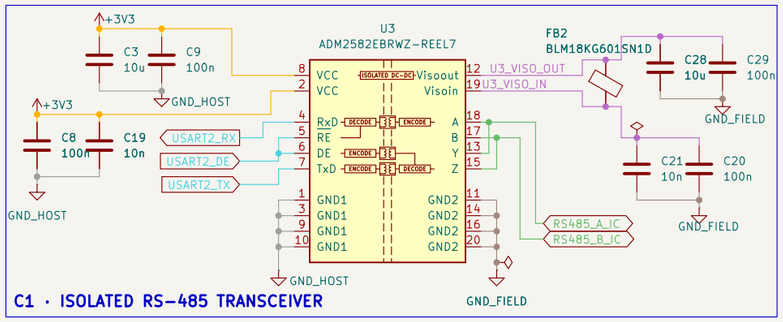


C1 · ISOLATED RS–485 TRANSCEIVER

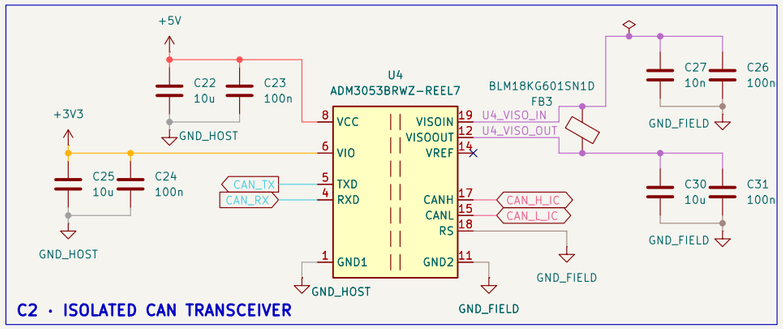


C2 · ISOLATED CAN TRANSCEIVER

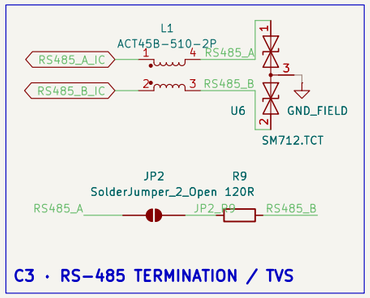

C3 · RS–485 TERMINATION / TVS

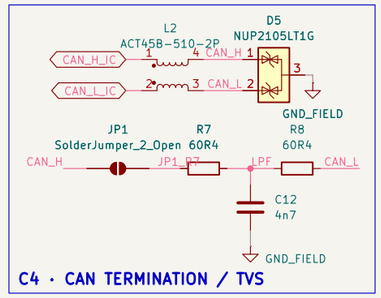

C4 · CAN TERMINATION / TVS

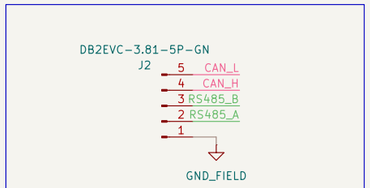

C5 · FIELD CONNECTOR

Flat A3, three capture zones
USB 2.0 FS to RS–485 / CAN 2.0B
Solo Engineering

Sheet: /
File: CAN485–dongle.kicad_sch

Title: CAN–485 Diagnostic Gateway

Size: A3	Date: 2026–10–21	**Rev: A**
KiCad E.D.A. 10.0.7		Id: 1/1