

Guidance Navigation & Control

Lead: Mehdi Muzaffari



Agenda

- Design Overview
 - GNC Requirements, & Constraints
 - Hardware Overview
 - Operating Modes & Block Diagrams
- Components Selection
 - Integrated System Update
 - ADCS Breakdown
- Pointing Budget
 - Pointing Simulation
 - Ground Track
 - Results
- Subsystem Development
 - Risk and Risk Mitigation
 - Subsystem Status – CDR through FSR
 - Next Steps



Design Overview

Detumble	Transmitting	Mission	Charging	Safe
When the satellite is first ejected it will be in tumble and the satellite will need to dump enough momentum to operate nominal ADCS maneuvers.	Transmitting allows for ease of access to telemetry data and command of the satellite. This mode will begin when the satellite is within line of sight with the ground station.	Mission mode is the mode POLAR enters to observe satellites in LEO and collect images	Charge mode is the mode POLAR enters to be as power positive as possible and charge the batteries for power negative tasks such as observation and image downlinking.	Safe mode is designed to be entered and remained in indefinitely to allow the ground team to perform system health checks, and troubleshoot any possible problems



Assumptions

Assumptions

POLAR will be deployed into an ISS orbit

The LEO Environment will be Stable

Detailed information about the observed LEO satellites, including their physical characteristics is available to the observation satellite

The mission assumes access to an accurate Earth gravity model for precise orbit determination and prediction

The mission assumes relatively stable atmospheric conditions that do not significantly affect the satellite's pointing accuracy

Sensors used for attitude determination are well-calibrated, with known accuracy and precision specifications

The field of view of the observation instruments is known and stable, allowing for precise satellite tracking



Requirements

Requirement #:	Derived From:	Requirement:
GNC - 3	SAT - 1	The GNC subsystem shall be capable of slewing the satellite at a rate of at least 1.5 degrees per second.
GNC - 4	SAT - 1	The GNC subsystem shall provide three-axis attitude control with a pointing accuracy of 5.2 degrees.
GNC - 5	SAT - 1	The GNC subsystem shall be capable of attitude determination with an error of 0.5 degrees. (TBV)
GNC - 7	SAT - 26	The GNC subsystem shall not perform attitude control maneuvers for 15 minutes after ejection.
GNC - 9	GNC - 3	Reaction wheels shall provide at least 4.8mNm of momentum storage about any axis.
GNC - 10	GNC - 3	Reaction wheels shall be capable of a torque of at least 0.32 mNm about all three axes.



Requirements

Requirement #:	Derived From:	Requirement:
GNC - 13	SAT - 1, SAT - 11	Magnetorquers shall provide a magnetic moment of at least 0.089 Am ² .
GNC - 15	GNC - 5	Magnetometers shall be capable of reading geomagnetic field measurements of at least ±1 gauss.
GNC - 16	GNC - 5	Magnetometers shall not exceed a noise density of (TBV)
GNC - 18	GNC - 5	Gyroscopes shall be capable of providing angular rates of at least (TBV) degrees per second.




Constraints


Constraints	Imposed by
Attitude exclusion of 30 degrees on the +Z axis from the Earth and the Sun	Sensitivity of Payload
Can only do mission science on the sun side of the Earth	Requirements of Payload
Magnetometers cannot be used while utilizing magnetorquers	Requirements of Magnetometers
Must put the fine sun sensor on the opposite face of the optical payload	Requirements of the Payload



Subsystem Architecture


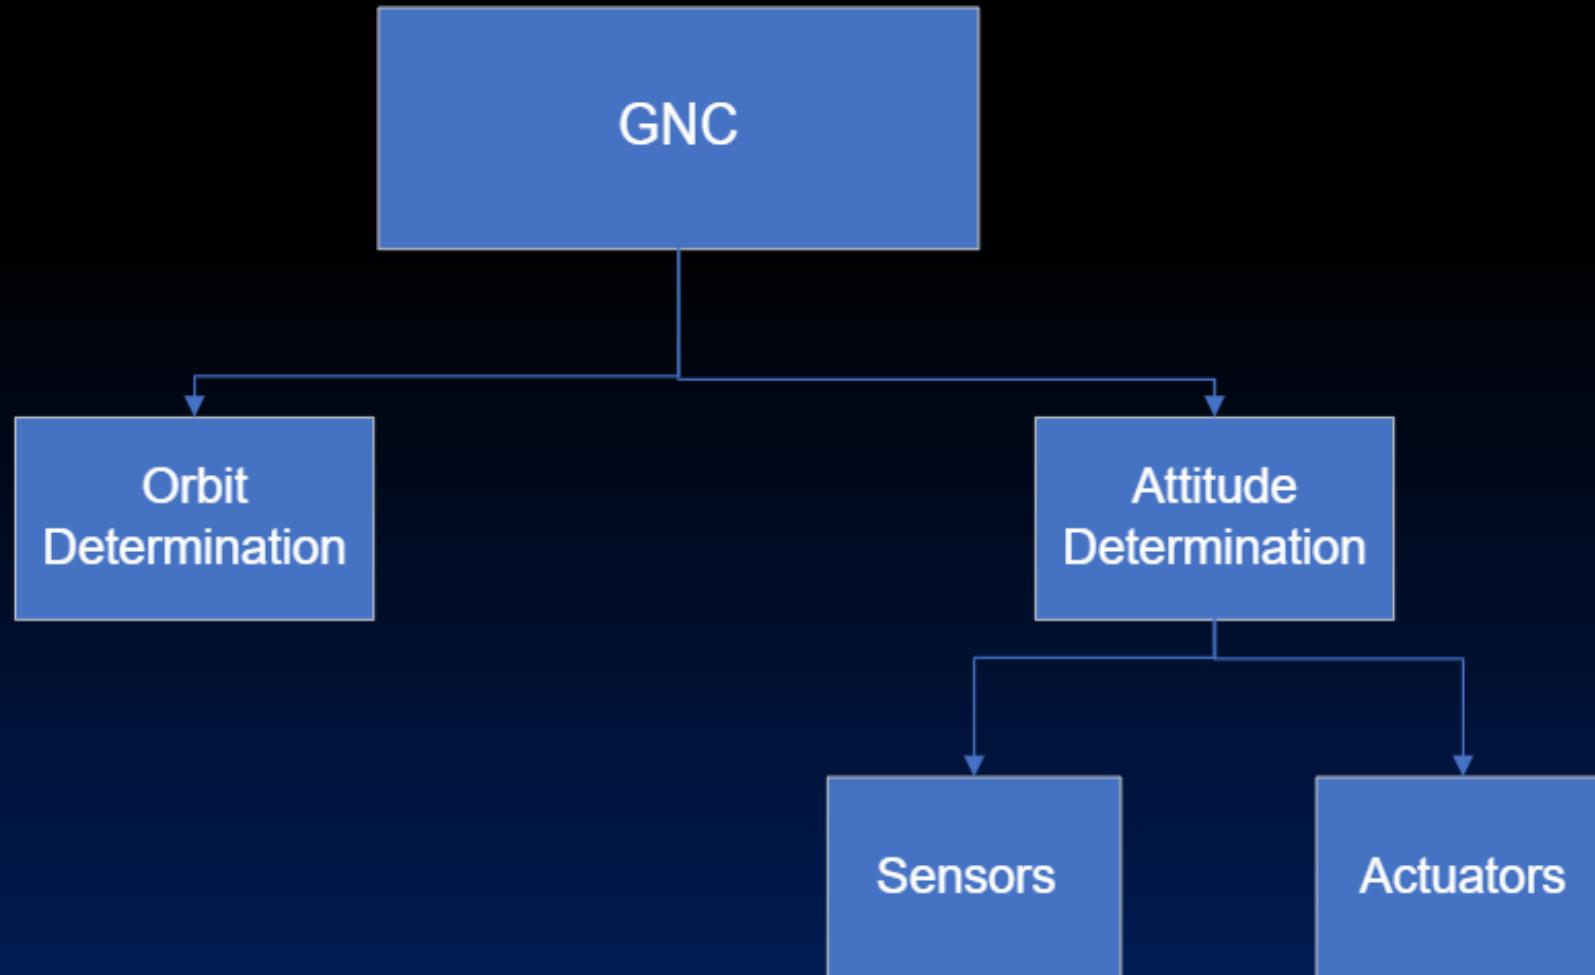


GNC ICD Schematic Interface

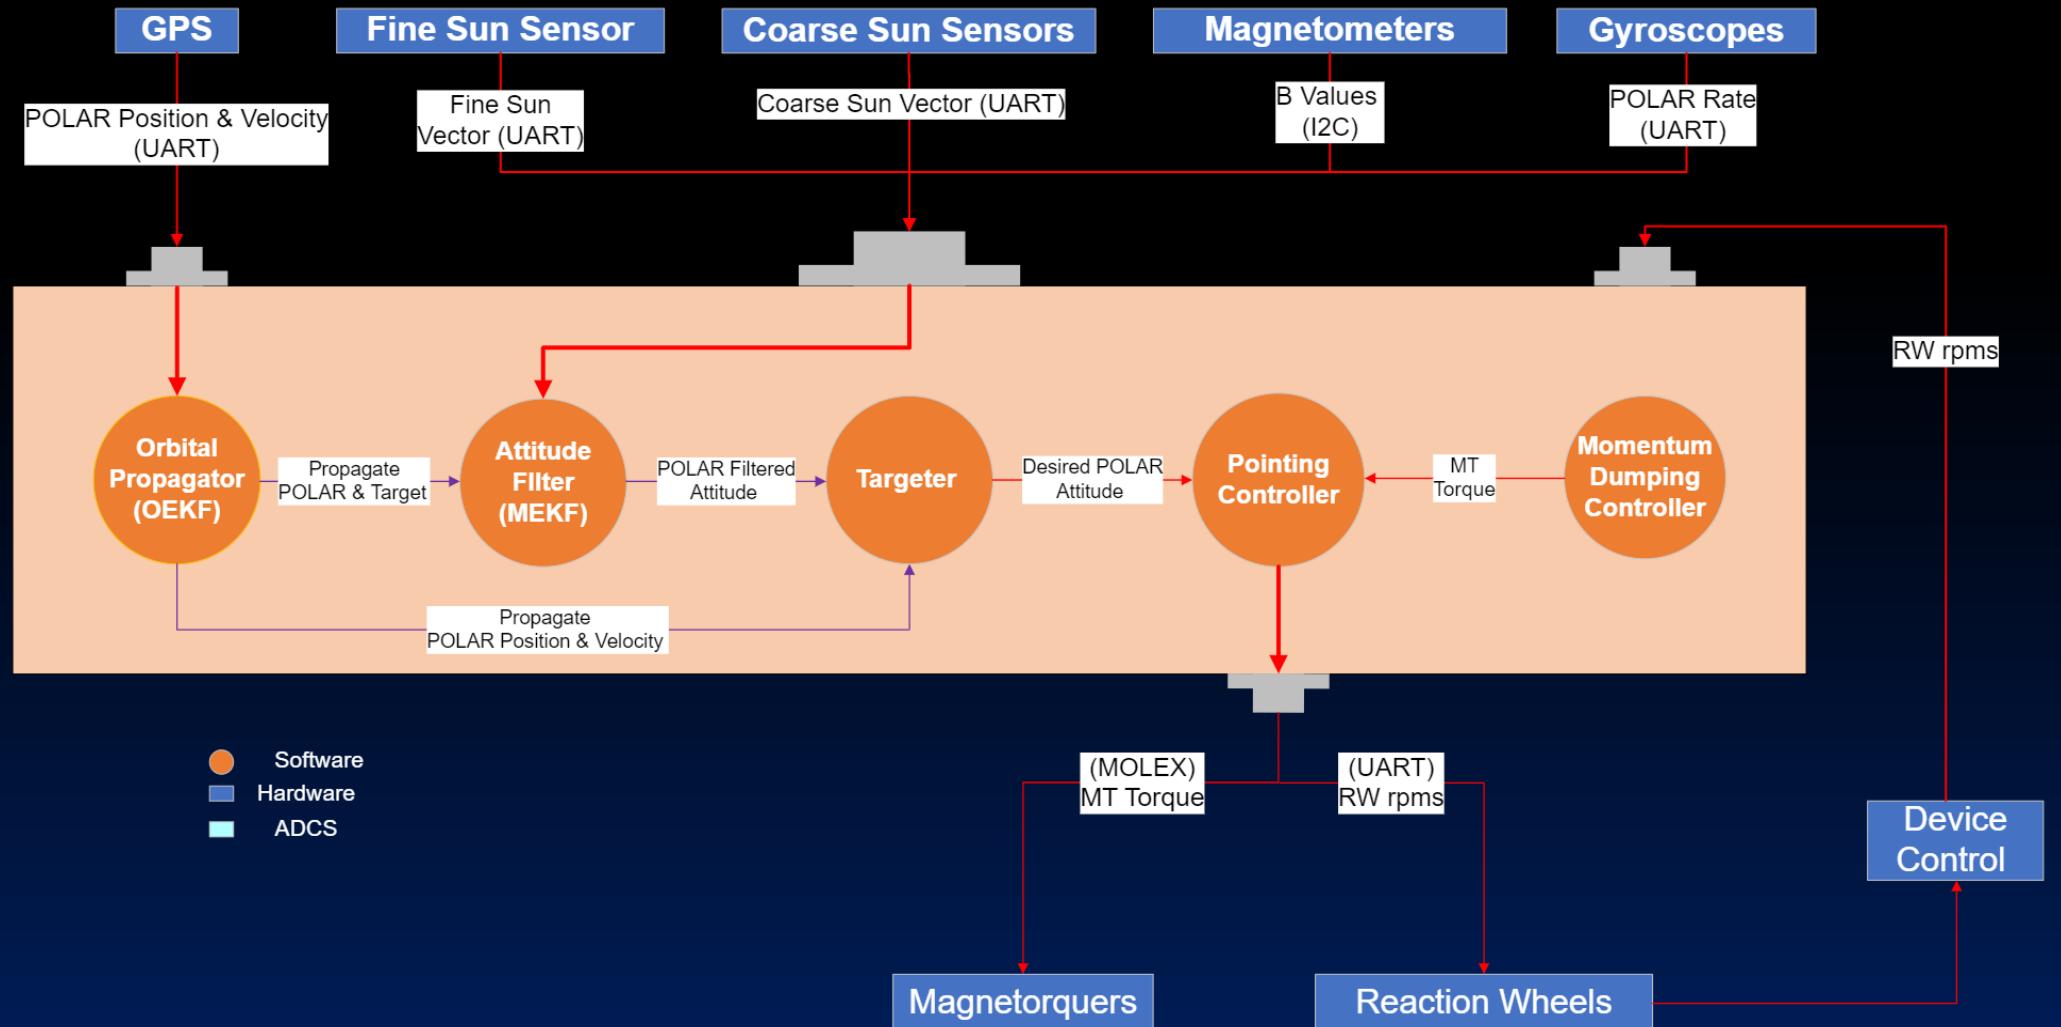




Integrated System Update

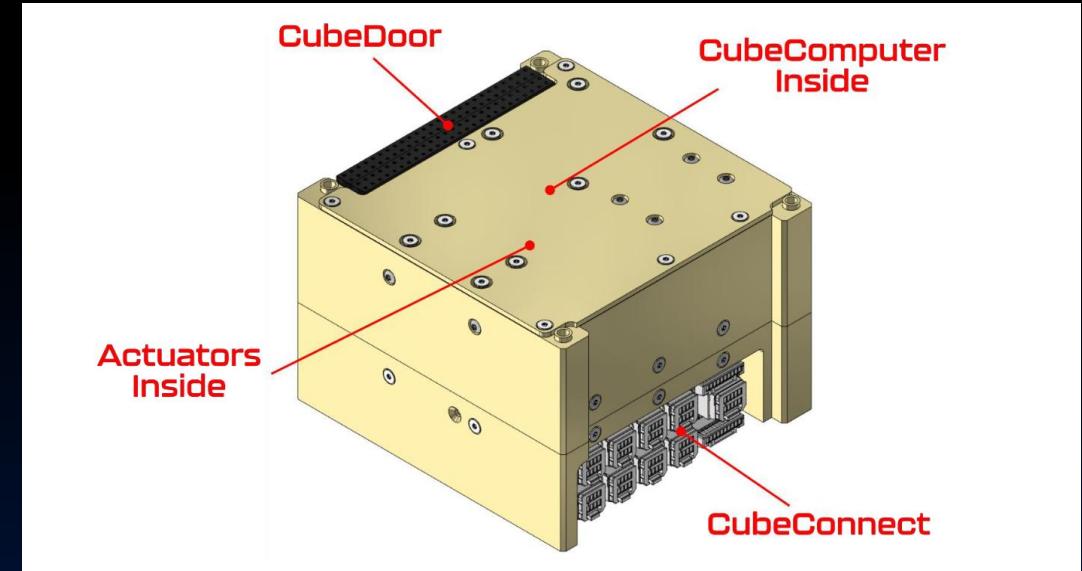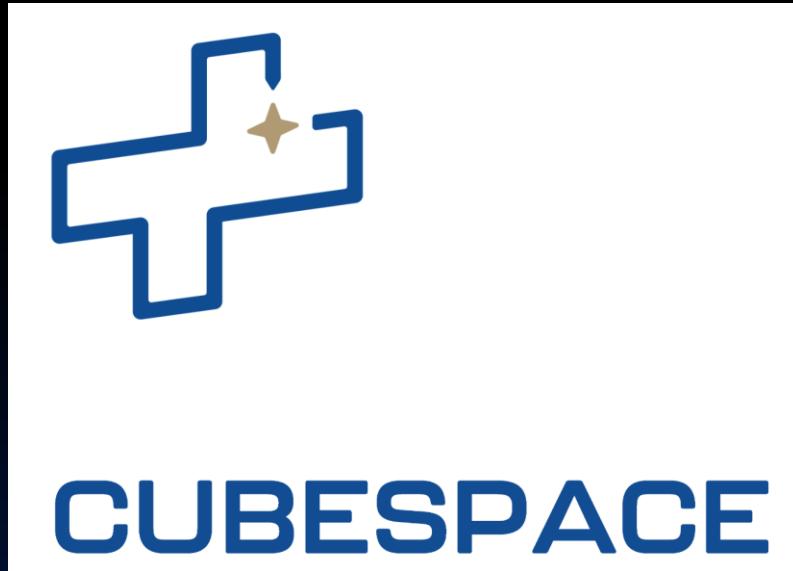

CubeSpace - Gen 2 ADCS

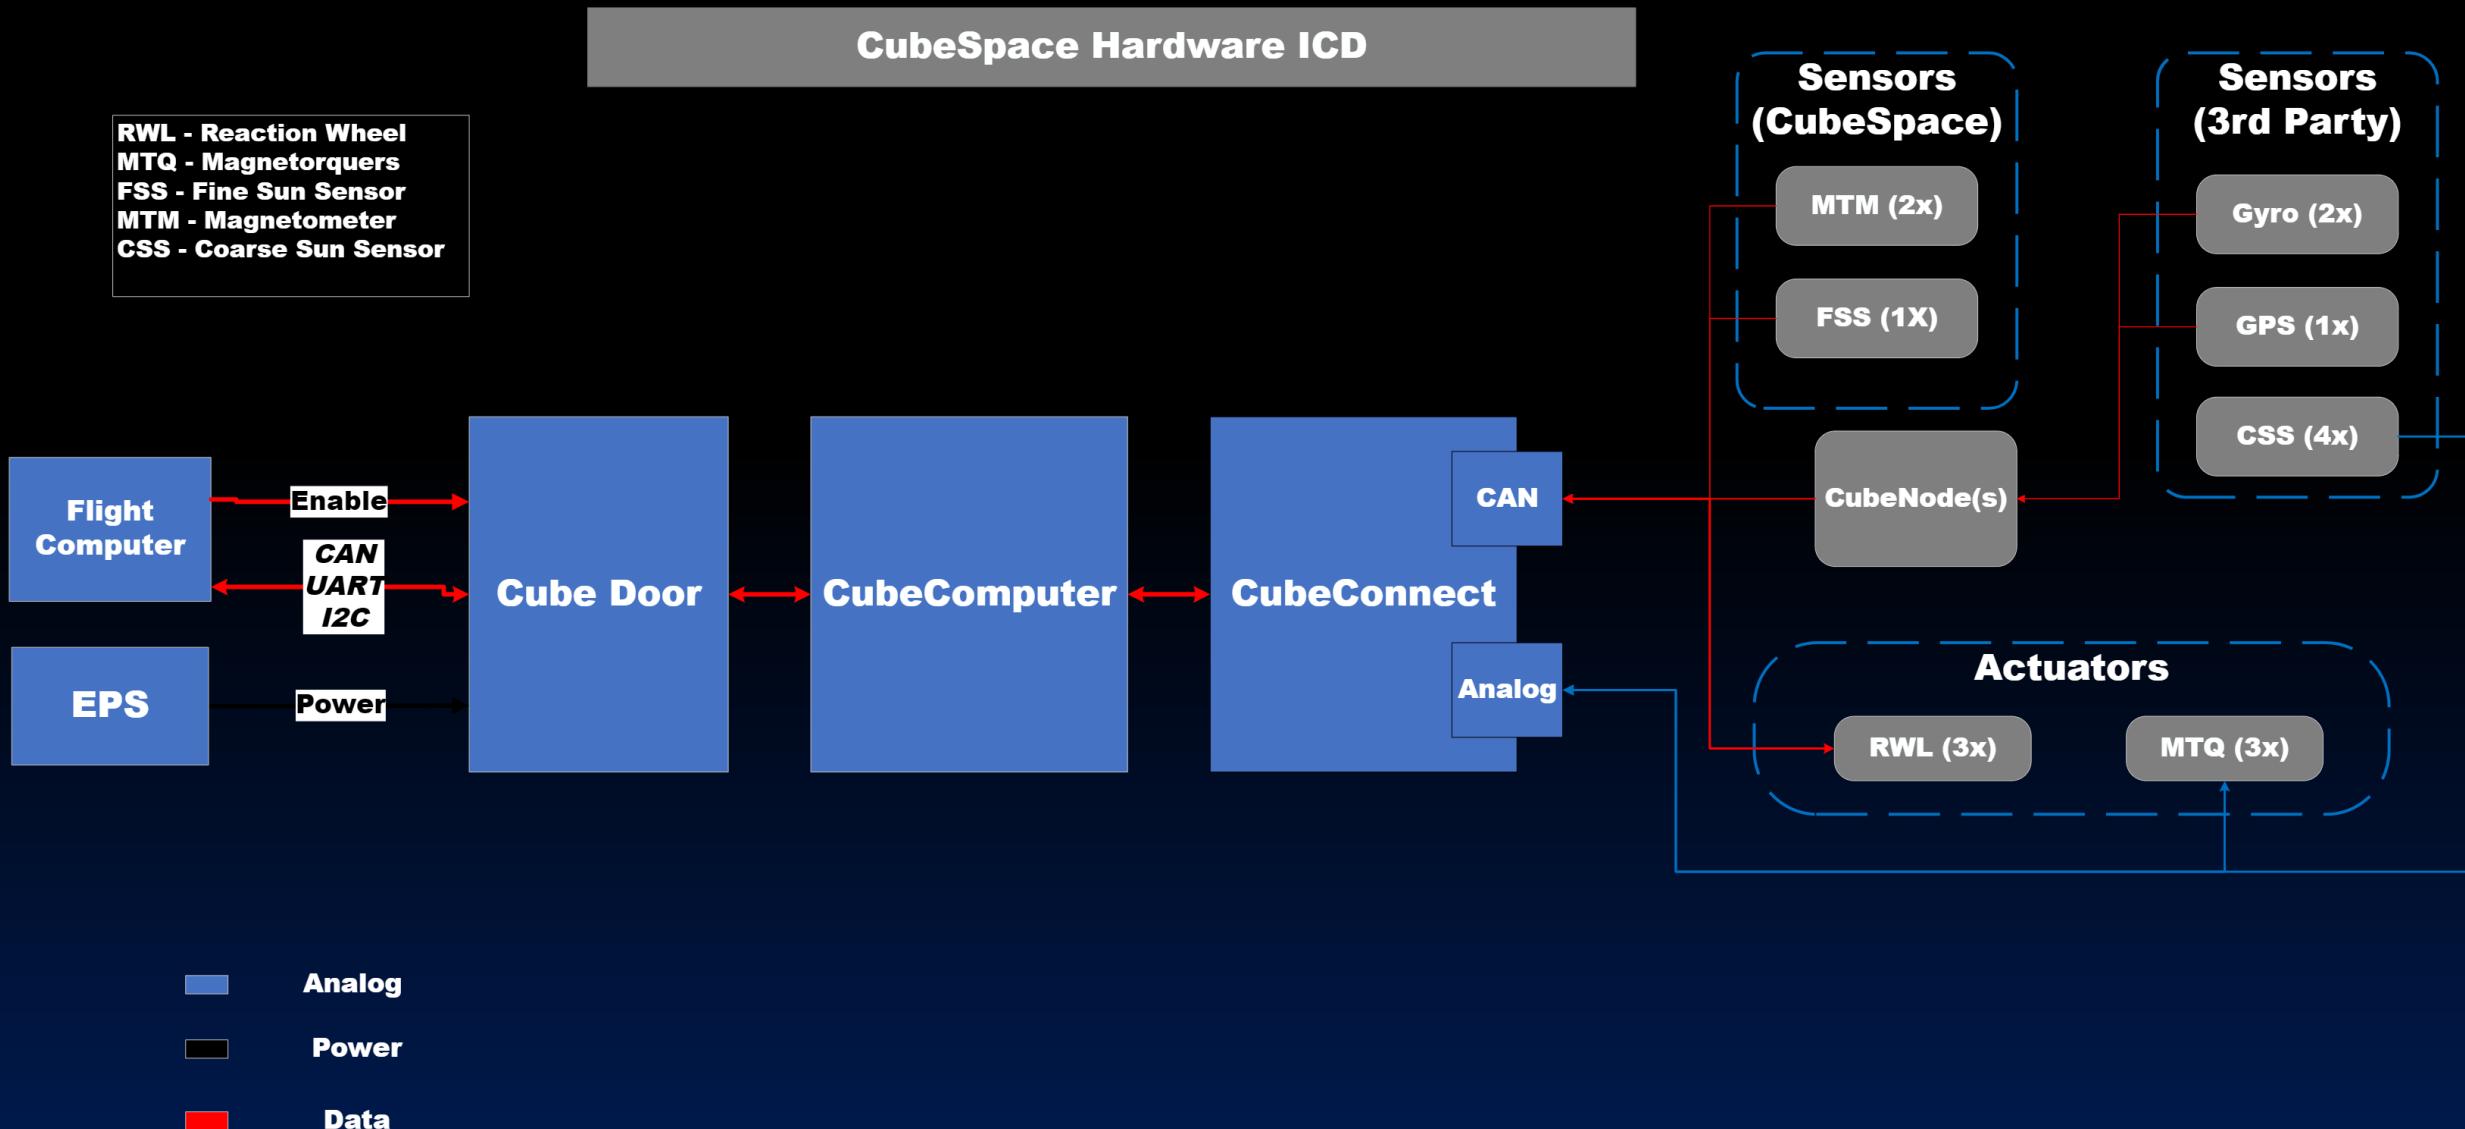





Component Selection

- Actuators
 - CubeWheel CW0057 (3x) - Reaction Wheels
 - CubeTorquer CR0003(3x) - Magnetorquers
- Sensors
 - CubeSense Sun – Fine Sun Sensor
 - EnduroSat Panels (4x) – Coarse Sun Sensors
 - CubeMag Compact (2x) - Magnetometer
 - Epson US M-G370s (2x) - Rate Gyro
 - UBlox NEO-M8M (2x) - GPS



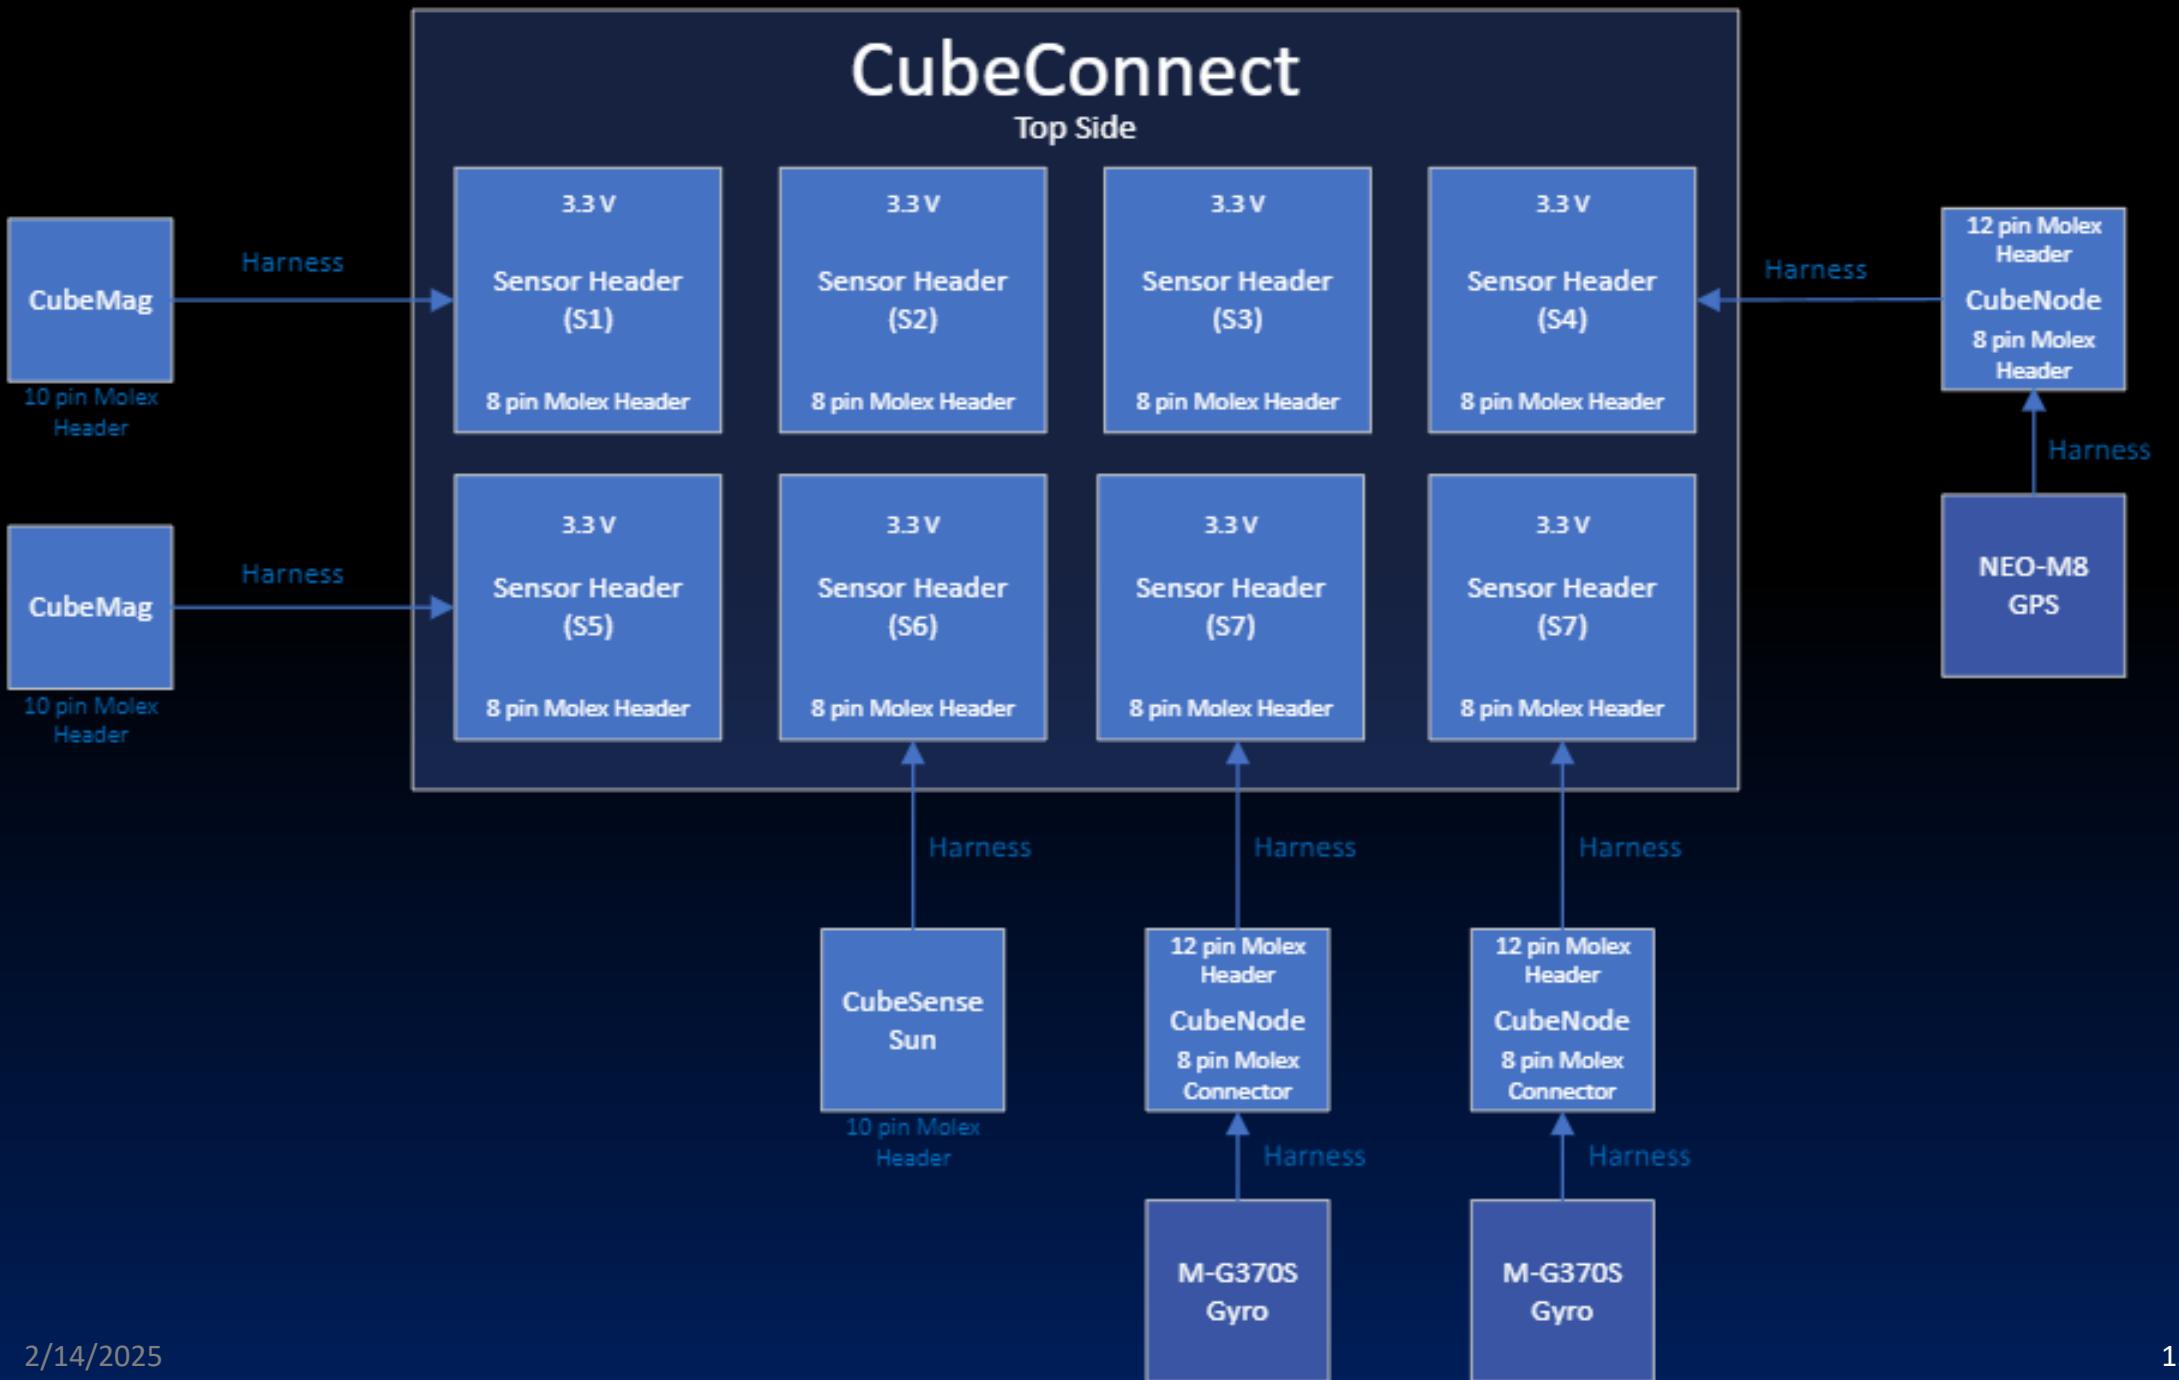

CubeADCS Stack

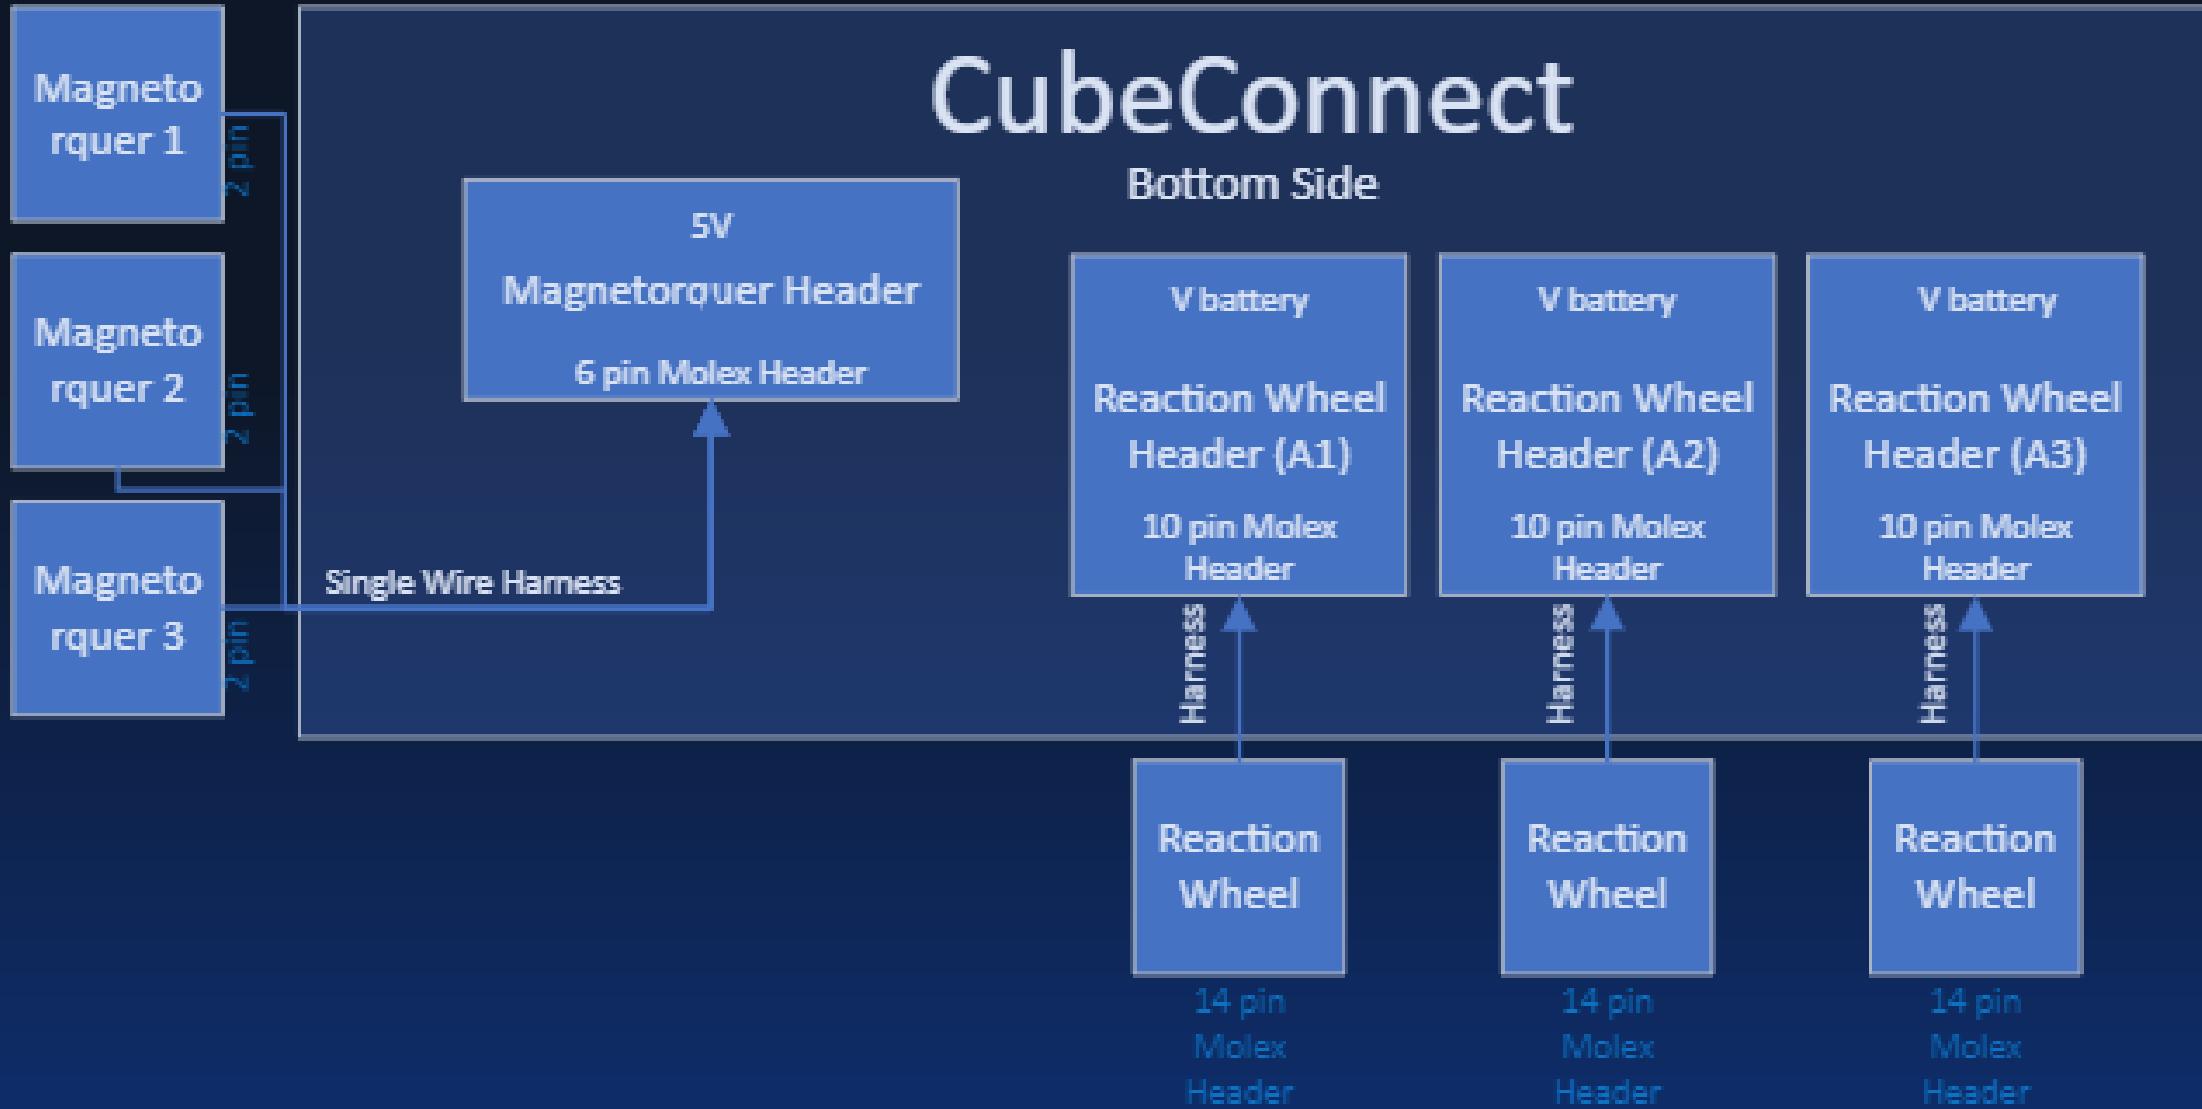




Pointing Simulation

Updates:

- Implemented a Charging Mode
- Transmitting Mode now includes a Ground Track for improved accuracy
- Implemented a 40 run Monte Carlo simulation to analyze initial conditions on POLAR's tracking
- Updated sensor and actuator specs to accurately represent all the noise and bias associated with the mission specific hardware

Future Development:


- Implement Data Product/Comms
- Integrate MMAE Algorithm
- Add real TLE data for observable satellites
- Ability to simulate a full mission where POLAR enters multiple modes sequentially

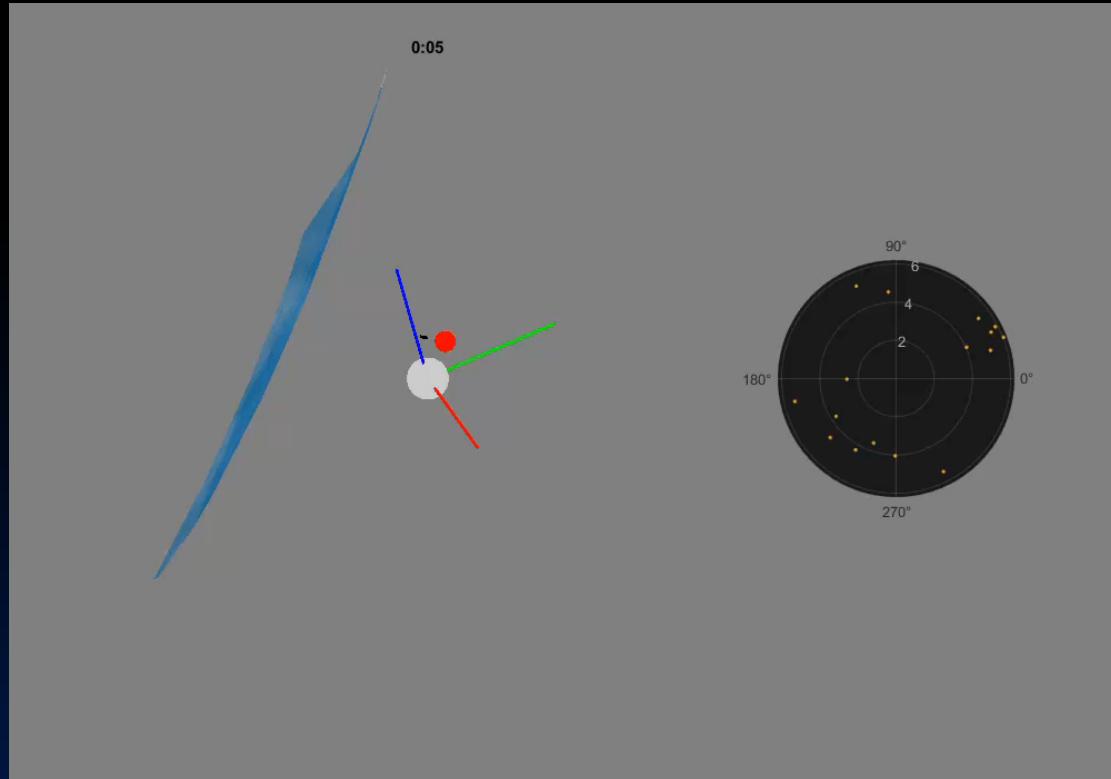

Mission Mode in Polar Mission Sim




Charging Mode - Pointing

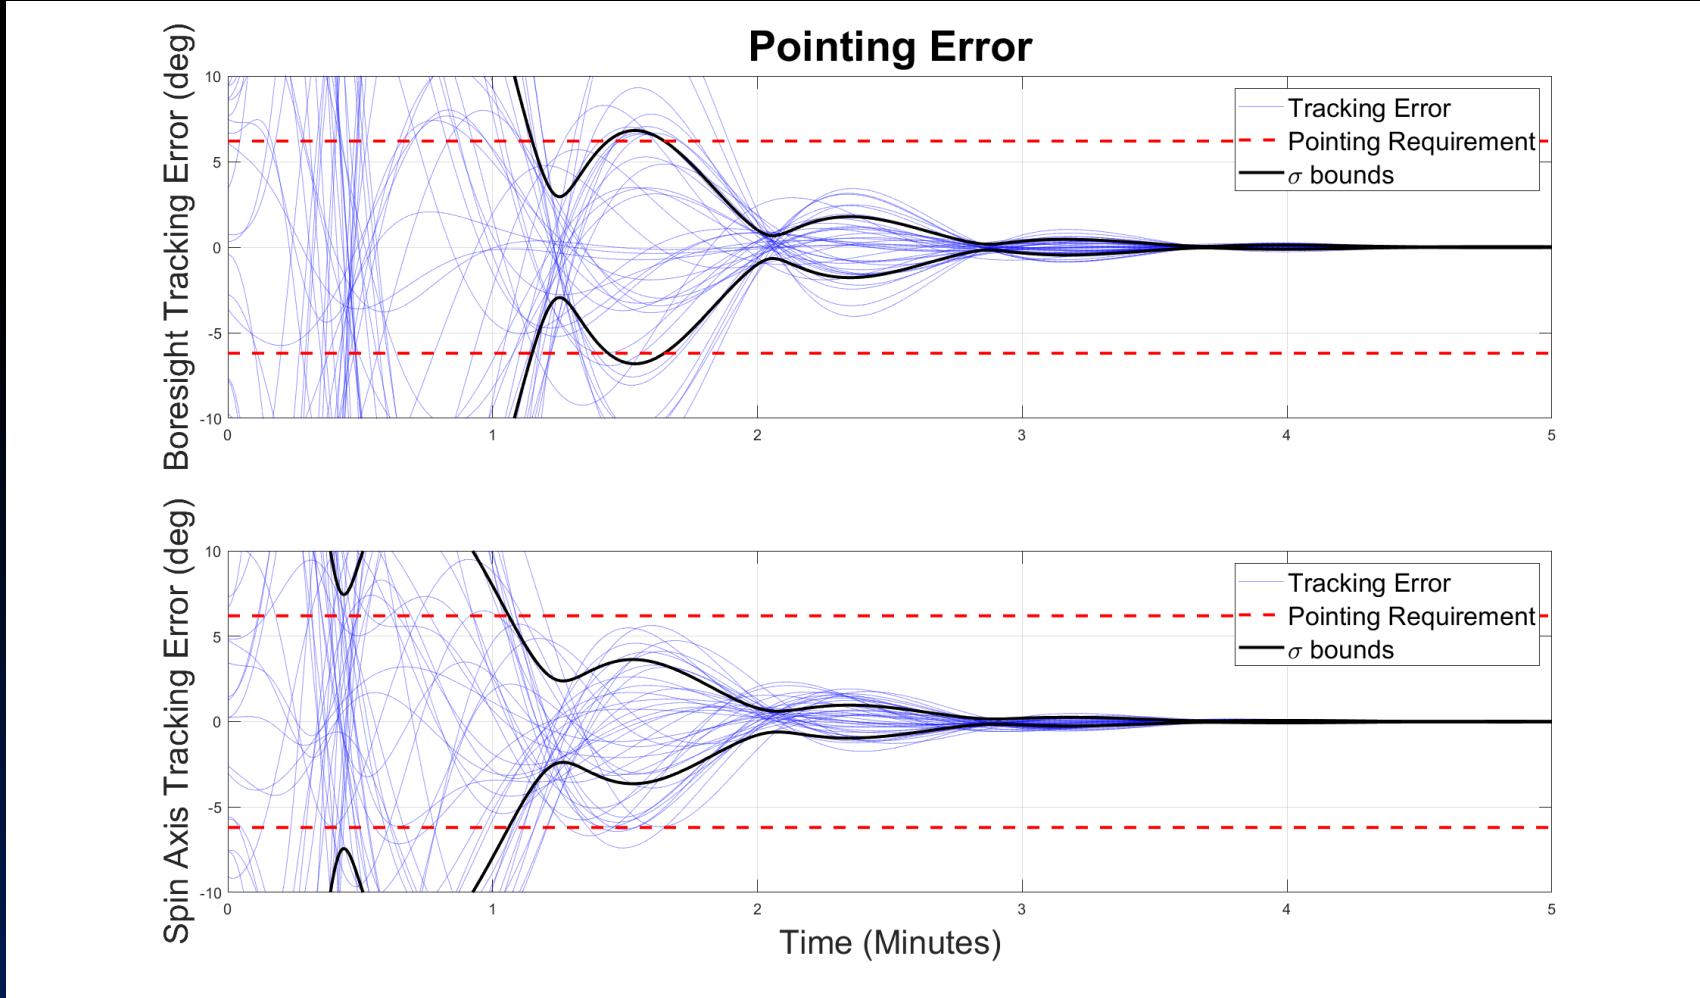




Charging Mode - Attitude

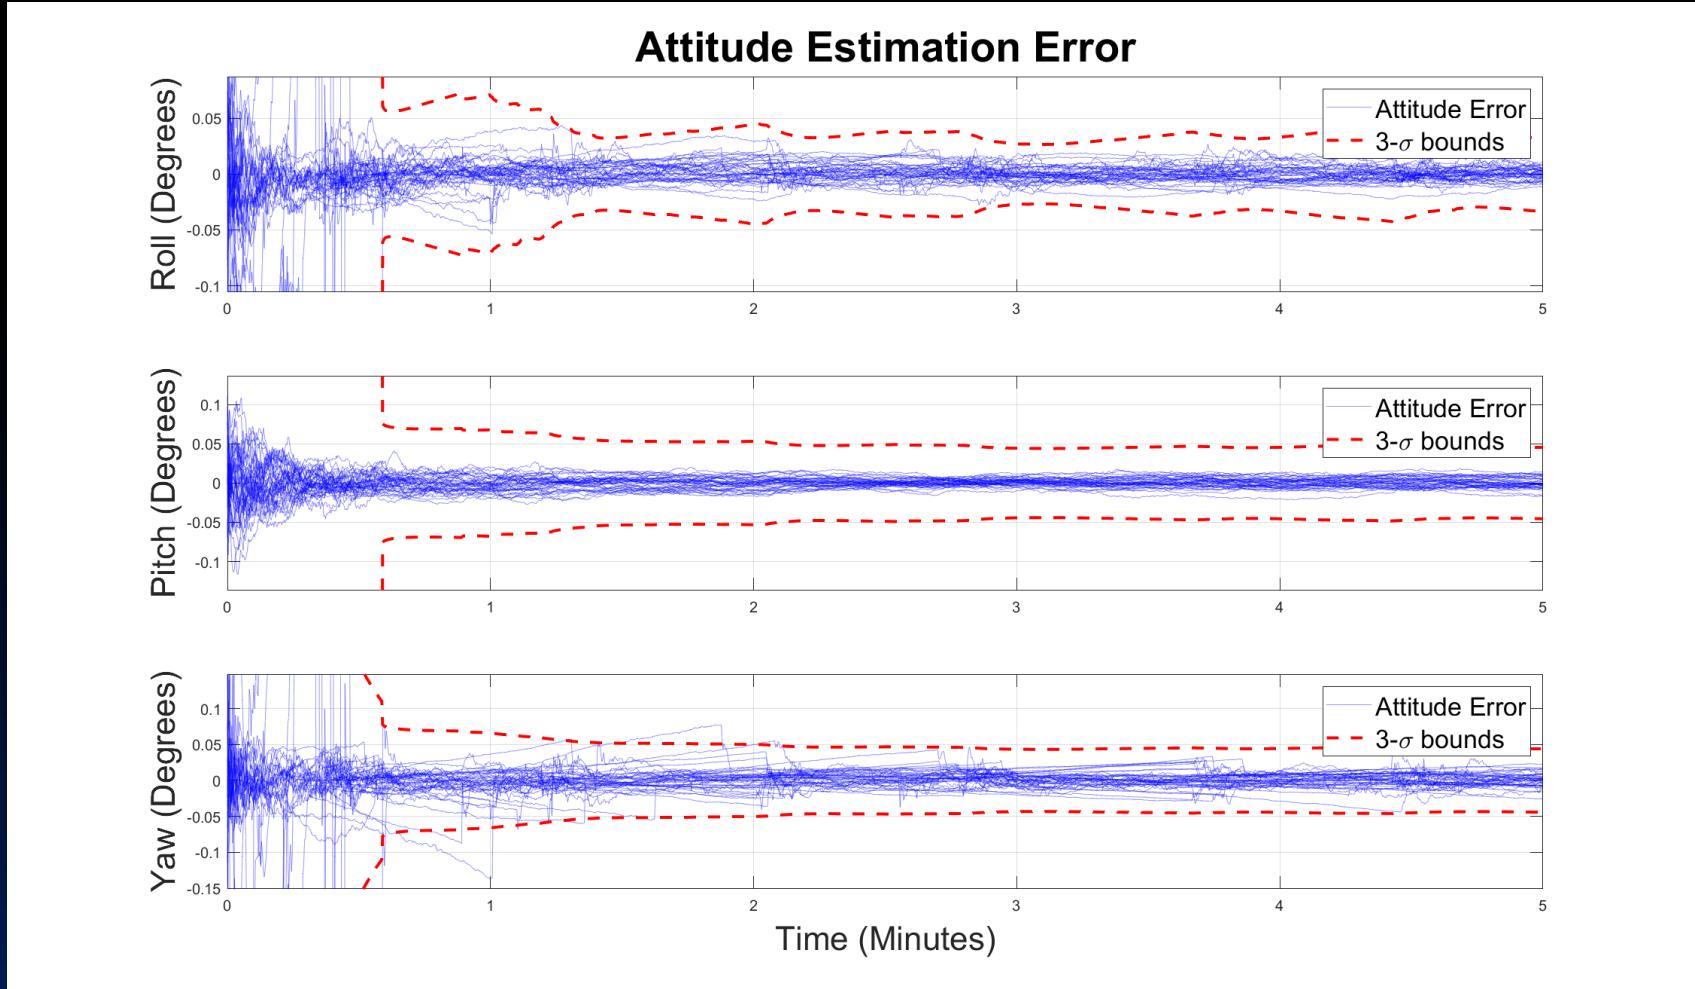




Mission Mode - Attitude

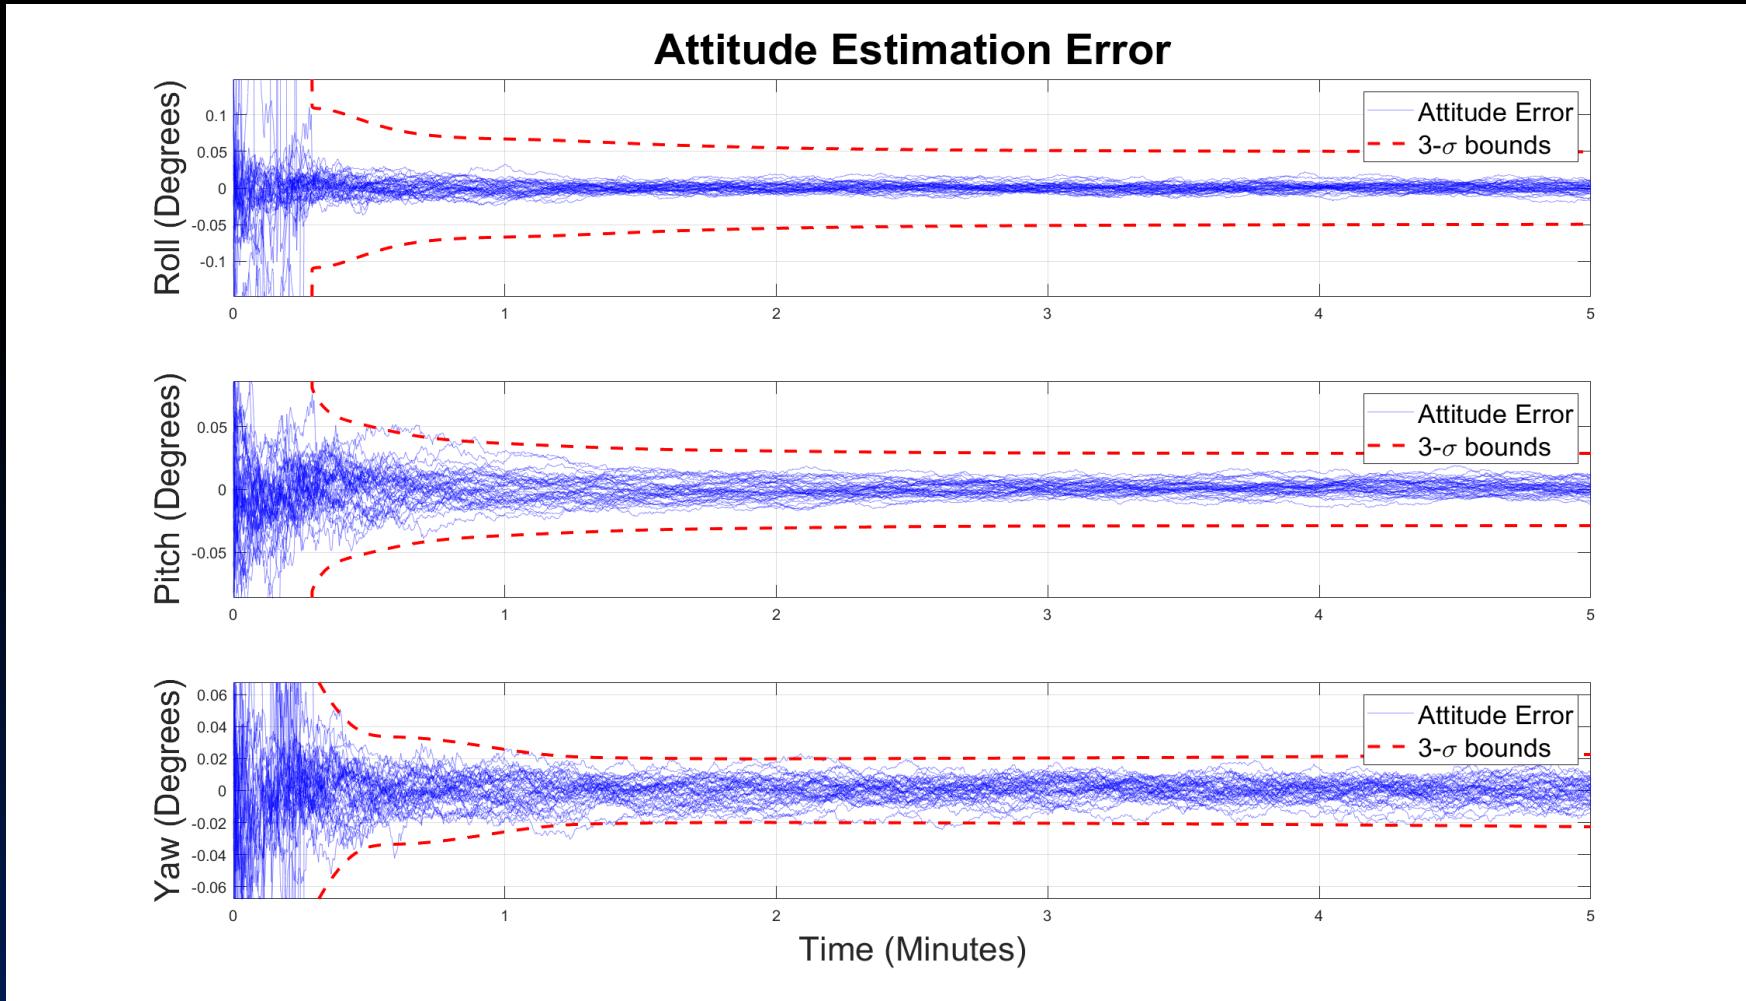




Mission Mode - Pointing

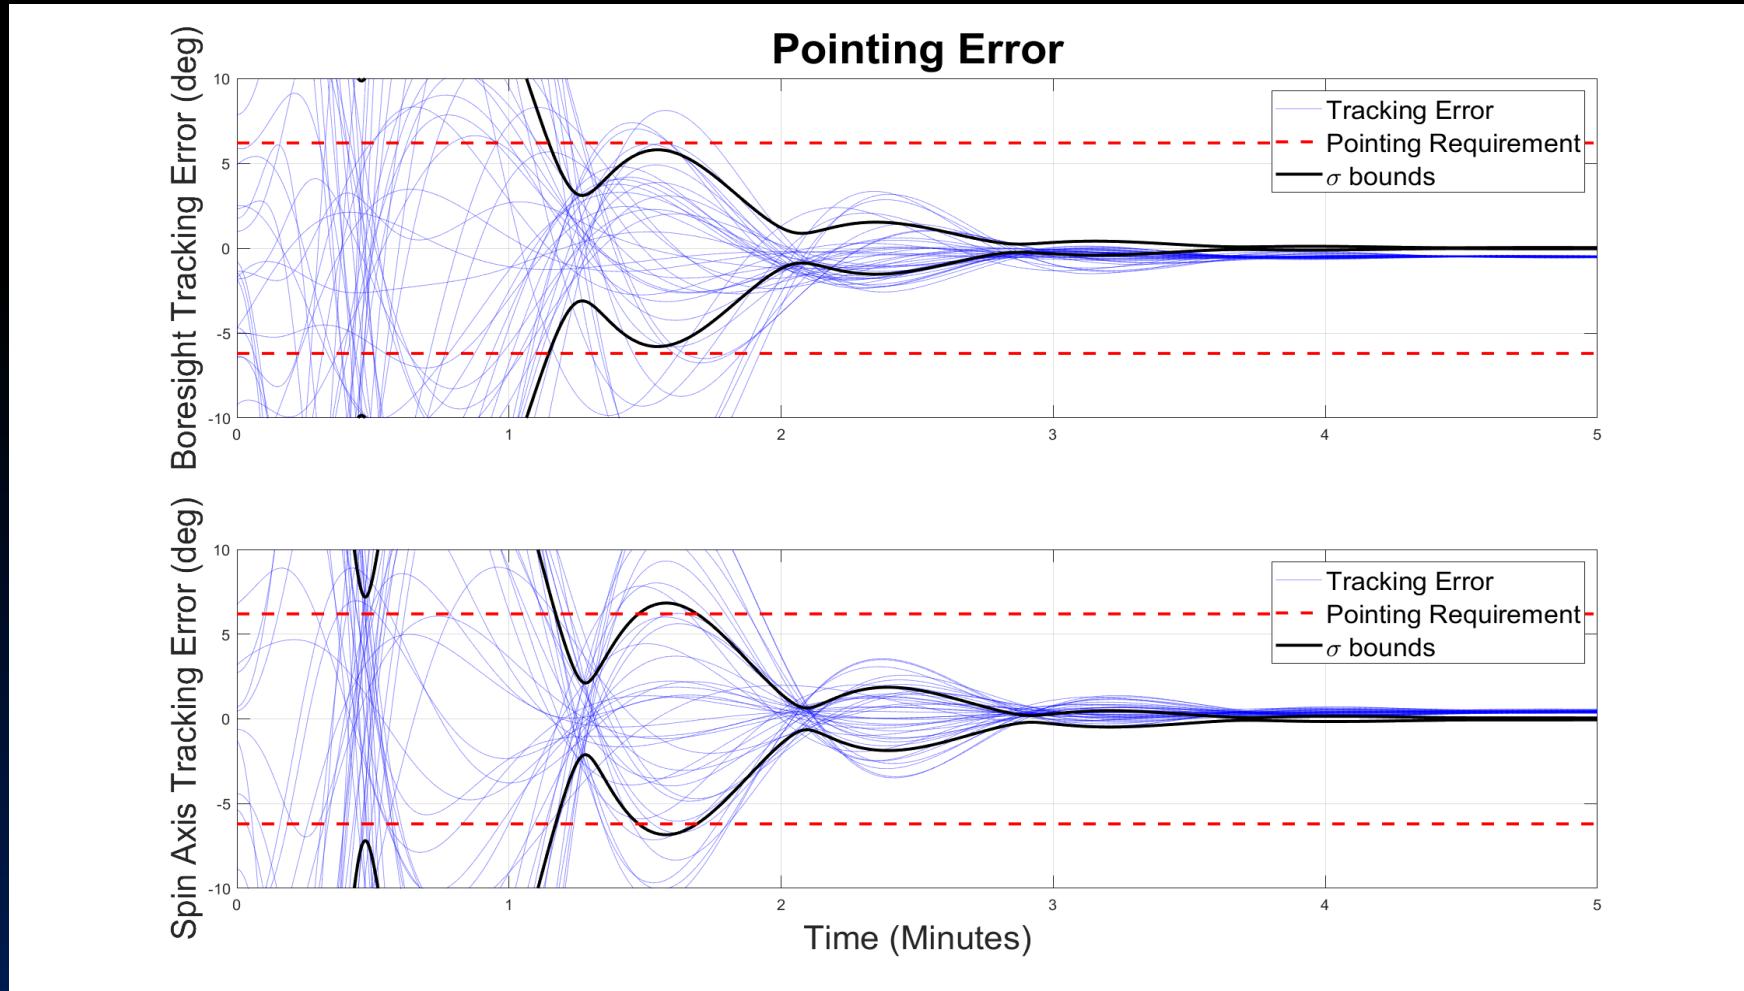




Transmitting Mode - Pointing

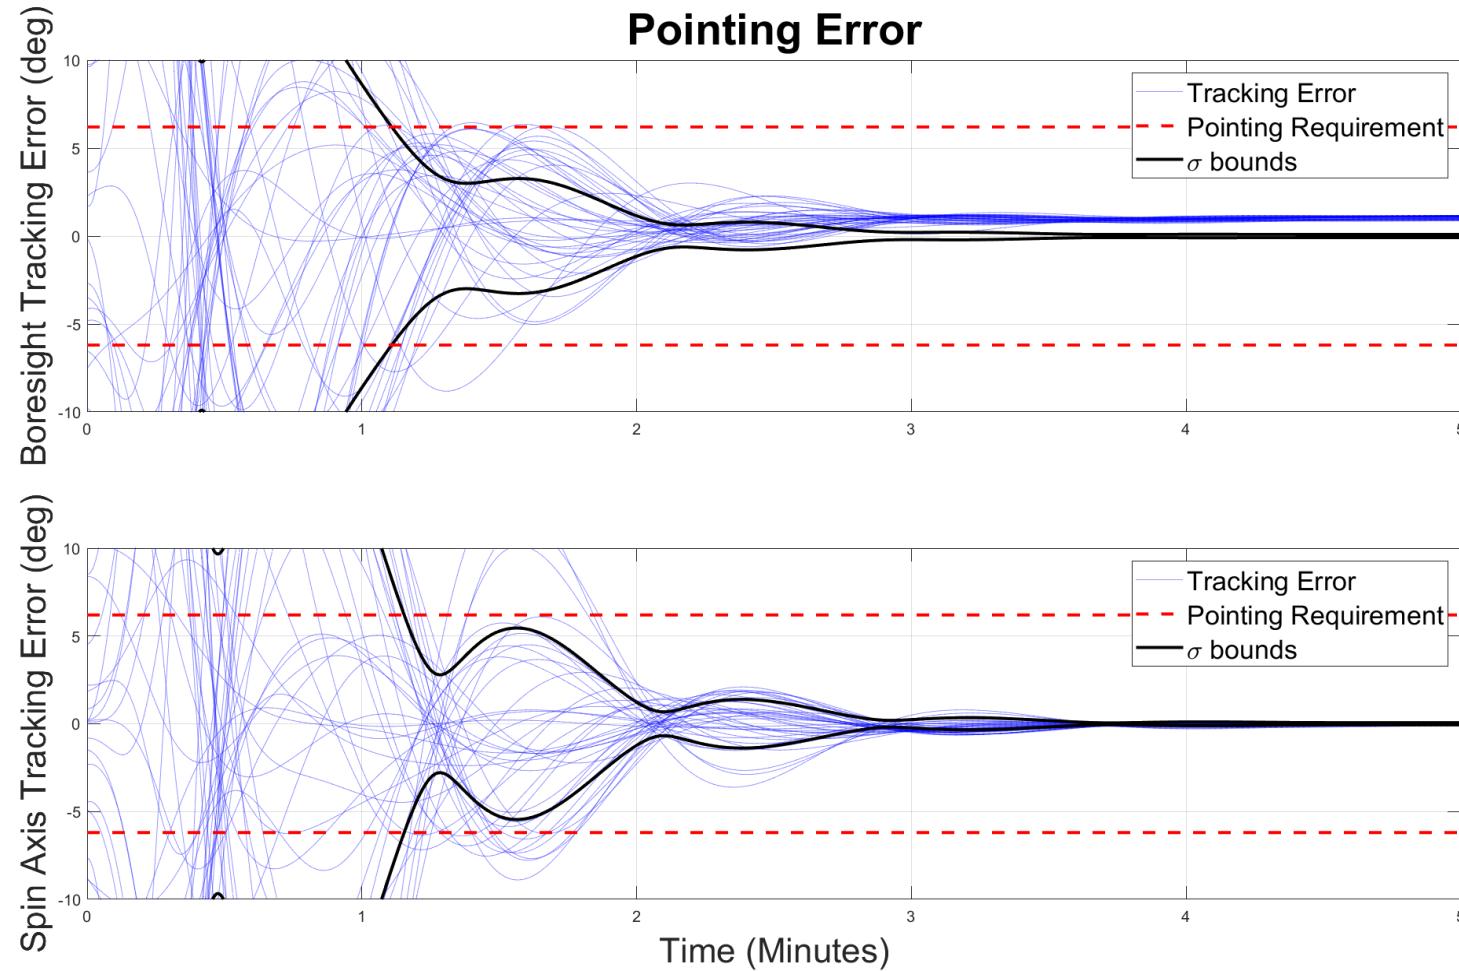




Transmitting Mode - Attitude

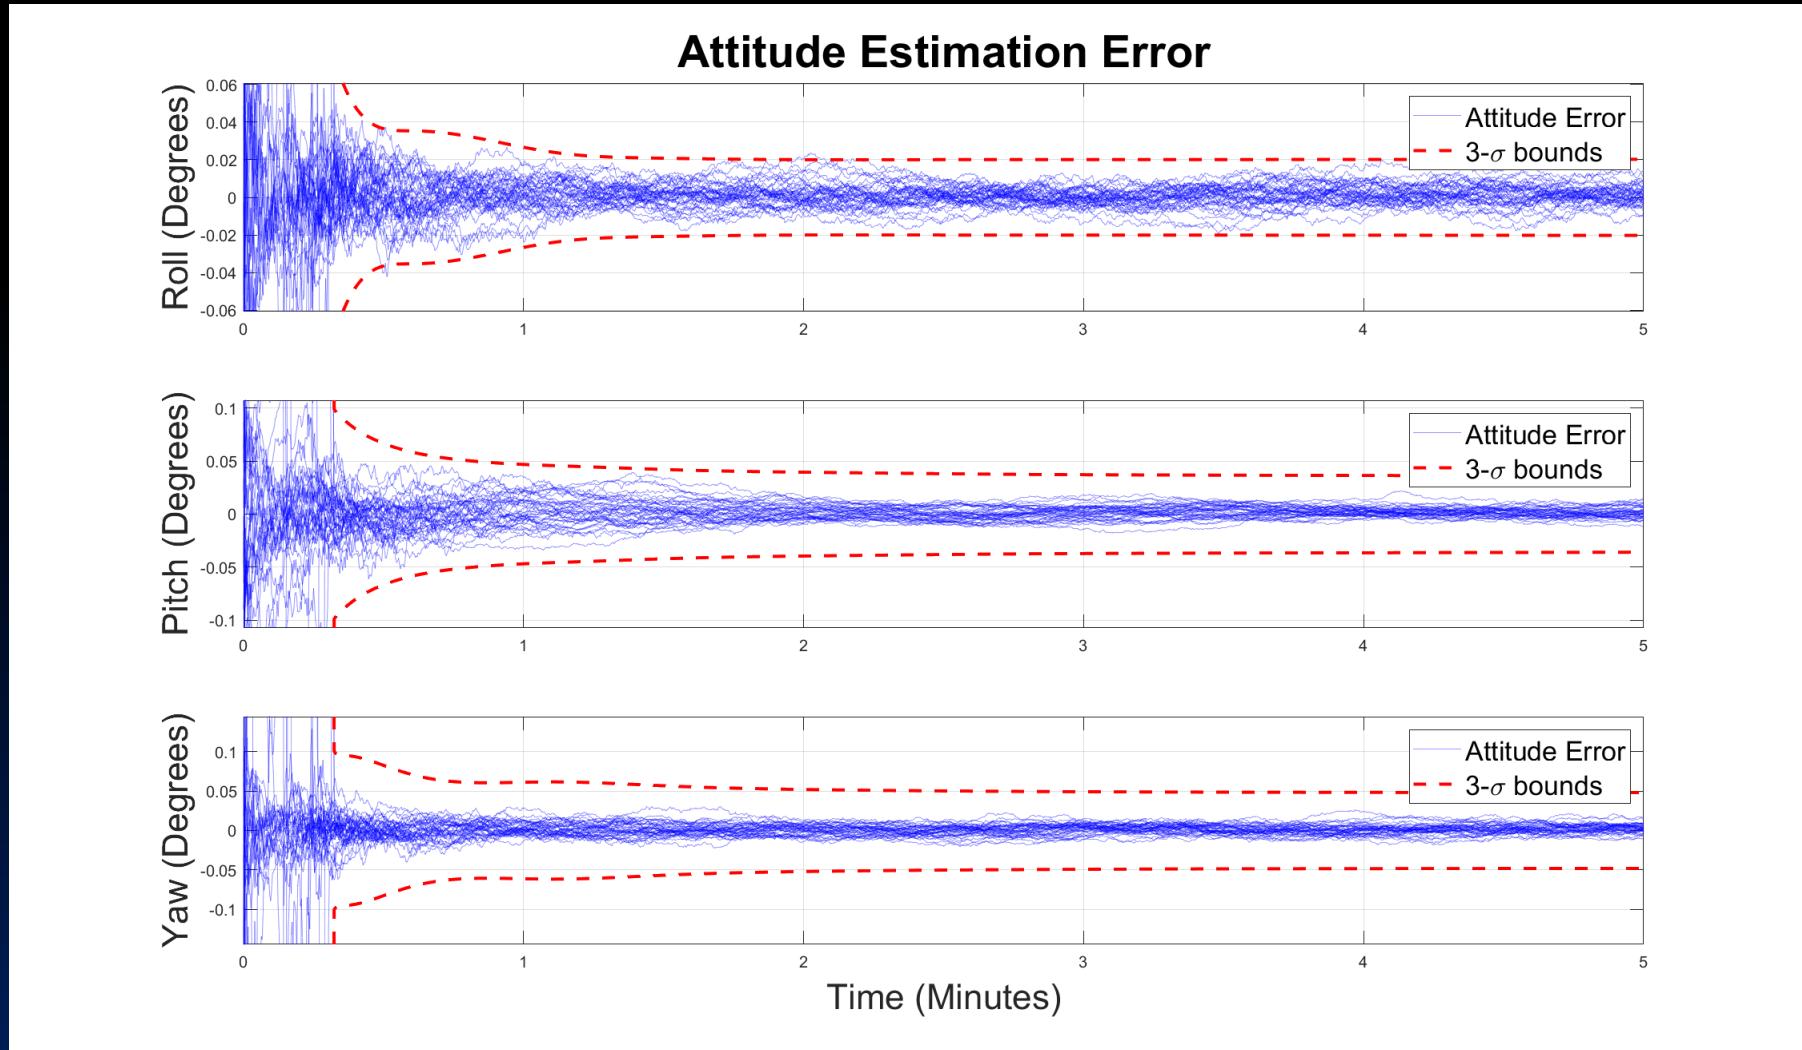




Transmitting Mode – Ground Track

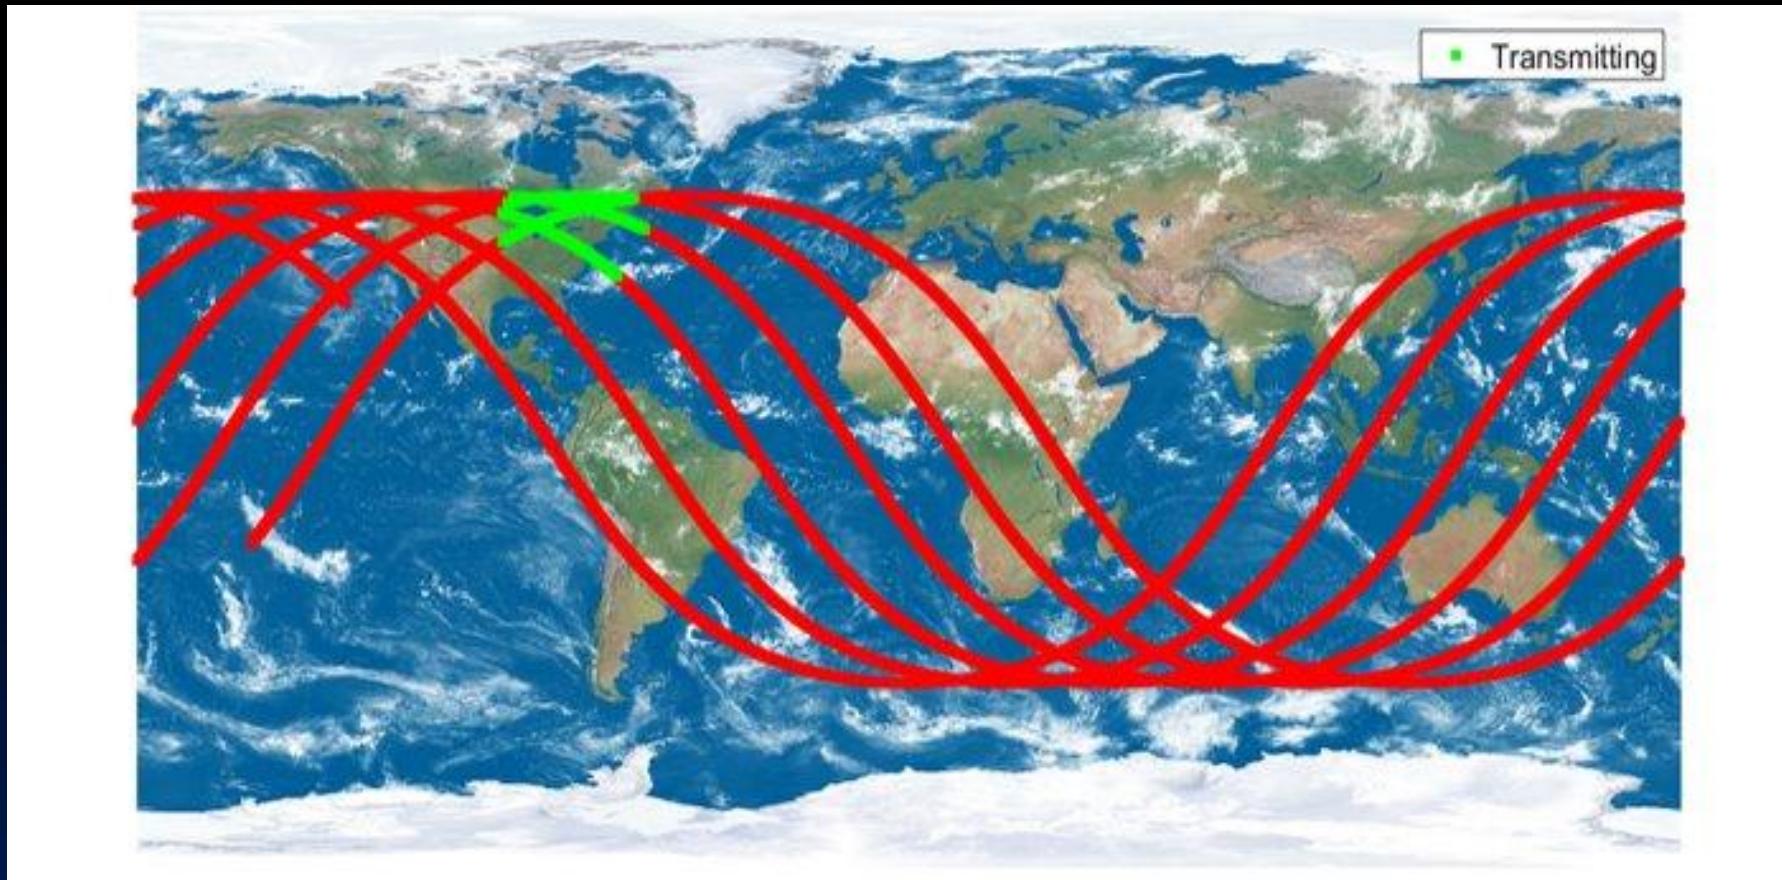




Detumble Sensor

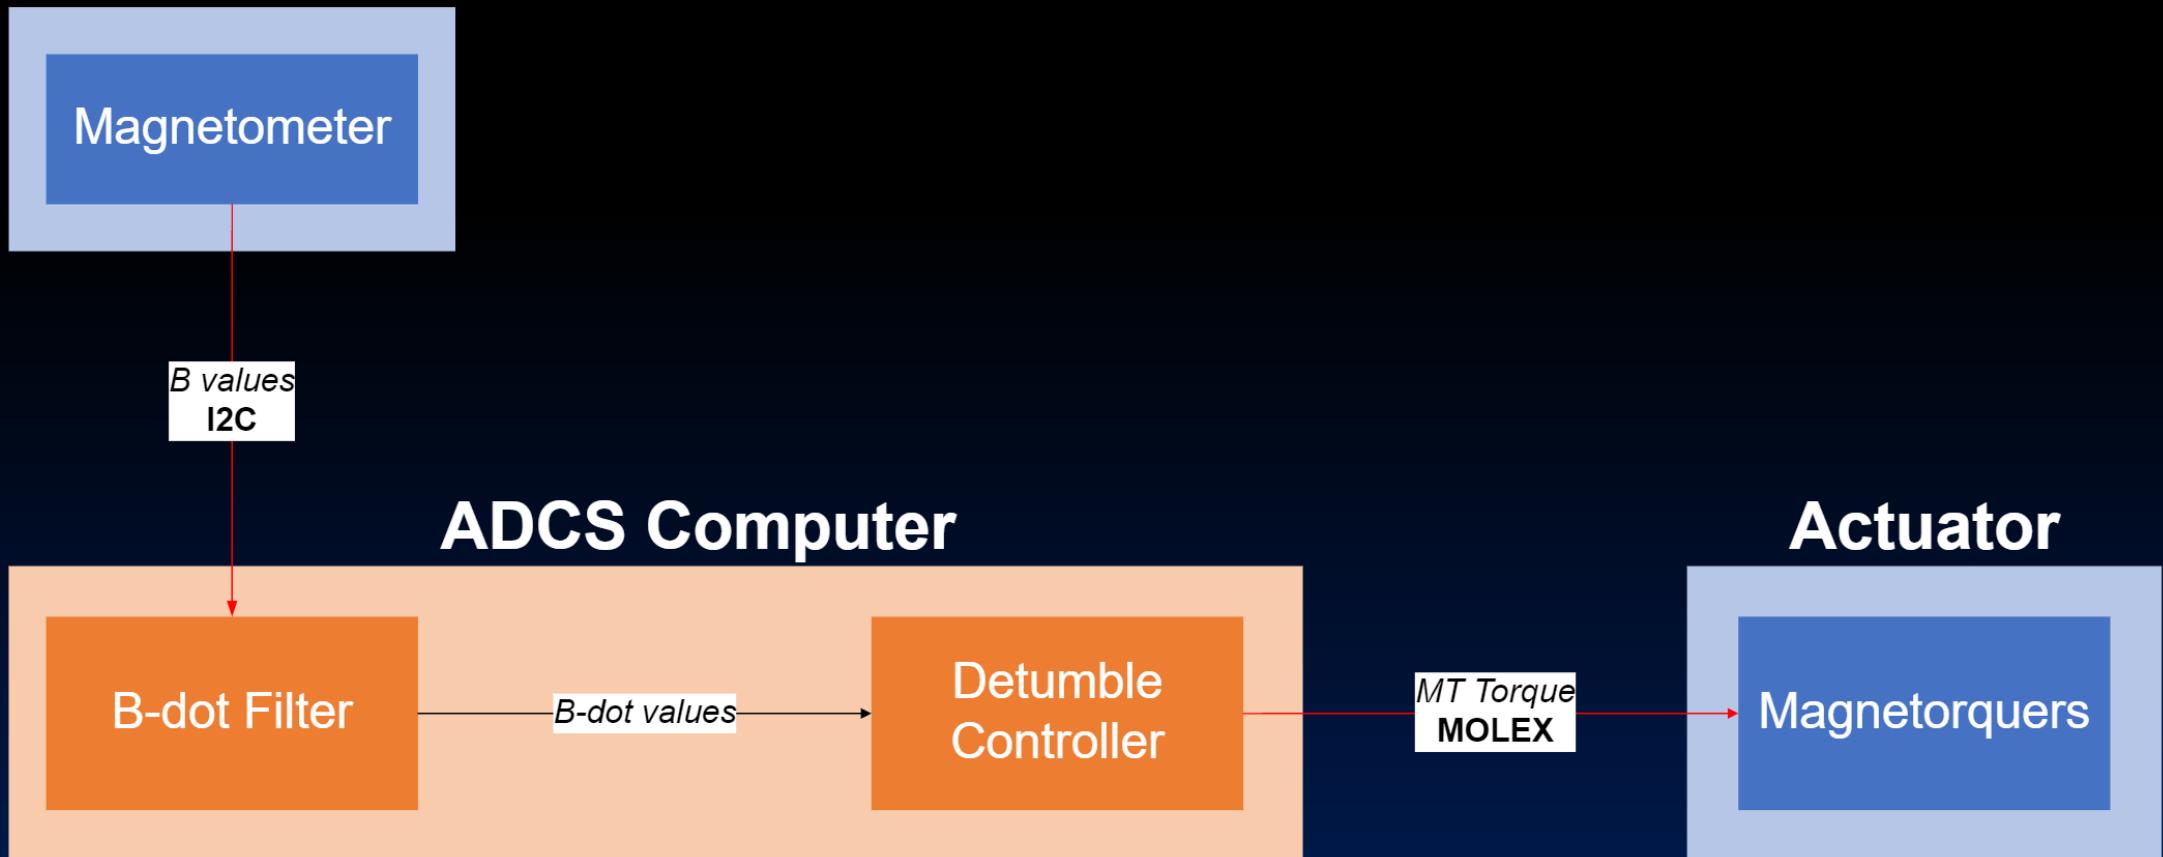




Transmitting Mode

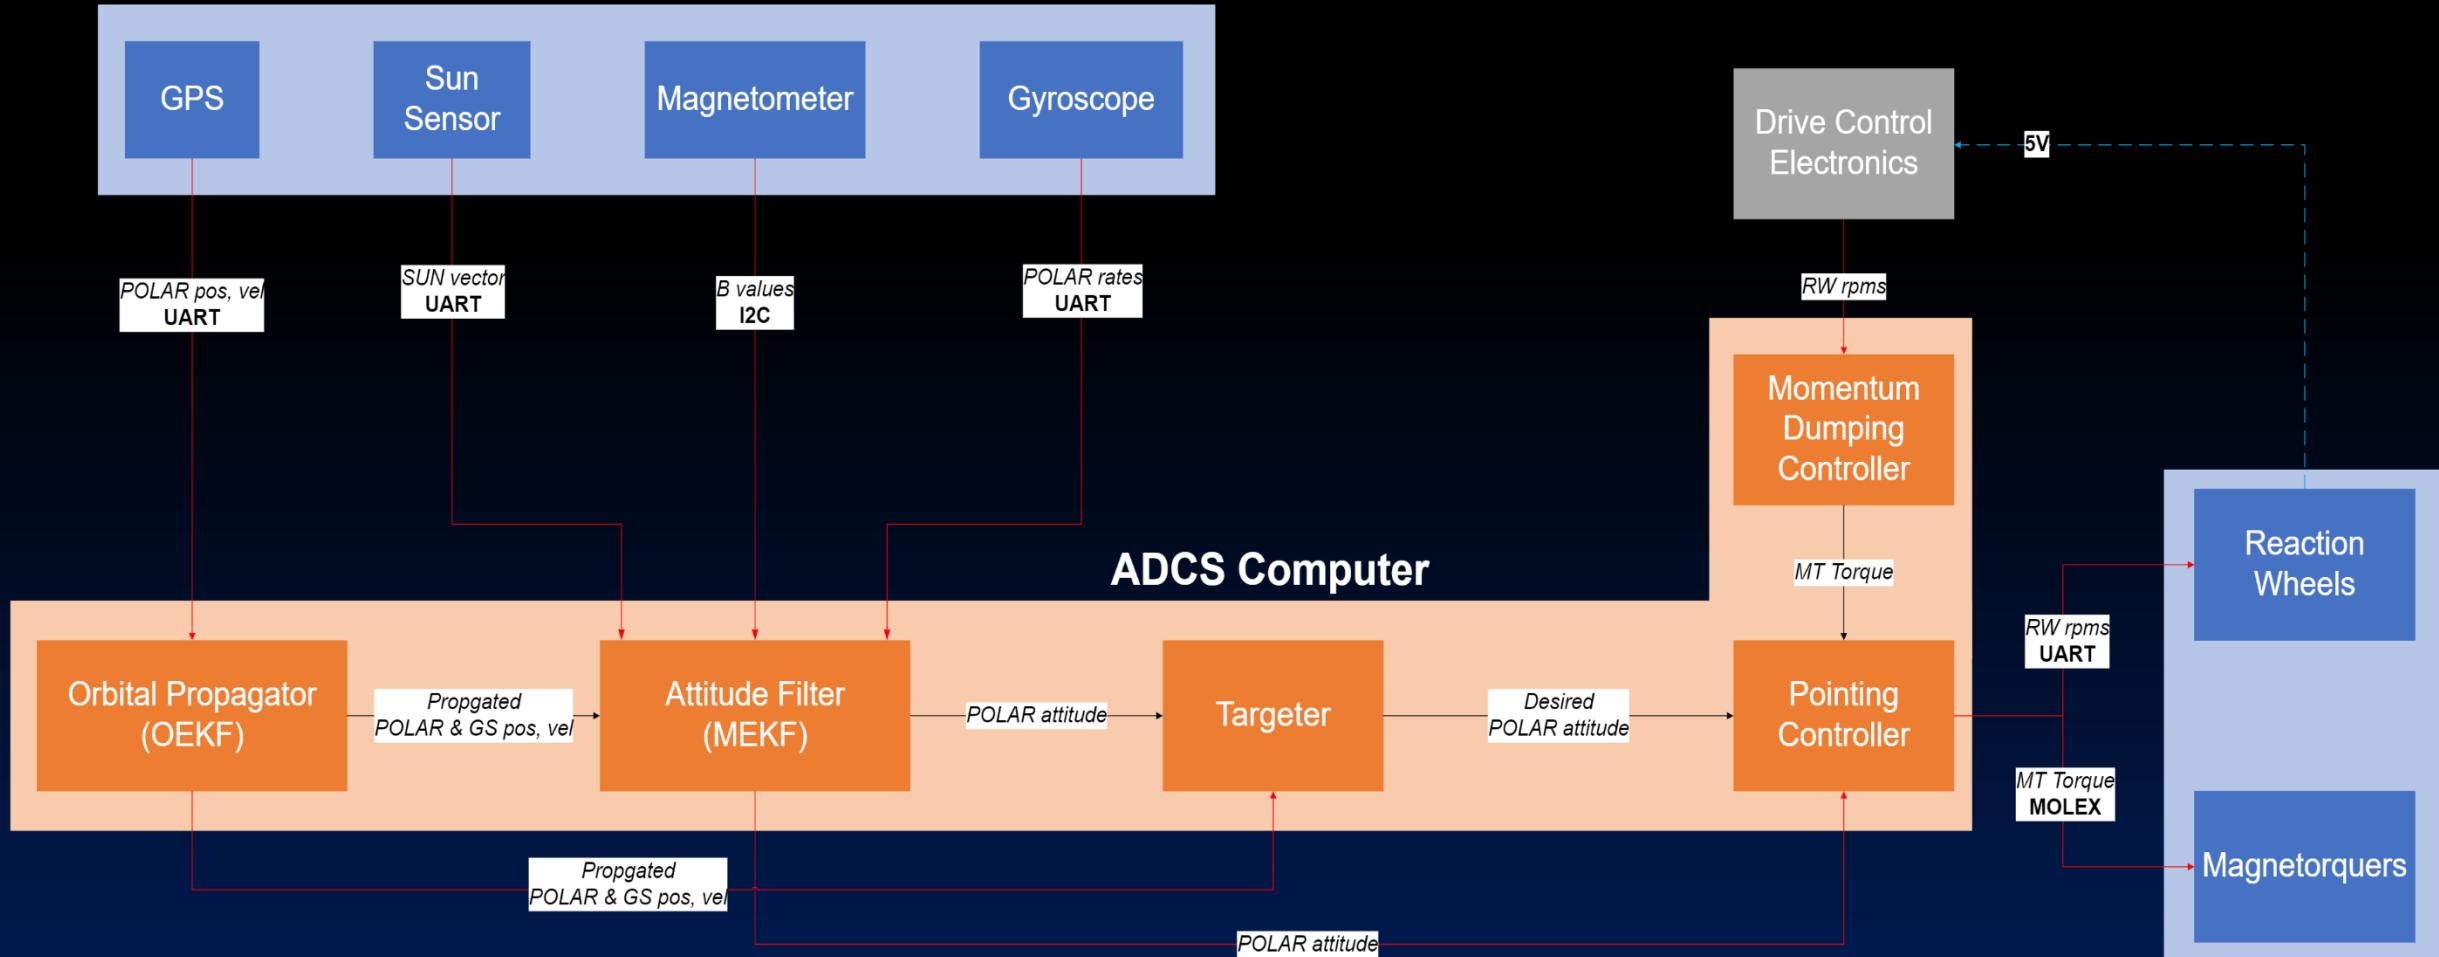




Charging Mode

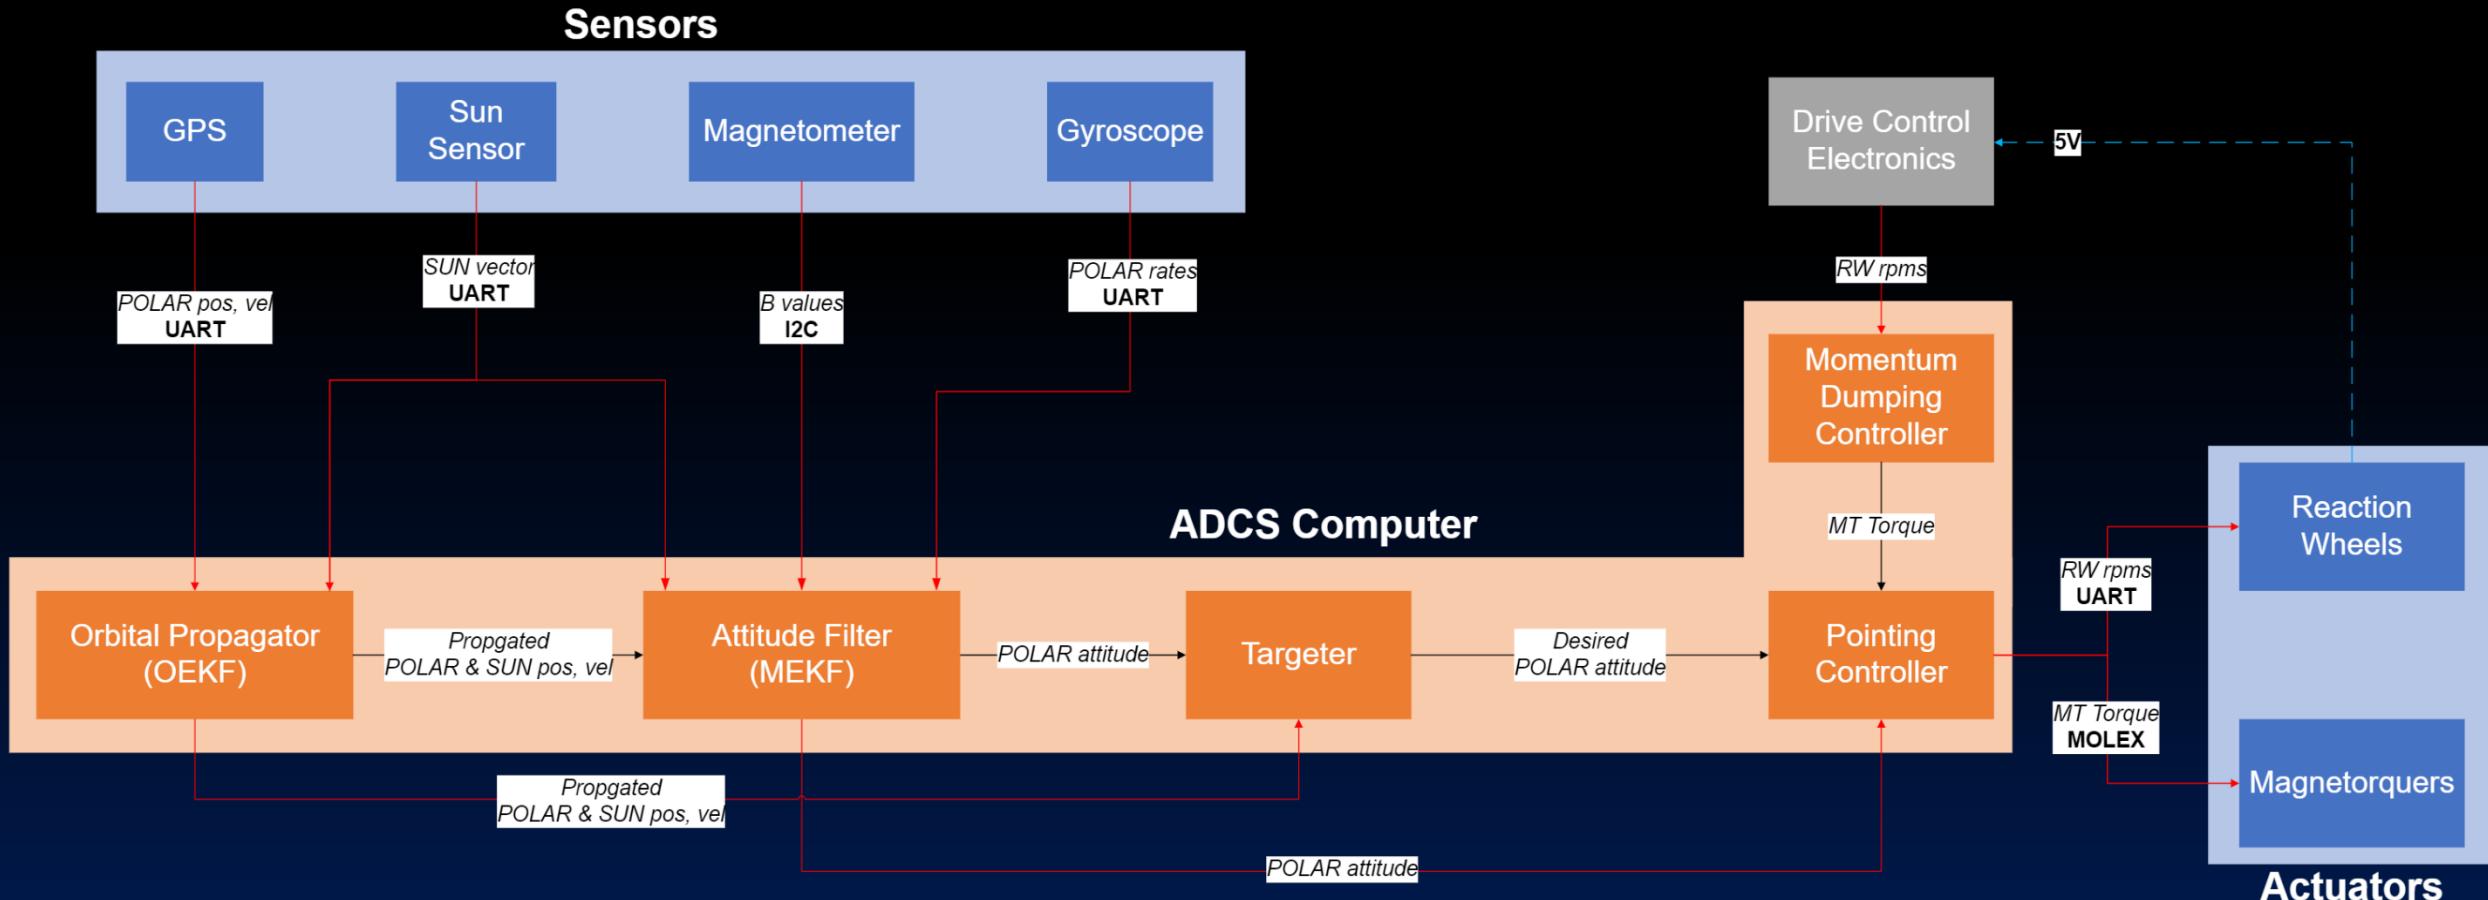




Mission Mode

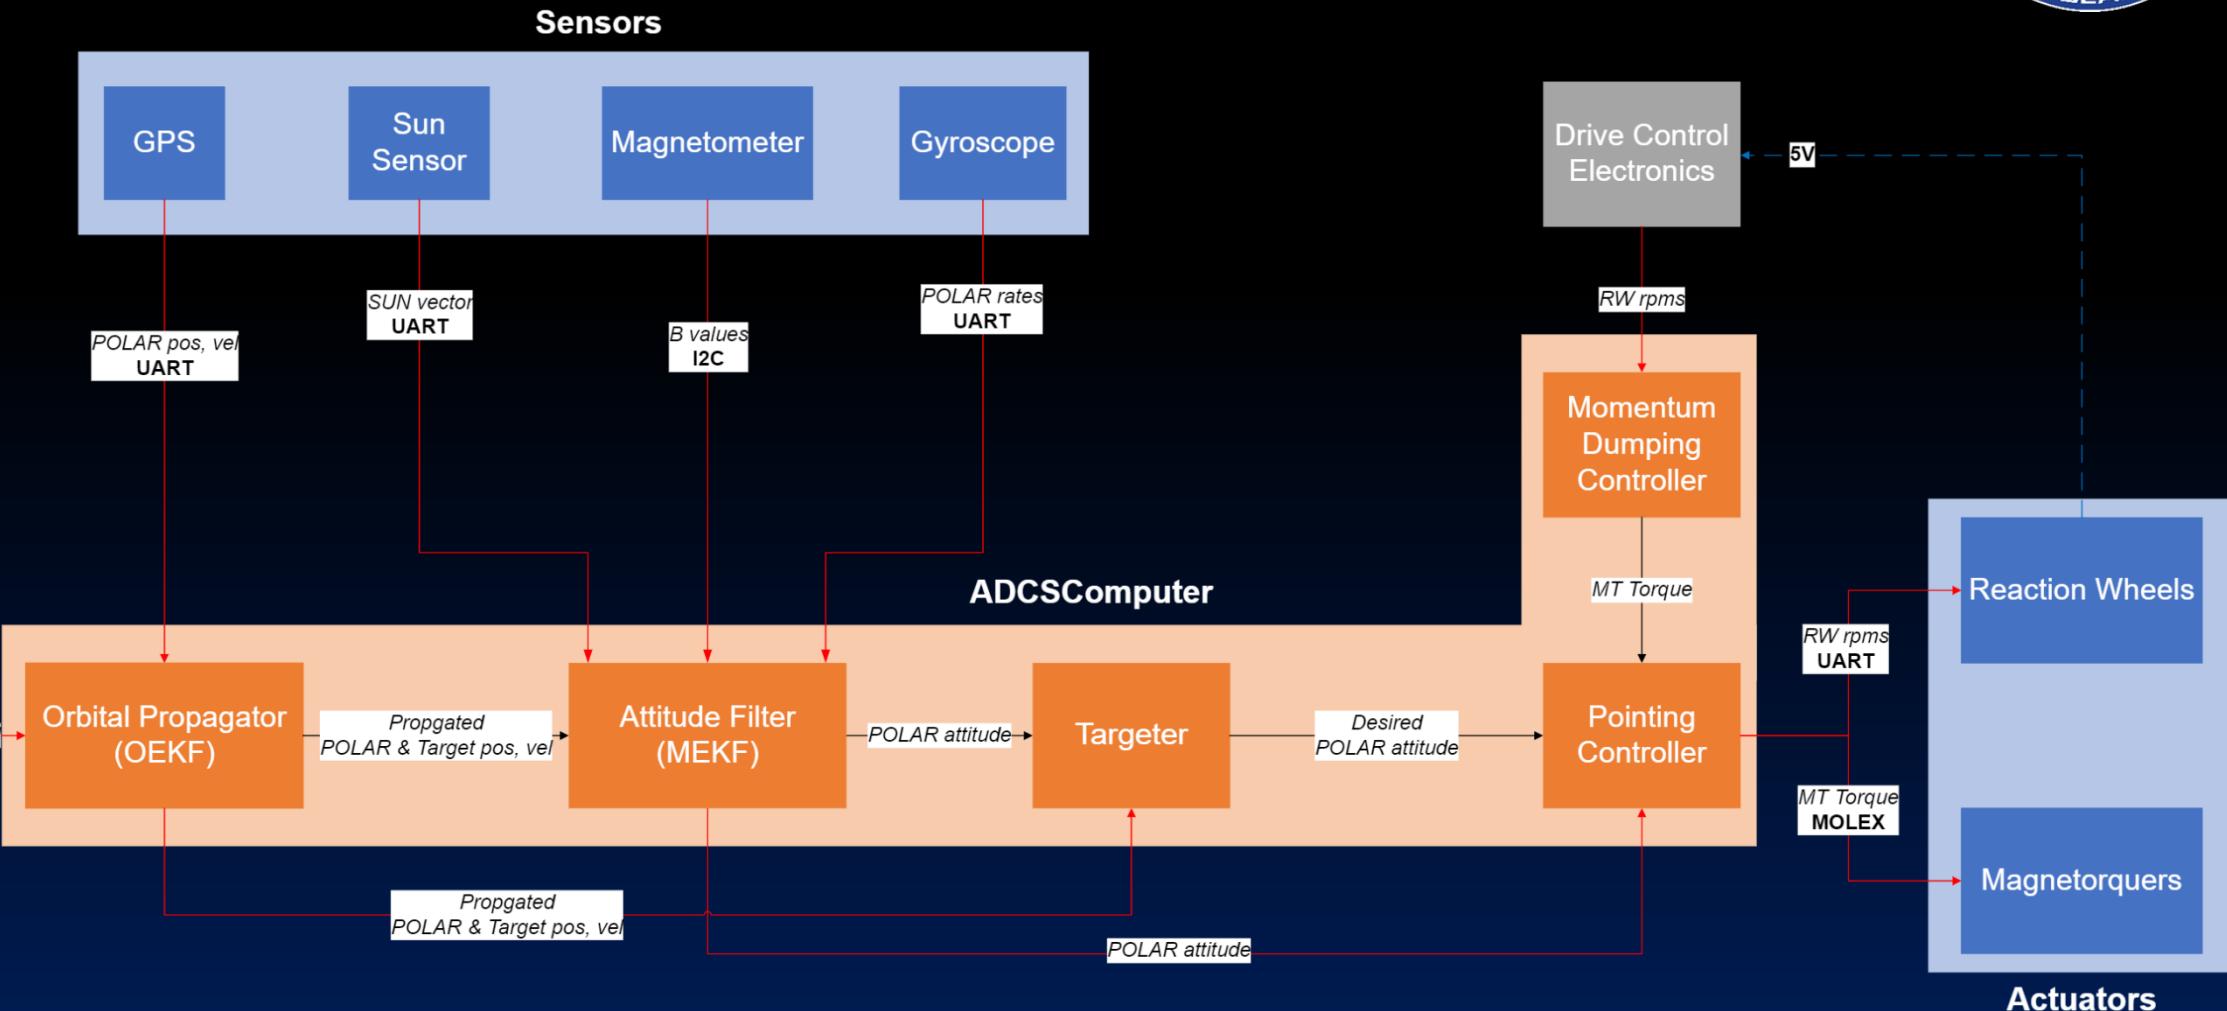

Risks

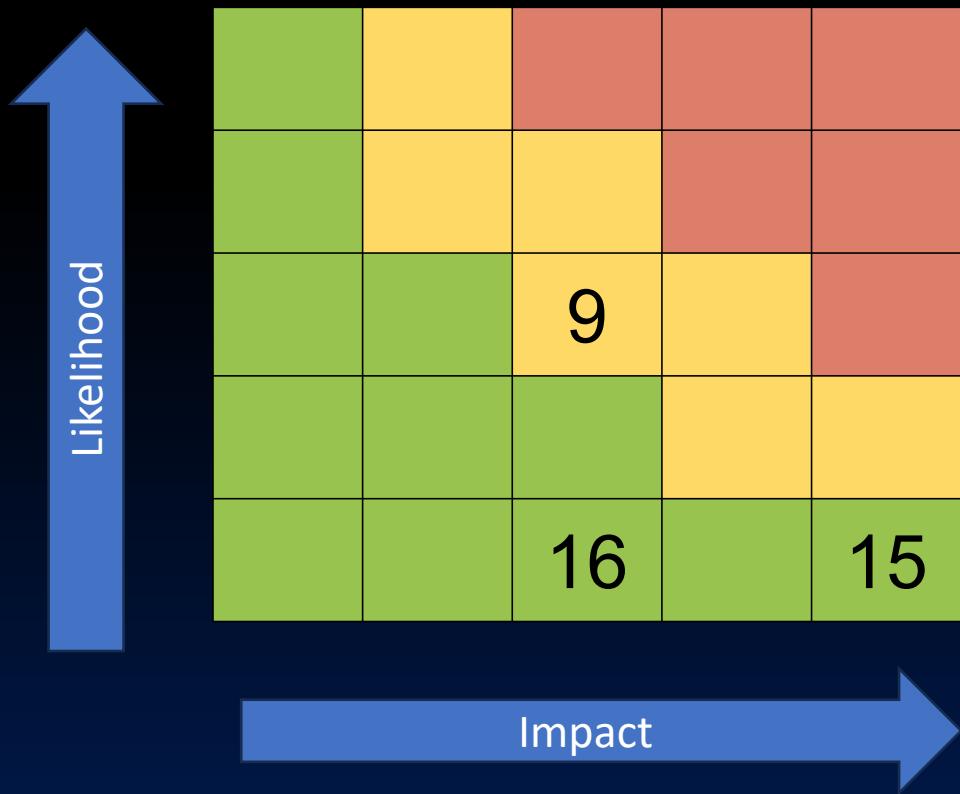

ID	Risk	Mitigation
9	GPS Error	GNC will derive a pointing budget that allows for L-Band patch antenna to view the Iridium constellation often enough for accurate GPS data
15	Reaction Wheel Failure	Redundancy will be implemented to prevent damage to POLAR's pointing ability
16	GNC Sensor Aging	Redundancy will be implemented to prevent damage to POLAR's pointing ability



Subsystem Progress - PDR

Sensor Models, Calibration

Active Members: 6-7

Orbit Determination

Master Sim

Pointing Mode Sims

Attitude Determination

Unit-Level Test Procedures

Pointing Budget

Component Trade Analyses

Block Diagrams

Incomplete

In Progress

Complete



Subsystem Progress - CDR

Sensor Models, Calibration

Active Members: 10-15

Target Determination

Orbit Determination

Hardware Procurement

Master Sim

Pointing Mode Sims

Attitude Determination

Unit-Level Test Procedures

Pointing Budget

Component Trade Analyses

Block Diagrams

Incomplete

In Progress

Complete



Next Steps

Develop
Mission Sim

Implement live
TLE data of
candidate
satellites

Submit CMO to
CubeSpace

Complete
Testing
Procedures


- Run a full mission Phase with different modes
- Integrate pBDRF material analysis algorithm

- Integrating a CelesTrack scraper
- Use observation selection from Operations

- Verify Hardware Selection with CubeSpace
- Order ADCS hardware






Mission Mode - Pointing

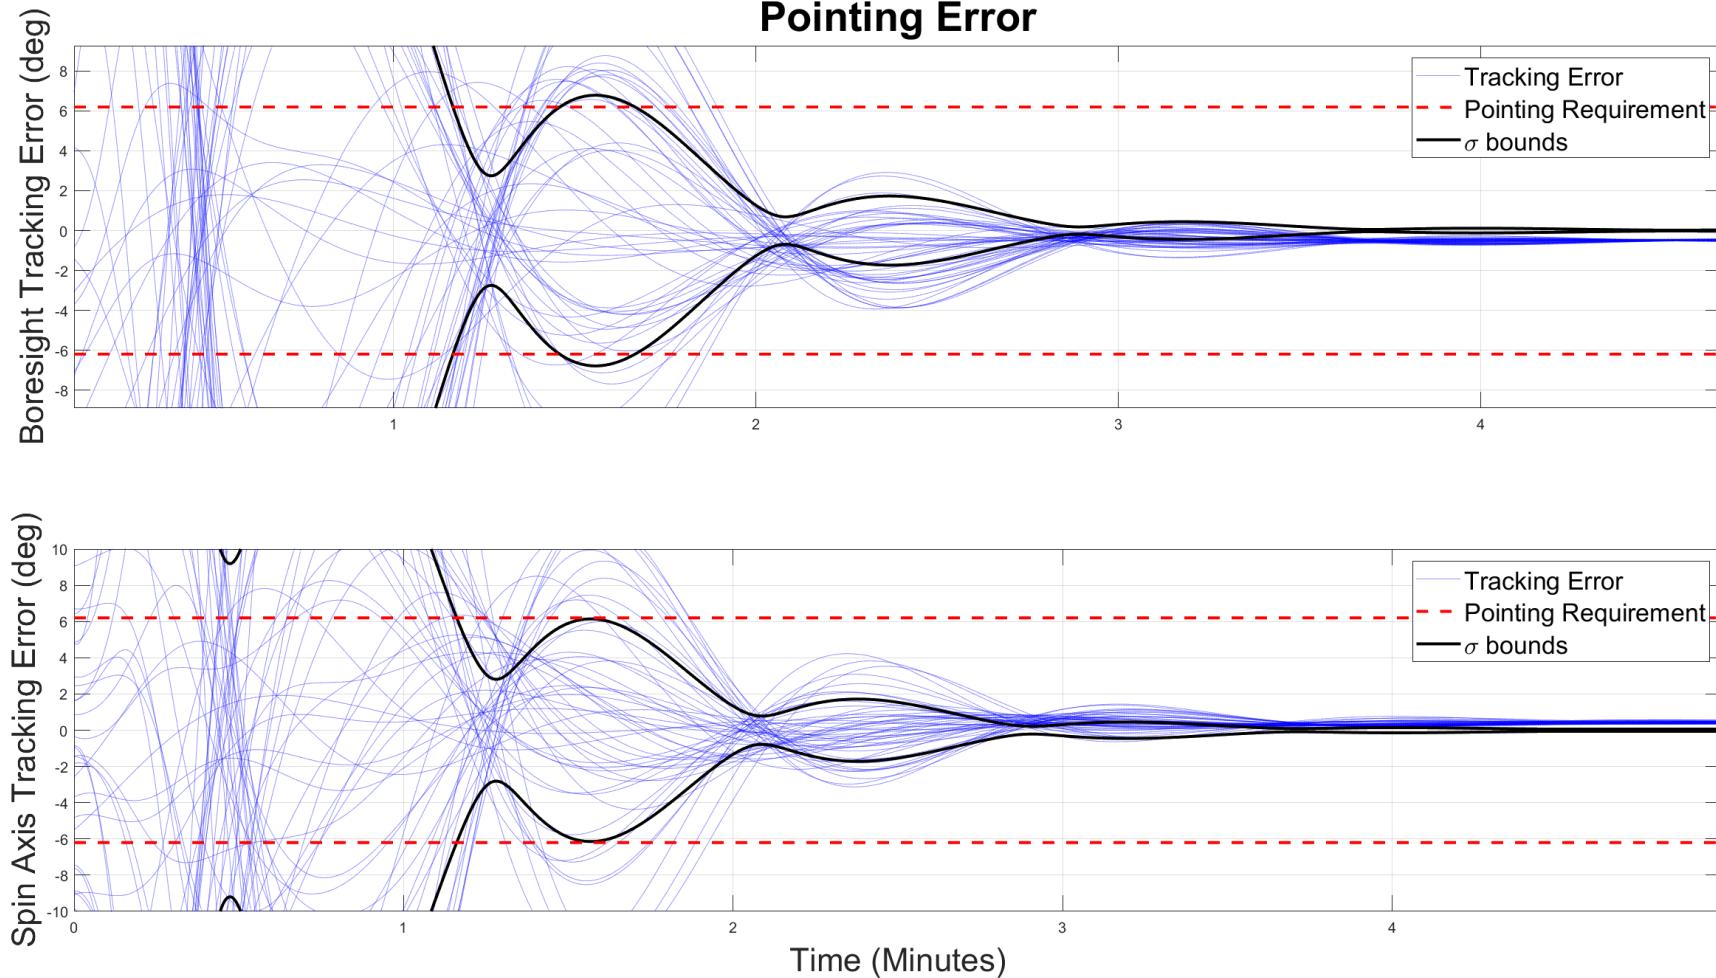




Mission Mode – Attitude

Attitude Estimation Error

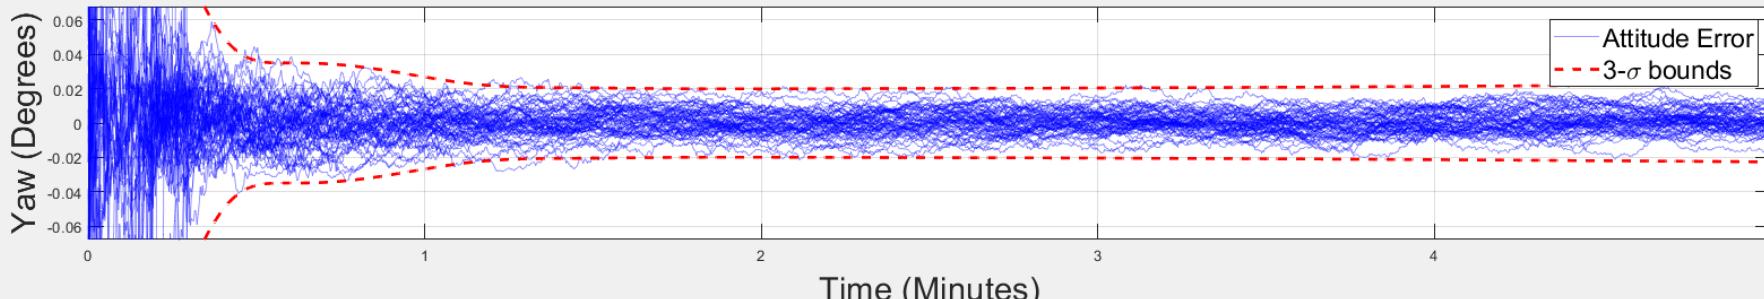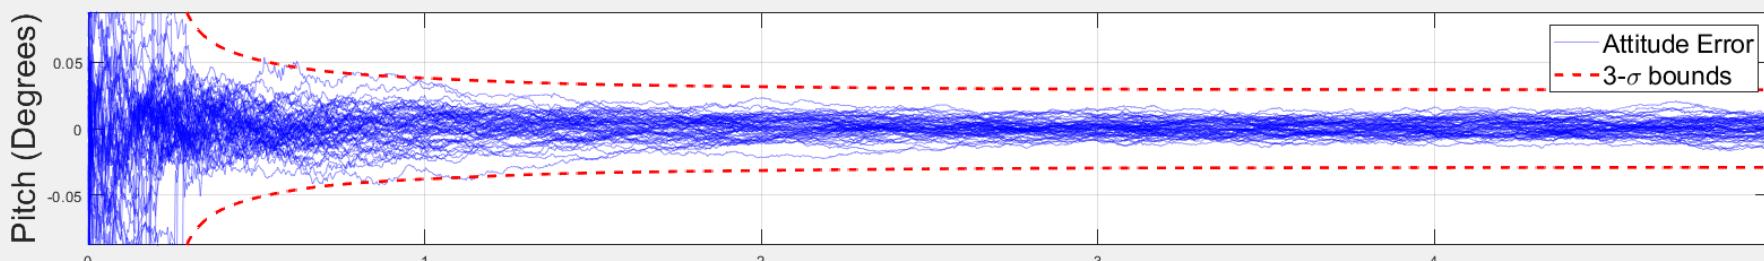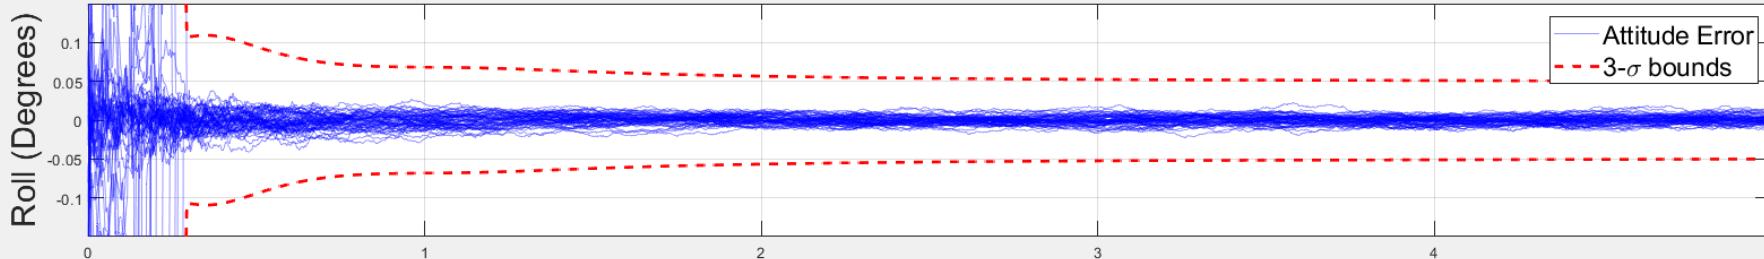




Charging Mode - Pointing

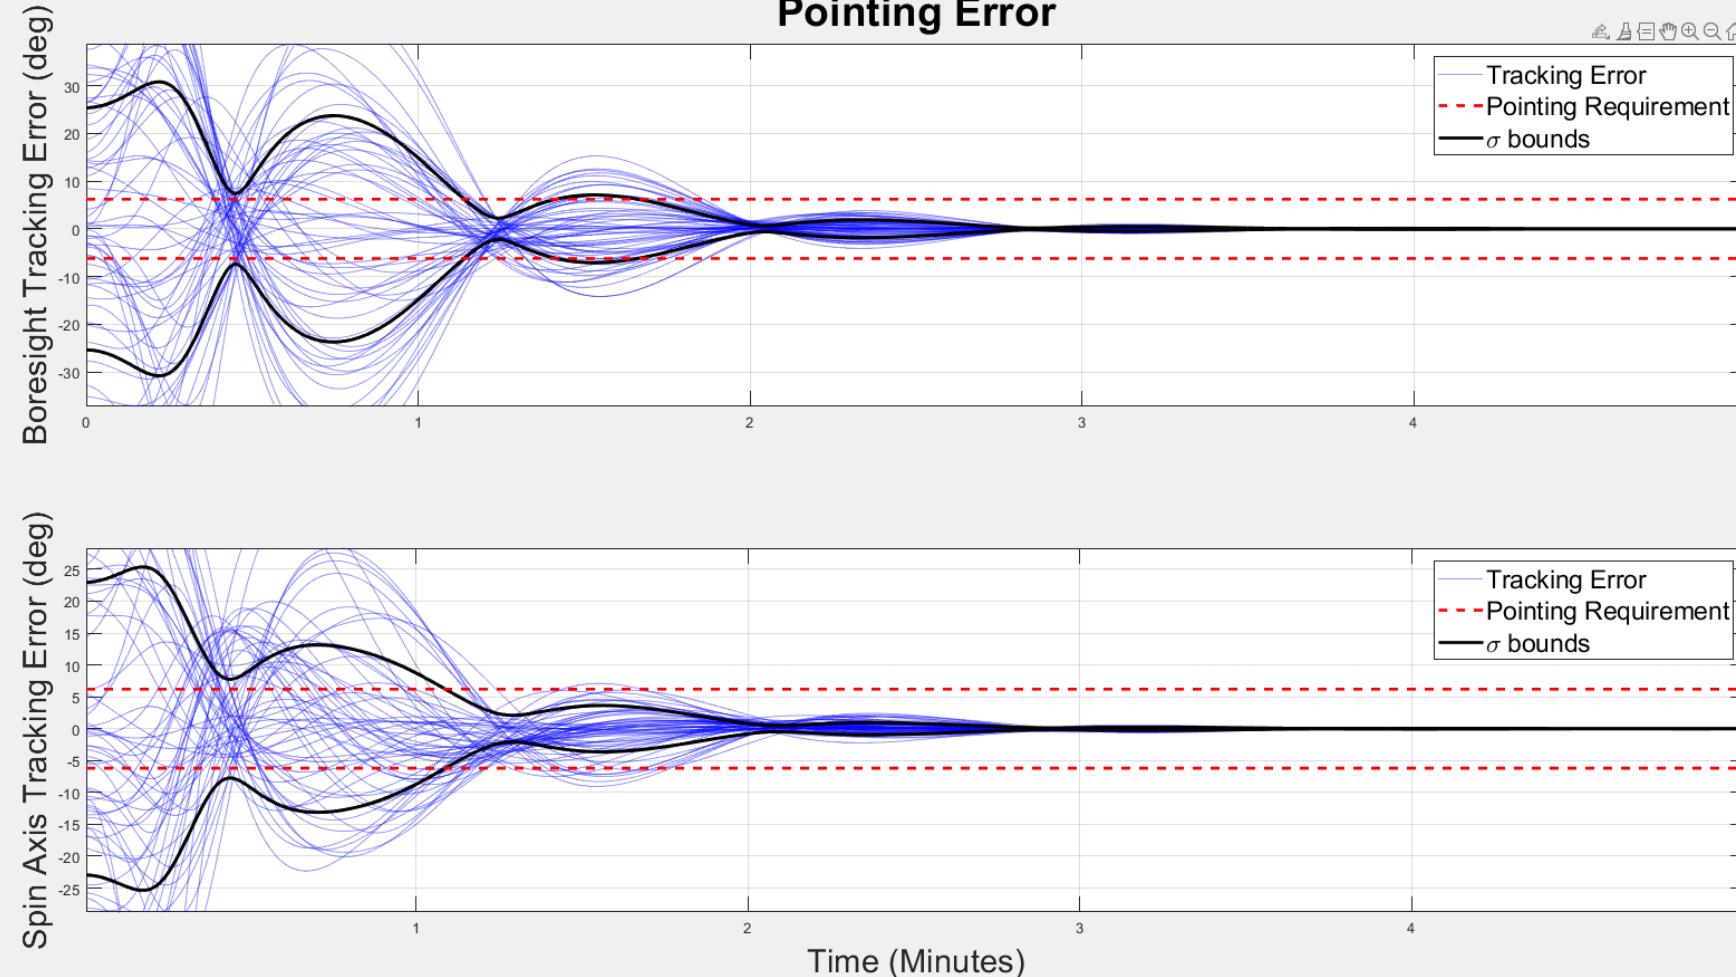




Charging Mode – Attitude

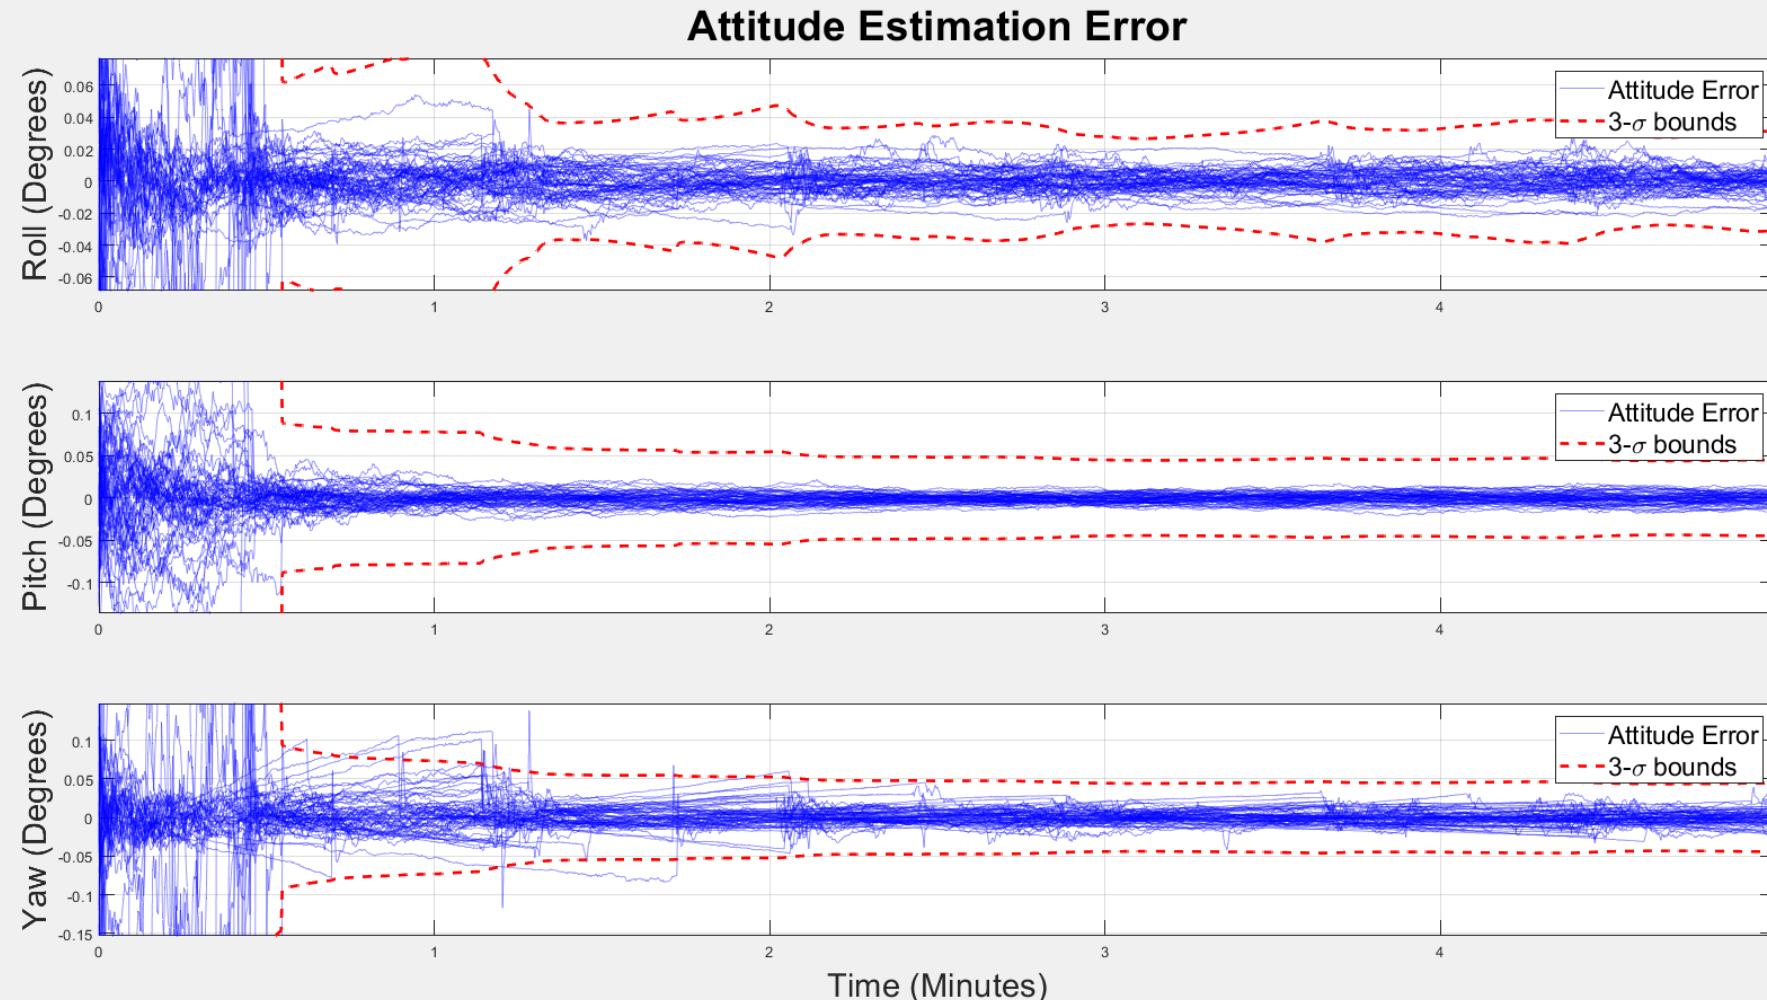



Transmitting Mode - Pointing

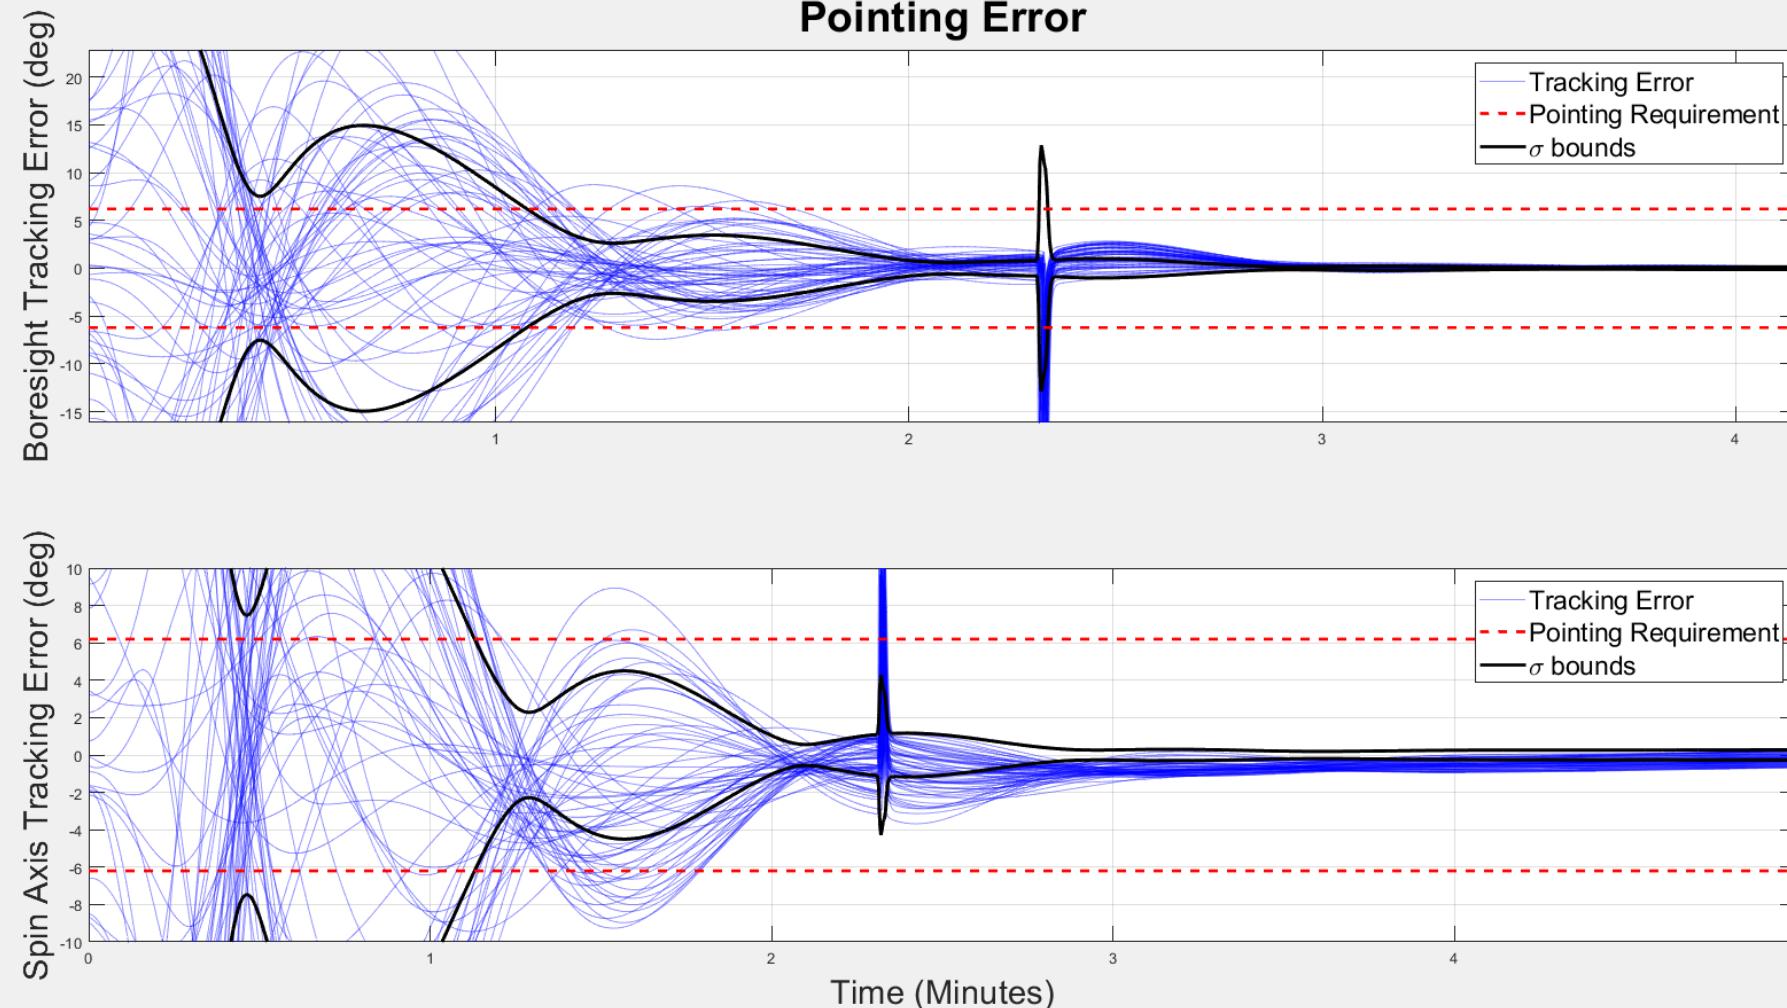



Transmitting Mode – Attitude

