SET B

ID: Name:

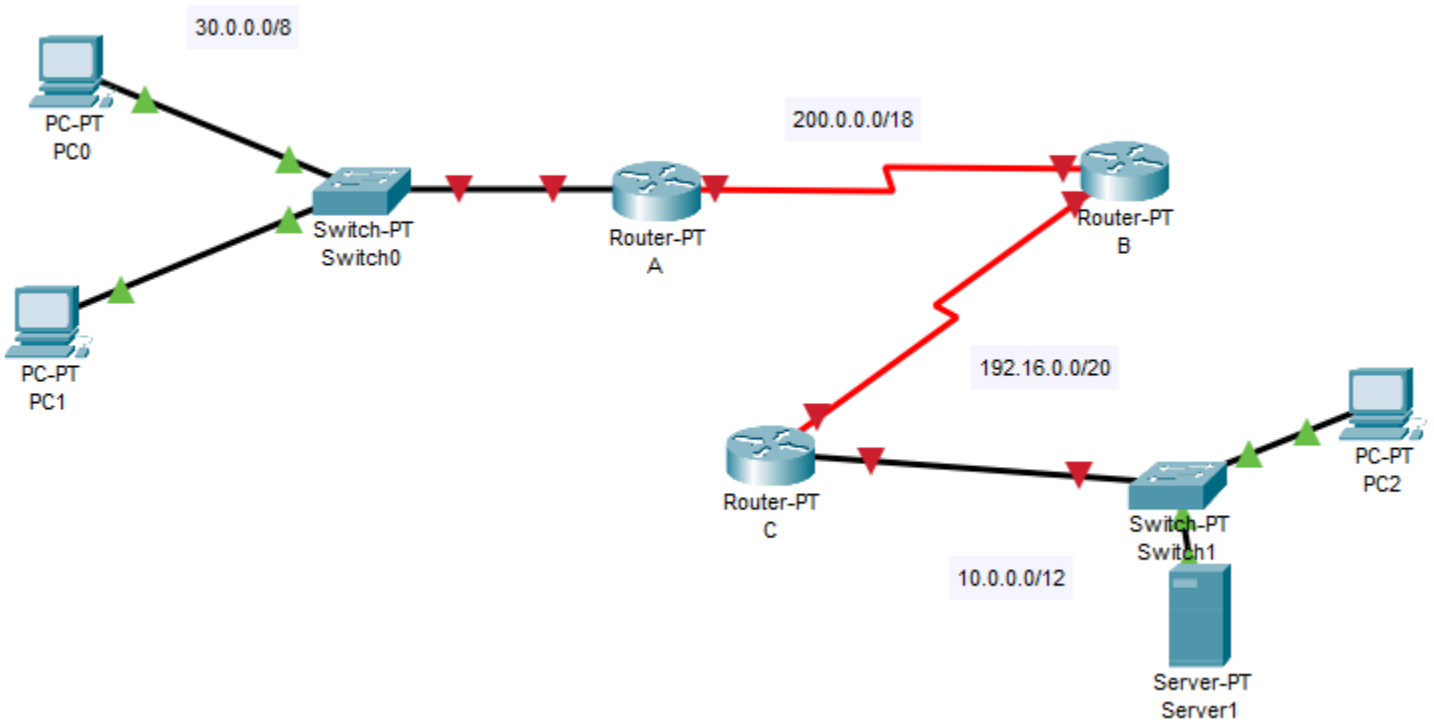

Q1. Configure RIP on the above topology.

Q2. Setup Dynamic NAT on Router A, with a range of publice IP (200.0.0.20 -200.0.0.40)