SET A

ID: Name:

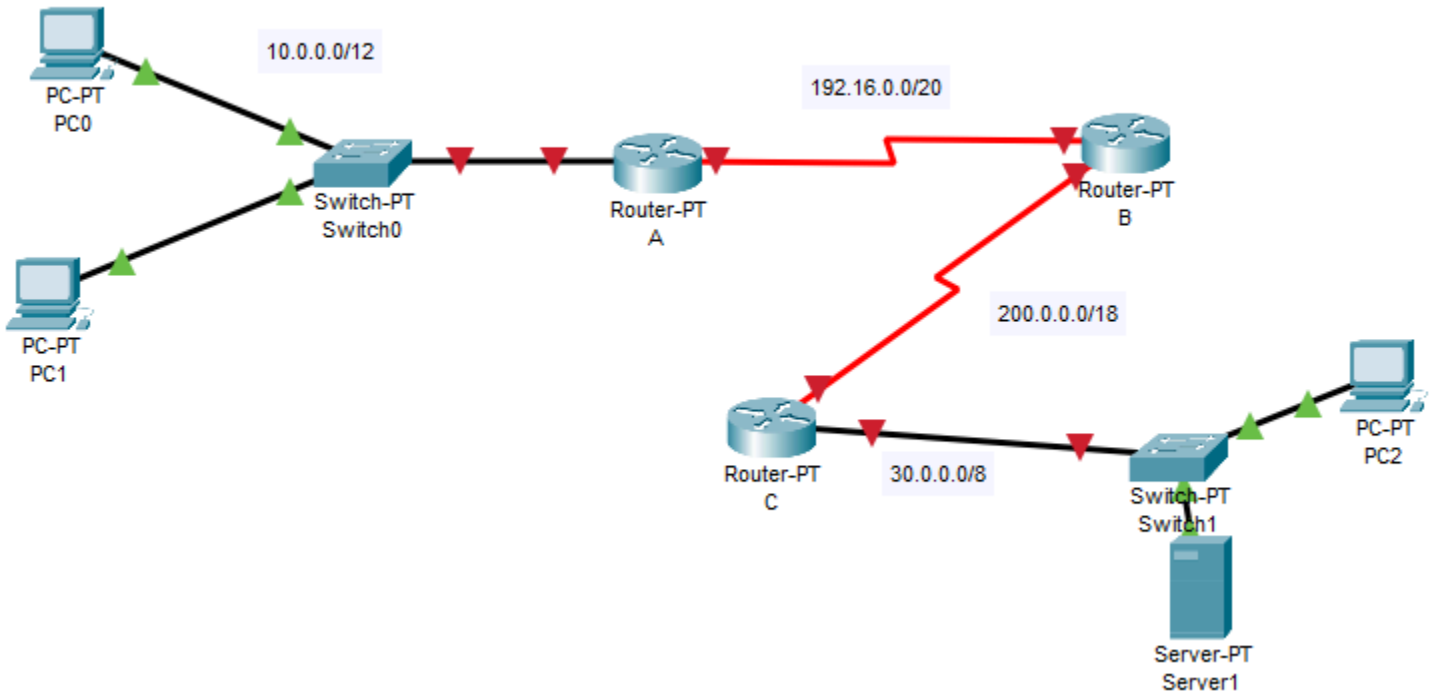

Q1. Configure RIP on the above topology.

Q2. Setup Dynamic NAT on Router A, with a range of publice IP (192.16.0.10 -192.168.0.20)