Onyx

Compact, eye-catching, contactless payment & telemetry device

Contactless Payments. Innovative Design.

A complete M2M telemetry and contactless payment solution ideally suited for unattended machines in various applications.

- Contactless device for use with debit, credit & prepaid cards,and mobile NFC payment transactions
- Attractive, compact design to fit smaller machines
- For use in closed and open environments

01 Part of a complete solution

- Seamlessly integrated with telemetry, cashless clearance, monitoring, management and BI
- Monitor machines in real-time with continuously updated information on all aspects of operation
- Inventory, cash monitoring, alerts and reports

02 Intuitive User Interface

- Graphical touch screen
- Integrated voice communication in local language
- Multi-language display capability

03 Marketing and loyalty promotions

- Increase consumer engagement
- Boost sales for regular customers
- Punch cards, discounts, gamification and more

04 Streamline your operation

- Remote capabilities & software updates
- Durable and highly secured to prevent vandalism
- Easy to install

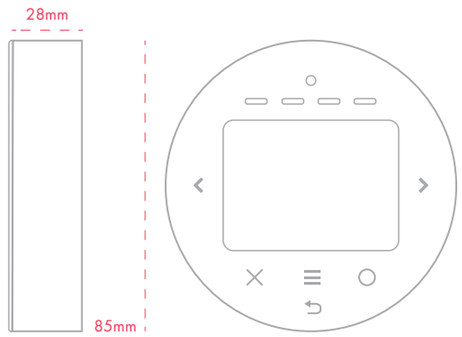

Payment solution for the unattended automated machine operators.

Benefit from simple & easy installation, clearance, and innovative design.

Installation Environment	
Operating Temperature	-20°C to +55°C / -4°F to +131°F
Storage Temperature	-40°C to +85°C / -40°F to +185°F
Humidity	25% to 95% (non-condensing)
Dust & Water Resistance	IP 66
Flammability	CE, FCC, RoHS

Physical Dimensions	
Diameter	85 mm / 3.3 inch
Depth	28 mm / 1.1 inch

Interface & Management	
Display	Color Touch LCD display 2.4 inch IPS ; 320 x 240 pixels + 4 LEDs + 6 soft touch buttons
Architecture	ARM Technology – 2 x Cortex, 32 bit, 180/216MHz
Audio	Speaker + Buzzer
Localization	Multi language support - LCD text & voice audio instructions
Security	Support DES, 3DES, AES, RSA, ECC, SHA1 algorithms, Random Number Generator
Power Supply	12-42V DC, 12-24V AC; 5 Watts. Recommended External Power Supply: 24V DC / 2Amp
Anti-vandal	Internal shock/tilt detector, anti-vandal Dragontrail glass
Power Loss Protection	Super Caps with safe shutdown mechanism
External Interface	Ethernet, 2 X RS232 (RS232 or TTL level through SW), External reader, 1 X door open sensor, 1 X temperature sensor
Pulse Input/Output	6 pulse input/output interfaces + 1 Inhibit input
Communication	3G/4G/Ethernet/NFC
Vending Machine Protocols	MDB / DEX / DDCMP / Pulse / VCCS / ccTalk / JVMA

*Nayax reserves the right in its sole discretion to make any modifications without prior notice.

Payment Support	
Contact	EMV Level 1 , EMV Level 2
Magnetic Stripe	ISO 7811 and JIS I Tracks 1,2,3 JIS I
Other Cards Supported	13.56 MHz : NFC, MIFARE, ISO 14443 Type A and B, ISO 15693, SONY® FeliCa
Contactless	Level 2: Visa payWave, MasterCard PayPass, Interac Flash,UnionPay qPBOC, AMEX ExpressPay, JCBJ/Speedy, FeliCa, Interac Flash, , Discover D-PAS, CUP QuickPass, SuiCa

Let Nayax help your business maximize your profits!

Nayax