


AC ELECTRICAL SPECIFICATIONS DEFINITIONS

The AC specifications presented consist of output delays, input setup and hold times, and signal skew times. All signals are specified relative to an appropriate edge of the MC68030 clock input and, possibly, relative to one or more other signals.

The measurement of the AC specifications is defined by the waveforms in Figure 1. To test the parameters guaranteed by Motorola, inputs must be driven to the voltage levels specified in Figure 1. Outputs of the MC68030 are specified with minimum and/or maximum limits, as appropriate, and are measured as shown. Inputs to the MC68030 are specified with minimum and, as appropriate, maximum setup and hold times, and are measured as shown. Finally, the measurements for signal-to-signal specifications are also shown.

Note that the testing levels used to verify conformance of the MC68030 to the AC specifications does not affect the guaranteed DC operation of the device as specified in the DC electrical characteristics.

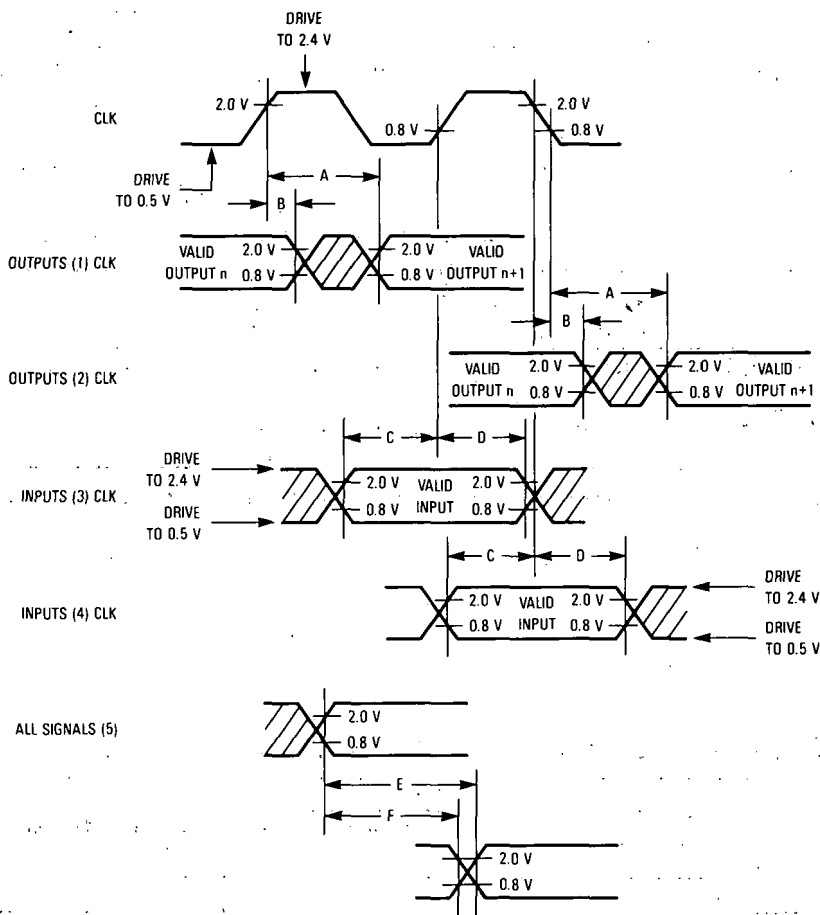

NOTES:

- 1 - This output timing is applicable to all parameters specified relative to the rising edge of the clock
- 2 - This output timing is applicable to all parameters specified relative to the falling edge of the clock
- 3 - This input timing is applicable to all parameters specified relative to the rising edge of the clock
- 4 - This input timing is applicable to all parameters specified relative to the falling edge of the clock
- 5 - This timing is applicable to all parameters specified relative to the assertion/negation of another signal

LEGEND:

- A - Maximum output delay specification
- B - Minimum output hold time
- C - Minimum input setup time specification
- D - Minimum input hold time specification
- E - Signal valid to signal valid specification (maximum or minimum)
- F - Signal valid to signal invalid specification (maximum or minimum)

Figure 1. Drive Levels and Test Points for AC Specifications