

SECTION 13


ORDERING INFORMATION AND MECHANICAL DATA

This section contains the pin assignments and package dimensions of the MC68881/MC68882 (FPCP). In addition, detailed information is provided to be used as a guide when ordering.

13.1 STANDARD MC68881/MC68882 ORDERING INFORMATION

Package Type	Frequency (MHz)	Temperature	Order Number
Pin Grid Array RC Suffix	12.5	0°C to 70°C	MC68881RC12
		–40°C to +85°C	MC68881LRC12
		–55°C to +125°C	MC68881ERC12
	16.67	0°C to 70°C	MC68881RC16
		–40°C to +85°C	MC68881LRC16
		–55°C to +125°C	MC68881ERC16
	20	0°C to 70°C	MC68881RC20
		–40°C to +85°C	MC68881LRC20
		–55°C to +125°C	MC68881ERC20
	25	0°C to 70°C	MC68881RC25
		0°C to 70°C	MC68882RC33
		0°C to 70°C	MC68882RC16
		0°C to 70°C	MC68882RC20
		0°C to 70°C	MC68882RC25

68-PIN GRID ARRAY

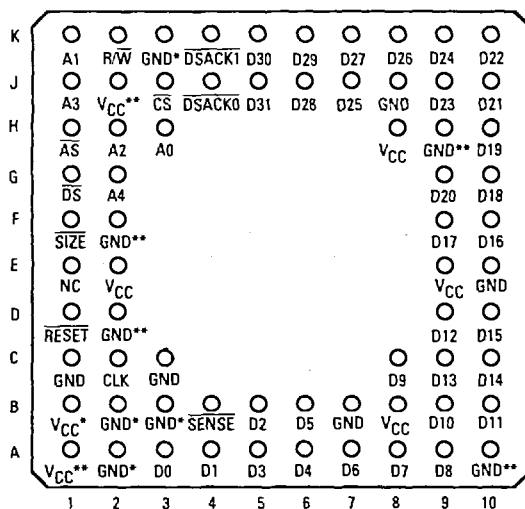


Pin Group	VCC	GND
D31-D16	H8	J8
D15-D00	B8	B7
Internal Logic, DSACK1, DSACK0	E2, E9	A2, B2, B3, B4***, C3, E10, K3
Separate	—	C1
Extra	A1, B1, J2	A10, D2, F2, H9

*New assignment for the A93N mask.

**Reserved for future Freescale use.

***SENSE pin, may be used as an additional GND pin.

**RC SUFFIX
PIN GRID ARRAY
CASE 765A-03**

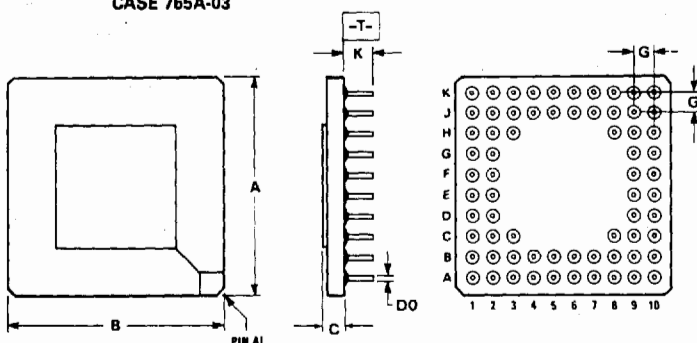

- NOTES:
1. DIMENSIONS A AND B ARE DATUMS AND T IS DATUM SURFACE.
 2. POSITIONAL TOLERANCE FOR LEADS (68 PLACES)
 $\phi 0.13 (0.005) \text{ T A B}$
 3. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
 4. CONTROLLING DIMENSION: INCH.

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	26.67	27.17	1.050	1.070
B	26.67	27.17	1.050	1.070
C	1.91	2.66	0.075	0.105
D	0.43	0.50	0.017	0.024
G	2.54 BSC		0.100 BSC	
K	4.32	4.82	0.170	0.190

