

LABO UTM

The screenshot shows a web browser window titled "pf-firewall.mlif.local - System: Package Manager: Installed Packages". The address bar shows the URL "http://192.168.50.254/pkg_mgr_installed.php". The page has two tabs: "Installed Packages" (active) and "Available Packages".

The "Installed Packages" section contains a table with the following data:

Name	Category	Version	Description	Actions
✓ FTP_Client_Proxy	ftp	0.3.7	Basic FTP Client Proxy using ftp-proxy from FreeBSD.	
✓ snort	security	4.1.6	Snort is an open source network intrusion prevention and detection system (IDS/IPS). Combining the benefits of signature, protocol, and anomaly-based inspection. Package Dependencies: snort-2.9.20_5	
✓ squid	www	0.4.46	High performance web proxy cache (3.5 branch). It combines Squid as a proxy server with its capabilities of acting as a HTTP / HTTPS reverse proxy. It includes an Exchange-Web-Access (OWA) Assistant, SSL filtering and antivirus integration via C-ICAP. Package Dependencies: squidclamav-7.2 squid_radius_auth-1.10 squid-5.8 c-icap-modules-0.5.5_1	
✓ squidGuard	www	1.16.19	High performance web proxy URL filter. Package Dependencies: squidguard-1.4.15 pfSense-pkg-squid-0.4.46	
✓ suricata	security	7.0.2	High Performance Network IDS, IPS and Security Monitoring engine by OISF. Package Dependencies: suricata-7.0.2_1	

Legend: = Update, = Current

Footer: = Remove, = Information, = Reinstall

liste de tous les paquets installé

Search

Search term

Both

Search

Clear

Enter a search string or *nix regular expression to search certificate names and distinguished names.

Certificates

Name	Issuer	Distinguished Name	In Use	Actions
webConfigurator default (640991c5c0c8c) Server Certificate CA: No Server: Yes	self-signed	O=pfSense webConfigurator Self-Signed Certificate, CN=pfSense-640991c5c0c8c Valid From: Thu, 09 Mar 2023 08:59:01 +0100 Valid Until: Wed, 10 Apr 2024 09:59:01 +0200		    
certificat du serveur MLIF Server Certificate CA: No Server: Yes	camlif	CN=pfSense.mlif.local Valid From: Fri, 07 Nov 2025 17:30:57 +0100 Valid Until: Thu, 10 Dec 2026 17:30:57 +0100		    

+ Add/Sign

Manager.

System / Certificate / Authorities

Search

Search term

Both

Search

Clear

Enter a search string or *nix regular expression to search certificate names and distinguished names.

Certificate Authorities

Name	Internal	Issuer	Certificates	Distinguished Name	In Use	Actions
camlif	✓	self-signed	1	CN=internal-ca Valid From: Fri, 07 Nov 2025 17:29:51 +0100 Valid Until: Mon, 05 Nov 2035 17:29:51 +0100		    

+ Add

Fichier Machine Ecran Entree Peripheriques Aide

pf-firewall.mlif.local - System: General Setup — Mozilla Firefox

pf-firewall.mlif.local - Sys x +

Not Secure http://192.168.50.254/system.php Sign in

System / General Setup

System

Hostname
Name of the firewall host, without domain part.

Domain
Domain name for the firewall.

Do not end the domain name with '.local' as the final part (Top Level Domain, TLD). The 'local' TLD is [widely used](#) by mDNS (e.g. Avahi, Bonjour, Rendezvous, Airprint, Airplay) and some Windows systems and networked devices. These will not network correctly if the router uses 'local' as its TLD. Alternatives such as 'home.arpa', 'local.lan', or 'mylocal' are safe.

DNS Server Settings

DNS Servers	8.8.8.8	DNS Hostname	Delete
192.168.100.10 Address Enter IP addresses to be used by the system for DNS resolution. These are also used for the DHCP service, DNS Forwarder and DNS Resolver when it has DNS Query Forwarding enabled.	192.168.100.10	 DNS Hostname Enter the DNS Server Hostname for TLS Verification in the DNS Resolver (optional).	Delete

Add DNS Server [+ Add DNS Server](#)

DNS Server Override ☒ Allow DNS server list to be overridden by DHCP/PPP on WAN or remote OpenVPN server
If this option is set, pfSense will use DNS servers assigned by a DHCP/PPP server on WAN or

1 2 3 4 pf-firewall.mlif.local - ... 17:14 Afficher les applications

This is the port the proxy server will listen on to intercept SSL traffic using transparent proxy.
Default: 3129

**SSL Proxy
Compatibility
Mode**

Modern
The compatibility mode determines which cipher suites and TLS versions are supported.
Default: Modern. Click Info for details. [i](#)

**DHParams
Key Size**

2048 (default)
DH parameters are used for temporary/ephemeral DH key exchanges and improve security by enabling the use of DHE ciphers.

CA

camlif
Select Certificate Authority to use when SSL interception is enabled. [i](#)

**SSL
Certificate
Daemon
Children**


5
This is the number of SSL certificate daemon children to start. May need to be increased in busy environments. Default: 5

**Remote Cert
Checks**

Accept remote server certificate with errors
Do not verify remote certificate
Select remote SSL certificate checks to perform. Use CTRL + click to select multiple options.

**Certificate
Adapt**

Sets the "Not After" (setValidAfter)
Sets the "Not Before" (setValidBefore)
Sets CN property (setCommonName)
See [sslproxy_cert_adapt directive documentation](#) and [Mimic original SSL server certificate wiki article](#) for details.

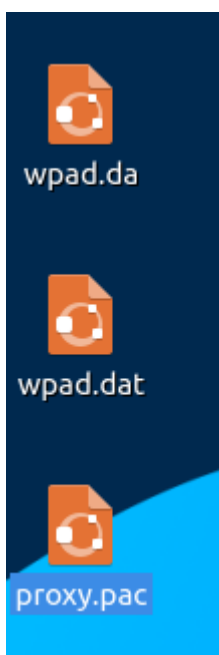

```
/home/test/Desktop/proxy.pac
Fichier  Éditer  Options  Chercher  Aide
[Icons] [Icons] [Icons] [Icons] [Icons] [Icons]
proxy.pac x
function FindProxyForURL(url,host)
{
return "PROXY 192.168.50.254:3128";
}
```

les fichier contiennent ceci

Uploaded file to /tmp/wpad.da.

Uploaded file to /tmp/wpad.dat.

Uploaded file to /tmp/proxy.pac.

Shell Output - mv /tmp/wpad.dat /usr/local/www

Shell Output - mv /tmp/wpad.da /usr/local/www

Shell Output - mv /tmp/proxy.pac /usr/local/www

```
wpad      IN      A      192.168.50.254
```

```
root@messagelab:~# nslookup wpad.mlif.local
Server:      192.168.100.10
Address:     192.168.100.10#53

Name:   wpad.mlif.local
Address: 192.168.50.254

root@messagelab:~#
```

FloatingWANLANSRVDMZ

Rules (Drag to Change Order)

☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☐	✓	4/168 KiB	IPv4 *	*	*	*	*	none			

↑ Add

↓ Add

🗑 Delete

🔄 Toggle

📄 Copy

💾 Save

+ Separator

i

pfSense is developed and maintained by Netgate. © ESF 2004 - 2025 View license.

Squid General Settings

Enable Squid Proxy

☐ Check to enable the Squid proxy.
Important: If unchecked, ALL Squid services will be disabled and stopped.

Settings — Mozilla Firefox

about:preferences#searchResults

Connection Settings

Configure Proxy Access to the Internet

☒ No proxy

☐ Auto-detect proxy settings for this network

☐ Use system proxy settings

☐ Manual proxy configuration

HTTP Proxy

192.168.50.254

Port

80

☐ Also use this proxy for HTTPS

HTTPS Proxy

Port

0

SOCKS Host

Port

0

☐ SOCKS v4

☒ SOCKS v5

☐ Automatic proxy configuration URL

Reload

No proxy for

Example: .mozilla.org, .net.nz, 192.168.1.0/24

Connections to localhost, 127.0.0.1/8, and ::1 are never proxied.

☐ Do not prompt for authentication if password is saved

Cancel

OK

General Options

Enable

☒ Check this option to enable squidGuard.
Important: Please set up at least one category on the 'Target Categories' tab before enabling.
See [this link for details](#).
The Save button at the bottom of this page must be clicked to save configuration changes.

Target Rules List

ACCESS: 'whitelist' - always pass; 'deny' - block; 'allow' - pass, if not blocked.

Target Categories

[blk_blacklists_adult]

access deny 

[blk_blacklists_download]

access deny 

[blk_blacklists_social_networks]

access deny 

Default access [all]

access allow 

LOBORTO_TRAINING_CLIENT (start) [En fonction] - Oracle VirtualBox

Fichier Machine Écran Entrée Périphériques Aide

pfSense.mlif.local - Services: Suricata: WAN - Interface Settings — Mozilla Firefox

pfSense.mlif.local - Services: Suricata: WAN - Interface Settings

Server Not Found

Server Not Found

Not Secure http://192.168.50.254/suricata/suricata_interfaces_edit... Sign in

Services / Suricata / WAN - Interface Settings 

Interfaces Global Settings Updates Alerts Blocks Files Pass Lists Suppress Logs View

Logs Mgmt SID Mgmt Sync IP Lists

WAN Settings WAN Categories WAN Rules WAN Flow/Stream WAN App Parsers WAN Variables

WAN IP Rep

General Settings

Enable ☒ Checking this box enables Suricata inspection on the interface.

Interface WAN (em0) 
Choose which interface this Suricata instance applies to. In most cases, you will want to choose LAN here if this is the first Suricata-configured interface.

Description WAN
Enter a meaningful description here for your reference. The default is the pfSense interface friendly description.

Logging Settings

Send Alerts to System Log ☐ Suricata will send Alerts from this interface to the firewall's system log.
NOTE: the FreeBSD syslog daemon will automatically truncate exported messages to 480 bytes max.

Enable Stats Collection ☐ Suricata will periodically gather performance statistics for this interface. Default is Not Checked.

1 2 3 4 pfSense.mlif.local - Se... 14:10

172.17.123.78	11/19/2025 14:15:19	ET SCAN Suspicious inbound to mySQL port 3306	1:2010937	✖
---------------	---------------------	---	-----------	---