

```
root@www:~# ping lemonde.fr
PING lemonde.fr (151.101.122.137) 56(84) bytes of data.
64 bytes from 151.101.122.137 (151.101.122.137): icmp_seq=1 ttl=59 time=3.88 ms
64 bytes from 151.101.122.137 (151.101.122.137): icmp_seq=2 ttl=59 time=5.28 ms
64 bytes from 151.101.122.137 (151.101.122.137): icmp_seq=3 ttl=59 time=4.60 ms
```

```
root@www:~# arp -a
? (192.168.200.254) at 08:00:27:14:a7:80 [ether] on enp0s3
root@www:~# _
```

```
-bash: sudo : commande introuvable
root@www:~# host messagelab
messagelab.mlif.local has address 192.168.100.10
root@www:~# host 192.168.100.10
10.100.168.192.in-addr.arpa domain name pointer messagelab.mlif.local.
root@www:~# arp -a
? (192.168.200.254) at 08:00:27:14:a7:80 [ether] on enp0s3
root@www:~# host www2.mlif.local
Host www2.mlif.local not found: 3(NXDOMAIN)
root@www:~# _
```

```
root@www:~# nslookup messagelab
Server:      192.168.100.10
Address:     192.168.100.10#53

Name:   messagelab.mlif.local
Address: 192.168.100.10

root@www:~# _
```

```
root@www:~# nslookup 192.168.200.5
** server can't find 5.200.168.192.in-addr.arpa: NXDOMAIN
```

```
root@www:~# nslookup free.fr
Server:      192.168.100.10
Address:     192.168.100.10#53

Non-authoritative answer:
Name:   free.fr
Address: 212.27.48.10
Name:   free.fr
Address: 2a01:e0c:1::1

root@www:~#
```

```

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the
permitted by applicable law.
root@messagelab:~# nslookup ut-capitole.fr
Server:      192.168.100.10
Address:     192.168.100.10#53

** server can't find ut-capitole.fr: SERVFAIL

root@messagelab:~#

```

```

root@messagelab:~# nslookup messagelab
Server:      192.168.100.10
Address:     192.168.100.10#53

Name:   messagelab.mlif.local
Address: 192.168.100.10

```

STOP 2

```

Enter an option:

*** FINAL System shutdown message from root@pf-firewall.mlif.local ***

System going down IMMEDIATELY

pfSense is now shutting down ...

net.inet.carp.allow: 0 -> 0
pflog0: promiscuous mode disabled

```

pf-firewall éteint proprement

al
ne
age
age
u
séries

Réseau

Adapter 1
Adapter 2
Adapter 3
Adapter 4



☐ Activer l'interface réseau

Mode d'accès réseau : Réseau interne

Name: sw-client

▶ Advanced

les deux dernière cartes sont desactivé

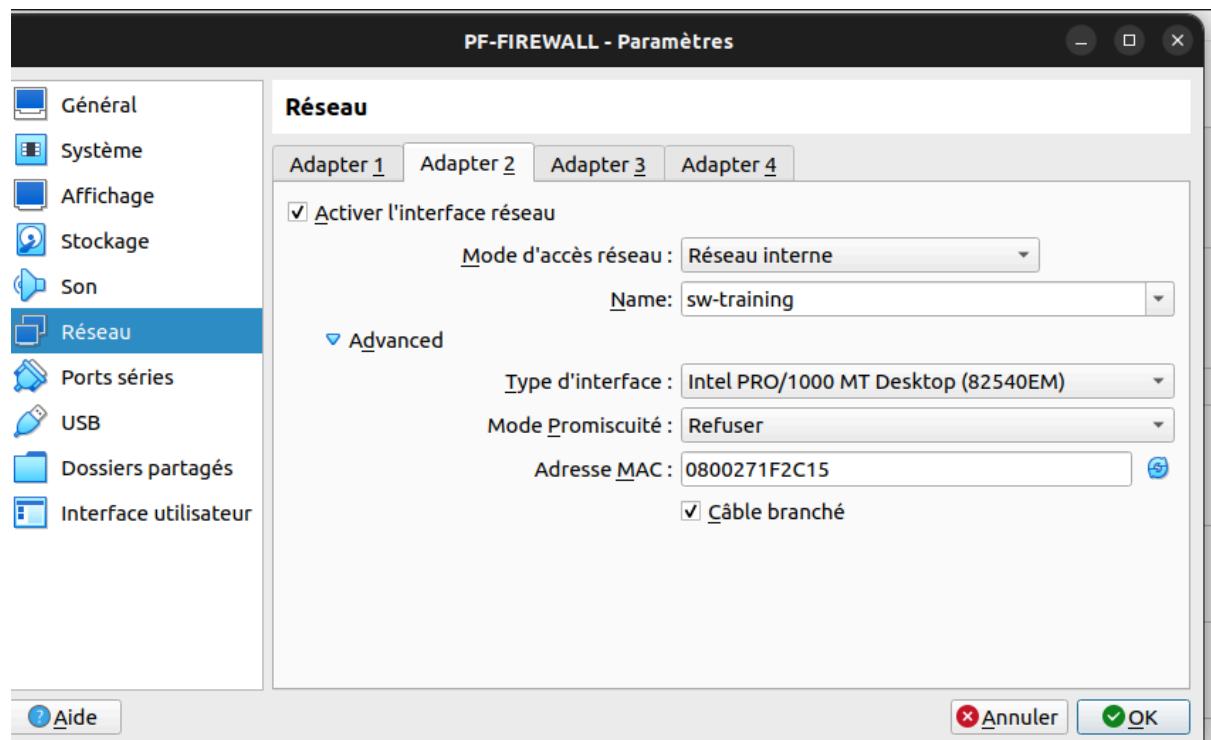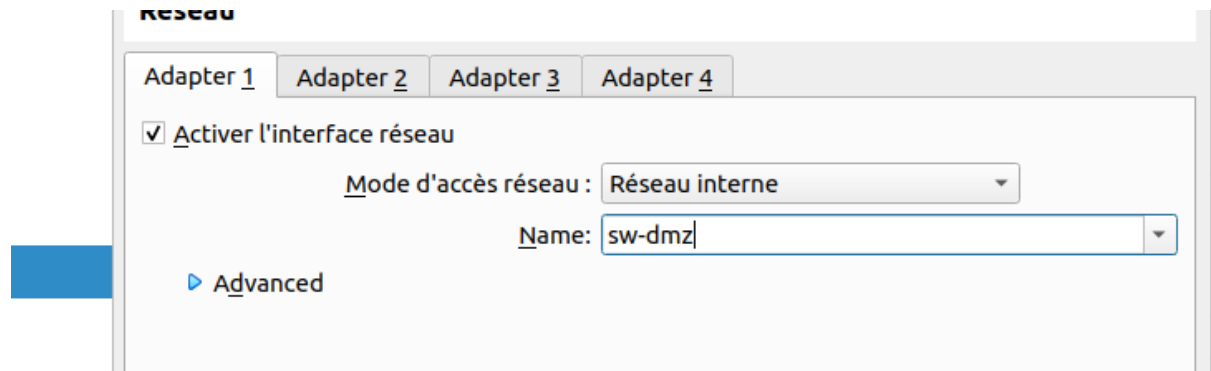

adresse mac changé avec mode d'accès réseau

```

Configuring WAN interface...done.
Configuring LAN interface...done.
Configuring SRV interface...done.
Configuring DMZ interface...done.
Warning: Configuration references interfaces that do not exist: em3 em2

Network interface mismatch -- Running interface assignment option.

Valid interfaces are:

em0      08:00:27:63:92:3d    (up) Intel(R) Legacy PRO/1000 MT 82540EM
em1      08:00:27:1f:2c:15    (up) Intel(R) Legacy PRO/1000 MT 82540EM

Do VLANs need to be set up first?
If VLANs will not be used, or only for optional interfaces, it is typical to
say no here and use the webConfigurator to configure VLANs later, if required.

Should VLANs be set up now [yln]? n

If the names of the interfaces are not known, auto-detection can
be used instead. To use auto-detection, please disconnect all
interfaces before pressing 'a' to begin the process.

Enter the WAN interface name or 'a' for auto-detection
(em0 em1 or a): 

```

```

Warning: Configuration references interfaces that do not exist: em3 em2

Network interface mismatch -- Running interface assignment option.

Valid interfaces are:

em0      08:00:27:63:92:3d    (up) Intel(R) Legacy PRO/1000 MT 82540EM
em1      08:00:27:1f:2c:15    (up) Intel(R) Legacy PRO/1000 MT 82540EM

Do VLANs need to be set up first?
If VLANs will not be used, or only for optional interfaces, it is typical to
say no here and use the webConfigurator to configure VLANs later, if required.

Should VLANs be set up now [yln]? n

If the names of the interfaces are not known, auto-detection can
be used instead. To use auto-detection, please disconnect all
interfaces before pressing 'a' to begin the process.

Enter the WAN interface name or 'a' for auto-detection
(em0 em1 or a): em1

Enter the LAN interface name or 'a' for auto-detection
NOTE: this enables full Firewalling/NAT mode.
(em0 a or nothing if finished): 

```

say no here and use the webConfigurator to configure VLANs later, if required.

Should VLANs be set up now [y|n]? n

If the names of the interfaces are not known, auto-detection can be used instead. To use auto-detection, please disconnect all interfaces before pressing 'a' to begin the process.

Enter the WAN interface name or 'a' for auto-detection
(em0 em1 or a): em1

Enter the LAN interface name or 'a' for auto-detection
NOTE: this enables full Firewalling/NAT mode.
(em0 a or nothing if finished):

The interfaces will be assigned as follows:

WAN -> em1

Do you want to proceed [y|n]? y

Writing configuration.....done.
One moment while the settings are reloading... done!
Configuring loopback interface...done.
Configuring WAN interface...

*** Welcome to pfSense 2.7.0-RELEASE (amd64) on pf-firewall ***

WAN (wan) -> em1 ->

Enter an option: 1

Valid interfaces are:

em0 08:00:27:63:92:3d (down) Intel(R) Legacy PRO/1000 MT 82540EM
em1 08:00:27:1f:2c:15 (up) Intel(R) Legacy PRO/1000 MT 82540EM

Do VLANs need to be set up first?

If VLANs will not be used, or only for optional interfaces, it is typical to say no here and use the webConfigurator to configure VLANs later, if required.

Should VLANs be set up now [y|n]? n

If the names of the interfaces are not known, auto-detection can be used instead. To use auto-detection, please disconnect all interfaces before pressing 'a' to begin the process.

Enter the WAN interface name or 'a' for auto-detection
(em0 em1 or a): em0

Enter the LAN interface name or 'a' for auto-detection
NOTE: this enables full Firewalling/NAT mode.
(em1 a or nothing if finished): em1

```
em1      08:00:27:1f:2c:15   (up) Intel(R) Legacy PRO/1000 MT 82540EM

Do VLANs need to be set up first?
If VLANs will not be used, or only for optional interfaces, it is typical to
say no here and use the webConfigurator to configure VLANs later, if required.

Should VLANs be set up now [yln]? n

If the names of the interfaces are not known, auto-detection can
be used instead. To use auto-detection, please disconnect all
interfaces before pressing 'a' to begin the process.

Enter the WAN interface name or 'a' for auto-detection
(em0 em1 or a): em0

Enter the LAN interface name or 'a' for auto-detection
NOTE: this enables full Firewalling/NAT mode.
(em1 a or nothing if finished): em1

The interfaces will be assigned as follows:

WAN  -> em0
LAN  -> em1

Do you want to proceed [yln]? y
```

```
WAN (wan)      -> em0      ->
LAN (lan)      -> em1      ->
```

```
Enter the new WAN IPv4 address.  Press <ENTER> for none:
> 192.168.200.20

Subnet masks are entered as bit counts (as in CIDR notation)
e.g. 255.255.255.0 = 24
     255.255.0.0   = 16
     255.0.0.0     = 8

Enter the new WAN IPv4 subnet bit count (1 to 32):
> 24
```

```
Please wait while the changes are saved to WAN...
Reloading filter...
Reloading routing configuration...
DHCPD...




The IPv4 WAN address has been set to 192.168.200.20/24
You can now access the webConfigurator by opening the following
browser:




      http://192.168.200.20/
```

```
Please wait while the changes are saved to LAN...
Reloading filter...
Reloading routing configuration...
DHCPD...

The IPv4 LAN address has been set to 10.20.30.254/24
You can now access the webConfigurator by opening the following
browser:

      http://10.20.30.254/
```

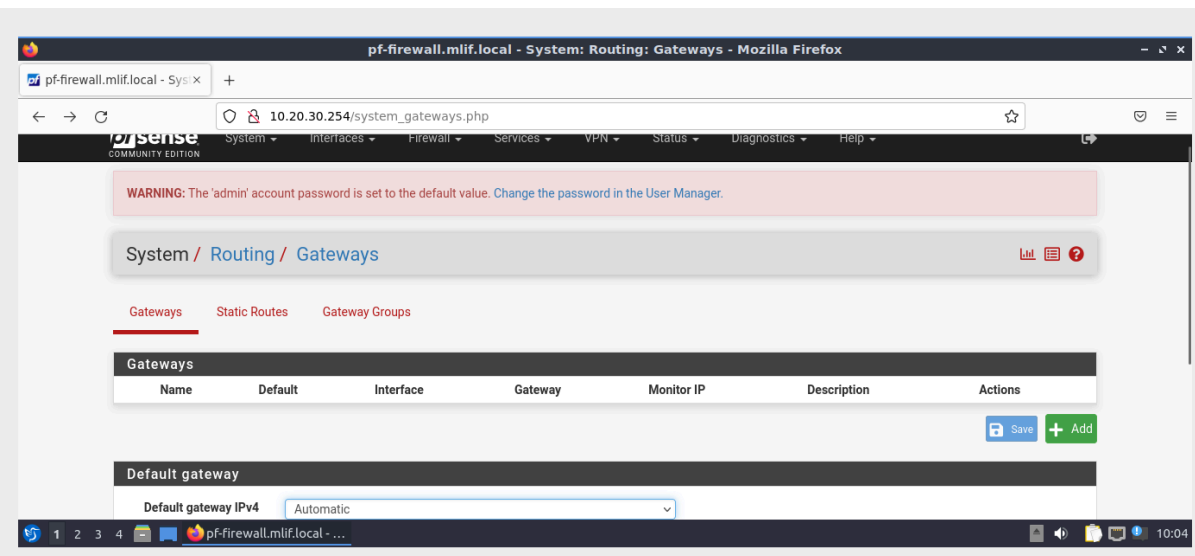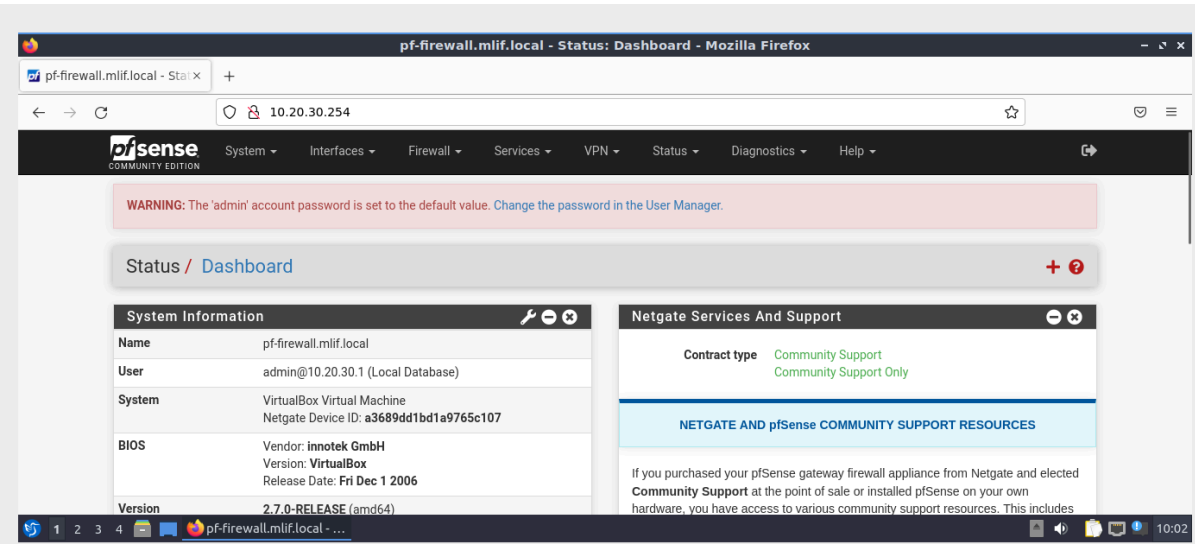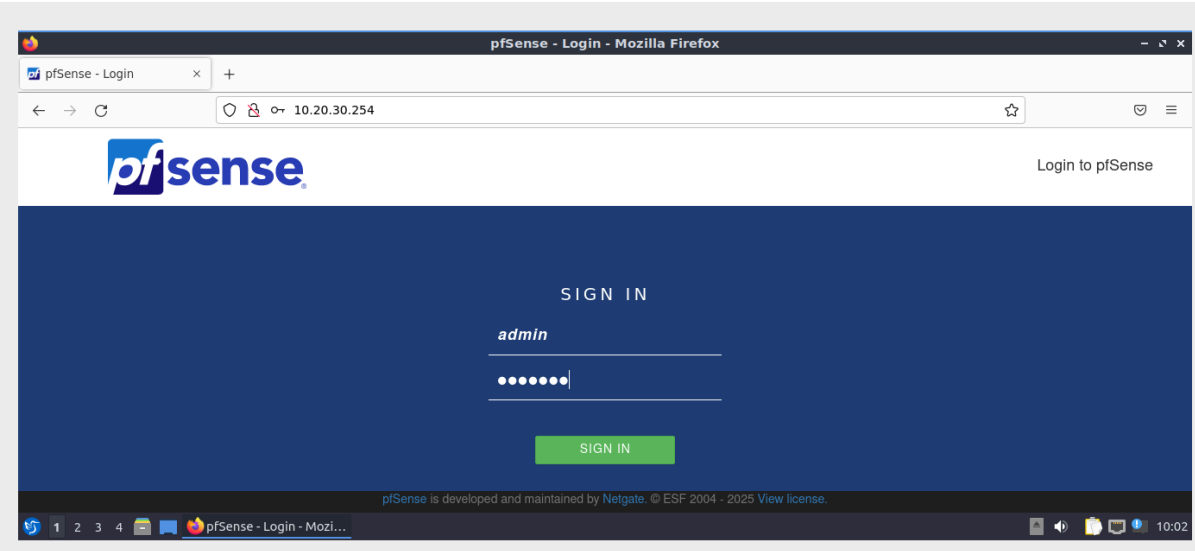

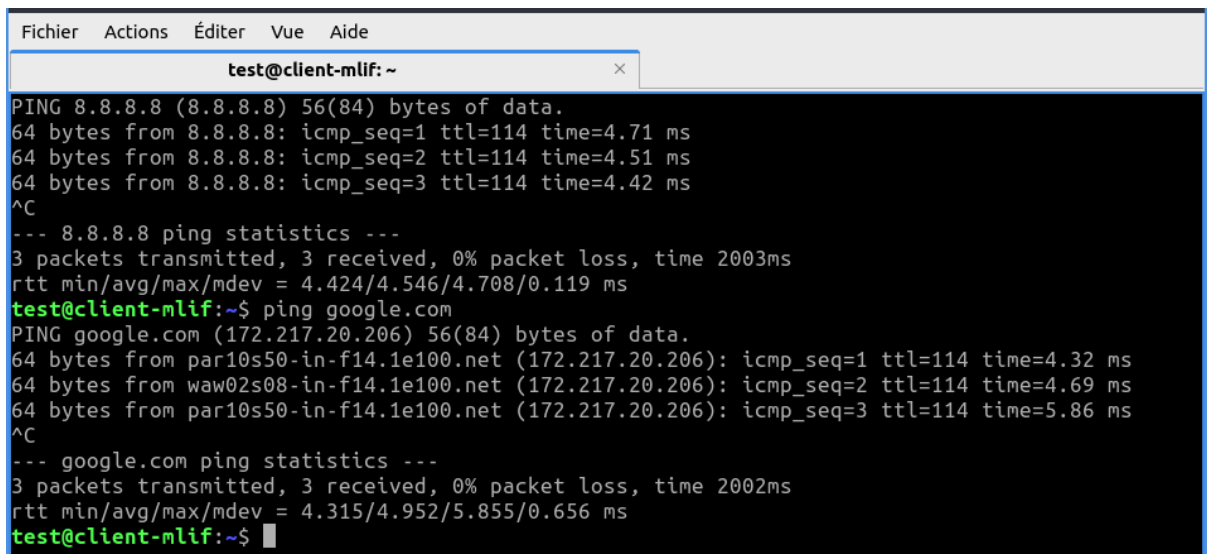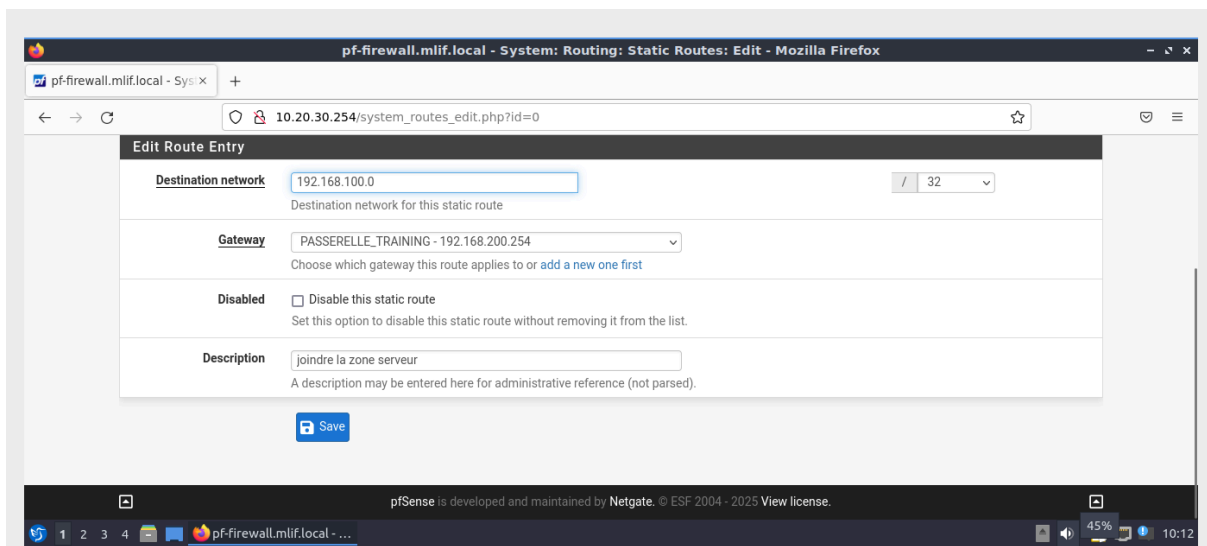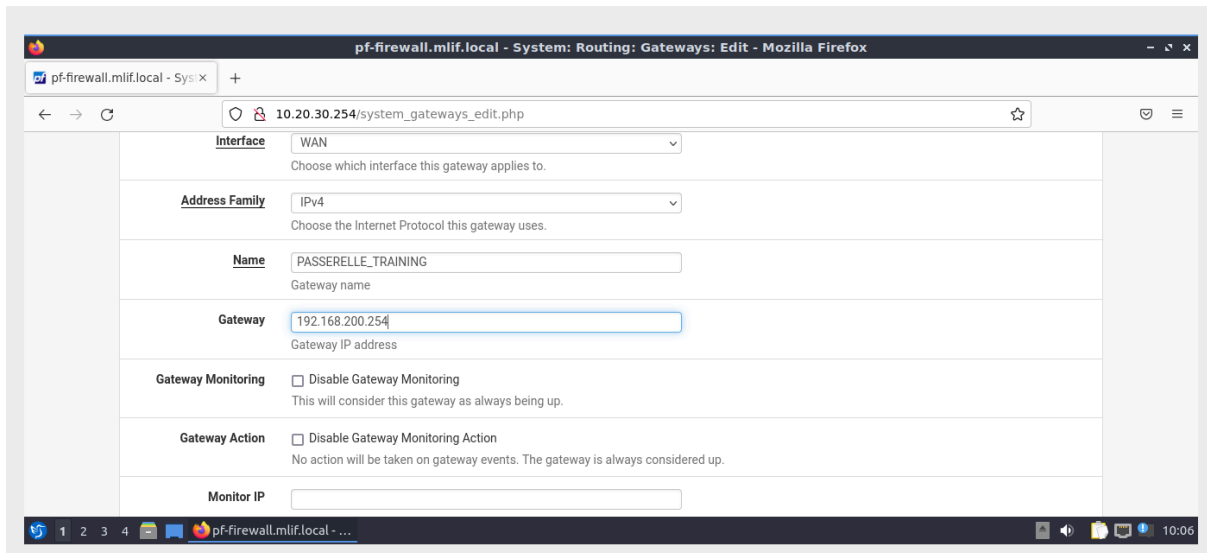


```
Fichier Actions Éditer Vue Aide
test@client-mlif: ~
64 bytes from 192.168.50.1: icmp_seq=2 ttl=62 time=0.766 ms
^C
--- 192.168.50.1 ping statistics ---
2 packets transmitted, 2 received, 0% packet loss, time 1008ms
rtt min/avg/max/mdev = 0.587/0.676/0.766/0.089 ms
test@client-mlif:~$ ping 192.168.200.20
PING 192.168.200.20 (192.168.200.20) 56(84) bytes of data.
64 bytes from 192.168.200.20: icmp_seq=1 ttl=64 time=0.293 ms
64 bytes from 192.168.200.20: icmp_seq=2 ttl=64 time=0.368 ms
64 bytes from 192.168.200.20: icmp_seq=3 ttl=64 time=0.346 ms
64 bytes from 192.168.200.20: icmp_seq=4 ttl=64 time=0.248 ms
64 bytes from 192.168.200.20: icmp_seq=5 ttl=64 time=0.315 ms
64 bytes from 192.168.200.20: icmp_seq=6 ttl=64 time=0.318 ms
^C
--- 192.168.200.20 ping statistics ---
6 packets transmitted, 6 received, 0% packet loss, time 5110ms
rtt min/avg/max/mdev = 0.248/0.314/0.368/0.038 ms
test@client-mlif:~$
```

WARNING: The 'admin' account password is set to the default value. [Change the password in the User Manager.](#)

Firewall / Rules / WAN

Floating WAN LAN

Rules (Drag to Change Order)

	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☐	✓	1/638 B	IPv4 *	*	*	*	*	none			

Add Add Delete Toggle Copy Save

WARNING: The 'admin' account password is set to the default value. [Change the password in the User Manager.](#)

Firewall / Rules / LAN

Floating WAN LAN

Rules (Drag to Change Order)

	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
	✓	1/279 KiB	*	*	LAN Address	80	*	*		Anti-Lockout Rule	
☐	✓	0/29 KiB	IPv4 *	LAN net	*	*	*	none		Default allow LAN to any rule	
☐	✓	0/0 B	IPv6 *	LAN net	*	*	*	none		Default allow LAN IPv6 to any rule	

Add Add Delete Toggle Copy Save Separate

```
test@client-mlif: ~
Fichier Actions Éditer Vue Aide
test@client-mlif: ~
test@client-mlif:~$ ping 192.168.200.254
PING 192.168.200.254 (192.168.200.254) 56(84) bytes of data.
64 bytes from 192.168.200.254: icmp_seq=1 ttl=63 time=0.535 ms
64 bytes from 192.168.200.254: icmp_seq=2 ttl=63 time=0.535 ms
64 bytes from 192.168.200.254: icmp_seq=3 ttl=63 time=0.498 ms
^C
--- 192.168.200.254 ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2032ms
rtt min/avg/max/mdev = 0.498/0.522/0.535/0.017 ms
test@client-mlif:~$
```

The changes have been applied successfully. The firewall rules are now reloading in the background.
[Monitor](#) the filter reload progress.

Floating WAN LAN

Rules (Drag to Change Order)


☐	States	Protocol	Source	Port	Destination	Port	Gateway	Queue	Schedule	Description	Actions
☒	2/328 KiB	*	*	*	LAN Address	80	*	*		Anti-Lockout Rule	
☐	0/0 B	IPv4 *	*	*	*	*	*	none			
☐	0/29 KiB	IPv4 *	LAN net	*	*	*	*	none		Default allow LAN to any rule	
☐	0/0 B	IPv6 *	LAN net	*	*	*	*	none		Default allow LAN IPv6 to any rule	

Add Add Delete Toggle Copy Save Separator



```
test@client-mlif: ~
Fichier Actions Éditer Vue Aide
test@client-mlif: ~
64 bytes from par10s50-in-f14.1e100.net (172.217.20.206): icmp_seq=3 ttl=114 time=5.86 ms
^C
--- google.com ping statistics ---
3 packets transmitted, 3 received, 0% packet loss, time 2002ms
rtt min/avg/max/mdev = 4.315/4.952/5.855/0.656 ms
test@client-mlif:~$ ping 192.168.100.10
PING 192.168.100.10 (192.168.100.10) 56(84) bytes of data.
64 bytes from 192.168.100.10: icmp_seq=1 ttl=63 time=0.433 ms
64 bytes from 192.168.100.10: icmp_seq=2 ttl=63 time=0.725 ms
64 bytes from 192.168.100.10: icmp_seq=3 ttl=63 time=0.514 ms
64 bytes from 192.168.100.10: icmp_seq=4 ttl=63 time=0.660 ms
64 bytes from 192.168.100.10: icmp_seq=5 ttl=63 time=0.659 ms
64 bytes from 192.168.100.10: icmp_seq=6 ttl=63 time=0.595 ms
^C
--- 192.168.100.10 ping statistics ---
6 packets transmitted, 6 received, 0% packet loss, time 5128ms
rtt min/avg/max/mdev = 0.433/0.597/0.725/0.098 ms
test@client-mlif:~$
```

Interfaces

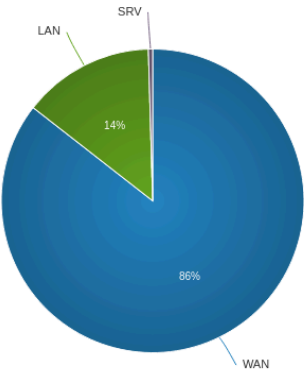

Interfaces	Data points
WAN	567
LAN	93
SRV	3

Advanced Log Filter

Source IP AddressDestination IP Address

☒ Pass

TimeSource PortProtocolQuantity

☐ Block

InterfaceDestination PortProtocol FlagsRule Tracker ID

Apply Filter

[Regular expression reference](#) Precede with exclamation (!) to exclude match. Invalid or potentially dangerous patterns will be ignored.

27 Matched Firewall Log Entries. (Maximum 500) Pause					
Action	Time	Interface	Source	Destination	Protocol
✓	Feb 7 17:32:41	LAN	192.168.50.1	192.168.50.254	ICMP
✓	Feb 7 17:32:42	LAN	192.168.50.1	192.168.50.254	ICMP
✓	Feb 7 17:32:45	LAN	192.168.50.1	192.168.50.254	ICMP
✓	Feb 7 17:32:47	LAN	192.168.50.1	192.168.50.254	ICMP
✓	Feb 7 17:32:48	LAN	192.168.50.1	192.168.50.254	ICMP
✓	Feb 7 17:32:49	LAN	192.168.50.1	192.168.50.254	ICMP

webConfigurator	
Protocol	☐ HTTP ☒ HTTPS (SSL/TLS)
SSL/TLS Certificate	webConfigurator default (640991c5c0c8c) Certificates known to be incompatible with use for HTTPS are not included in this list.
TCP port	Enter a custom port number for the webConfigurator above to override the default (80 for HTTP, 443 for HTTPS). Changes will take effect immediately after save.
Max Processes	2 Enter the number of webConfigurator processes to run. This defaults to 2. Increasing this will allow more users/browsers to access the GUI concurrently.
WebGUI redirect	☐ Disable webConfigurator redirect rule When this is unchecked, access to the webConfigurator is always permitted even on port 80, regardless of the listening port configured. Check this box to disable this automatically added redirect rule.
HSTS	☐ Disable HTTP Strict Transport Security When this is unchecked, Strict-Transport-Security HTTPS response header is sent by the webConfigurator to the browser. This will force the browser to use only HTTPS for future requests to the firewall FQDN. Check this box to disable HSTS. (NOTE: Browser-specific steps are required for disabling to take effect when the browser already visited the FQDN while HSTS was enabled.)
OCSP Must-Staple	☐ Force OCSP Stapling in nginx When this is checked, OCSP Stapling is forced on in nginx. Remember to upload your certificate as a full chain, not just the certificate, or this option will be ignored by nginx.
WebGUI Login Autocomplete	☒ Enable webConfigurator login autocomplete When this is checked, login credentials for the webConfigurator may be saved by the browser. While convenient, some security standards require this

Activities Oracle VM VirtualBox 7 févr. 17:36 LUBUNTU_TRAINING_CLIENT (maquette ok) [En fonction] - Oracle VM VirtualBox

Fichier Machine Écran Entrée Périphériques Aide

pf-firewall.mlif.local - Diagnostics: Backup & Restore: Backup & Restore - Mozilla Firefox

192.168.50.254/diag_backup.php

Diagnostics / Backup & Restore / Backup & Restore

Backup & Restore Config History

Backup Configuration

Backup area: All

Skip packages: ☐ Do not backup package information.

Skip RRD data: ☒ Do not backup RRD data (NOTE: RRD Data can consume 4+ megabytes of config.xml space!)

Include extra data: ☐ Backup extra data. Backup extra data files for some services.

Backup SSH keys: ☒ Backup SSH keys (otherwise clients would fail to recognize the host keys after restore)

Encryption: ☐ Encrypt this configuration file.

Download configuration as XML

Restore Backup

Open a pfsense configuration XML file and click the button below to restore the configuration.

Restore area: All

Configuration file: Parcourir... Aucun fichier sélectionné.

Encryption: ☐ Configuration file is encrypted.

1 2 3 4 Network Connections pf-firewall.mlif.local - ... qterminal - 5 windows

Activities Oracle VM VirtualBox 7 févr. 17:36 LUBUNTU_TRAINING_CLIENT (maquette ok) [En fonction] - Oracle VM VirtualBox

Fichier Machine Écran Entrée Périphériques Aide

pf-firewall.mlif.local - Diagnostics: ARP Table - Mozilla Firefox

192.168.50.254/diag_arp.php

pfSense SECURITY EDITION System Interfaces Firewall Services VPN Status Diagnostics Help

WARNING: The 'admin' account password is set to the default value. Change the password in the User Manager.

Diagnostics / ARP Table

Search

Search term: All Search Clear

Enter a search string or *nix regular expression to filter entries.

ARP Table

Interface	IP address	MAC address	Hostname	Status	Link Type	Actions
LAN	192.168.50.1	08:00:27:67:7d:ae		Expires in 1139 seconds	ethernet	
DMZ	192.168.200.5	08:00:27:ca:f9:0a		Expires in 591 seconds	ethernet	
DMZ	192.168.200.20	08:00:27:12:99:fc		Expires in 108 seconds	ethernet	
DMZ	192.168.200.254	08:00:27:14:a7:80		Permanent	ethernet	
SRV	192.168.100.10	08:00:27:64:27:7d		Expires in 1162 seconds	ethernet	
SRV	192.168.100.254	08:00:27:21:97:7f		Permanent	ethernet	
WAN	172.17.123.135	08:00:27:1d:2c:4f		Permanent	ethernet	
WAN	172.17.123.2	bc:24:11:b9:5c:14		Expires in 1200 seconds	ethernet	
LAN	192.168.50.254	08:00:27:f7:a5:37	pf-firewall.mlif.local	Permanent	ethernet	

Clear ARP Table

1 2 3 4 Network Connections pf-firewall.mlif.local - ... qterminal - 5 windows