



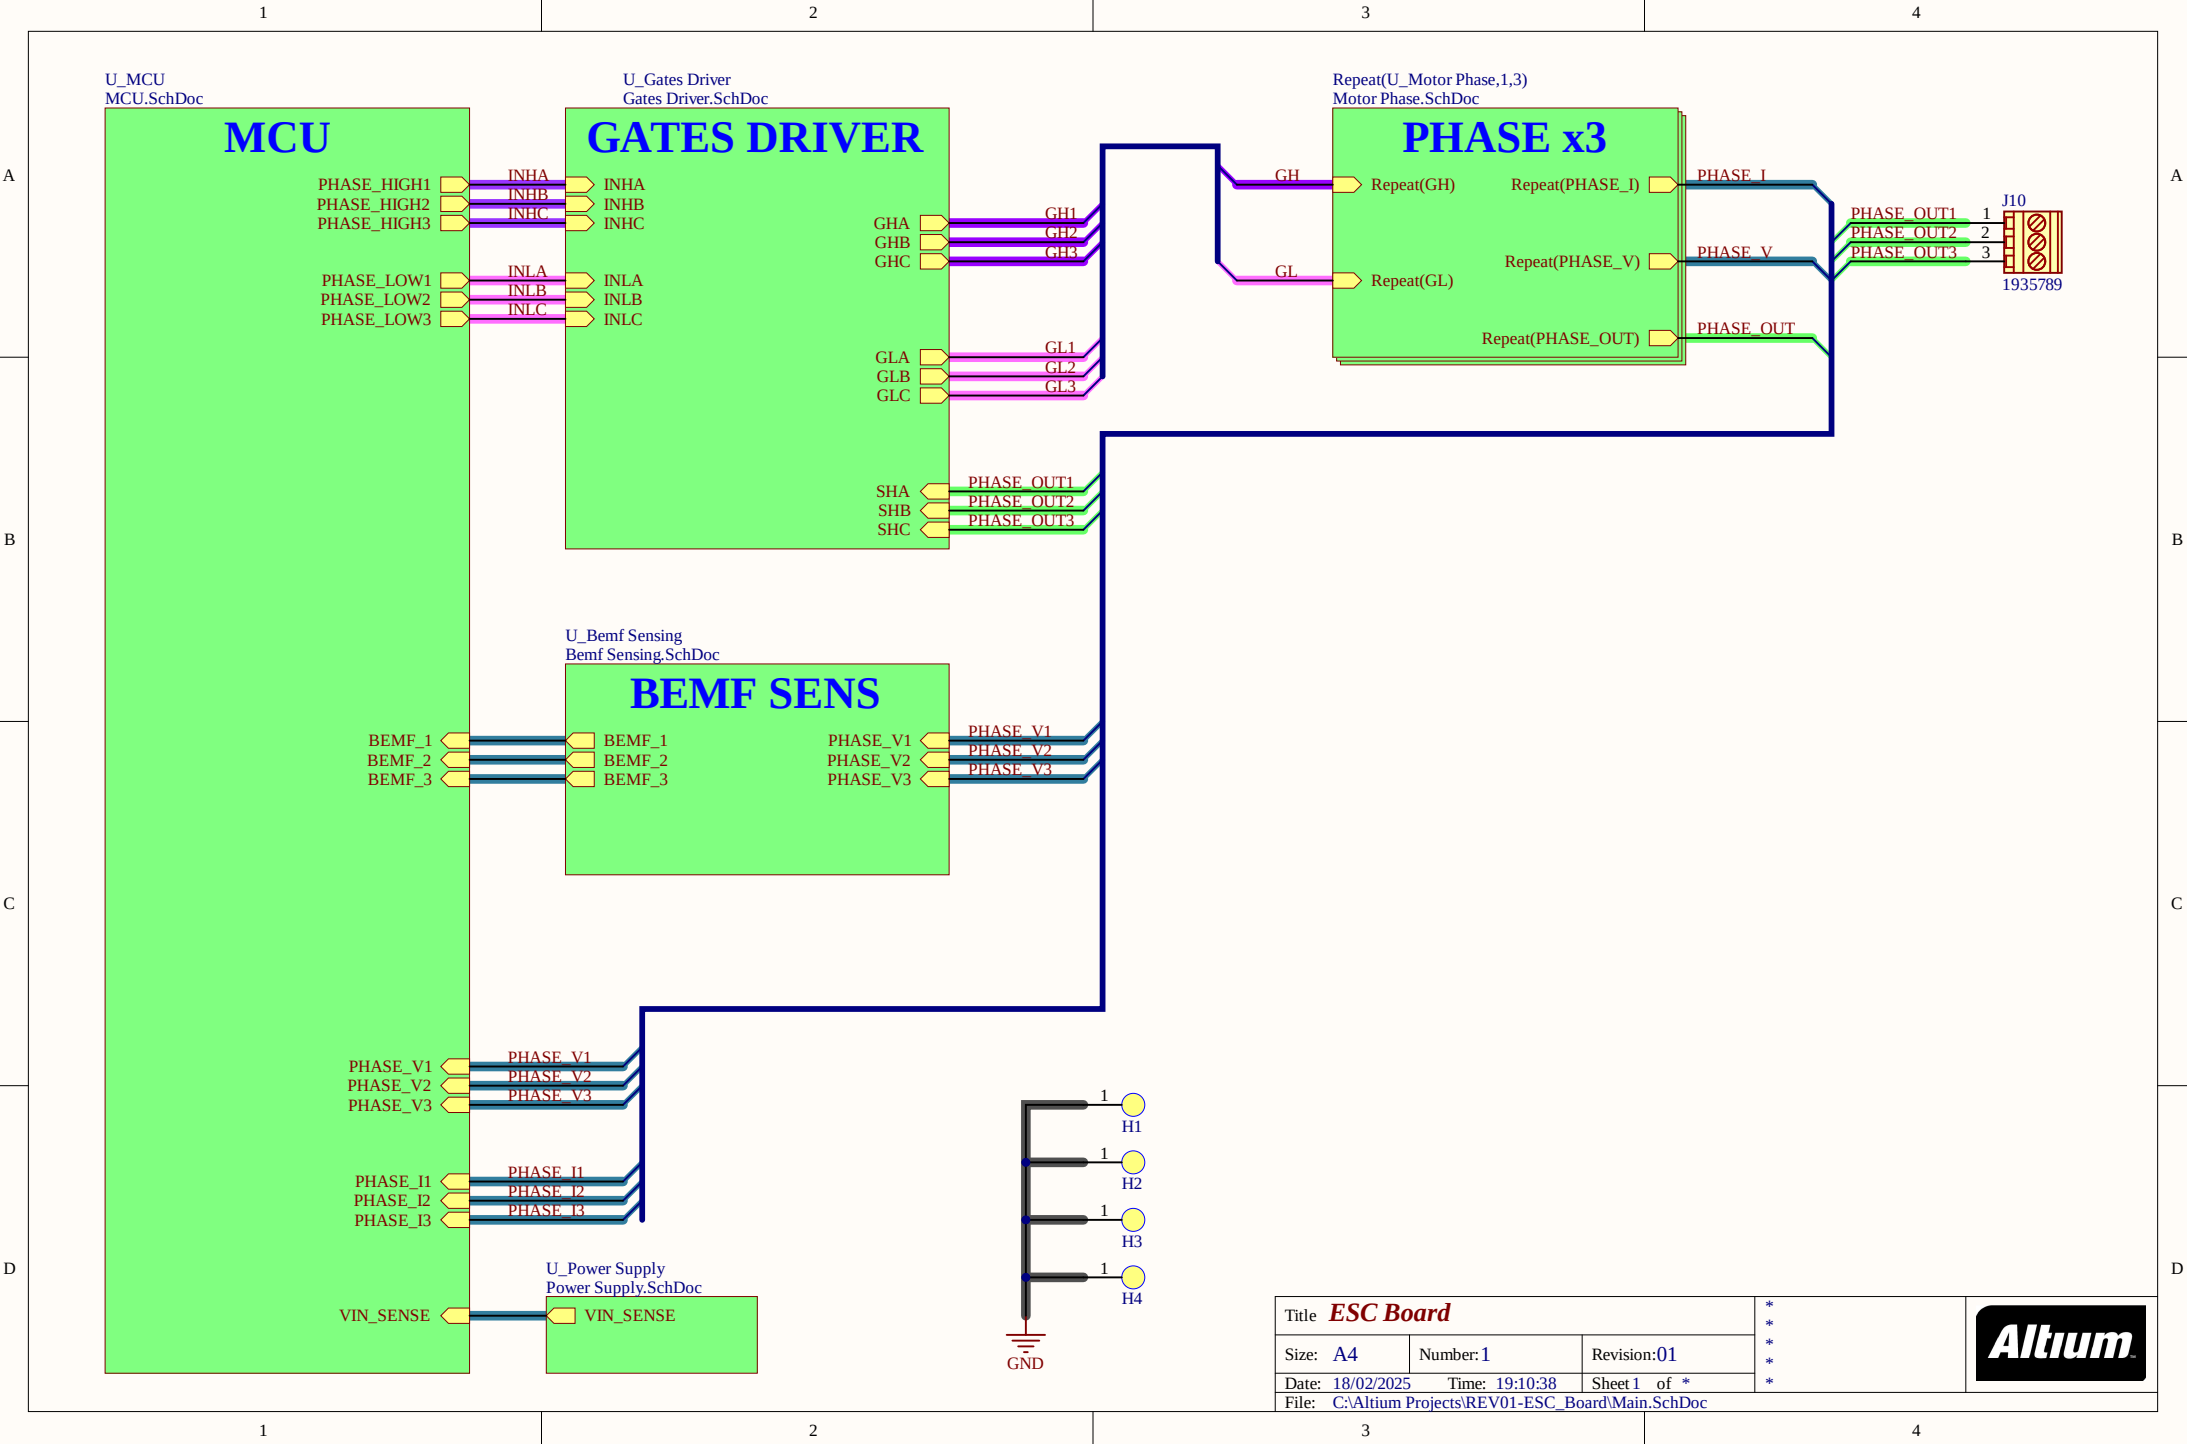


MCU


DIR = HIGH : Direction A → B
DIR = LOW : Direction B → A
DIR State is related to VCC(A)

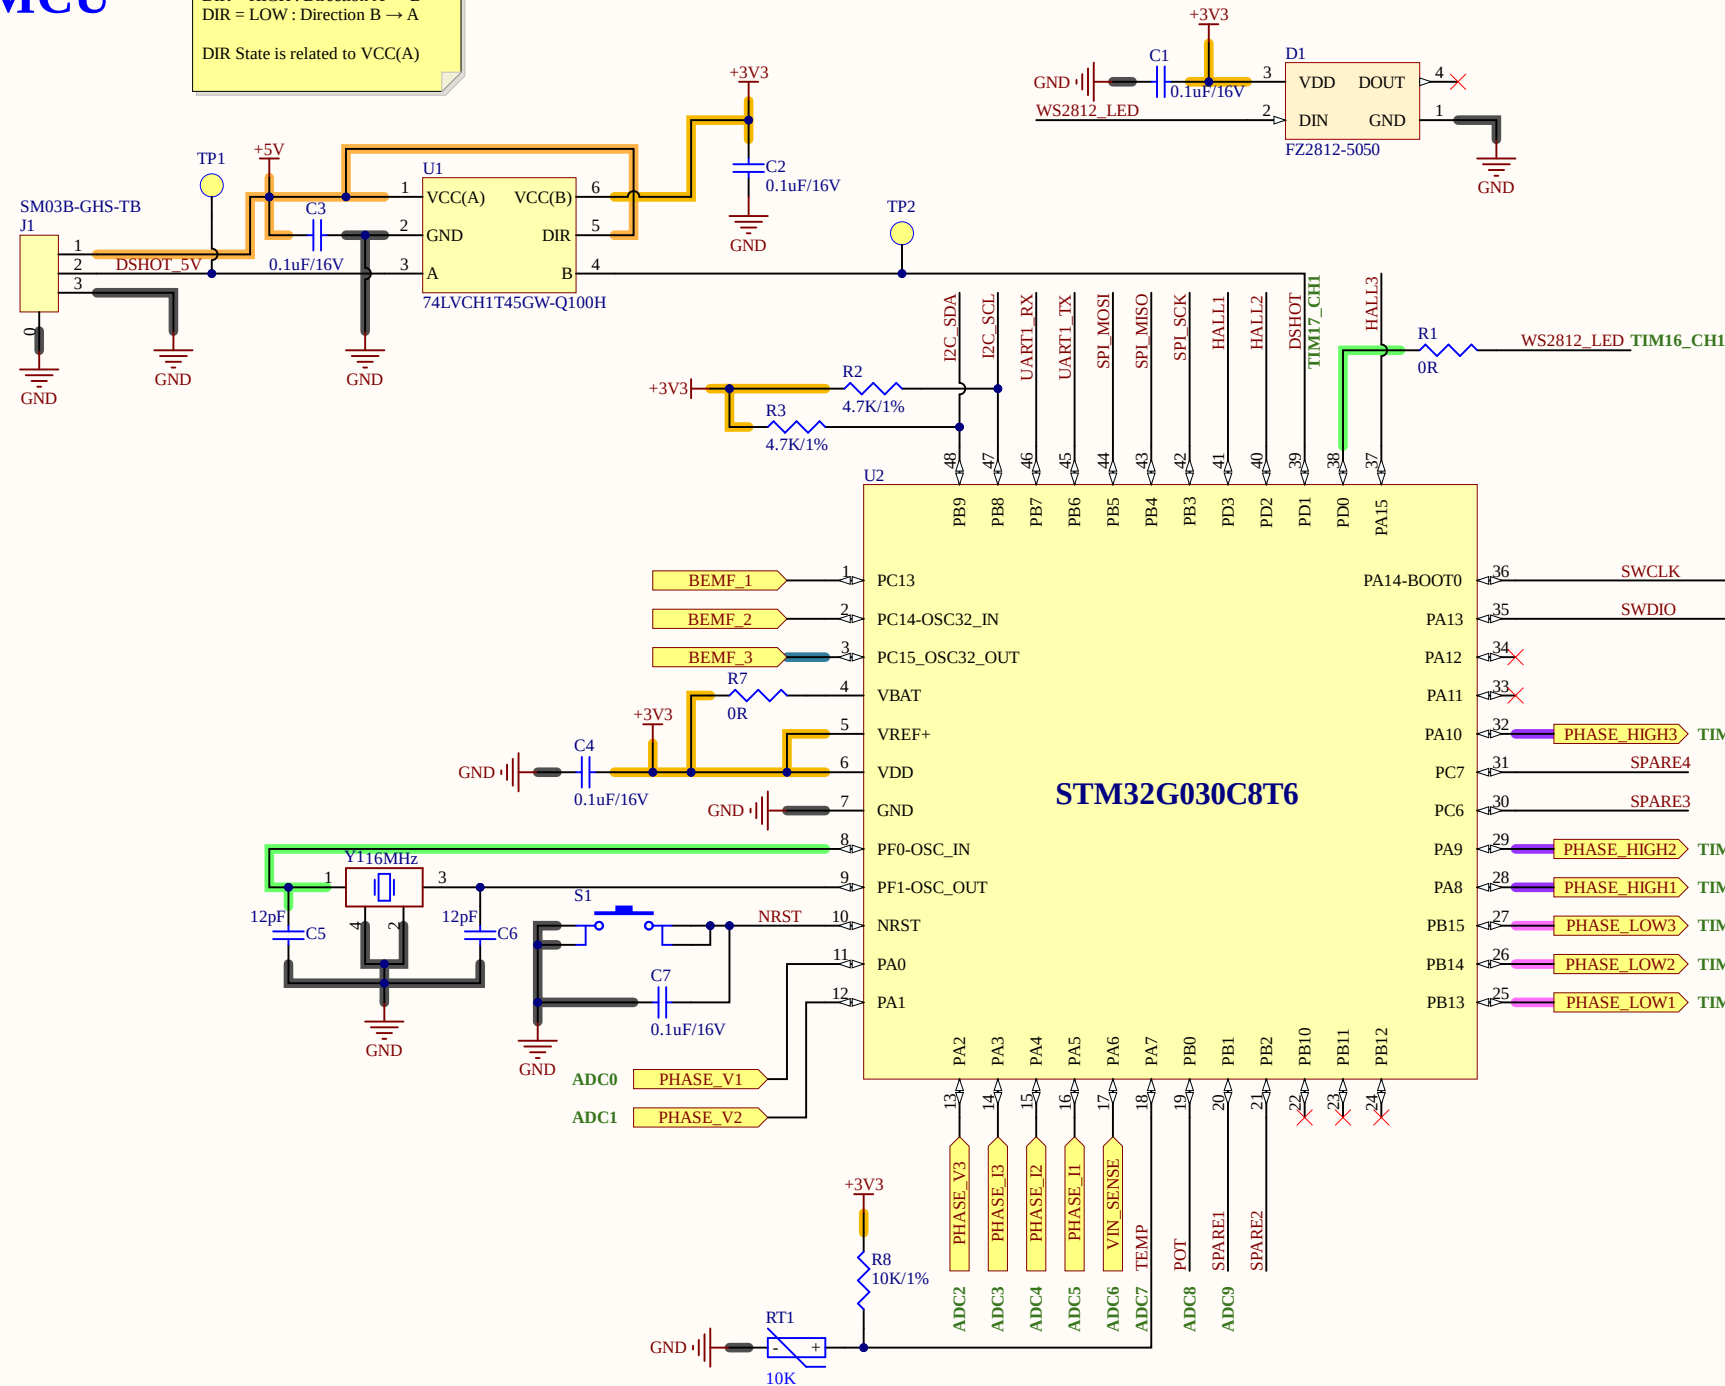

PROG

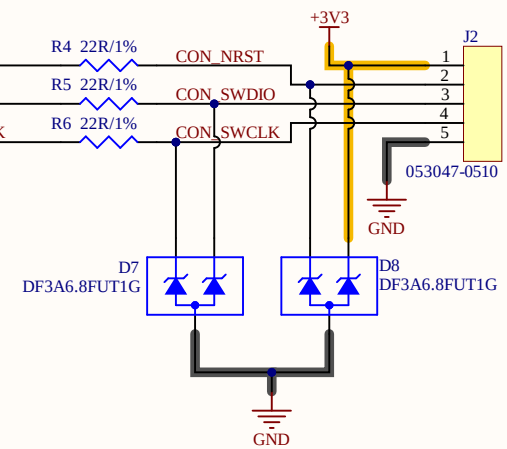


HALL SENSORS

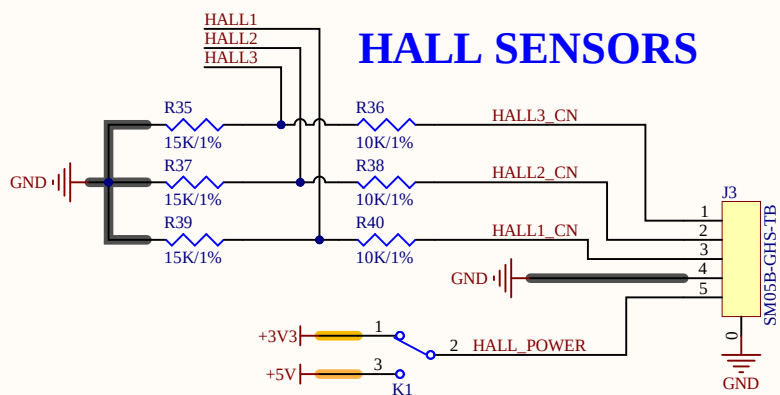


For Hall Sensors operating from 3.3V:
* Do not Place 15K Resistors
* Use 0R insted of 10K Resistors


I2C




SPI




UART




I/O HDR




POT




POWER IN

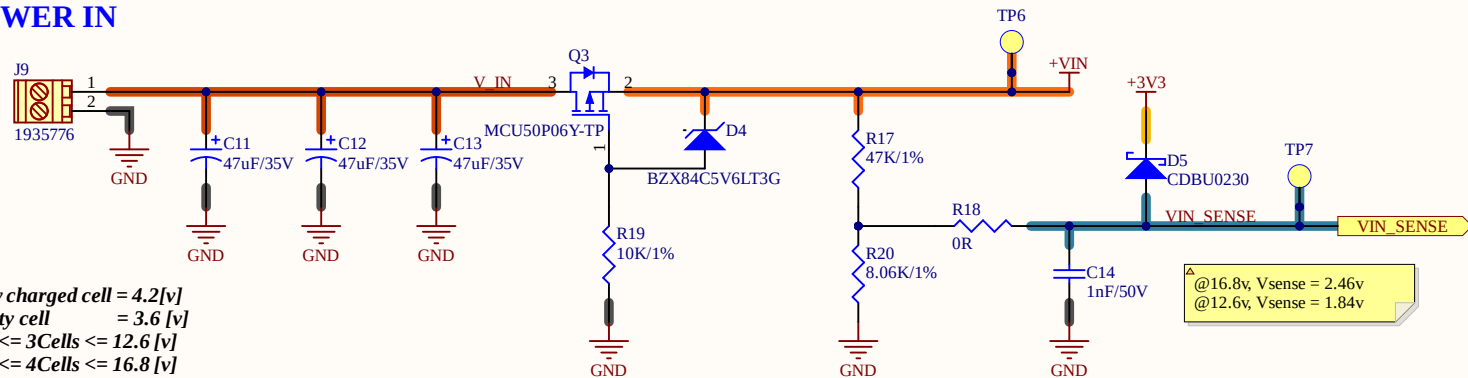


DC-DC Converter 10V

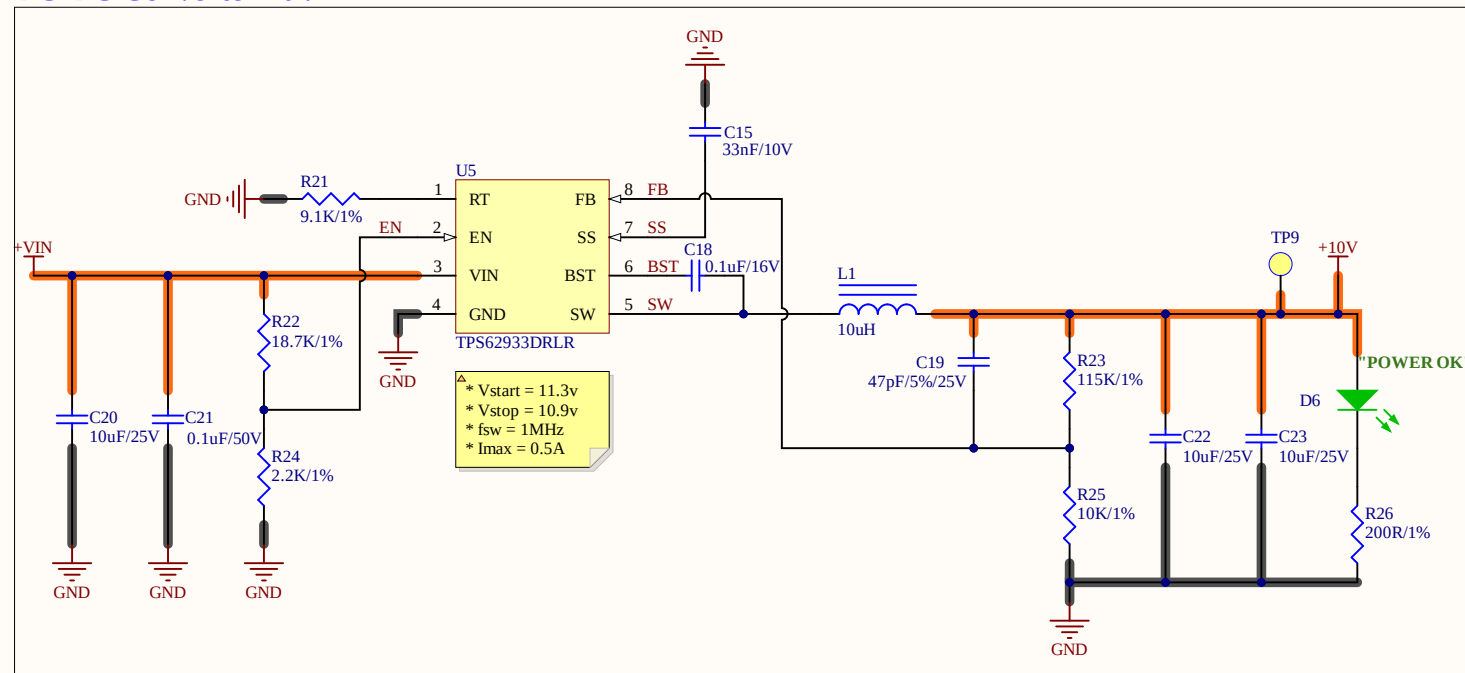

3.3V LDO

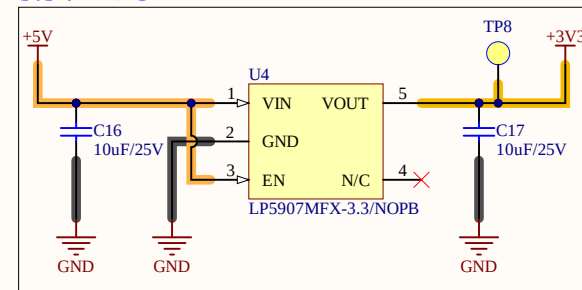

5V LDO

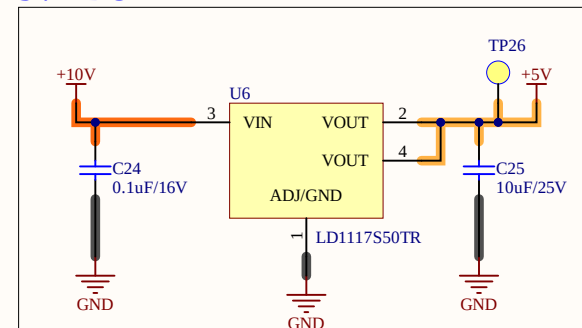

Title *		
Size: A4	Number: 4	Revision: *
Date: 18/02/2025	Time: 19:10:38	Sheet 4 of *
File: C:\Altium Projects\REV01-ESC_Board\Power Supply.SchDoc		



A

A

B


B

C


C

D

D

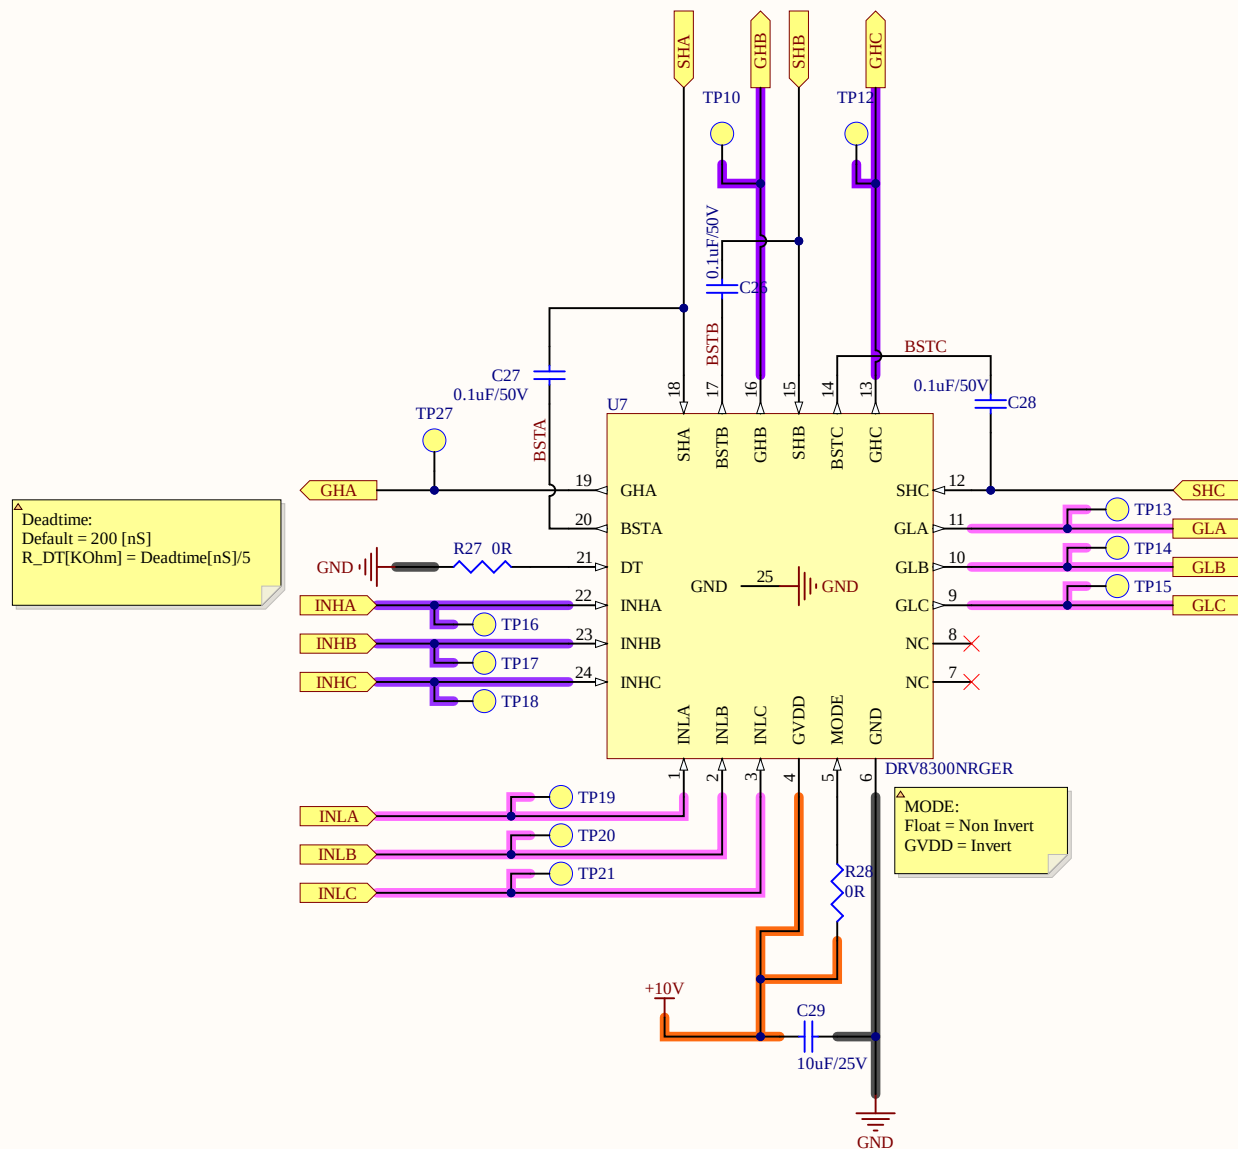

Title		
Size	Number	Revision
A4		
Date:	2/18/2025	Sheet of
File:	C:\Altium Projects\Gates Driver.SchDoc	Drawn By:

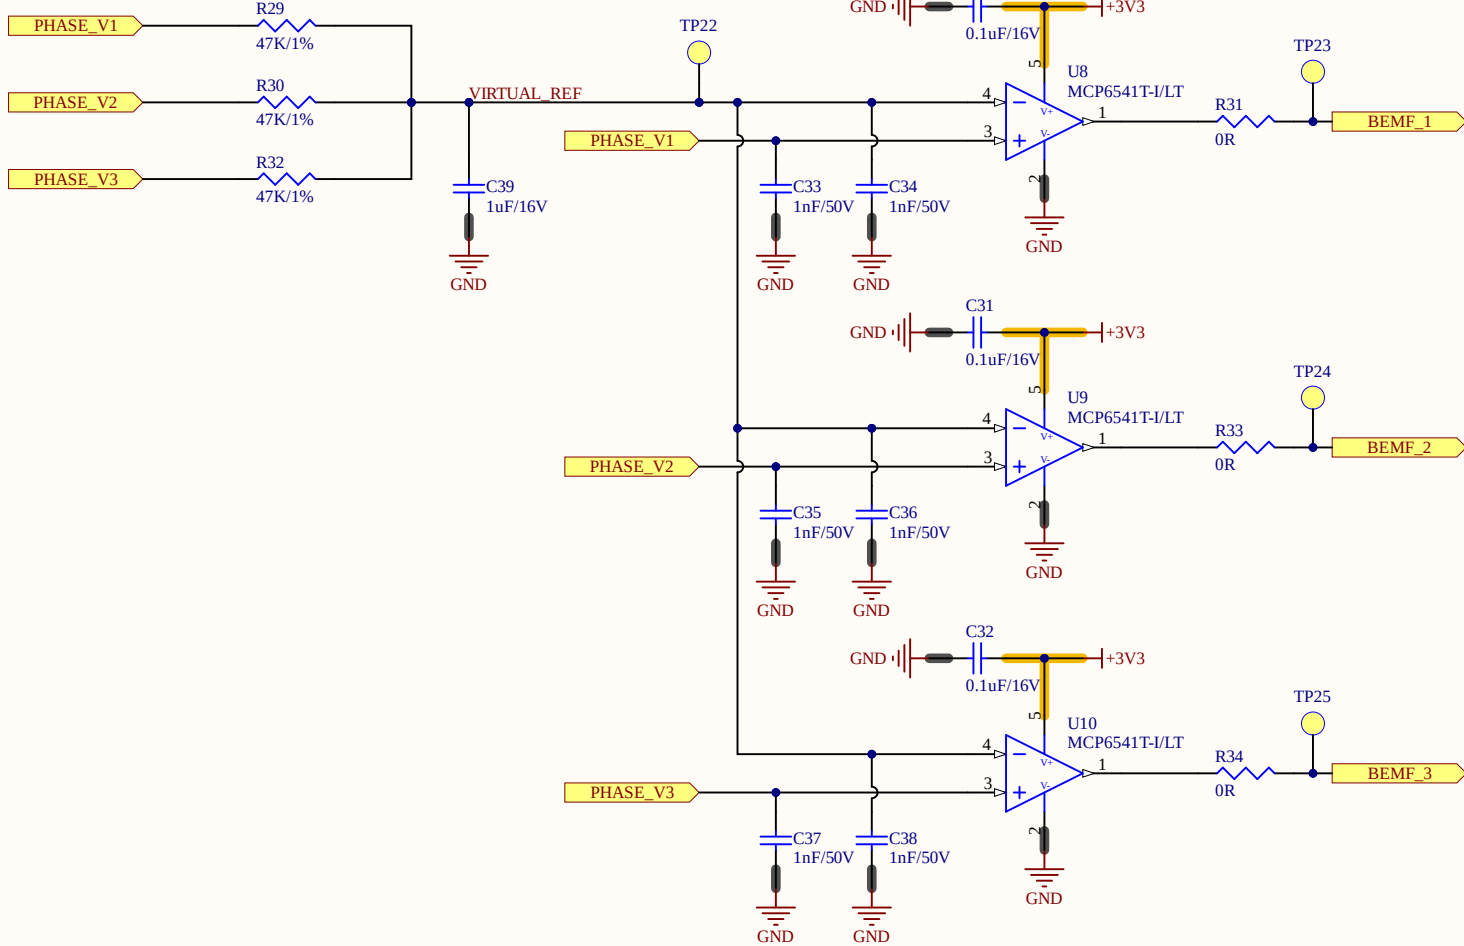

Title *		
Size: A4	Number: 6	Revision: *
Date: 18/02/2025	Time: 19:10:38	Sheet 6 of *
File: C:\Altium Projects\REV01-ESC_Board\Bemf Sensing.SchDoc		

