


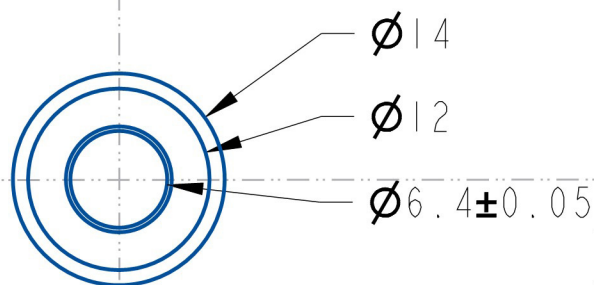
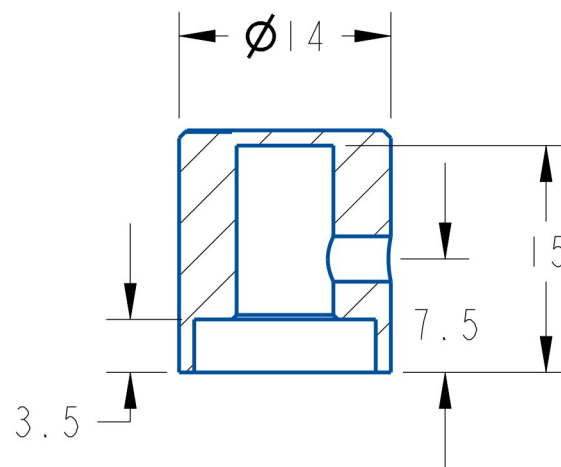


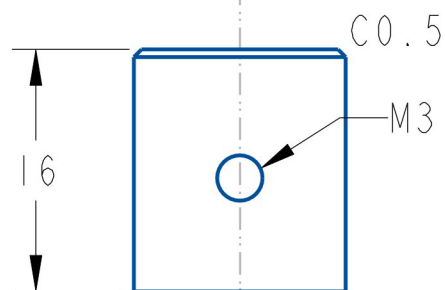

版本号	工程	日期	修改标注
VI.0	HXW	5-16	

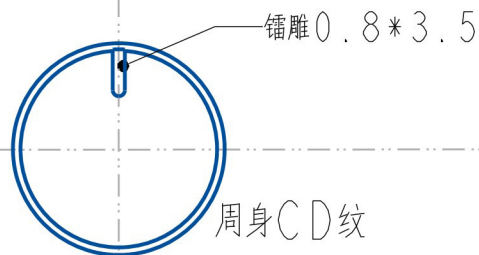

技术要求：

- 标注公差位置必须检测合格。
- 未标注尺寸公差按GB/T1804-2000m级。
- 产品表面干净无油污，无毛刺，无刮花。
- 曲面及未标注尺寸 请参考3D图或及时沟通。

GB/T 1804m		3004 (14X16) shaft hole:6.4mm									
0.5-3	±0.1	材质	铝	表面 处理	普通氧化	品名：旋钮 4 * 6					
>3-6	±0.1										
>6-30	±0.2	尺寸 规格	14 * 16mm								
>30-120	±0.3										
>120-400	±0.5	比例	2 : 1			页数	1 / 1		SIZE		
>400-1000	±0.8										
>1000-2000	±1.2	DRWN	HXW			2024-5-16	A4				
>2000-4000	±2										
角度	±1°										
		0.1	0.2	0.4							