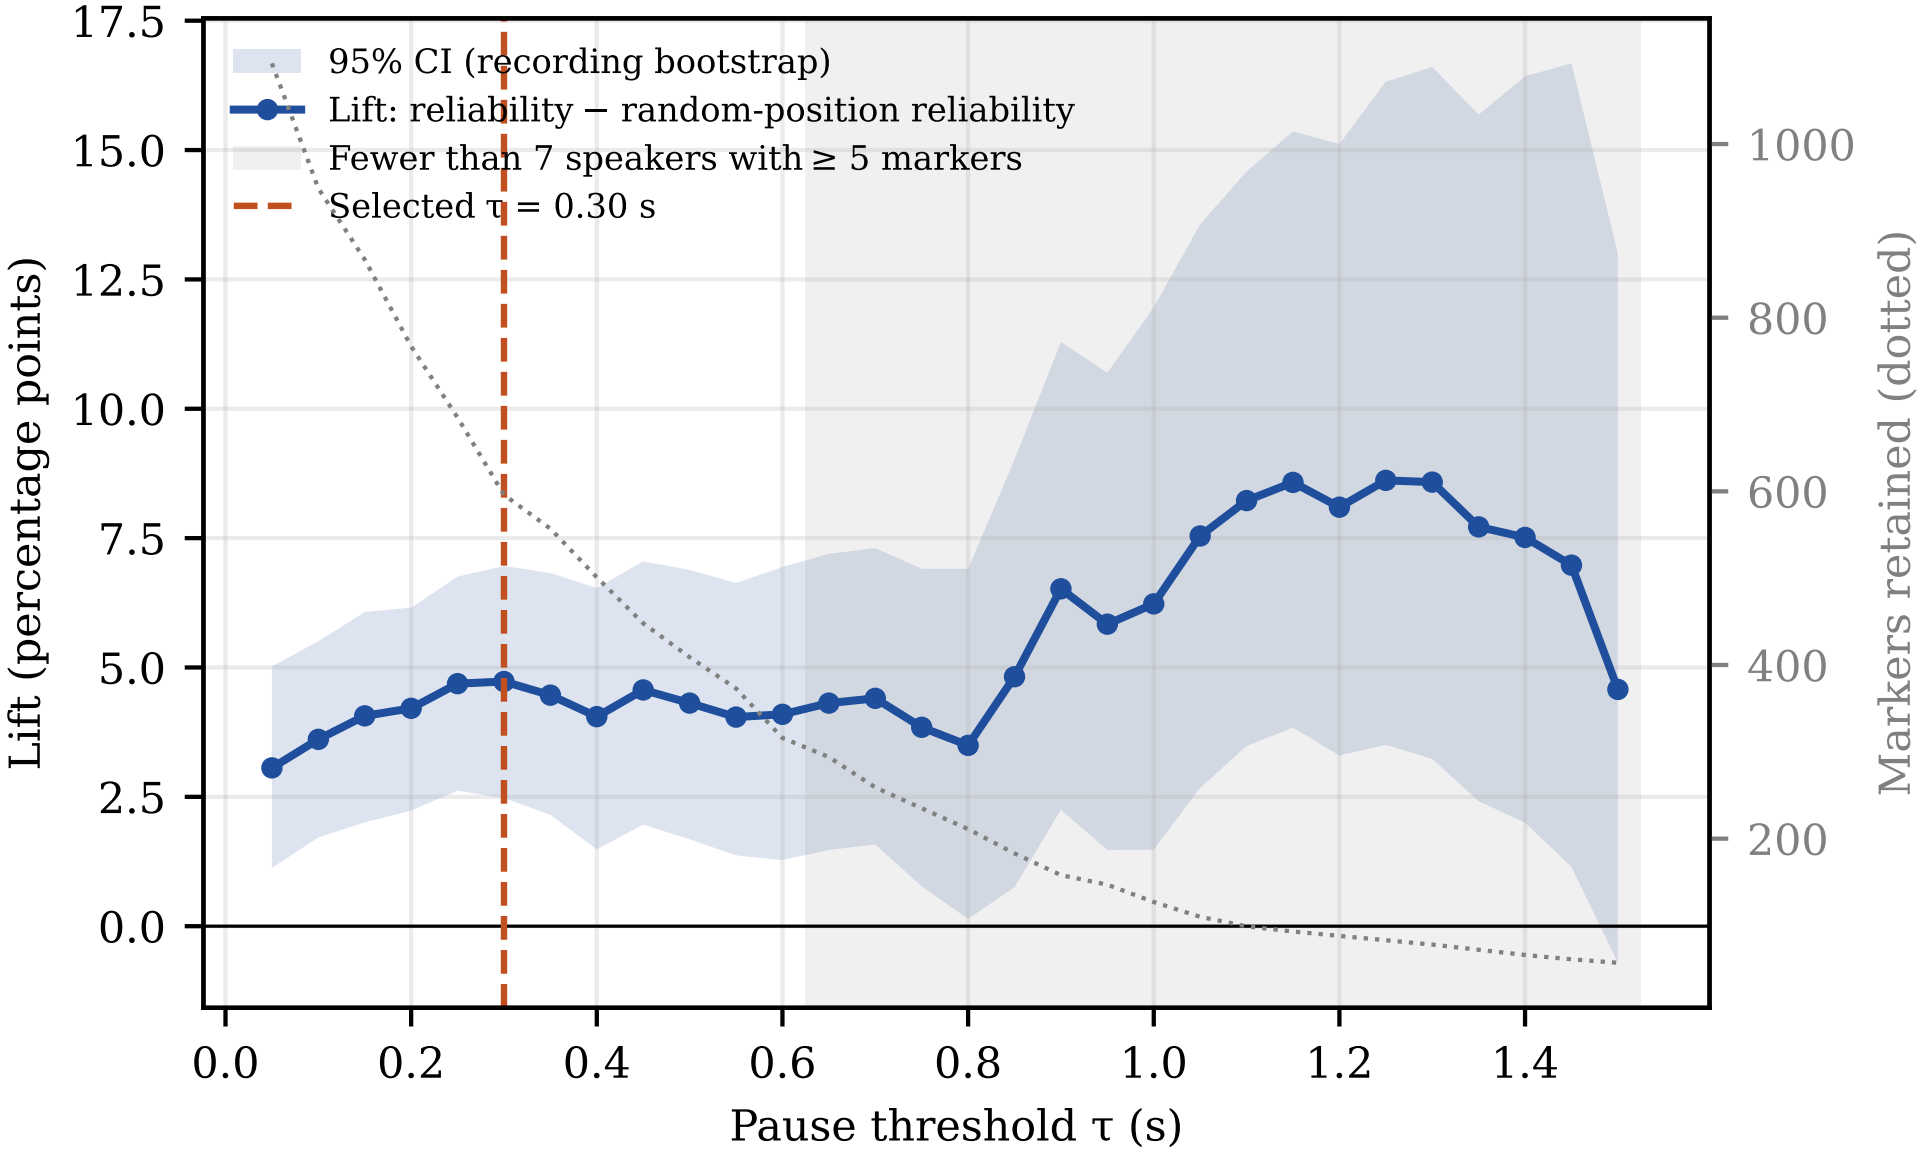
95% CI (recording bootstrap)
Lift: reliability − random-position reliability
Fewer than 7 speakers with ≥ 5 markers
Selected τ = 0.30 s
Lift (percentage points)
Markers retained (dotted)
Pause threshold τ (s)
17.5
15.0
12.5
10.0
7.5
5.0
2.5
0.0
1000
800
600
400
200
0.0
0.2
0.4
0.6
0.8
1.0
1.2
1.4