

USB-A Breakout Module (Host)

CHIP: *SS-52100-001***SIZE:** *25mm x 18.5mm*

Description:

This USB-A Breakout Module features pin headers for VDD, GND, and the differential data pairs. The module is configured as a host, your board supplies the +5v. The module features an AP2171W power switch for USB VBUS. The module features comprehensive ESD protections, including diodes on data pairs along with decoupling capacitors & the power switch. This module takes out the tedious, unpredictable troubles that come from USBs, and will let you streamline and debug your inventions & innovations.

PINOUT:

PIN	NAME	DOES THIS
1	GND	Ground
2	D+	Negative Data Pair
3	D-	Positive Data Pair
4	VDD	+5v
5	GND	Ground



Applications:

- Hosting keyboards, mice, chargers & more
 - Power supply for low current applications
 - Data Transmission between hosts & slaves
-

CHIPS ON BOARD:

COMPONENT	PART #	JOB	DATASHEET
USB-A	SS-52100-001	USB-A Port	[link]
Power Switch	AP2171W	ESD & Power Management	[Link]

PHOTOS:

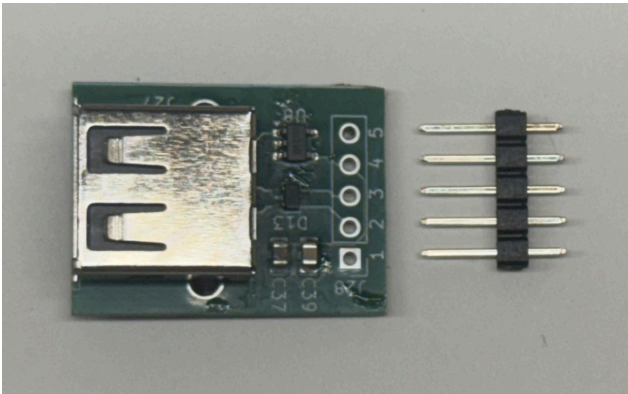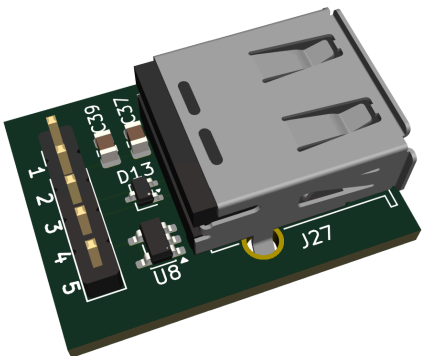

Notes & Debugging:

- This board is hard wired to be a Host.
- This module’s ESD protections do not ensure a board's safety. They act as 1 very valuable layer of protection, however proper handling, design & care are also vital.