

USB-C Breakout Module

CHIP: *USB4110-GF-A***SIZE:** *21mm x 17mm*

Description:

This USB-C Breakout Module features pin headers for VDD, GND, and the differential data pairs. The module is hard wired with 5.1k CC resistors, configuring it as a 5v slave. The module features comprehensive ESD protections, including diodes on VBUS and data pairs, a polyfuse and a 10uF capacitor. This module takes out the tedious, unpredictable troubles that come from USBs, and will let you streamline and debug your inventions & innovations.

PINOUT:

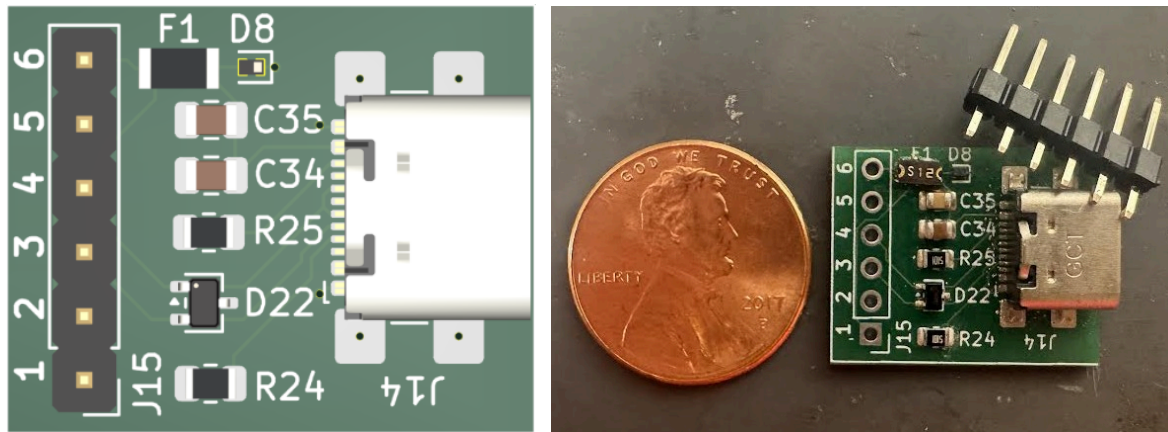
PIN	NAME	DOES THIS
1	VDD	+5V
2	GND	Ground
3	D-	Negative Data Pair
4	D+	Positive Data Pair
5	GND	Ground
6	VDD	+5v

Applications:

- Debugging & Code uploading for microcontrollers
 - Power supply for low current applications
 - Data Transmission between boards & hosts
-

CHIPS ON BOARD:

COMPONENT	PART #	JOB	DATASHEET
USB-C	USB4110-GF	USB-C Connector	[link]

PHOTOS:**Notes & Debugging:**

- You may choose to swap CC resistor values, to alter the host/slave properties, or the voltage.
- This module's ESD protections do not ensure a board's safety. They act as 1 very valuable layer of protection, however proper handling, design & care are also vital.
- The USB's maximum capacitance is 10uF, which is already met on this module. If you need to exceed the capacitance by a meaningful amount, removing the 10uF capacitor is recommended.