




High Quality • Reliable • Efficient

• Professional • Innovative Technology



Your Smart Security Solution

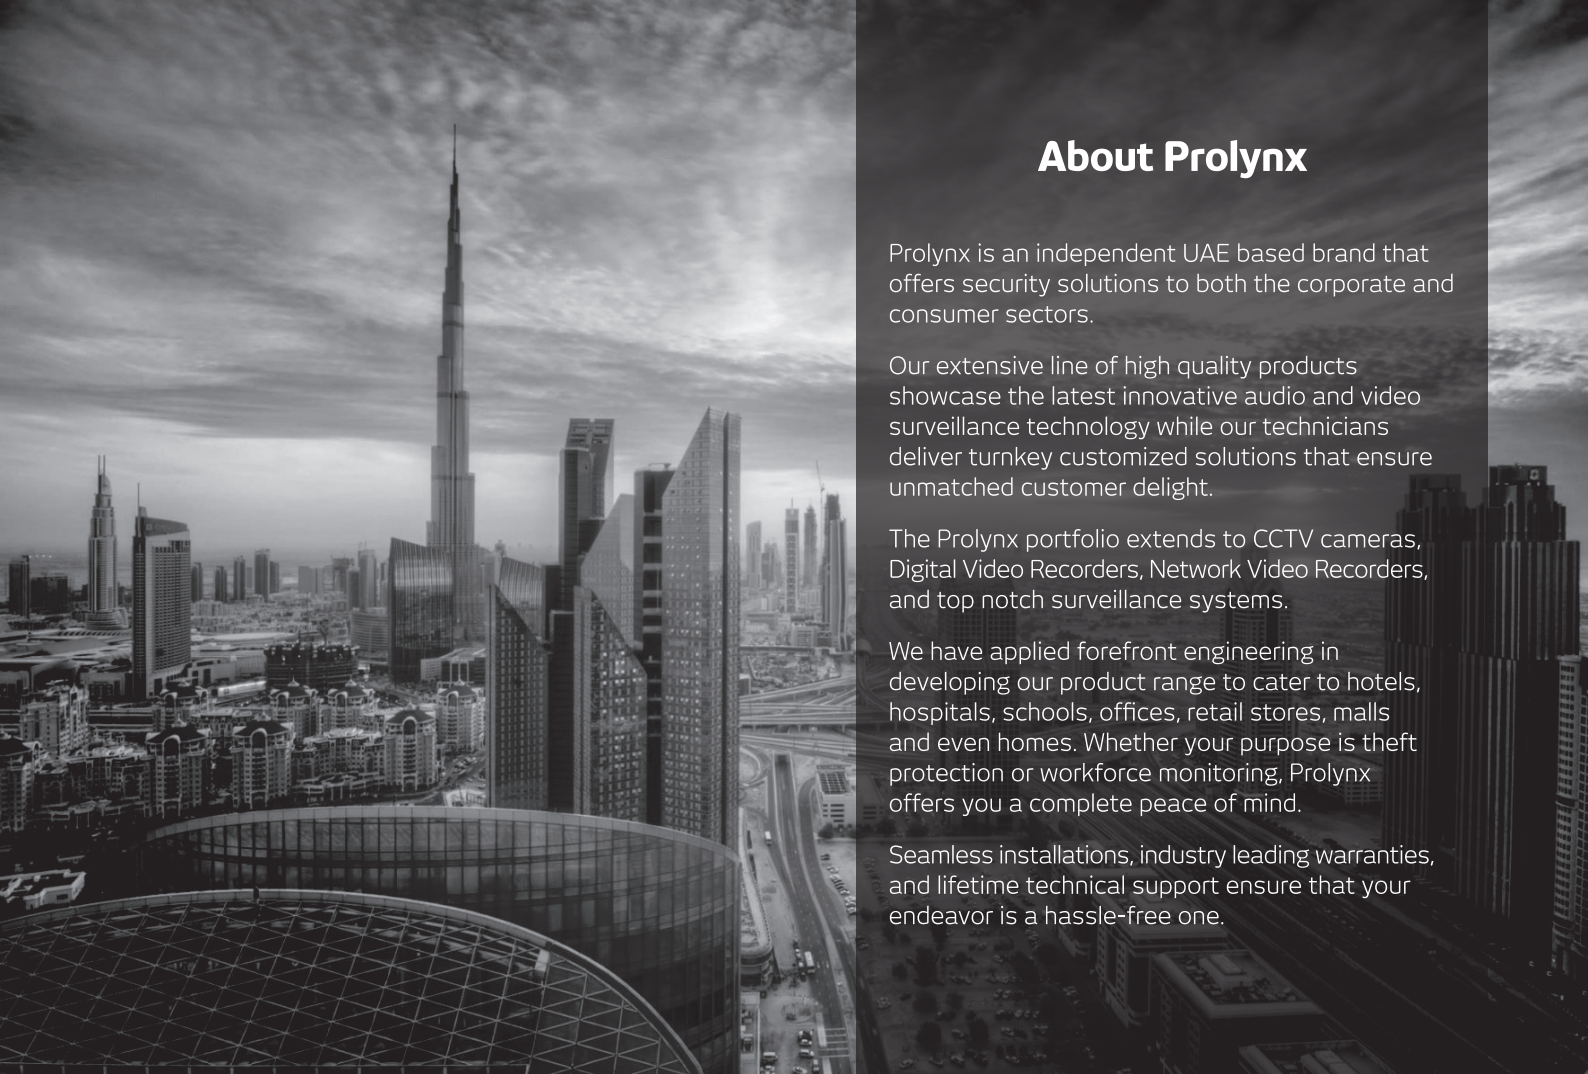

About Prolynx

Prolynx is an independent UAE based brand that offers security solutions to both the corporate and consumer sectors.

Our extensive line of high quality products showcase the latest innovative audio and video surveillance technology while our technicians deliver turnkey customized solutions that ensure unmatched customer delight.

The Prolynx portfolio extends to CCTV cameras, Digital Video Recorders, Network Video Recorders, and top notch surveillance systems.

We have applied forefront engineering in developing our product range to cater to hotels, hospitals, schools, offices, retail stores, malls and even homes. Whether your purpose is theft protection or workforce monitoring, Prolynx offers you a complete peace of mind.

Seamless installations, industry leading warranties, and lifetime technical support ensure that your endeavor is a hassle-free one.

PL-NSD2208S

2MP 22X STARLIGHT IR SPEED DOME



- 1/1.9", 2 megapixel, progressive scan, CMOS
- VF Lens 6.5 mm ~ 143 mm
- 22 X Optical Zoom
- Smart IR, up to 200 meters
- IR cut filter with auto switch
- H.265 / H.264 / MJPEG
- PAN 360° (endless)
- Ingress Protection Level : IP66

PL-NSD3007 / PL-NSD2007

2MP 30X / 20X IR SPEED DOME



- 1/3", 2 megapixel, progressive scan, CMOS
- shutter time: 1/6 s ~ 1/8000 s
- 20X / 30X Optical Zoom
- IR Range up to 100 meters
- IR cut filter with auto switch
- H.265 / H.264 / MJPEG
- 360° (endless)
- Ingress Protection Level : IP66



PL-NSD1006M

3MP NETWORK IR MINI SPEED DOME

- 1/2.8" Progressive Scan CMOS
- 12X Optical Zoom
- IR Range up to 100 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- DWDR / 3D DNR (Noise Reduction)
- Ingress Protection Level : IP66



PL-NSD3004

2MP 30X NETWORK IR SPEED DOME

- 1/2.8" Progressive Scan CMOS
- 30X Optical Zoom
- IR Range up to 120 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- DWDR / 3D DNR (Noise Reduction)
- Ingress Protection Level : IP66



PL-NSD2005

2MP 20X NETWORK IR PTZ CAMERA

- 1/2.8" Progressive Scan CMOS
- 20X Optical Zoom
- IR Range up to 150 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- DWDR / 3D DNR (Noise Reduction)
- Ingress Protection Level : IP66



PL-PTZ0203IP

2MP NETWORK IR MINI SPEED DOME

- 1/3" Progressive Scan CMOS
- 3X Optical Zoom
- IR Range up to 20 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- DWDR / 3D DNR (Noise Reduction)
- Ingress Protection Level : IP54



PL-8NFC30

4K ULTRA HD FISHEYE DOME CAMERA

- 1/1.7", progressive scan, CMOS
- wide angle lens, 360° Panoramic Image
- 4K, Max. 4000 X 3000 Resolution
- POE (Power Over Ethernet)
- Built-in Microphone & Speaker
- Ingress Protection Level : IP66 , IK10



PL-4NDC26Z

4MP WDR (MOTORIZED) NETWORK IR VARIFOCAL DOME CAMERA

- 1/3", Progressive scan CMOS
- VF Lens 2.8~12 mm
- Up to 30m (98 ft) IR range
- IR-cut filter with auto switch (ICR)
- POE (Power Over Ethernet)
- DWDR / 3D DNR (Noise Reduction)
- Ingress Protection Level IP66, IK10



PL-4NDC27

4MP WDR NETWORK IR DOME CAMERA

- 1/3", 4 megapixel, progressive scan CMOS
- IR Range up to 30 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- Video Compression H.265/H.264 MJPEG
- DWDR / 3D DNR (Noise Reduction)
- Ingress Protection Level : IP66, IK10



PL-4NDC28

4MP NETWORK IR MINI DOME CAMERA

- 1/3", Progressive scan CMOS
- IR Range 15 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- Audio: built-in microphone
- DWDR / 3D DNR (Noise Reduction)
- Ingress Protection Level : IP66, IK10



PL-3NDC08

3MP NETWORK DOME CAMERA WITH AUDIO AND WIFI

- 1/3" Progressive Scan CMOS Sensor
- IR Range up to 30 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- Audio: 1 x RCA Input / 1 x RCA Output
- DWDR / 3D DNR (Noise Reduction)
- Operating temperature : -30°C to 60°C



PL-3NDC09

3MP VANDALPROOF NETWORK DOME CAMERA WITH AUDIO

- 1/3" Progressive Scan CMOS Sensor
- IR Range 10 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- Audio; built-in microphone
- DWDR / 3D DNR (Noise Reduction)
- Operating temperature : -30°C to 60°C



PL-2NDC31

2MP WDR NETWORK IR DOME CAMERA

- 1/2.7" progressive scan CMOS
- 2.8 mm@F2.0
- Smart IR, up to 30 m (98 ft) IR distance
- Up to 120 dB WDR
- POE (Power Over Ethernet)
- Audio: Two-way audio Supported
- 3D DNR (Noise Reduction)
- Ingress Protection Level : IP66, IK10



PL-2NDC19

2MP VARIFOCAI NETWORK DOME CAMERA

- 1/3" Progressive Scan CMOS Sensor
- VF Lens 2.8-12mm
- IR Range 20 to 30 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- Audio: 1 x RCA Input / 1 x RCA Output
- DWDR / 3D DNR (Noise Reduction)
- Operating temperature : -10°C to 55°C



PL-4NBC15

4MP VARIFOCAI NETWORK BULLET CAMERA

- 1/3" Progressive Scan CMOS Sensor
- IR Range Approx. 20 to 25 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- DWDR / 3D DNR (Noise Reduction)
- Built-in Micro SD card slot, up to 64GB
- Ingress Protection Level : IP66



PL-4NBC21

4 MP WDR NETWORK BIG BULLET CAMERA

- 1/3" Progressive Scan CMOS Sensor
- EXIR Technology, up to 80 meters IR Range
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- 3D DNR (Noise Reduction)
- 120 db WDR (Wide Dynamic Range)
- Ingress Protection Level : IP66



PL-4NBC22

4MP NETWORK MINI BULLET CAMERA

- 1/3" Progressive Scan CMOS Sensor
- IR Range up to 30 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- 3D DNR (Noise Reduction)
- 120 db WDR (Wide Dynamic Range)
- Ingress Protection Level : IP66



PL-4NBC23

4MP WDR NETWORK MINI BULLET CAMERA

- 1/3" Progressive Scan CMOS Sensor
- IR Range up to 30 meters
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- 3D DNR (Noise Reduction)
- 120 db WDR (Wide Dynamic Range)
- Ingress Protection Level : IP66

PL - 4NBC25Z

4MP WDR (MOTORIZED) NETWORK IR VF BULLET CAMERA



- 1/3", Progressive scan CMOS
- VF Lens 2.8-12mm
- IR Range up to 30 meters
- POE (Power Over Ethernet)
- DWDR / 3D DNR (Noise Reduction)
- Built-in Micro SD card slot, up to 128 GB
- Ingress Protection Level : IP66

PL - 2NBC24

2 MP NETWORK IR MINI BULLET CAMERA



- 1/2.8" Progressive Scan CMOS Sensor
- Up to 30m (98 ft) IR range
- IR cut filter with auto switch
- POE (Power Over Ethernet)
- 3D DNR (Noise Reduction)
- 120 db WDR (Wide Dynamic Range)
- Ingress Protection Level : IP66

PL-3NXC10D

3MP WDR NETWORK BOX CAMERA



- Aptina 1/3" WDR CMOS
- 0.5 Lux (Color) (0.02 Lux B/W)
- True Day / Night with ICR Filter
- POE (Power Over Ethernet)
- Audio: 1 x RCA Input / 1 x RCA Output
- 120 db WDR (Wide Dynamic Range)
- Operating temperature : -10°C to 55°C

PL-2NXC10D

2MP NETWORK BOX CAMERA



- 1/2.8", progressive scan CMOS
- 0.02 Lux (F1.2, AGC ON) 0 Lux with IR
- True Day / Night with ICR Filter
- POE (Power Over Ethernet)
- Audio: Two-way audio
- 120 db WDR (Wide Dynamic Range)
- Operating temperature : -20°C ~ +60°C

PL-1NVR0904/08 UE9 SERIES NETWORK VIDEO RECORDER



- Third-party network cameras with ONVIF supported
- Up to 8 Megapixels resolution recording
- 1-ch HDMI, 1-ch VGA, HDMI at up to 4K (3840x2160) resolution
- 04/08 network cameras can be connected
- 1 SATA hard disks can be connected with up to 6TB capacity for each
- Support for P2P, UPnP, NTP, DHCP, PPPoE

PL-2NVR0504-4P/08-8P/16-8P 2H SERIES NETWORK VIDEO RECORDER



- Third-party network cameras with onvif supported
- Up to 6 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- 4/8/16 network cameras can be connected
- Up to 1 / 2 SATA hard disks can be connected with up to 4 / 6TB capacity for each
- Plug & Play with up to 4/8 independent PoE network interfaces

PL-4NVR0616/32-16P 4H SERIES NETWORK VIDEO RECORDER



- Third-party network cameras with onvif supported
- Up to 6 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- 16/32 network cameras can be connected
- Up to 4 SATA hard disks can be connected with up to 6TB capacity for each
- Plug & Play with up to 16 independent PoE network interfaces

PL-4NVR1016/32-16P UE10 SERIES NETWORK VIDEO RECORDER



- Third-party network cameras with ONVIF supported
- Up to 12 Megapixels resolution recording
- 2-ch HDMI, 1-ch VGA, HDMI2 at up to 4K (3840x2160) resolution
- 16/32 network cameras can be connected
- Up to 4 SATA hard disks can be connected with up to 8TB capacity for each
- Plug & Play with up to 16 independent PoE network interfaces

PL-8NVR0716 / 32 8H SERIES NETWORK VIDEO RECORDER



- Third-party network cameras with onvif supported
- Up to 6 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- 16/32 network cameras can be connected
- Up to 8 SATA hard disks can be connected with up to 4TB capacity for each
- Disk Array : RAID0, RAID1, RAID5, RAID10
- Support network detection, including network delay, packet loss, etc

PL-8NVR1132R / 64R UE8 Series Network Video Recorder



- Third-party network cameras with ONVIF supported
- Up to 12 Megapixels resolution recording
- 2-ch HDMI, 1-ch VGA, 1-ch CVBS, HDMI2 at up to 4K(3840x2160) resolution
- 32 and 64 network cameras can be connected
- Up to 8 SATA hard disks can be connected with up to 8TB capacity for each
- Disk Array : RAID1, RAID5
- Support for P2P, UPnP, NTP, DHCP, PPPoE
- Support for mobile client access

PL-ASB1003

2MP AHD MINI PTZ 10X BULLET CAMERA



- 5.1~51 mm Sony CMOS Sensor
- IR Range Approx. 80 meters
- IR cut filter with auto switch
- 10X Optical Zoom
- DWDR / 3D DNR (Noise Reduction)
- Intergration PTZ Camera Structure
- Ingress Protection Level : IP66

PL-ASD1004

2MP 22X IR SPEED DOME



- 1/2.8" Sony EXMOR CMOS
- Smart LED up to 150 meters
- IR cut filter with auto switch
- 22X Optical Zoom, 16X Digital Zoom
- 0°~ 90°, Auto Flip 180°to Continue Monitor
- 1080P@25fps, NTSC:1080P@30fps
- Ingress Protection Level : IP66

PL-ASD1002

2MP 10X MINI IR SPEED DOME



- 1/3" Progressive Scan CMOS Sensor
- VF Lens 5.1mm ~ 51mm
- 10X Optical Zoom
- IR Range up to 60 meters
- IR cut filter with auto switch
- Video Transmission 300 meters
- Ingress Protection Level : IP66

PL-ASD2001

2MP 20X IR SPEED DOME



- 1/3" Progressive Scan CMOS Sensor
- VF Lens 4.7 mm ~ 94.0 mm
- 20X Optical Zoom
- IR Range up to 60 meters
- IR cut filter with auto switch
- Video Transmission 300 meters
- Ingress Protection Level : IP66



PL - AHD06D

2MP AHD IR DOME CAMERA

- 1/3" CMOS 2 Megapixel
- 2 X HLED, 20-30 Meters Distance
- IR cut filter with auto switch
- Video Transmission 300 meters
- Day/Night(ICR), AWB, AGC, BLC, 2D-DNR
- Dual glass, no IR diffusion and fog
- Ingress Protection Level : IP66



PL-AHD01D

1080P AHD DOME CAMERA

- 1/3" Sony CMOS
- 3.6mm Fixed Lens
- ICR, IR LED 18 Pcs, IR range 15 meters
- IR cut filter with auto switch
- Video Transmission 300 meters
- 3D DNR (Noise Reduction)
- Ingress Protection Level : IP66



PL-AHD02D

1080P AHD VARI-FOCAL DOME CAMERA

- 1/2.9" Sony CMOS
- VF Lens 2.8-12mm
- ICR, IR LED 24 Pcs, IR range 25-35 meters
- IR cut filter with auto switch
- Video Transmission 300 meters
- 3D DNR, dWDR, ICR, BLC, HLC, ATW
- Ingress Protection Level : IP66



PL - AHD03D

2MP AHD IR DOME CAMERA

- 1/2.9" Sony "Exmor" CMOS
- 3.6mm Fixed Lens
- IR cut filter with auto switch
- 24 IR LEDs, 10~20 Meters Distance
- DWDR / 3D DNR (Noise Reduction)
- Video Transmission 300 meters
- Ingress Protection Level : IP67



PL - AHD05D

1080P AHD VARIFOCA L DOME CAMERA

- 1/2.9" Sony CMOS
- 12pcs Piranha LED up to 20-25 meters
- IR cut filter with auto switch
- 2.8-12mm Motorized Lens
- 2D/3D DNR,dWDR,ICR,BLC,ATW
- Video Transmission 300 meters
- Ingress Protection Level : IP66



PL - AHD04D

2MP AHD VARIFOCA L IR DOME CAMERA

- 1/2.9" Sony "Exmor" CMOS
- 2.8~12MM Varifocal Lens
- 24 IR LEDs, 10~20 Meters Distance
- IR cut filter with auto switch
- 2D/3D DNR (Noise Reduction)
- Video Transmission 300 meters
- Ingress Protection Level : IP67



PL-AHD09D

1080P AHD VARIFOCA L DOME CAMERA

- 1/2.9" 2.0 Mega pixels Sony CMOS
- 2.8 -12 mm VF lens
- 18 pcs SMD IR Led, 20-30 Meters Distance
- IR cut filter with auto switch
- Video Transmission 300 meters
- 2D/3D DNR, multi-levels adjustable
- Ingress Protection Level : IP65



PL - AHD08D

1080P AHD IR DOME CAMERA

- 1/2.9" 2.0 Megapixels Sony CMOS
- 12pcs IR LED, 10 Meters Distance
- IR cut filter with auto switch
- Video Transmission 300 meters
- 2D/3D DNR, multi-levels adjustable
- Built-in Microphone
- Ingress Protection Level : IP65



PL - AHD06B

2MP AHD IR BULLET CAMERA

- 1/3" CMOS 2 Megapixel
- 2 X HLED, 20-30 Meters Distance
- IR cut filter with auto switch
- Video Transmission 300 meters
- Day/Night(ICR), AWB, AGC, BLC, 2D-DNR
- Dual glass, no IR diffusion and fog
- Ingress Protection Level : IP66



PL-AHD01B

FULL HD 1080P AHD BULLET CAMERA

- 1/3" Progressive Scan CMOS Sensor
- IR LED 18 Pcs
- IR Range up to 20 meters
- IR cut filter with auto switch
- Video Transmission 300 meters
- 3D DNR,dWDR,BLC,HLC
- Ingress Protection Level : IP66a



PL-AHD02B

1080P AHD VARIFOCAAL BULLET CAMERA

- 1/3" Sony CMOS
- 2.8 -12 mm VF lens
- IR LED 30 Pcs, IR range 35-40 meters
- IR cut filter with auto switch
- Video Transmission 300 meters
- 3D DNR, dWDR, ICR, BLC, HLC, ATW
- Ingress Protection Level : IP66



PL - AHD04B

2MP AHD VARIFOCAAL IR BULLET CAMERA

- 1/2.9" Sony "Exmor" CMOS
- 2.8 ~ 12MM Varifocal Lens
- 8 IR Array LEDs, 30 ~ 40 Meters
- IR cut filter with auto switch
- Video Transmission 300 meters
- 1080P AHD/TVI/CVI, 960H, Four in one, BNC
- Ingress Protection Level : IP66



PL - AHD03B

2MP AHD IR BULLET CAMERA

- 1/2.9" Sony "Exmor" CMOS
- 2 Array Led's, 10~20 Meters Distance
- IR cut filter with auto switch
- 3.6mm Fixed Lens
- 2D/3D DNR (Noise Reduction)
- Video Transmission 300 meters
- Ingress Protection Level : IP67



PL-AHD08B

1080P AHD FIXED LENS BULLET CAMERA

- 1/2.9" 2.1 Mega pixels Sony CMOS
- Lens : 3.6 mm fixed lens
- 8 pcs SMD Leds 10-15 Meters
- IR cut filter with auto switch
- Video Transmission 300 meters
- 2D/3D DNR, multi-levels adjustable
- Ingress Protection Level : IP66



PL-AHD09B

1080P AHD VARIFOCAAL BULLET CAMERA

- 1/2.9" 2.1 Mega pixels Sony CMOS
- 2.8 -12 mm VF lens
- 15 pcs SMD Leds, 30-40 meters
- IR cut filter with auto switch
- Video Transmission 300 meters
- 2D/3D DNR, multi-levels adjustable
- Ingress Protection Level : IP66




PL - AHD10BX

1080P AHD BOX CAMERA

- 1/2.9" 2.0 Megapixel Sony CMOS
- 0.01Lux@ (F1.2,AGC ON) , 0 Lux with IR
- Auto(ICR) / Color / B/W / WDR
- AHD HD output and CVBS 960H output
- 2D/3D DNR (Noise Reduction)
- Video Transmission 300 meters
- Ingress Protection Level : IP66

PL-ADR0104/08E1

FULL HD 1080P AHD DVR



- Supports AHD 1080P Encode
- Supports 960H Analogue, IP hybrid access
- 4/8 AHD Cameras can be connected
- VGA and HDMI Full HD output
- Supports 1 SATA hard disk up to 4 TB Each
- P2P , App for iOS & Android
- Support 12 languages

PL-ADR0204E1

FULL HD 1080P AHD DVR



- Supports AHD 1080P Encode
- Supports 960H Analogue, IP hybrid access
- 4 AHD Cameras can be connected
- VGA and HDMI Full HD output
- Supports 1 SATA hard disk up to 6 TB Each
- P2P , App for iOS & Android
- Support 29 languages

PL-ADR0308/16E2 1080P ECONOMIC STANDALONE DVR



- Support AHD 1080P encoding
- Compression H.264 (high profile)
- 8/16 AHD Cameras can be connected
- 2 SATA Interfaces, Up to 12TB
- Preview & Playback Zoom Support
- Support Remote View, Remote Playback
- Support P2P services, Alarm input/output

PL-ADR0508E1 FULL HD 1080P AHD DVR



- Support AHD 1080P encoding
- Compression H.264 (high profile)
- 8 AHD Cameras can be connected
- 1 SATA Interfaces, Up to 6TB
- Preview & Playback Zoom Support
- Support Remote View, Remote Playback
- Support P2P services, Alarm input/output



PL-W0420

HD WiFi CAMERA WITH TEMPERATURE & HUMIDITY DETECTION

- Smart HD (720p) IP camera
- Quick & Easy setup with QR code
- Built in Temperature and Humidity Sensor
- Remote Pan/Tilt rotate (Horizontal:270 degree/vertical:120 degree)
- Micro SD card slot up to 32GB
- Infrared LED, digital smart zoom
- APP available in APP store or Google play



PL-WC0521

HD WiFi CAMERA WITH TWO WAY AUDIO

- Smart HD (720p) IP camera
- Quick & Easy setup with QR code
- Built in microphone and speaker
- Remote Pan/Tilt rotate (Horizontal:330 degree/vertical:90 degree)
- Micro SD card slot up to 64GB
- Infrared LED, digital smart zoom
- APP available in APP store or Google play



PL-WC0622

HD WiFi CAMERA WITH TWO WAY AUDIO

- Slim 20mm body, streamlined elegant design
- Magnetic base easier to mount
- Easy setup with soundwave technology
- Built in microphone and speaker
- Micro SD card slot up to 32GB
- Infrared LED, digital smart zoom
- APP available in APP store or Google play



PL - FE01

HD WiFi CAMERA WITH FISH EYE LENS

- Fisheye lens, f / 1.44mm
- Quick & Easy setup with QR code
- IR cut filter with auto switch
- 1280 X 960 Horizontal 360°
- AAC/G.711, Two-way Audio
- Micro SD card slot up to 128G
- 1 key reset
- APP available in APP store or Google play

PL-IC02

INSPECTION CAMERA WITH COLOR LCD MONITOR



- Video recording capability, supports up to 32GB micro SD card
- Mini 8mm IP67 water-proof camera head with 1m (3ft) flexible extended tube
- Allows for easy surveying of small and hard-to-reach places
- OSD menu for operation, 2.7" TFT-LCD color monitor
- Adjustable brightness on lens-mounted LED lights for night vision
- Lightweight, handheld design, flexible and convenient to use
- 3 useful accessories included: hook, mirror and magnet
- Built-in rechargeable Li-ion battery.

PL-IC01

INSPECTION CAMERA WITH COLOR LCD MONITOR



- Used for video inspection of narrow or hard to reach places.
- Mini 8mm waterproof camera with flexible extended tube.
- 1/9" CMOS image sensor. 840 x 480 effective pixels.
- 2.4" TFT LCD color monitor.
- Adjustable brightness on lens mounted LED light.
- Video out function for viewing in big screen.
- Light weight compact designs to easily find diagnose and solve problem
- IP67 waterproof standard.
- AA batteries for power supply.

PL-AHDK01 COMPACT AHD KIT



- Video System: NTSC / PAL Switch Selectable
- Video Input: BNC*4, 1.0Vp-p, 75ohm
- 1 HDMI Output / 1 VGA Output
- 1 SATA Interface, Up to 6TB
- 1/2.9" Sony "Exmor" CMOS
- 3.6mm Fixed Lens 1920 (H) x 1080 (V)
- PAL / NTSC : 15 fps / 1080P
- 2 Array Leds, 10 ~ 20 Meters Distance
- Ingress Protection: IP66

PL-AHDK02 4 CHL AHD DVR KIT



- Video System: NTSC / PAL Switch Selectable
- Video Input: 4 CH BNC Interface (1.0Vp-p, 75Ω)
- 10.1-inch LCD in-built
- HDMI Output: 1CH (1920*1080)
- 1 SATA HDD, Up to 6TB
- 1/3" CMOS 2 Megapixel
- 3.6mm Fixed Lens 1920 (H) x 1080 (V)
- PAL: 25fps/1080P NTSC: 30fps/1080P
- 2 X HLED, 20-30 Meters Distance
- Ingress Protection: IP66



PL-VDO03M

APARTMENT OUTDOOR STATION

- 3.5-inch TFT screen, vivid pictures are on show
- Tempered glass panel, touch buttons.
- Adopt TCP/IP network host, support SNMP network protocol.
- Network security technology, provides stable and safe operating environment.
- Support night vision, voice indication
- Support card and password to open the door
- Support visitor leaving audio and video message function



PL-VDIO03W-AH

7" IP VIDEO DOOR PHONE KIT

- 7" Color TFT-LCD Touch Screen
- Cat6 system, easy installation
- Support monitoring, video talk, unlock function
- Color 1MP CMOS night vision camera
- Support smart card door opening
- Intercom between all indoor monitors
- Up to 6 indoor monitors(backward compatible)
- Picture capture, video record for visitors



PL-VDIO05

7" IP SMART VIDEO DOOR PHONE KIT

- 7" Color TFT-LCD Touch Screen
- Cat6 system, easy installation
- Support monitoring, video talk, unlock function
- Support push notification on smart phones (Android/iOS)
- Color 1MP CMOS night vision camera
- Support smart card door opening
- Intercom between all indoor monitors
- Up to 6 indoor monitors(backward compatible)



PL-VDIO06K

4" VIDEO DOOR PHONE KIT

- 4" TFT display screen
- Hands-free video intercom
- Internal call between indoor units
- Support touch key functions
- Support unlock, call transfer, and monitoring functions
- Up to 2 doorbells can be connected with 4 indoor monitors(backward compatible)
- 700 TVL, 1.4" CMOS night vision camera
- Support one channel camera surveillance



PL-AC02B6-AZ

WEB BASED STANDALONE ATTENDANCE AND ACCESS CONTROL

- Inbuilt HTTP Web Server for management
- Fingerprint Sensor : Optical
- Communications : TCP/IP, Wiegand/RS485
- Fingerprint /Pin/Card verification mode
- 9590 Fingerprint templates capacity
- 20000 RFID card capacity
- 51968 transaction log capacity



PL-ACS02P-AN

STANDALONE ACCESS CONTROL

- Elegant Design & Touch sensitive
- Frequency: EM125KHz
- 2-6 digits pins by program
- Tri-color LED Indicator
- Operation Voltage: 12VDC
- Max 1000 Users
- Water-proof, IP Rating: 65



PL-A350

STANDALONE ACCESS CONTROL

- 32bit RISC CPU, 1.8" Color LCD
- EM / MIFARE / HID / ICLASS RF CARD
- Red / Green / Blue Led Indicator
- TCP/IP based communication
- 1000 Users FP / Card / Pin, 100000 Accesslog
- 360 Degree Fingerprint recognition sensor
- Less than 1 second to verify 1,000 fingerprints



PL-ACS04/05

STANDALONE ACCESS CONTROL

- With internal EM reader(Frequency: 125KHz)
- Zone 1: 1K passwords & 1K card holders
- Zone 2: 10 passwords & 10 card holders
- Card, Code & Combined Access
- Digital Keypad Operation
- Dual Relay output
- Water-proof, IP Rating: 65

PL-24W02MD

WALK THROUGH METAL DETECTOR



- Power Supply : AC 210V-240V 50/60Hz
 - Sensitivity : $\geq 6g$ metal
 - Detecting Zone : 24 detecting zones
 - Power Consumption : 25W
 - Weight : 65kg
 - Through Rate : >60 persons/per minute
 - Work environment : $-20^{\circ}\text{C} \sim +60^{\circ}\text{C}$
 - Door size : 2220mm (H) * 500mm (W) * 810mm (D)
 - Tunnel size : 2020mm (H) * 700mm (W)
 - Technology standard : GB15210-2003;CE
- Key Features
1. Extremely high sensitivity to almost all metals
 2. Exceptional immunity to environmental interferences
 3. High reliability, Rapid installation, Dust & water protection
- Certificates : CE ; ISO9001

PL-H01MD/H02MD

HANDHELD METAL DETECTOR



- Sensitivity Level : High and low, two options
 - Alarm Method : Audio and light alarm, vibration
 - Battery Type : 9V alkaline battery or rechargeable nickel-hydrogen battery
 - Battery Working Hours : 40 hours (under 10% alarm rate), rechargeable nickel-hydrogen battery 14 hours
 - Size : 400mm*79mm*30mm, Weight : 248g
 - Detecting Accuracy : Pin 30-60mm, 64 type pistol 150mm, 6" dagger 160mm, dia 20mm SUS ball
 - Technology Standard : GB15210-2003;CE
- Key Features
1. Very high sensitivity to almost all metals
 2. Exceptional immunity to environmental interferences
 3. High reliability & Smart design
- Certificates : CE ; ISO9001

PL-PS0304/09/18D



POWER SUPPLY

PL-CT001



Professional tools for CCTV

PL-DCP05



PTZ CONTROLLER

PL-NKC05



PTZ CONTROLLER

PL-PA0312V-A1B



12 V DC POWER ADAPTER

PL-CCB0420/25



READY MADE BNC CABLE

PL-CCB0401/02/03



BARE COPPER COAXIAL CABLE

PL-BNC02-AQ



BNC & DC CONNECTORS

PL-WBK01-AE



WALL MOUNT BRACKET

PL-PBK02-AE



PENDANT BRACKET

PL-WBK03



WALL MOUNT PTZ BRACKET

PL-PBK04



PENDANT PTZ BRACKET

HDD 1TB/2TB/3TB 4TB/6TB/8TB



PURPLE DRIVE
SURVEILLANCE GRADE

PL-VFL02AE



VARI FOCAL LENS
6-60mm

PL-VFL0204-2812AS



VARI FOCAL LENS
2.8-12mm

PL-VFL1304-0820AS



VARI FOCAL LENS
8-20mm



facebook



LinkedIn



www.prolynx.ae



Twitter



YouTube



Tel: +971 4 2224464 | Fax: +971 4 2243282 | P.O. Box: 82769, Dubai, U.A.E.

Web : www.kansas.ae | Email : info@kansas.ae