



## Complete Collaboration Solution for Small to Midsize Meeting Spaces

Solstice Conference paired with the Huddly GO meeting room camera and a supported USB mic combines the reach of video conferencing with the power of rich, multi-participant content sharing to enhance the collaboration experience between onsite and remote users.

This room solution delivers the convenience of a traditional room system with the flexibility to use any conferencing service installed on the meeting host's laptop.

### Solstice Conference


- Multi-participant content sharing from any device
- Agnostic support for all major conferencing services
- Easy, one-step start from the meeting host's laptop
- Connects Huddly GO meeting room camera through USB
- Enterprise-grade security and fully IT-compliant
- Cloud-based deployment management and analytics

### Huddly GO

- Ultra Wide-Angle 150° wide-angle lens
- HD 720p 30fps output
- Dynamic Light Optimization

### Meeting Host Laptop

- Requires Windows or macOS laptops to host meetings
- Supports Zoom, Teams, and most other conferencing apps

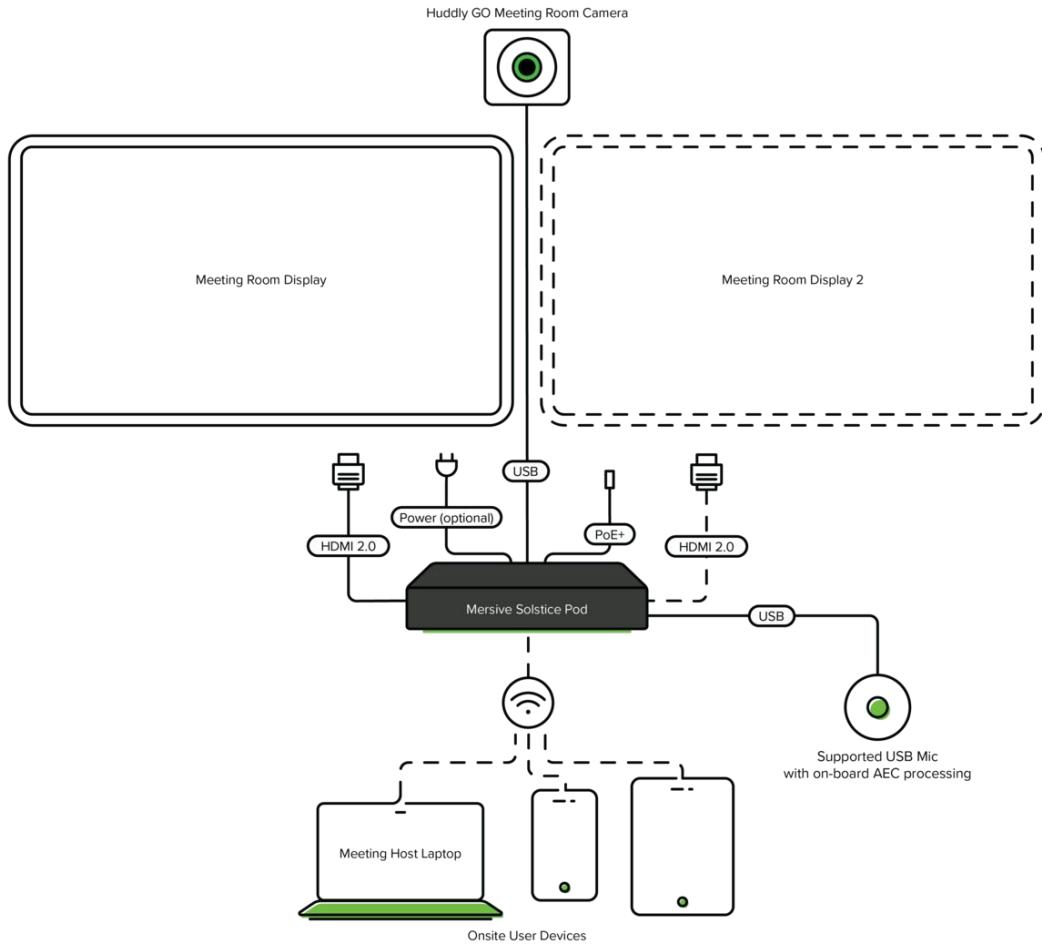

## System Components

### Solstice Conference

Solstice Pod Gen3  
HDMI cable  
Power supply

### Huddly GO

Huddly GO camera  
Power supply

### Additional Requirements

Meeting host laptop  
(Windows or macOS)  
Web conferencing service  
(Teams, Zoom, etc.)  
Supported USB mic  
USB 2.0 cable

## Installation Instructions

1. Connect the Huddly GO meeting room camera to one of the USB ports on the back of the Solstice Pod using a USB 2.0 cable.
2. (Optional) Connect a [supported USB mic](#) with on-board AEC processing to one of the USB ports on the back of the Solstice Pod.
3. (Optional) Connect a speaker to the audio out port on the back of the Solstice Pod.
4. Attach the Solstice Pod to power and the local Ethernet and/or wireless network (PoE+ supported).
5. Connect the Pod to the display monitor via HDMI (outer HDMI 1 port recommended). An optional second display monitor can also be connected to the Pod.
6. As a note, Mersive recommends configuring the Solstice Pod's basic settings, such as updating the display name to match the room name.

For conferencing support, meeting hosts simply install the Solstice app on their laptop device along with their web conferencing application of choice. As a note, the host laptop must be connected to the same network as the Pod.

## Technical Specifications

### Solstice Pod Gen3

Part #: SP-8000-E1



**Supported user devices** Windows, macOS, iOS, Android, Chromebook, Linux

**Number of users** Unlimited

**Number of content posts** Unlimited

**Solstice app features** Conferencing Support (meeting hosts only, Windows and macOS supported)  
Share desktop, application window, image file, video file  
Intuitive drag-and-drop layout control  
Wireless annotation via smartphone

**App-free sharing** AirPlay, Miracast, browser-based sharing, HDMI input

**Streaming video support** 4K UHD, Full HD, HD, SD

**Network connection** Ethernet, WiFi, VLAN (x3)

**Wireless frequency band** 2.4 GHz and 5 GHz;

**Security features** 2048-bit network encryption  
Firewall protection between networks  
802.1x authentication  
Access controls and moderation  
User authentication at runtime (optional)

**Additional features** Wireless USB peripheral support  
Dual display support  
Touch display support  
Microsoft Exchange and O365 calendar support  
Digital signage playback  
API for third-party integrations  
Cloud-based management and meeting analytics

**Warranty** 1-year limited hardware warranty with option to extend to 3 years

### Huddly GO

Part #: 7090043790467



**Meeting Room Camera** 16 Megapixels 1/2.3" CMOS Sensor  
Wide-angle six-element glass lens

Horizontal field of view 120°

Vertical field of view 90°

Diagonal field of view 150°

f/2.8 aperture

16:9 aspect ratio output

**Features** 720p HD @ 30 fps  
High-quality scaling and dewarping  
3D noise reduction  
Automatic white balance  
Automatic color correction  
Optical aberration correction  
4x digital zoom  
Low latency video processing  
180° Auto-Flip (when mounted upside down)

**Video Compression** MJPEG, YUV 4:2:2 and 4:2:0 support over USB 3  
MJPEG support over USB 2

**Connection Types** USB Type-C connector  
SuperSpeed USB 3  
HighSpeed USB 2 (Requires 5V 900 mA power supply)

**Mounting options** Embedded Mounting Hinge  
Camera tripod mount

**Warranty** 2-year limited hardware warranty