




I2C SHIELD BOARD




User Led

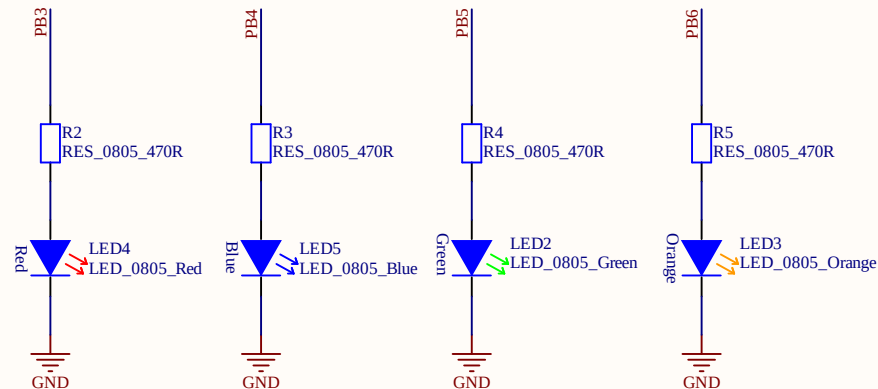

Connectors

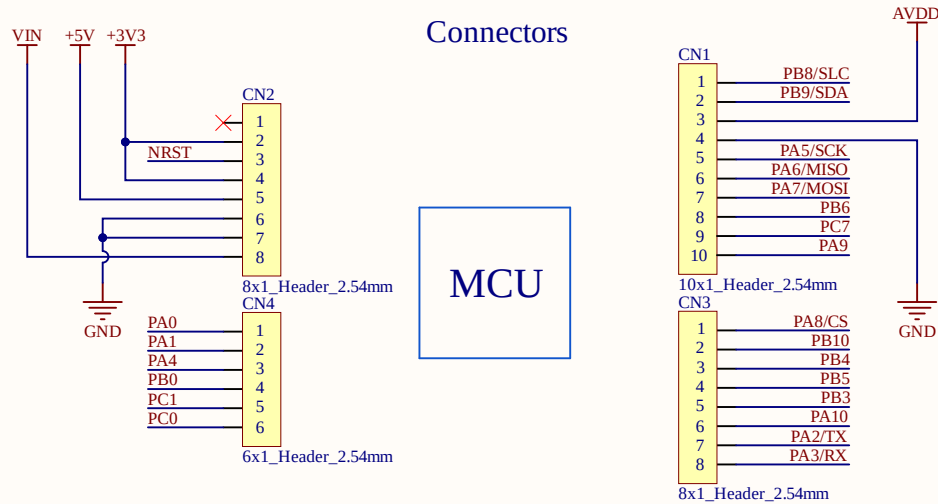


User Button

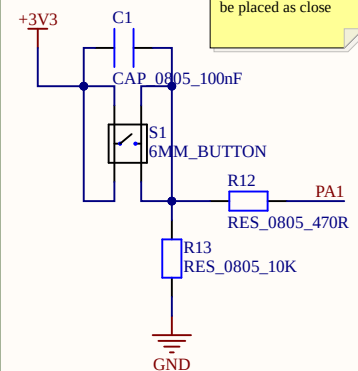


Capacitors C4 should be placed as close

User Button

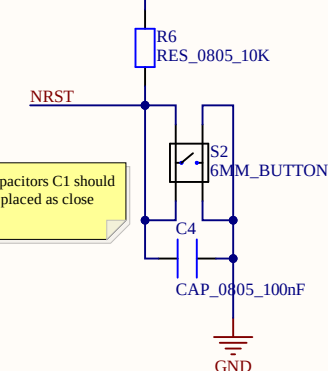

Capacitors C1 should be placed as close


128X64 Oled Screen

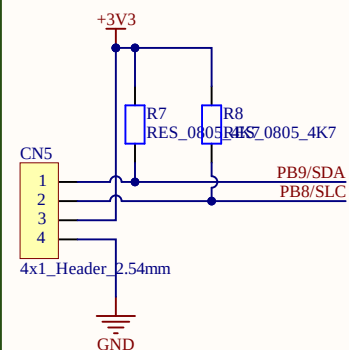

ADXL345 Accelerometer

▲ Populate R14 with 10K pull-down to set ADDR to 0x53H


▲ Capacitors C5, C6 ad C7 should be placed as close as possible to ADXL345

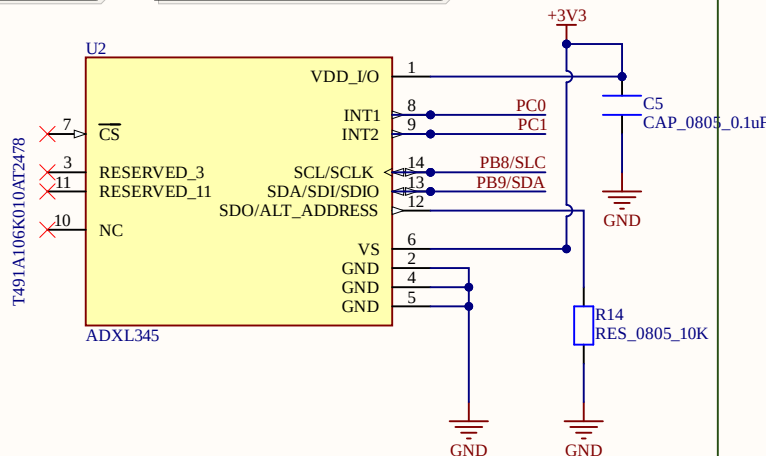

LTC2990(Voltage,Current,Temperature Sensor)

△ LTC2990 address pins (ADDR0 and ADDR1) are set to GND. I2C address is 0x98H.

Capacitors C2 should be placed as close

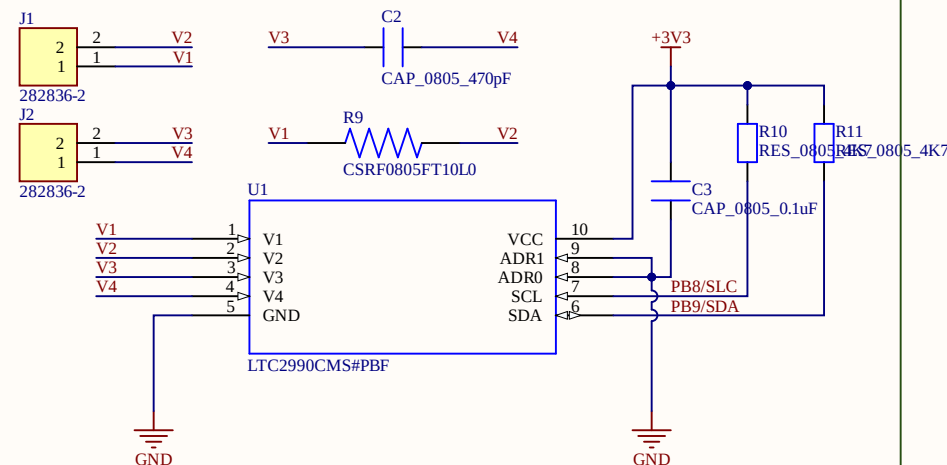

Mert Çubuk		(c) Altium Electronic Licence	
Project Title: I2C Shield		Page Content: I2C_Shield.SchDoc	
Size: -	Revision: VER1.0	Drawn By: -	
Date: 4.11.2025	Sheet: 1 of 1		